



Tender No. DFC/ADI/ENGG/ADI-PNU/ROB/LC.No.204/19

For

Construction of Road over Bridge including approaches complete in lieu of LC No. 204 at Railway km. 700/3-4 (DFC Ch. 65.270) between Unjha and Bhandu motidau station of Ahmedabad-palanpur section of Western Railway, Ahmedabad Division.

(PARTICIPATION THROUGH E-TENDER ONLY)

Visit:- www.tenderwizard.com/DFCCIL

Help: Please contact Tender wizard helpdesk at no. 011-49424365 or Mobile No. +91-9599653865/9714881992/080-40482000.

**TECHNICAL BID
(PACKET-A)**

**TENDER DOCUMENT
August, 2019**

**Employer:
DEDICATED FREIGHT CORRIDOR CORPORATION OF INDIA LIMITED
CGM-AHMEDABAD UNIT
(A GOVERNMENT OF INDIA ENTERPRISE)
UNDER
MINISTRY OF RAILWAYS**

INDEX

PART/CHAPTERS	DESCRIPTION	PAGE NO.
PART - I	Important instructions to Tenderer(s) before submitting their tenders online.	3
Chapter I	Notice Inviting Tender	6
Chapter II	General Information / Data sheet	11
Chapter III	Preamble and General Instructions to Tenderers	13
Chapter IV	General Conditions of Contract	33
Chapter V	Special Conditions of Contract	91
PART - II	Technical Specifications	103
PART – III (A)	Additional Technical Specifications-I	178
PART – III (B)	Additional Technical Specifications-II	191
PART – III (C)	Additional Technical Specifications-III	209
PART - IV		
Chapter I	Milestones and Time Schedule	365
Chapter II	Tender Forms (Including Schedule of Prices)	368
PART - V	Drawings	411

Signature of tenderer (s)

Date:



Important instructions to Tenderer(s) before submitting their tenders online.

- A. All bidders must note that this being E-tender, bids received only through online on E-tendering portal www.tenderwizard.com/DFCCIL shall be considered as a valid offer. **Any bid submitted in paper form will not be received and opened and shall be summarily rejected.**
- B. The bidder must ensure that the tender document submission before the closing time as the tender submission shall stop accepting the offer at prescribed date and time.
- C. Tenderer should submit the Tender Document cost and original EMD in Chief General Manager-Ahmedabad's Office on/or before date 27/09/2019 up to 18.00 hrs. duly mentioning the tender reference on the envelope. Scanned copy of Tender Document cost, EMD to be submitted with online tender. In case Tender Document cost, original EMD not received by the date 27/09/2019 up to 18.00 hrs ; offer will be summarily rejected.
- D. The following documents are to be submitted in physical form on/or before the date 27/09/2019 up to 18.00 hrs in enclosed envelope duly mentioning the tender reference, **Otherwise, the offer of the tender shall be considered as invalid offer.:**
1. Tender document cost
 2. Original EMD
 3. Documents related to Sole Proprietorship Firm (if applicable)
 - a) Sole Proprietorship Firm Para 1.3.6.2(a) Sole Proprietorship Firm shall submit the notarized copy of the affidavit.
 4. Documents related to Partnership Firm (if applicable)
 - a) Self-attested copies of (i) registered / notarized Partnership Deed as per Para 1.3.6.2(b)(i) , (ii)Power of Attorney duly authorizing one or more of the partners of the firm or any other person(s) as per Para 1.3.6.2(b)(ii).
 5. Documents related to JV firm. (if applicable)
 - a) Form 9, 10, 11, 12 & 13 of the tender document,
 - b) In case one or more of the members are JV firm then, enclose following documents:
 - 1) Copy of Partnership deed (Clause 65.14.1 (a)); 2) Consent of all the partners to enter into the Joint Venture Agreement on a stamp paper (Clause 65.14.1 (b)); 3) Power of Attorney (duly registered as per prevailing law) in favour individual to sign the MOU/JV agreement on behalf partnership firm & create liability against the firm (Clause 65.14.1 (c)).
 - c) In case one or more members of JV is/are Proprietary Firm or HUF A copy of notarized affidavit on Stamp Paper declaring that his/her Concern is a Proprietary Concern and he/she is sole proprietor of the Concern OR he/she is in position of "KARTA" of Hindu Undivided Family (HUF) and he/she has the authority, power and consent given by other partners to act on behalf of HUF. (Clause 65.14.2)
 - d) In case one or more members of the JV is/are companies then, a) Copy of resolutions of the Directors of the Company, permitting the company to enter into a JV agreement (Clause 65.14.3 (a); b) Memo. /Article of asso. Of company (Clause 65.14.3 (b); c) A Copy of Authorization/Power of Attorney

Signature of tenderer (s)

Date:



issued by the Company authorizing in favour of individual to sign the tender.....company. (Clause 65.14.3 (c))

- e) It is to be ensured by the tenderer that the documents such as Tender document, scan copy of EMD, scan copy of Documents related to Sole Proprietorship Firm, Partnership Firm and Companies registered under Companies Act as mentioned in the Para 1.3.6 of the tender document and Documents related JV mentioned in Para 65 and Form 9, 11, 12, 13 of the tender document such as mentioned in the check list by Sr. no 1, 2, 5, 6 and 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26,27,28,29,30 as applicable should be uploaded with tender online before the time and date of closure of the tender document.
- f) **GST Registration Certificate.**
The documents required to be submitted in physical form shall be submitted on or before date, time and venue, for submission of original physical copy of statutory documents mentioned in relevant paras of Bid documents or as modified/revised/ rescheduled / extended through corrigendum/ addendums published on above said e-tendering websites.

Note: The documents are to be submitted in physical form shall be in enclosed envelope and write “Kind attention to Shri Shailesh Upadhvay Dy. Project Manager/DFCCIL-Ahmedabad” mentioning the tender number.

- E. Each and Every page of the tender document shall be downloaded carefully, and signed on each and every page in ink, and then scan each and every page of the tender document in sequence and then uploaded. Tender uploaded without tender documents will summarily be rejected.
- F. Please attach all the addendum(s)/corrigendum(s)(if any) along with the tender document as per Clause 1.1.4 and then upload with the tender document.
- G. **Financial bid (Microsoft Excel file) to be filled, saved and uploaded with digital signature.** Only the downloaded financial bid filed should be uploaded after filing and saving. Do not upload scanned copy such as pdf or jpg file etc of ‘Financial Bid’ in document library.
- H. **Cost of biddings:** The Bidder shall bear all costs associated with the preparation and submission of its Bid, and the Employer shall not be responsible or liable for those costs, regardless of the conduct or outcome of the bidding process.
- I. Tenderer may carefully note that they are liable to be disqualified at any time during tendering process in case any of the information furnished by them is not found to be true. In addition, the EMD of such tenderer shall also be forfeited. The decision of Employer in this respect shall be final and binding.
- J. The bidder shall submit only one bid in the capacity of an individual or sole proprietor, partnership firm, company and Joint venture. Violation of this condition is liable to disqualify the tenders in which bidder has participated and EMD of all such tenderers shall stand forfeited.
- K. The bidder is expected to examine all instructions, terms, conditions, forms.

Signature of tenderer (s)

Date:



L. Specifications and other information in the bidding document. Failure to furnish all information required by the bidding documents or submission of a bid not substantially responsive to the bidding document in every respect will be at the bidders risk and may result in rejection of his bid.

M. At any time prior to the deadline for submission of bids, Employer may for any reason whether at its own initiative or in response to any request by any prospective bidder amend the bidding documents by issuing Corrigendum, which shall be part of the Tender documents.

N. Employer may at its discretion extend the deadline for submission of the bids at any time before the time of submission of the bids.

O. Opening of the tender

The **“Packet-A (TECHNICAL BID)”** will be opened online at **12.30 Hrs on 28.09.2019** at the address mentioned in “Notice Inviting tender “and read out in the presence of such tenderer(s) as is/ are present. The detail procedure of tender opening will be as per para 1.3.5 of Chapter-III of Part-I. Tenderers or their authorized representatives who are present shall sign register in evidence of their attendance.

P. Help desk for E- Tendering

1. For any difficulty in downloading & submission of tender document at website www.tenderwizard.com/DFCCIL, please contact at tenderwizard.com helpdesk no.

011-49424365 or Mobile No. +91-9599653865/9714881992/080-40482000.

2. Bidder manual & system requirement is available on website www.tenderwizard.com/DFCCIL for necessary help.

PART- I

Chapter I

NOTICE INVITING TENDER

PART- I

Chapter I

DEDICATED FREIGHT CORRIDOR CORPORATION OF INDIA LIMITED (A GOVERNMENT OF INDIA ENTERPRISE)

T.No. DFC/ADI/ENGG/ADI-PNU/ROB/LC.No.204/19

NOTICE INVITING TENDER E TENDER

National Competitive Bidding

Dear Sir,

Name of Work: Construction of Road over Bridge including approaches complete in lieu of LC No. 204 at Railway km. 700/3-4 (DFC Ch. 65.270) between Unjha and Bhandu motidau station of Ahmedabad-palanpur section of Western Railway, Ahmedabad Division.

1.1.1 Chief General Manager, Dedicated Freight Corridor Corporation of India Ltd. Ahmedabad, B/3rd Floor, 4-D Square Mall, Opp. Vishwkarma Engg. College, Visat-Gandhinagar Highway, Ahmedabad-380005, India, invites sealed tenders on two packet system on prescribed forms from firms/ Companies/ Joint Ventures having requisite experience and financial capacity for execution of the following work:

Table 1				
S. No.	Name of work	Tender cost (Rs)	Earnest money (Rs)	Completion Period
1.	Construction of Road over Bridge including approaches complete in lieu of LC No. 204 at Railway km. 700/3-4 (DFC Ch. 65.270) between Unjha and Bhandu motidau station of Ahmedabad-palanpur section of Western Railway, Ahmedabad Division.	56,96,28,000/-	56,96,280/-	18 months

* As per works manual

1.1.2 Eligibility shall be assessed on applicants, fulfilling the technical capability and competence as well as for financial and organizational resources as specified in clause no. 1.3.13 (i) A & B of Preamble and General instruction to tenders (Part-I, Chapter III).

1.1.3 The Tender document can be downloaded from DFCCIL's website www.dfccil.com, www.tenderwizard.com/DFCCIL and Central Procurement Portal, eprocure.gov.in.

Signature of tenderer (s)

Date:



Tenderer should submit the original EMD, Tender Document cost in physical form in Chief General Manager-Ahmedabad 's Office on/or before date 27/09/2019 up to 18.00 hrs.

Tenderer should submit the Tender Document cost and original EMD in Chief General Manager-Ahmedabad 's Office on/or before date and time of 27/09/2019 up to 18.00 hrs duly mentioning the tender reference on the envelope. Scanned copy of Tender Document cost and EMD to be submitted with online tender. In case original Tender Document cost and EMD not received by the date and time of 27/09/2019 up to 18.00 hrs, the offer will be summarily rejected.

The cost of tender documents shall be deposited in the form of The Banker's Cheque/ Demand Draft shall be from State Bank of India or any of the nationalized Bank or by Indian Scheduled Bank.

Tenderer are advised not to make any correction /addition /alteration in the downloaded tender documents. If any such correction /addition /alteration in downloaded tender documents are made such tenders shall not be considered.

- 1.1.4** DFCCIL may issue addendum(s)/corrigendum(s) to the tender documents. In such cases the addendum(s)/corrigendum(s) shall be issued and placed on website: www.dfccil.com, www.tenderwizard.com/DFCCIL and Central Procurement Portal, eprocure.gov.in at least three days in advance of date of closing of tender. The tenderer who has downloaded the tender documents from the website before issue of addendum(s)/corrigendum(s) must visit the website and ensure that such addendum(s)/corrigendum(s)(if any) is also downloaded by them. Please attach all the addendum(s)/corrigendum(s)(if any) along with the tender document and then upload with the tender document. Such addendum(s)/corrigendum(s)(if any) shall also be submitted duly stamped and signed along with the submission of tenders.

- 1.1.5** The tender documents shall be in two separate online packets viz **Packet - A containing TECHNICAL BID** and **Packet- B containing FINANACIAL BID**. Detailed credential as per the requirement of eligibility criteria and all tender papers except Bill of Quantities are to be submitted in Technical Bid. Summary of Prices (Form No.3) with % age above or below or at par on the amount of various schedules "A", "B", "C", "D", "E", "F", duly filled in along with Schedule of Prices (Form - 4) are to be submitted in "Financial Bid". **Packet- B also contains** Microsoft Excel file to be filled as Financial Bid, saved and Uploaded with digital signature. Only the downloaded financial bid form in excel file should be uploaded after filing and saving the file in document library. **Caution: Do not upload scanned copy such as pdf or jpg file etc of 'Financial Bid' in document library.**

- 1.1.6** Tender shall be submitted as per "General Instruction to Tenderers" forming as part of the complete tender documents.

The tender documents should be submitted through online mode in website www.tenderwizard.com/DFCCIL only. The offer submitted other than online will not be accepted. Please refer 'Procedure for submission of E-tender' in Para 'Instructions To Bidder' (ITB), Section-2 for clarification.

To participate in the E-Bid submission, it is mandatory for the bidders to have user ID & password to login www.tenderwizard.com/DFCCIL, which has to be obtained by

Signature of tenderer (s)

Date:



submitting an annual registration charges of INR **2000/- + GST** as per latest provision, to M/s ITI Ltd through e-payment or latest prevailing charges with GST, as per latest provision, which may be confirmed. Bidders have to pay the Tender Processing Fee to ITI Ltd through e-payment at the time of submission of bid. Already registered vendors with M/s. ITI Ltd need not pay registration charges.

E-Tenders shall be opened online at the time and given date in NIT.

Section -2

Instructions to Bidders (ITB)

a) General: All bidders must note that this being E-tender, bids received only through E-tendering portal shall be considered as an offer. Any bid received in paper form will not be opened and shall be summarily rejected.

Further, following instructions should be noted by bidders

b) Procedure for submission of E-tender:

c) Bid Document obtaining process:

- The Bidder who wish to view free Notification and tender documents can visit DFCCIL's website www.dfccil.com OR www.tenderwizard.com/DFCCIL OR Central Procurement Portal eprocure.gov.in.
- Interested bidders who wish to participate should visit website www.tenderwizard.com/DFCCIL, which is the ONLY website for bidding their offer. Further the procedure is as follows:
- Register yourself with ITI Ltd for obtaining Login ID and Password (after paying necessary charges). This is one time annual payment and applicable for bidding other tenders also.
- Obtain Class-III Digital Signature Certificate from ITI Ltd or any other digital signature issuing authority. In case bidder wish to obtain the digital signature certificate from ITI Ltd, they may contact Mobile numbers +91-9599653865/9714881992/080-40482000.
- Using the login ID, password and digital signature, the tenderer/bidder can enter the tender portal to purchase the tender document.
- The tender document charge has to be paid through DD/FDR drawing in favour of Dedicated Freight Corridor Corporation of India Limited payable at Ahmedabad and payment details to be filled in website.
- Pay processing fees through e-payment. This payment can be done only through e-payment gateway of ITI.
- With the payment of processing fee, the bidder can download the 'tender document' and Financial bid i.e. (Microsoft Excel file 'Financialbid.xls') by clicking the link "Show Form".

Completed tender documents should be uploaded on or before the date and time of closing of tender specified in the NIT and tender document. The financial Bid shall be

Signature of tenderer (s)

Date:



opened only after accessing suitability as per the Technical Bids by DFCCIL. Certain documents as specified and mentioned to be sent in physical form in the 'Important Instruction to Bidders' must reach in this office **not later than date 27/09/2019** up to 18.00 hrs. Any such documents received later than the time and date 27/09/2019 up to 18.00 hrs, the offer shall be summarily rejected.

- 1.1.7 Any tender received without Earnest money and cost of tender documents in the form as specified in the tender documents shall not be considered and shall be summarily rejected.**
- 1.1.8** DFCCIL reserves right to cancel the tender before submission /opening of tender, postpone the tender submission/ opening date and to accept/reject any or all tenders without assigning any reason thereof. DFCCIL's assessment of suitability as per eligibility criteria shall be final and binding.
- 1.1.9** Tenderers may note that they are liable to be disqualified at any time during tendering process in case any of the information furnished by them is not found to be true. EMD of such tenderers shall be forfeited. The decision of DFCCIL in this regards shall be final and binding.
- 1.1.10** Information as required as per various Forms to tender document should be submitted by the tenderers without fail strictly as per formats provided.
- 1.1.11** The validity of offer shall be 90 days from the date of opening of the tender.
- 1.1.12** The tender document shall be submitted in online mode through website www.tenderwizard.com/DFCCIL.
- 1.1.13 Mobilization Advance (Applicable as per Spl. Condition of contract Part-I, Chapter- V, Cl. 1.5.20) :-**

The Tenderer/Contractor may be granted a recoverable interest bearing mobilization advance up to 10% of the contract value provided mobilization advance is admissible as per the tender conditions and **he specifically applies for it while tendering. If the tenderer fails to apply specifically for Mobilization Advance while giving his offer at the tendering stage in case where grant of Mobilization Advance is permissible, no subsequent requests from him for grant of this advance will be entertained.**

PART - I

Chapter II

GENERAL INFORMATION / DATA SHEET

PART - I
Chapter II
GENERAL INFORMATION/DATA SHEET

TENDER NOTICE NO.	DFC/ADI/ENGG/ADI-PNU/ROB/LC.No.204/19
Name of the work	Construction of Road over Bridge including approaches complete in lieu of LC No. 204 at Railway km. 700/3-4 (DFC Ch. 65.270) between Unjha and Bhandu motidau station of Ahmedabad-palanpur section of Western Railway, Ahmedabad Division.
Tender Value	Rs. 56,96,28,000/-
Completion Period	18 months
Earnest Money	Rs. 56,96,280/-
Cost of Tender Document	Rs.29,500/- (25,000 + 18% GST) to be Paid through Demand Draft / Banker's cheque payable in favour of "Dedicated Freight Corridor Corporation of India Limited, Ahmedabad"
Tender Processing Fee	Rs. 7500/- plus taxes and duties as applicable (non-refundable) through e-payment while uploading of tender.
Date and Time of Sale of Tender (Online)	From date 23.08.2019.
Pre Bid conference	On 06.09.2019 at 12.30 Hrs. at CGM-DFCCIL office, Ahmedabad.
Last date and Time of submission of Tender (Online)	23.09.2019 upto 18:00 hrs
Last date and Time of submitting documents in physical form.	27.09.2019 upto 18:00 hrs
Date and Time of Opening of Tender (Technical Bids - Packet A)	On 28.09.2019 at 12:30 hrs
Date and Time of Opening of Financial Bid -Packet B	Will be notified to bidder qualified in Technical bid and also posted on www.tenderwizard.com/DFCCIL
E-Tendering Web site Address:	www.tenderwizard.com/DFCCIL For any help in connection with e-tendering please contact at tenderwizard.com helpdesk No. 011-49424365 or Mobile No. +91-9599653865/9714881992/080-40482000.
Validity of offer	90 days
Retention Money / Security Deposit	5 % of Contract Value
Performance Bank Guarantee	Performance Guarantee (PG) have to be submitted within 21(Twenty One) days from the date of issue of Letter Of Acceptance (LOA), amounting to 5% of the contract value in the form as give in clause 16.(4) of GCC.
Office Address	Chief General Manager, Dedicated Freight Corridor Corporation of India Limited, B/3rd Floor, 4-D Square Mall, Opp. Vishwkarma Engg. College, Visat-Gandhinagar Highway, Ahmedabad-380005

Signature of tenderer (s)

Date:



PART- I
Chapter- III

**PREAMBLE & GENERAL
INSTRUCTION TO TENDERERS**

Signature of tenderer (s)
Date:

PART- I

Chapter- III

PREAMBLE & GENERAL INSTRUCTIONSTOTENDERERS

1.3.1 Introduction

(i) General

Dedicated Freight Corridor Corporation of India Ltd. (DFCCIL), a public sector undertaking has been set up under the Indian Companies Act, 1956 for implementation of Dedicated Freight Corridor Project. Government of India is the sole shareholder of the DFCCIL.

Ministry of Railways (MOR), Government of India has planned to construct Dedicated Freight Corridor (DFC) covering about 3338 route Kilometres on Eastern and Western Corridors. The coverage of Eastern Corridor is from Ludhiana to Dankuni and Western Corridor is planned from Jawaharlal Nehru Port, Mumbai to Rewari / Tughlakabad / Dadri near Delhi. There will be a linkage between two corridors at Dadri.

(ii) Dedicated Freight Corridor

Eastern DFC Route will be approximately 1839 Km long from Dankuni to Ludhiana via Dankuni– Asansole– Dhanbad– Gaya– Sonnagar - Mughalsarai- Allahabad- Kanpur- Tundla- Aligarh- Khurja- Bulandshahr–Meerut– Saharanpur– Ambala- Ludhiana.

Western DFC Route will be approximately 1520Kmlong from Dadri to JNPT via Rewari – Iqbalgarh - Vadodara-JNPT.

Proposed alignment of DFC has been generally kept parallel to existing Indian Railway line except provision of detours at some stations where the existing yards/cities are congested.

Level Crossings (LC's) are generally unsafe locations and also a congestion points for road/rail's users. These LC's are operational bottlenecks for Railways / DFCCIL in terms of loss in punctuality and reduction in line capacity. Construction of ROB(s)/ RUB(s) is financially and operationally beneficial apart from the fact that it improves the safety of Rail/ Road users.

Road over bridges (ROB) are being constructed on the level crossings falling on Western Corridor of DFCCIL. These ROB's shall span over the existing railway lines, the proposed DFCC lines and on approaches. The ROB's shall be constructed in Railway and DFCCIL portion with composite girders/ *Bow string girders/ Through girders* based on Railway GADs and design, and on approach portion, RE wall, RCC girders/ *PSC girders* etc. based on State Government GADs and detail Designs, and suitably designed RCC abutments, piers and foundations including staircases and other

Signature of tenderer (s)

Date:



allied components. Depth of type of foundation shall be decided/ designed based on detailed geotechnical investigation at ROB's sites. Before execution or during execution, if there is a modification/correction in approved GADs of DFCCIL/Railways/State Government, the Agency has to execute the work as per modified/corrected GADs, for which Contractor shall not be entitled to any extra payment or claims.

(iii) Scope of Work

On behalf of President of India, *Chief General Manager* herein after referred to as 'DFCCIL' is inviting sealed tenders from Firms / Companies / Joint Ventures having requisite experience and financial capacity for execution of the following work:

" Construction of Road over Bridge including approaches complete in lieu of LC No. 204 at Railway km. 700/3-4 (DFC Ch. 65.270) between Unjha and Bhandu motidau station of Ahmedabad-palanpur section of Western Railway, Ahmedabad Division.."

- a) Railway Portion arrangement as per approved GAD :
- b) For Approach portion of work as per approved GAD of Gujarat State government.

SL. No.	Level Crossing No	Chainage of ROB (km)	Approx Rly.Span configuration (m)	Approx. Approach Span configuration (m)
1.	204	IR Km. 700/3-4 DFC Ch. 65.270	2x36 + 1x18 + 1x30 (Composite Girder)	24x24 (RCC T-Beam deck slab)

(iv) Scope of work is as per the requirements given in the Bid document but Not limited to:

Contractor shall have to submit Design and drawings duly proof checked by IIT on the basis of the approved GAD of DFCCIL for approval of DFCC/Railways of various components of ROB before execution of the work and as per instruction of representative of DFCCIL.

- i) Preparations of preliminary and detailed design of foundation, substructure, superstructure, including staircase, approach slab (wherever applicable) and all other drawing as required for construction of DFC + Railway portion of the ROB and both approaches.
- ii) Submission of proof checked detailed design and drawing for, Foundation, Sub-structure, Super-Structure (if in non-RDSO span is adopted), Reinforced Earth Wall and Retaining wall.
- iii) The detail design of superstructure will be further governed as per para (iv) h of deliverables in part-I Chapter-III.
- iv) Out-station visits (Sites, District HQs, WR HQ, Delhi/NCR and other locations in ADI-PNU section, with stakeholders will be attended by contractor team on specific advise of DFCCIL and nothing extra will be paid for visits for such meetings during currency of contract.
- v) Proof Checking of designs of ROB structures of Railway portion and approach portion of work from IIT, and there after approval of same by WRly and/ or DFCCIL
- vi) Proof checking of detailed design and drawing of viaducts as well as RE wall and retaining walls and all other necessary components of approaches of said ROB from IIT and their after approval of respective State Govt authorities or instruction given

Signature of tenderer (s)

Date:



by DFCCIL.

- (a) Construction of RCC abutments and piers, for Composite girders RCC/PSC girder as per IRC loading, including pile foundations/ open foundation as per GAD/*Design*.
 - (b) Fabrication of composite plate girders/ Bow string girders /Open Web girders (skew up to 45^0) of around 18m, 22m, 24m, 30m, 36m, 48m, 62m and 72 m etc. clear span including erection with traffic power block as per GAD.
 - (c) Construction of Approximate 12m/20m etc wide RCC deck slab on plate girders (composite) RCC/PSC girder and 7.5m/ 15m etc. width on approaches as per approved GADs.
 - (d) Providing and fixing in position standard fixed type POT bearing, free sliding type POT cum PTFE bearings/*Elastomeric bearings* as per approved drawing.
 - (e) Providing and laying cement concrete wearing coat, drainage spouts, footpath, road markings, etc.
 - (f) Providing and fixing RCC crash barrier and RCC railing (As per MORTH design) and electric lighting poles.
 - (g) Providing and fixing in position single strip seal elastomeric type expansion joints.
 - (h) Construction of Inspection platform, railing, ladders, etc.
 - (i) Construction of RCC/Steel staircases, providing and fixing of protection screens.
 - (j) Construction of approaches which includes constructing of RE wall, RCC slab, piers, abutment, RCC Girder, crash barrier, earthwork/ sand filling in bank, providing bituminous road, Road furniture & all works related to constructing approaches complete.
 - (k) Including any other miscellaneous works for commissioning Railway/ DFCCIL portion and approach portion of said work.
- (v) **Cost of the work: The estimated cost of the tendered work is approximately Rs. 56,96,28,000/-**
- (vi) The Tenderer shall be governed by General Conditions of Contract (GCC), Preamble and General Instructions to Tenderers (ITT) and Special Conditions of Contract (SCC). Wherever, there is a conflict in any condition between GCC and Special Conditions of Contract mentioned in the tender documents, the condition mentioned in Special Conditions of Contract will prevail. However, Engineer's decision in this connection shall be final and binding.

Part I, Chapter-IV and V of the tender document contains General Conditions of

Signature of tenderer (s)

Date:



Contract and Special Conditions of Contract specific to this work and shall be applicable in the contract.

(vii) Location

Works are to be executed in the jurisdiction of Ahmedabad Division of Western Railway with approaches of ROBs in State Government land. However, DFCCIL reserves right to change the site of work anywhere in adjacent / adjoining area of the work defined in Para 1.3.1 (iii) above in the jurisdiction of CGM/DFC/ADI and the contractor shall be bound to execute the work without any extra cost.

1.3.2(a) Tender Bid

The Tender Bid shall be submitted in online mode through website www.tenderwizard.com/DFCCIL.

Packet - A

Eligibility/Qualifying element of the Tender Bid along with other documents mentioned in para 1.3.2 (b) (i), here in after called "TECHNICAL BID "

Packet - B

Price elements of the Tender Bid as per para 1.3.2 (b) (ii), herein after called "FINANCIAL BID".

The TECHNICAL BID (Packet - A) shall be opened on the date of tender opening and the detailed scrutiny of TECHNICAL BID shall be carried out. The "FINANCIAL BID" (Packet - B) shall be opened only of those tenderers who qualify in "Technical Bid". The Financial Bid of un-qualified tenderers shall not be process further. The detailed procedure for tender opening and processing is given in Para 1.3.5.

1.3.2(b) Form of Tender

The Tender documents shall be in **two separate documents :-**

"Packet - A" containing technical Bid and "Packet - B" containing financial Bid. Detailed credentials as per the requirement of eligibility criteria and all tender papers except Summary of Prices and Schedule of Prices are to be submitted in "TECHNICAL BID" i.e. Packet-A. Summary of Prices and Schedule of Prices with percentage above/below/at par duly filled on line Financial bid (Microsoft Excel file) to be filled, saved and Uploaded with digital signature".

Any tender received later than the time and date of submission of tenders shall be rejected and returned to the tenderer/s unopened.

Tenders not submitted in the proper Forms are liable to be rejected.

(i) Documents to be enclosed with the TECHNICAL BID (Packet - A) online only :-

S. No	Description	Documents
(1)	Signed copy of tender document downloaded from website www.tenderwizard.com/DFCCIL	Bid document packet -A along with corrigendum/ Addendums
(2)	Offer letter complete.	Form No. 1
(3)	Tenderer's credentials in accordance with para 1.3.13 (i) & (ii) of Preamble and General Instructions to Tenderers.	Form No. 2A, 2B & 2C
(4)	Earnest money in accordance with Para 1.3.8 and Cost of Tender Document in case of downloaded tenders in accordance with Para 1.3.4.3 of Preamble and General Instructions to Tenderers in an envelope.	
(5)	Written confirmation authorizing the signatory of the tender to commit the tenderer and other documents as per format as applicable, in accordance with para 1.3.6 of Preamble and General Instructions to Tenderers.	
In case of Bidder is Joint Venture firms (s)		In case of JV relevant forms among Form no 9 to Form no 13 (Chapter-II Part-IV)
(6)	A copy of the tender papers duly signed in ink by the tenderer, on each and every page in token of his having studied the tender papers carefully shall be attached with the tender.	
(7)	GST Registration certificate of bidder	
(8)	Any other documents relevant of Tender/Bid	

(ii) Documents related to the FINANCIAL BID (Packet B), are required to be uploaded online :-

S. No	Description	Documents
(1)	Summary of Prices, Schedule of Prices & Total Prices	Form No. 3 (Part-IV, Chapter II)
(2)	Signed Copy of Schedule of prices i.e. BOQ- "Packet B of tender document downloaded from www.tenderwizard.com/DFCCIL	Form No. 4 (Part-IV, Chapter II)

Signature of tenderer (s)

Date:



1.3.3 Tender Document

This tender document consists of following five parts:

CHAPTERS	DESCRIPTION
PART - I	
Chapter I	Notice Inviting Tender
Chapter II	General Information / Data sheet
Chapter III	Preamble and General Instructions to Tenderers
Chapter IV	General Conditions of Contract
Chapter IV (B)	Pre contract integrity Pact
Chapter V	Special Conditions of Contract
PART - II	Technical Specifications
PART – III (A)	Additional Technical Specifications-I
PART – III (B)	Additional Technical Specifications- II
PART – III (C)	Additional Technical Specifications- III
PART - IV	
Chapter I	Mile Stones and Time Schedule
Chapter II	Tender Forms (including Schedule of Prices)
PART – V	Drawings

1.3.4 Sale and Submission of Tender Document

1.3.4.1 The Tender document can be downloaded from DFCCIL's e-tendering website www.tenderwizard.com/DFCCIL on payment of tender processing fee of the website . However the bidder may download tender documents from the DFCCIL official website www.dfccil.com and Central Procurement Portal, eprocure.gov.in.. **The tender document shall be submitted only through online mode through DFCCIL's e-tendering website www.tenderwizard.com/DFCCIL.**

1.3.4.2 Tender Document cost of Rs. **29,500/-** (25000+18% GST) through Demand Draft / Banker's cheque payable in favour of "Dedicated Freight Corridor Corporation of India Limited, Ahmedabad", The cost of the tender form is not refundable and also not transferable.

Signature of tenderer (s)

Date:



1.3.4.3 Cost of Tender documents downloaded from internet

The Tender document can be downloaded from DFCCIL's website www.dfccil.com, www.tenderwizard.com/DFCCIL and Central Procurement Portal, eprocure.gov.in. The cost of the tender document as indicated above in para 1.3.4.1 above will have to be deposited by the tenderer in the form of Demand draft/banker's cheque payable in favour of 'Dedicated Freight Corridor Corporation of India Limited, Ahmedabad' along with the Tender document.

Tenderer should submit the Tender Document cost in physical form in Chief General Manager-Ahmedabad's Office on/or before date 27/09/2019 up to 18.00 hrs duly mentioning the tender reference on the envelope. Scanned copy of Tender Document cost, EMD to be submitted with online tender. In case tender document cost & original EMD not received by the date 27/09/2019 up to 18.00 hrs, offer will be summarily rejected. This should be paid separately and not included in the earnest money. In case, tender is not accompanied with the cost of the tender document as detailed above, tender will be summarily rejected.

- 1.3.4.4** The tender documents should be submitted through online mode in website www.tenderwizard.com/DFCCIL only up to **18.00 Hrs** on **23.09.2019**. The **"Packet - A (TECHNICAL BID)"** will be opened at **12.30 Hrs on the 28.09.2019**. Any modified date and time for submission of tenders shall be uploaded on website www.dfccil.com, www.tenderwizard.com/DFCCIL and Central Procurement Portal, eprocure.gov.in. The detail procedure of tender opening will be as per Para 1.3.5.

1.3.4.5 DELETED

- 1.3.4.6** The rates should be quoted in ink in figures as well as in words. If there is variation between rates quoted in figures and in words, the rate quoted in 'words' shall be taken as correct. If more than one or improper rates are tendered for the same item, the tender is liable to be rejected.

- 1.3.4.7** Each page of the tender papers is to be signed by the tenderers or such person/s on his/their behalf that is/are legally authorized to sign for him / them.

1.3.4.8 Care in Submission of Tenders –

- a) Before submitting a tender, the tenderer will be deemed to have satisfied himself by actual inspection of the site and locality of the works, that all conditions liable to be encountered during the execution of the works are taken into account and that the quoted rates by tenderer in tender forms are adequate and all inclusive in item of Taxes incl. GST), Duties & Levies etc. in terms of General/Special Conditions of Contract for the completion of works to the entire satisfaction of the Employer .
- b) Tenderers will examine the various provisions of The Central Goods and Services Tax Act, 2017(CGST)/ Integrated Goods and Services Tax Act, 2017(IGST)/ Union Territory Goods and Services Tax Act, 2017(UTGST)/ respective state's State Goods and Services Tax Act (SGST) also, as notified by Central/State Govt. & as amended from time to time and applicable taxes before bidding. Tenderers will ensure that full benefit of Input Tax Credit (ITC) likely to be availed by them is duly considered while quoting rates.
- c) The successful tenderer who is liable to be registered under

Signature of tenderer (s)

Date:



CGST/IGST/UTGST/SGST Act shall submit GSTIN along with other details required under CGST/IGST/UTGST/SGST Act to DFCCIL immediately after the award of contract, without which no payment shall be released to the Contractor. The Contractor shall be responsible for deposition of applicable GST to the concerned authority and DFCCIL shall Pay the applicable GST after receipt of GST invoice with on account bill from the contractor.

- d) In case the successful tenderer is not liable to be registered under CGST/IGST/UTGST/ SGST Act, the DFCCIL shall deduct the applicable GST from his/their bills under reverse charge mechanism (RCM) and deposit the same to the concerned authority.
- e) When work is tendered for by a firm or company, the tender shall be signed by the individual legally authorized to enter into commitments on their behalf.
- f) The DFCCIL will not be bound by any power of attorney granted by the tenderer or by changes in the composition of the firm made subsequent to the execution of the contract. It may, however, recognize such power of attorney and changes after obtaining proper legal advice, the cost of which will be chargeable to the Contractor.

1.3.4.9 Tenders containing erasures and/or alteration of the tender documents are liable to be rejected. Any correction made by Tenderer(s) in his/their entries must be attested by him/them.

1.3.4.9.1 Pre-Bid conference: There will be pre-Bid conference at **12.30 hours** on **06.09.2019** in Conference Room of **Chief General Manager, Dedicated Freight Corridor Corporation of India Limited, B/3rd Floor, 4-D Square Mall, Opp. Vishwkarma Engg. College, Visat-Gandhinagar Highway, Ahmedabad-380005, India**. Bidders should give their queries in writing at least 3 days prior to Pre-Bid conference. All interested firms / contractors may attend the Pre-Bid conference. DFCCIL response to queries as well as addenda to Bidding document will be posted on the DFCCIL's website. Non-attendance at the pre-Bid conference will not be a cause for disqualification of the Bidder.

All communication between the Employer and the tenderer shall be in writing. For the purposes of seeking clarification, the Employer's address is:

Dedicated Freight Corridor Corporation of India Limited
Attention: **Mr. Sanjay Gupta, Chief General Manager, DFCCIL Office,**
B/ 3rd Floor, 4-D Square Mall, Opp. Vishvkarma Engg. College, Visat - Gandhinagar Highway, Ahmedabad-380005, INDIA
Telephone: 91-07922175107, Facsimile number: :+91-07922163101
Electronic mail address: cgmdfcadi@gmail.com

1.3.4.11 The list of documents to be attached along with the tender documents is as under:

- a) Requisite Earnest Money in proper form.
- b) Tender fee in prescribed form.
- c) Various Pro-forma attached with tender document as per chapter II of Part IV.
- d) Offer Letter as per Form No1.
- e) Documents fulfilling the eligibility criteria as per Form No 2A & 2B.
- f) Applicant's Party Information as per form no. 2C.

Signature of tenderer (s)

Date:



- g) List of personnel, organization available on hand and proposed to be engaged for the subject work.
- h) List of plants & machinery available on hand (own) and proposed to be inducted (Own & hired to be given separately) for the subject work.
- i) List of works completed in the last three financial years and current financial year giving description of work, organization for whom executed, approximate value of contract at the time of award, date of award, date of schedule completion of work, date of actual commencement of work, actual date of completion and completion cost. Supportive documents/certificates from the organizations with whom they had worked should also be enclosed. Certificate from private individuals for whom such works were executed will not be accepted.
- j) List of works on hand indicating description of work, contract value, date of award, value of work executed & approximate value of balance work yet to be done. Supportive documents/certificates from the organizations with whom they are working should also be enclosed. Certificate from private individuals for whom such works are being executed will not be accepted.
- k) Method statement, PERT CHARTS & Construction schedule vis-à-vis deployment resources.
- l) MOU for JV and Partnership deed as per Forms 9,10,11,12 and 13. The documents as mentioned in GCC Clause 65.0.
- m) Power of Attorneys as per Form 12 & 13.
- n) GST Registration Certificate.
- o) Tender documents Packet-A & Packet-B with addenda/corrigendum for respective work, downloaded from website www.tenderwizard.com/DFCCIL
- p) All above documents completed in all and duly signed each and every page.

1.3.5 Opening of Tender:

- (a) Tender will be opened **online** at the prescribed date and time
- (b) **TECHNICAL BID (Packet- A)** of all the tenderers shall be opened first.
- (c) After the opening of “TECHNICAL BID” (Packet-A) of all the tenderers, these Bids shall be scrutinized and analyzed. If found necessary by the Employer, the tenderers shall be asked to furnish clarifications and the Employer may also hold discussions with the tenderers after giving due notice. The names of the tenderers whose Bid are considered complete and meet eligibility criteria shall be short listed.
- (d) The **FINANCIAL BID (Packet –B)** shall be opened on a subsequent date and time duly notified well in advance. The Financial Bids of only those tenderers shall be opened who are short listed after scrutiny of their Technical Bid. The Financial Bid of the tenders who do not qualify during scrutiny of Technical Bid shall not be opened
- (e) Employer will notified bidders in writing/online who has been rejected on the ground of their technical bids being substantially non- responsive to the requirement of bidding document and their price bids shall remain unopened.

1.3.6 Constitution of the Firm:-

- 1.3.6.1 Tenderer shall clearly specify whether the tender is submitted on his own or on behalf of a partnership firm / Joint Venture (JV) / Company. The tenderer(s) who is / are

Signature of tenderer (s)

Date:



constituents of the firm / Company, shall enclose self-attested copies of the constitution of their concern, Partnership Deed and Power of attorney along with their tender. Tender documents in such cases shall be signed by such persons as may be legally competent to sign them on behalf of the firm / company as the case may be.

1.3.6.2 The tenderer shall give full details of the constitution of the Firm / JV / Company and shall also submit following documents (as applicable), in addition to documents mentioned above:

- (a) Sole Proprietorship Firm: The tenderer shall submit the notarized copy of the affidavit.
- (b) Partnership Firm : The tenderer shall submit self-attested copies of (i) registered / notarized Partnership Deed and (ii) Power of Attorney duly authorizing one or more of the partners of the firm or any other person(s), authorized by all the partners to act on behalf of the firm and to submit & sign the tender, sign the agreement, witness measurements, sign measurement books, receive payments, make correspondences, compromise / settle / relinquish any claim (s) preferred by the firm, Sign "No claim Certificate", refer all or any dispute to arbitration and to take similar action in respect of all tenders / contracts or said tender / contract.
- (c) Joint Venture: The tenderer shall submit documents as mentioned in clause 65 of GCC.
- (d) Companies registered under Companies Act-1956: The tenderer shall submit (i) the copies of Memorandum of Association (MOA) and Articles of Association (AOA) of the company; and (ii) Power of attorney duly registered / notarized by the company (backed by the resolution of Board of Directors) in favour of the individual, signing the tender on behalf of company.
- (e) LLP (Limited Liability Partnership) Firm: If the tender is submitted on behalf of a LLP Firm registered under LLP Act-2008, the tenderer shall submit along with the tender- (i) a copy of LLP Agreement, (ii) a copy of Certificate of Incorporation; and (iii) Power of Attorney/Authorisation (duly registered as per prevailing law) issued by the LLP Firm in favour of the individual to sign the tender on behalf of the LLP Firm and create liability against the Firm.
- (f) Registered Society & Registered Trust: The tenderer shall submit (i) a copy of the Certificate of Registration, (ii) Deed of Formation; and (iii) Power of Attorney (duly registered as per prevailing law) in favour of the individual to sign the tender documents and create liability against the Society/Trust.
- (g) Company registered under Companies Act-2013: The tenderer shall submit (i) the copies of MOA (Memorandum of Association) / AOA (Articles of Association) of the company; and (ii) Authorization/Power of Attorney (duly registered as per prevailing law) issued by the Company (backed by the resolution of Board of Directors) in favour of the individual to sign the tender on behalf of the company and create liability against the company.
- (h) If it is NOT mentioned in the tender submission that it is being submitted on behalf of / by a Sole Proprietorship Firm / Partnership Firm / Joint Venture / Registered Company etc., then the tender shall be treated as having been submitted by the individual who has signed the tender.

1.3.6.3 A tender from Joint Venture / Partnership Firm etc. shall be considered only where

Signature of tenderer (s)

Date:



permissible as per the tender conditions.

- 1.3.6.4** The DFCCIL will not be bound by any power of attorney granted by the tenderer or by changes in the composition of the Firm made subsequent to the submission of tender. It may, however, recognize such power of attorney and changes after obtaining proper legal advice.

1.3.7 Validity of Tender:-

Tenderer shall keep his offer open for a minimum period of 90 days from the date of opening of the tender or as mentioned in the Tender Notice.

1.3.8 Earnest Money:-

- (a) The tender must be accompanied by Earnest Money in favour of '**Dedicated Freight Corridor Corporation of India Limited, Ahmedabad**' deposited in any of the forms as mentioned in 1.3.8(c), failing which the tender will not be considered.
- (b) The earnest money shall remain deposited with the DFCCIL for the period of validity of the offer prescribed in this tender i.e. 90 days from the date of opening of tender. If the validity of the offer is extended, the validity of earnest money should also be extended failing which the offer after the expiry of the aforesaid period may not be considered by the DFCCIL. Tenderer should submit the original EMD and Tender Document cost in physical form in Chief General Manager-Ahmedabad's Office on/or before date 27/09/2019 up to 18.00 hrs duly mentioning the tender reference on the envelope. Scanned copy of EMD to be submitted with online tender before date and time of closing of tender. In case original EMD, tender document cost not received by the date 27/09/2019 up to 18.00 hrs, offer will be summarily rejected.
- (c) The Earnest money should be in any of the following forms:
FDR/Banker's cheque / Demand Draft executed by Scheduled Commercial banks in India other than Cooperative Banks. Schedule Commercial banks are the banks which are listed in the second schedule of the Reserve Bank of India Act 1934 (Usually private, Foreign and Nationalized Bank operating in India) .
- (d) It shall be understood that the tender documents have been submitted online by the tenderer and the tenderer is permitted to tender in consideration of stipulation on his part, that after submitting his tender he will not resile from his offer or modify the terms and conditions, thereof in a manner not acceptable to the Employer. Should the tenderer fail to observe or comply with the said stipulation, the aforesaid amount shall be liable to be forfeited to the DFCCIL.
- (e) The earnest money of the unsuccessful tenderer(s) will, save as here- in-before provided, be returned to the unsuccessful tenderer(s) within a reasonable time but the DFCCIL shall not be responsible for any loss or depreciation that may happen for the due performance of the stipulation to keep the offer open for the period specified in the tender documents or to the earnest money while in their possession nor be liable to pay interest thereon.
- (f) The bidder has to submit the original EMD in physical form shall be in sealed Envelope along with the tender fee and Statutory documents addressed to Chief

Signature of tenderer (s)

Date:



General Manager/DFCCIL-Ahmedabad, mentioning the tender Number.

NOTE: No interest shall be paid by DFCCIL on earnest money amount.

1.3.9 Execution of Contract Agreement:-

The Tenderer whose tender is accepted shall be required to appear in person at the office of **Chief General Manager/ Ahmedabad, Dedicated Freight Corridor Corporation of India Limited B/3rd Floor, 4-D Square Mall, Opp. Vishwkarma Engg. College, Visat-Gandhinagar Highway, Ahmedabad-380005, Gujarat** or if a firm or corporation, a duly authorized representative shall so appear and execute the contract agreement within 7days of notice from DFCCIL that Contract Agreement is ready. The Contract Agreement shall be entered into by DFCCIL only after submission of valid Performance Guarantee by the Contractor. Failure to do so shall constitute a breach of the agreement affected by the acceptance of the tender. In such cases the DFCCIL may determine that such tenderer has abandoned the contract and there upon his tender and acceptance thereof shall be treated as cancelled and the DFCCIL shall be entitled to forfeit the full amount of the Earnest Money and other dues payable to the Contractor under this contract. The failed Contractor shall be debarred from participating in the re-tender for that work.

In the event of any tenderer whose tender is accepted refuses to execute the contract agreement as here in before provided, DFCCIL may determine that such tenderer has abandoned the contract and there upon his tender and acceptance thereof shall be treated as cancelled and DFCCIL shall be entitled to forfeit the full amount of the Earnest Money.

1.3.10 Security Deposit on Acceptance of Tender:

The security deposit / rate of recovery / mode of recovery on acceptance of tender shall be as per the Para 16.(1) to 16.(3) of General Conditions of Contract (GCC).

1.3.11 Tenderer's Address

The tenderer (in his bid) should state his postal address, Fax number and email address legibly and clearly. Any communication sent in time, to the tenderer either by post or Fax or e-mail, at his said postal address/ Fax number/ e-mail address, shall be deemed to have reached the tenderer duly and in time. The communication sent through Fax or e-mail shall be delivered (either through post/courier/ per bearer) at said address, in hard copy within 72 hours (excluding intermittent Holidays) of such e-mail or Fax. In case of any deviation/ dispute in communication through Fax/e-mail & its respective hard copy, the decision of DFCCIL shall be final.

1.3.12 Right of DFCCIL to Deal with Tenders

- (a) The DFCCIL reserves the right of not to invite tenders for any of DFCCIL work or works or to invite open or limited tenders and when tenders are called to accept a tender in whole or in part or to reject any tender or all tenders without assigning reasons for any such action.
- (b) The authority for the acceptance of the tender will rest with the DFCCIL. It shall not be obligatory on the said authority to accept the lowest tender or any other tender and no tenderer(s) shall demand any explanation for the cause of rejection of his/their tender nor the DFCCIL undertake to assign reasons for declining to consider or reject any particular tender or tenders.

Signature of tenderer (s)

Date:



1.3.13(i) Eligibility Criteria**(A): Technical Eligibility Criteria**

Criteria	Compliance Requirement		Documents
Requirement	Single Entity	Joint venture	Submission Requirements
<p>(i) The tenderer- a sole proprietorship firm/ Partnership firm/ Company registered under Companies Act/LLP Firm /Registered society/Registered Trust/ JV firm or Lead Member of JV firm must have satisfactorily completed at least one single work in last three previous financial years and the current financial year upto the date of submission of tender, of construction of any one of the following having minimum value of 35% of the Advertised value of tender:</p> <ol style="list-style-type: none"> 1 Railway Bridge* having superstructure of RCC or PSC or Steel on at least one span. OR 2 Viaduct of Railway* having superstructure of RCC or PSC or Steel on at least one span. OR 3 Bridge* of Metro Railway having superstructure of RCC or PSC or Steel on at least one span OR 4 Viaduct* of Metro Railway having superstructure of RCC or PSC or Steel on at least one span. OR 5 ROB of Railway Portion having superstructure of RCC or PSC or Steel on at least one span. OR 6 Approach Portion of ROB having superstructure of RCC or PSC or Steel on at least one span. OR 7 Flyover on Roads having superstructure of RCC or PSC or Steel on at least one span. <p>Note: (a) *Road Under Bridge of box type & FOB shall not be considered as Railway bridge/ viaduct of railway/bridge of</p>	Must meet requirement	<p>Existing JV - Must meet requirement.</p> <p>Or</p> <p>Lead Member of proposed JV-Must meet requirement</p>	<p>The tenderer shall submit the completion certificates / certified completion certificates from the client(s) and or Photostat of original certificates of client. All documents either original or photocopy should be attested by Notary.</p>

Signature of tenderer (s)

Date:



<p>metro/viaduct of metro and shall not be considered as similar nature of work for this tender.</p> <p>(b) For the purpose of technical eligibility criteria, the definition of ROB means "Road Over Bridges" constructed over Railway line(s).</p> <p>(c) Any Road Bridge constructed on River/Pond/Canal etc. shall not be considered as similar nature of work for this tender.</p> <p style="text-align: center;">And</p>			
<p>(ii) The tenderer / JV firm or any Member of JV firm must have satisfactorily completed in last three previous financial years and the current financial year upto the date of submission of tender, at least one single work having a component of "fabrication and erection", of Open Web Steel Girder or Plate Steel Girder or Bow string Steel Girder irrespective of cost of work done.</p> <p>This fabrication and erection must be for Railway Bridge or Metro Railway or ROB.</p> <p>Note:</p> <p>(a) *Road Under Bridge of box type & FOB shall not be considered as Railway bridge/ viaduct of railway/bridge of metro/viaduct of metro and shall not be considered as similar nature of work for this tender.</p> <p>(b) For the purpose of technical eligibility criteria, the definition of ROB means "Road Over Bridges" constructed over Railway line(s).</p> <p>(c) Any Road Bridge constructed on River/Pond/Canal etc. shall not be considered as similar nature of work for this tender.</p> <p>(d) The single work can be a separate work or same as (i) above</p>	Must meet requirement	<p>Existing JV - Must meet requirement.</p> <p style="text-align: center;">Or</p> <p>Any Member of proposed JV-Must meet requirement.</p>	<p>The tenderer shall submit the completion certificates / certified completion certificates from the client(s) and or Photostat of original certificates of client. All documents either original or photocopy should be attested by Notary.</p>

Note: 1. Value of completed work done by a member in an earlier JV Firm shall be reckoned only to the extent of the concerned member's share in that JV firm for the purpose of satisfying his / her compliance to the above mentioned technical eligibility criteria in the tender under consideration.

2. In case the tenderer/s is a partnership firm, the work experience shall be in the name of partnership firm only.

Signature of tenderer (s)

Date:



(B): Financial Eligibility Criteria

Criteria	Compliance Requirement		Documents
Requirement	Single Entity	Joint Venture	Submission Requirements
The contractual payments received by the tenderer / JV firm or the arithmetic sum of contractual payments received by all the members of the JV firm in the previous three financial year and the current financial year up to the date of submission of tender shall be at least 150% of advertised value of tender.	Must meet Requirement	Must meet requirement	TDS certificates/ Audited balance sheets and or Photostat of TDS certificates/Audited Balance sheets clearly indicating the contractual amount received. All documents either original or photocopy should be attested by Notary.

Note: 1. Contractual payments received by a Member in an earlier JV firm shall be reckoned only to extent of the concerned member's share in that JV Firm for the purpose of satisfying compliance of the above mentioned financial eligibility criteria in tender for considerations.

2. In case the tenderer/s is a partnership firm, the turnover etc shall be in the name of partnership firm only.

1.3.13 (ii) Credentials of Tenderer

The tenderer shall provide satisfactory evidence in support of their technical and financial eligibility, which are acceptable to DFCCIL, as follows:

- (a) For Technical eligibility criteria, the details will be submitted in Form No. 2A along with supporting documents.
- (b) For Financial eligibility criteria, the details will be submitted in Form No. 2B along with supporting documents.
- (c) The tenderer shall submit the completion certificates/certified completion certificates from the client(s) or Photostat of original certificates of client. All documents either original or photocopy should be attested by Notary. These certificates should indicate the details of works carried out and successful commissioning of similar type of work executed by the tenderer. Completion certificate from Govt. organisation /PSUs/Public Limited Company will be accepted. The certificate from Private individual/Private Company for whom such works are executed shall not be accepted. In case, the work is executed for Public Limited Company, copy of work order, bill of Quantity, TDS certificate payments received and copy of final/last bill paid by client shall be submitted.

Signature of tenderer (s)

Date:



- (d) The list of personnel / organization on hand and proposed to be engaged for the tendered work. Similarly list of Plant & Machinery available on hand and proposed to be inducted and hired for the tendered work, shall be submitted.
- (e) The tenderer shall submit along with the tender document(s) in support of his/their claim to full fill the eligibility criteria as mentioned in the tender document(s). Each page of the copy of documents/ certificates in support of credentials submitted by the tenderer shall be self-attested/digitally signed by the tenderer or authorised representative of the tendering firm. Self-attestation shall include signature, stamp and date (on each page). Only those documents which are declared explicitly by the tenderer as “Documents supporting the claim of Qualifying the laid down eligibility criteria”, will be considered for evaluating his/their Tender.
- (f) **The tenderers shall submit a notarized affidavit on a non-judicial stamp paper stating that they are not liable to be disqualified and all their statements/documents submitted along with bid are true and factual. Standard format of the affidavit to be submitted by the bidder is enclosed as Form No.22. Non-submission of notarized affidavit by the bidder shall result in summarily rejection of his/their bid. It shall be mandatorily incumbent upon the tenderer to identify, state and submit the supporting documents duly self-attested by which they/he is qualifying the Qualifying Criteria mentioned in the Tender Document.**
- (g) Though bidder has submitted the affidavit, the DFCCIL reserves the right to verify all statements, information and documents submitted by the bidder in his tender offer, and the bidder shall, when so required by the DFCCIL, make available all such information, evidence and documents as may be necessary for such verification. Any such verification or lack of such verification, by the DFCCIL shall not relieve the bidder of its obligations or liabilities hereunder nor will it affect any rights of the DFCCIL there under.

The following will be applicable for evaluating the eligibility:

- (i) Similar nature of work physically completed within the qualifying period, i.e. last three financial year and current financial year (even though the work might have commenced before the qualifying period) shall only be considered in evaluating the eligibility.
- (ii) The total value of similar nature of work completed during the qualifying period and not the payment received within qualifying period alone, shall be considered. In case, the final bill of similar nature of work has not been passed and final measurements have not been recorded, the paid amount including statutory deductions is to be considered. If final measurements have been recorded and work has been completed with negative variation, then also the paid amount including statutory deductions is to be considered.

However, if final measurements have been recorded and work has been completed with positive variation but variation has not been sanctioned, original contract agreement value or last sanctioned contract agreement value whichever is lower, shall be considered for judging eligibility.

- (iii) As proof of sufficient financial capacity and organizational resources, contractor should have received total payments against satisfactory execution of all completed /on-going works of all types (not confined to only similar works) during the last three financial years and in the current financial year (up to the date of submission of the tender) of a value not less than 150% of advertised tender value.

Signature of tenderer (s)

Date:



- (iv) Tenderer shall submit a statement of contractual payments received during last three financial years and current financial year on the prescribed Performa as per Form No. 2B. The details shall be based on the form 16-A issued by the employer i.e. the certificate of deduction of tax at source as per Income Tax Act 1961. The photocopies of Form 16-A shall be enclosed duly attested by Notary Public with seal and Notarial Stamp thereon or a certificate from auditor or audited balance sheet certified by Chartered Accountant clearly indicating the contractual amount received duly attested by Notary Public with seal and Notarial Stamp thereon.
- (v) The tenderer shall be considered disqualified/in-eligible if:
- (a) The Tenderer or any of its partners and/or subcontractors included in the tender has been banned for business with Ministry of Railways/DFCCIL along with any of its attached and subordinate offices through an order issued by Ministry of Railways as per list available on Web site (<http://www.indianrailways.gov.in/railwayboard>) of Railway Board pertaining to banning of Business, with the banning being valid as on the date of submission the Tender.
 - (b) The Tenderer or any of its partners has suffered bankruptcy / insolvency or it is in the process of winding-up or there is a case of insolvency pending before any Court on the deadline of submission of application.
 - (c) In case of any information submitted by tenderer is found to be false forged or incorrect at any time during process for evaluation of tenders, it shall lead to forfeiture of the tender Earnest Money Deposit besides banning of business for a period of upto five years.
 - (d) In case of any information submitted by tenderer is found to be false forged or incorrect after the award of contract, the contract shall be terminated. Earnest Money Deposit (EMD), Performance Guarantee and Security Deposit available with the DFCCIL shall be forfeited. In addition, other dues of the contractor, if any, under this contract shall be forfeited and agency shall be banned for doing business for a period of upto five years.
- (vi) For the purposes of conversion of foreign currency to Indian rupees (INR) Bank Currency (BC) selling exchange rates as published by State Bank of India on the date 28 days prior to date of submission of tender shall be used. For few of the currencies where BC selling rates are not published by SBI or reserve bank of India, the exchange rate may be obtained from website- <http://www.oanda.com/currency/historical-rates> or <http://www.xe.com>.
- (vii) For the purpose of evaluation of proposals, all values given in INR in eligible qualification criteria and the values provided by the applicants in the proposal in the currencies other than INR shall be converted into one i.e. INR as per exchange rate mentioned in para (vi) above.

1.3.14 Period of Completion

The entire work is required to be completed in all respects within 18 months (Eighteen months) from the date of issue of the acceptance letter. Time is the essence of contract. The contractor shall be required to maintain steady and regular progress to the satisfaction of the Engineer to ensure that the work will be completed in all respects within the stipulated time.

Signature of tenderer (s)

Date:



1.3.15 If the Tenderer/s deliberately gives any wrong information about credentials / documents in his/their tenders and thereby create(s) circumstances for acceptance of his/their tender, DFCCIL reserves the right to reject such tender at any stage, besides, shall suspend business with such tenderer. The EMD of such tenderers shall also be forfeited.

1.3.16 Quantum of work and materials:

The indicative schedule of quantities of various items of works is included in Form - 4 of the tender documents.

1.3.17 Employer not bound to accept any tender:

The employer shall not be bound to accept the lowest or any tender or to assign any reason for non-acceptance or rejection of a tender. The employer reserves the right to accept any tender in respect of the whole or any portion of the work specified in the tender papers or to reduce the work or to accept any tender for less than the tendered quantities without assigning any reason whatsoever.

1.3.18 Schedule of Prices

The Schedule-A to F of the tender document lists out the Schedule of Prices for various items. Based on these, the total tender value has also been worked out.

1.3.19 Performance Guarantee: Refer relevant clause of GCC.

1.3.20 The tenderer shall furnish information for making payment through ECS/ NEFT / RTGS (Tender Form No. 8 placed at Part IV of the tender documents).

1.3.21 Negotiation:

Should DFCCIL decide to negotiate with a view to bring down the rates, the tenderer called for negotiations should furnish the following form of declaration before commencement of negotiations:

"I..... do declare that in the event of failure of contemplated negotiations relating to Tender No..... datedmy original tender shall remain open for acceptance on its original terms and conditions,".

1.3.22 Site Inspection:

Tenderers are requested to inspect the site and carry out careful examination to satisfy them as to the nature of work involved and facilities available at the site. They should note carefully all the existing structures and those under construction through other agencies. They should also study the suitability of utilizing the different equipment and the machinery that they intend to use for the execution of the work. The tenderers should also select suitable sites for the purpose of locating their store yard, laboratory, staff quarters etc., and satisfy themselves with regard to the feasibility of transporting the girders, etc. from the yard to the final site of placement etc.

1.3.23 No form C & D shall be issued to the contractor for this work.

Signature of tenderer (s)

Date:



CHAPTER-IV

GENERAL CONDITIONS OF CONTRACT

PART - I
CHAPTER IV

GENERAL CONDITIONS OF CONTRACT

DEFINITIONS AND INTERPRETATION

- 1. (1) Definition:-** In these General conditions of Contract, the following terms shall have the meaning assigned hereunder except where the context otherwise requires:-
- (a) “Railway” shall mean the President of the Republic of India or the Administrative Officers of the Railway/DFCCIL or of the Successor Railway / DFCCIL authorized to deal with any matters which these presents are concerned on his behalf.
 - (b) “DFCCIL” shall mean Dedicated Freight Corridor Corporation of India Ltd. (a PSU of Ministry of Railway) or the MD-DFCCIL or Director-DFCCIL/Administrative officers of DFCCIL or the subordinates to respective officers of DFCCIL or of the Successor of DFCCIL authorized to deal with any matter which these presents are concerned on his behalf.
 - (c) “General Manager of Railway ” shall mean the officer - in-charge of the General Superintendence and Control of the Railway and shall mean and include their successors, of the successor Railway;
 - (d) “Chief General Manager(CGM) of DFCCIL” shall mean the officer – in charge of “Project Offices of DFCCIL”, and shall mean and include their successors of “successor Project Offices” of DFCCIL.
 - (e) “Chief Engineer” shall mean the officer -in-charge of the Engineering Department of Railway and shall also include Chief Engineer (Construction), Chief Signal and Telecommunication Engineer, Chief Signal and Telecommunication Engineer(Construction), Chief Electrical Engineer, Chief Electrical Engineer (Construction) and shall also include GGM/GM/CGM of DFCCIL
 - (f) “Divisional Railway Manager” shall mean the Officer in-charge of a Division of the Railway and shall also mean any officer nominated by Managing Director / DFCCIL and shall mean and include their successors of the successor Railway.
 - (g) “Engineer” shall mean the Chief General Manager of DFCCIL/Dy CPM- DFCCIL or the officer(s) who so ever is authorized by the Chief General Manager of DFCCIL/ Dy CPM- DFCCIL or the agency who so ever being engaged as “Consultant” to act as Engineer, to deal with any matter which these presents are concerned on his behalf .

Signature of tenderer (s)

Date:



- (h) “Engineer’s Representative” shall mean the Assistant Engineer, Assistant Signal and Telecommunication Engineer and Assistant Electrical Engineer, APM / PM / Dy.CPM / Add. CPM of DFCCIL in direct charge of the work and shall include any Sr. Sec. / Sec / Jr. Engineer / Executive / Sr.Executive, APM/PM / Dy CPM of DFCCIL of Civil Engineering / Signal & Telecommunication Engineering / Electrical Engineering Department appointed by the Railway / DFCCIL and shall mean and include the Engineer’s Representative of the successor Railway / DFCCIL.
- (i) “Contractor” shall mean the person / Firm / Company / JV whether incorporated or not who enters into the contract with the DFCCIL and shall include their executors, administrators, and successors and permitted assigns.
- (j) “Contract” shall mean and include the Agreement of Work Order, the accepted schedule of rates of the Schedule or Rates of Railway / DFCCIL modified by the tender percentage for items of work quantified, or not quantified, General Conditions of Contract, Special Conditions of Contracts, if any, Drawings, Specifications, Additional / Special Specifications, if any and tender forms, if any, and all other documents included as part of contract .
- (k) “Open Tenders” shall mean the tenders invited in open and public manner and with adequate notice.
- (l) “Works” shall mean the works to be executed in accordance with the contract. works contemplated in the drawings and schedules set forth in the tender forms and required to be executed according to the specifications
- (m) “Specifications” shall mean the Specifications for materials and works referred / mentioned in tender documents.
- (n) “Schedule of rates of Railway” (USSOR) shall mean the schedule of rates issued under the authority of the Chief Engineer from time to time and shall also includes Rates specified in tender document.
- (o) “Schedule of rates (SOR) of State Govt.” shall mean the schedule of rates issued under the authority of the Chief Engineer(R&B) /State Govt. Gujarat from time to time and shall also includes Rates specified in tender document.
- (p) “Drawing” shall mean the maps, drawings, plans and tracings or prints there of annexed to the contract and shall include any modifications of such drawings and further drawings as may be issued by the Engineer from time to time.
- (q) “Constructional Plan” shall mean all appliances or things of whatsoever nature required for the execution, completion or maintenance of the works or temporary works (as hereinafter defined) but does not include materials or other things intended to form or forming part of the permanent work.
- (r) “Temporary Works” shall mean all temporary works of every kind required for the execution completion and/or maintenance of the works.

Signature of tenderer (s)

Date:



- (s) “Site” shall mean the lands and other places on, under, in or through which the works are to be carried out and any other lands or places provided by the DFCCIL for the purpose of the contract.
 - (t) “Period of Maintenance” shall mean the defect liability period from the date of completion of the works as certified by the Engineer.
- 1.(2) Singular and Plural:-** Words importing the singular number shall also include the plural and vice versa where the context requires.
- 1.(3) Headings & marginal headings:-**The headings and marginal headings in these general conditions are solely for the purpose of facilitating reference and shall not be deemed to be part thereof or be taken into consideration in the interpretation or construction thereof or the contract.

GENERAL OBLIGATION

- 2. (1) Execution Co-relation and intent of contract Documents:-**The contract documents shall be signed in triplicate by the DFCCIL and the Contractor. The contract documents are complementary, and what is called for by any one shall be as binding as if called for by all, the intention of the documents is to include all labour and materials, equipment's and transportation necessary for the proper execution of work. Materials or work not covered by or properly inferable from any heading or class of the specifications shall not be supplied by the DFCCIL to the contractors unless distinctly specified in the contract documents. Materials or works described in words which so applied have a well-known technical or trade meaning shall be held to refer to such recognized standards.
- 2.(2)** If a work is transferred from the jurisdiction of one Railway to another Railway or to a Project Authority/ DFCCIL or vice versa while contract is in subsistence, the contract shall be binding on the Contractor and the Successor Railway/Project in the same manner & take effect all respects as if the Contractor and the Successor Railway/Project were parties there to from the inception and the corresponding officer or the Competent Authority in the Successor Railway/Project will exercise the same powers and enjoy the same authority as conferred to the Predecessor Railway/Project under the original contract/agreement entered into.
- 2.(3)** If for administrative or other reasons the contract is transferred to the Successor Railway/Successor Project Authority of DFCCIL the contract shall notwithstanding any things contained herein contrary there to, be binding on the Contractor and the Successor Railway /Project Authority/ DFCCIL in the same manner and take effect in all respect as if the Contractor and the Successor Railway/ successor Project Authority of DFCCIL had been parties thereto from the date of this contract.
- 3.(1) Law governing the contract:-**The contract shall be governed by the law for the time being in force in the Republic of India.
- 3.(2) Compliance to regulations and bye-laws:-**The contractor shall conform to the provision of any statute relating to the works and regulations and by-laws of any local authority and of any water and lighting companies or undertakings, with whose system the work is

Signature of tenderer (s)

Date:



proposed to be connected and shall before making any variation from the drawings or the specifications that may be necessitated by so confirming give to the Engineer notice specifying the variation proposed to be made and the reasons for making the variation and shall not carry out such variation until he has received instructions from the Engineer in respect thereof. The contractor shall be bound to give all notices required by statute, regulations or bye-laws as aforesaid and to pay all fees and taxes payable to any authority in respect thereof.

4. **Communications to be in writing:-** All notices, communications, reference and complaints made by the DFCCIL or the Engineer or the Engineer's Representative or the Contractor inter-se concerning the works shall be in writing or e-mail on registered e-mail IDs and no notice, communication, reference or complaint not in writing or through e-mail, shall be recognized. In case of any deviation/ dispute in communication through Fax/e-mail & its respective hard copy the decision of DFCCIL shall be final.
5. **Service of Notices on Contractors:-** The Contractor shall furnish to the Engineer the name, designation and address of his authorized agent and all complaints, notices, communications and references shall be deemed to have been duly given to the Contractor, if delivered to the Contractor or his authorized agent or left at or posted to the address so given and shall be deemed to have been so given in the case of posting on day on which they would have reached such address in the ordinary course of post or on the day on which they were so delivered or left. In the case of contract by partners, any change in the constitution of the firm shall be forthwith notified by the Contractor to the Engineer.
6. **Occupation and use of land:-** No land belonging to or in the possession of the Railway / DFCCIL/State Government shall be occupied by the Contractor without the permission of the Railway / DFCCIL. The Contractor shall not use, or allow to be used, the site for any purposes other than that of executing the works. Whenever non-railway bodies / persons are permitted to use Railway/DFCCIL/ *State Government* premises with competent authority's approval, conservancy charges as applicable from time to time may be levied.
7. **Assignment or subletting of contract:-** The contractor shall not assign or sublet the contract or any part thereof or allow any person to become interested therein any manner whatsoever without the special permission in writing of the DFCCIL. Any breach of this condition shall entitle the DFCCIL to rescind the contract under clause 62 of these conditions and also render the contractor liable for payment to the DFCCIL in respect of any loss or damage arising or ensuing from such cancellation. Provided always that execution of the details of the work by petty contractor under the direct and personal supervision of the Contractor or his agent shall not be deemed to be sub-letting under this clause. The permitted subletting of work by the contractor shall not establish any contractual relationship between the sub- contractor and the DFCCIL and shall not relieve the contractor of any responsibility under the contract.
8. **Assistance by the DFCCIL for the Stores to be obtained by the Contractor:-** Owing to difficulty in obtaining certain materials (including Tools & Plant) in the market, the DFCCIL may have agreed without any liability therefore to endeavour to

Signature of tenderer (s)

Date:



obtain or assist the contractor in obtaining the required quantities of such materials as may be specified in the tender. In the event of delay or failure in obtaining the required quantities of the aforesaid material the contractor shall not be deemed absolved of his own responsibility and shall keep in touch with day to day positions regarding their availability and accordingly adjust progress of works including employment of labour and the DFCCIL shall not in any way be liable for the supply of materials or for the non-supply thereof for any reasons whatsoever nor for any loss or damage arising in consequence of such delay or no supply.

9. Deleted

10. Carriage of materials:- No forwarding orders shall be issued by the DFCCIL for the conveyance of contractor's materials, tools and plant by Rail which may be required for use in the works and the contractor shall pay full freight charges at public tariff rates therefore.

11. Use of Ballast Trains: The Railway may agree to allow the Contractor use of the ballast or material trains under such conditions as shall be specially prescribed, provided that the Contractor shall pay for the use thereof charges calculated at public tariff rates on the marked carrying capacity of each vehicle subject to specified minimum charge per day or part of day and provided further that the Contractor shall indemnify the Railway against any claims or damages arising out of the use or misuse thereof and against any liabilities under the Workmen's Compensation Act, 1923 or any statutory amendments thereto.

12. Representation on Works :- The contractor shall, when he is not personally present on the site of the works place and keep a responsible agent at the works during working hours who shall on receiving reasonable notice, present himself to the Engineer and orders given by the Engineer or the engineer's representative to the agent shall be deemed to have the same force as if they had been given to the Contractor. Before absenting himself, the contractor shall furnish the name and address of his agent for the purpose of this clause and failure on the part of the Contractor to comply with this provision at any time will entitle the DFCCIL to rescind the contract under clause 62 of these conditions.

13. Relics and Treasures:- All gold, silver, oil and other minerals of any description and all precious stones, coins, treasures relics antiquities and other similar things which shall be found in or upon the site shall be the property of the DFCCIL and the Contractor shall duly preserve the same to the satisfaction of the DFCCIL and shall from time to time deliver the same to such person or persons as the DFCCIL may appoint to receive the same.

14. Excavated material:- The contractor shall not sell or otherwise dispose of or remove except for the purpose of this contract, the sand, stones, clay, ballast, earth, rock or other substances or materials which may be obtained from any excavation made for the purpose of the works or any building or produced upon the site at the time of delivery of the possession thereof but all the substances, materials, buildings and produce shall be

Signature of tenderer (s)

Date:



the property of the DFCCIL provided that the contractor may, with the permission of the Engineer, use the same for the purpose of the works either free of cost or pay the cost of the same at such rates as may be determined by the Engineer.

15. Indemnity by Contractors:- The contractor shall indemnify and save harmless the Railway/DFCCIL from and against all actions, suit proceedings losses, costs, damages, charges, claims and demands of every nature and description brought or recovered against the Railways /DFCCIL by reason of any act or omission of the contractor, his agents or employees, in the execution of the works or in his guarding of the same. All sums payable by way of compensation under any of these conditions shall be considered as reasonable compensation to be applied to the actual loss or damage sustained, and whether or not any damage shall have been sustained.

16.(1) Security Deposit: The Earnest Money deposited by the Contractor with his tender will be retained by the DFCCIL as part of security for the due and faithful fulfilment of the contract by the Contractor. The Security Deposit shall be 5% of the contract value. Security Deposit may be deposited by the Contractor before release of first on account bill in cash or Term Deposit Receipt issued from Scheduled Bank, or may be recovered at the rate of 10% of the bill amount till the full Security Deposit is recovered. Provided also that in case of defaulting Contractor, the DFCCIL may retain any amount due for payment to the Contractor on the pending "on account bills" so that the amounts so retained (including amount guaranteed through Performance Guarantee) may not exceed 10% of the total value of the contract.

Further, in case of contracts having value equal to or more than Rs. 50 crore (Rs Fifty crore) the Security Deposit may be deposited as Bank Guarantee Bond also, issued by a scheduled bank after execution of contract documents, but before payment of 1st on account bill. Provided further that the validity of Bank Guarantee Bond shall be extended from time to time, depending upon extension of contract granted in terms of Clause 17 of the Standard General Conditions of Contract.

Further, in case Security Deposit has been submitted as Term Deposit Receipt/Bank Guarantee Bond in full amount, the Earnest Money deposited by the Contractor with his tender will be returned by the DFCCIL.

Note: After the work is physically completed as certified by competent authority, Security Deposit recovered from the running bills of a Contractor can be returned to him, if he so desires, in lieu of Term Deposit Receipt/irrevocable Bank Guarantee for equivalent amount from Scheduled Bank, to be submitted by him.

16.(2) (i) Refund of Security Deposit: Security Deposit mentioned in sub clause (1) above shall be returned to the Contractor after the following:

(a) Final Payment of the Contract as per clause 51.(1) and

Signature of tenderer (s)

Date:



- (b) Signature of Final Supplementary Agreement or Certification by DFCCIL that DFCCIL has No Claim on Contractor and
- (c) Issue of Maintenance Certificate on expiry of the maintenance period as per clause 50.(1).

16. (2) (ii) Forfeiture of Security Deposit: Whenever the contract is rescinded as a whole under clause 62 (1) of GCC, the Security Deposit already with DFCCIL under the contract shall be forfeited. However, in case the contract is rescinded in part or parts under clause 62 (1) of GCC, the Security Deposit shall not be forfeited.

16.(3) No interest shall be payable upon the Earnest Money and Security Deposit or amounts payable to the Contractor under the Contract, but Government Securities deposited in terms of Sub-Clause 16.(4)(b) of this clause will be payable with interest accrued thereon.

16.(4) Performance Guarantee

The procedure for obtaining Performance Guarantee is outlined below:

- (a) The successful bidder shall have to submit a Performance Guarantee (PG) within 21 (Twenty one) days from the date of issue of Letter of Acceptance (LOA). Extension of time for submission of PG beyond 21 (Twenty one) days and upto 60 days from the date of issue of LOA may be given by the Authority who is competent to sign the contract agreement. However, a penal interest of 12% per annum shall be charged for the delay beyond 21(Twenty one) days, i.e. from 22nd day after the date of issue of LOA. Further, if the 60th day happens to be a declared holiday in the concerned office of the DFCCIL, submission of PG can be accepted on the next working day.

In all other cases, if the Contractor fails to submit the requisite PG even after 60 days from the date of issue of LOA, the contract is liable to be terminated. In case contract is terminated DFCCIL shall be entitled to forfeit Earnest Money Deposit and other dues payable against that contract. In case a tenderer has not submitted Earnest Money Deposit on the strength of their registration as a Startup recognized by Department of Industrial Policy and Promotion (DIPP) under Ministry of Commerce and Industry, DIPP shall be informed to this effect.

The failed Contractor shall be debarred from participating in re-tender for that work.

- (b) The successful bidder shall submit the Performance Guarantee (PG) in any of the following forms, amounting to 5% of the contract value:
 - (i) A deposit of Cash;
 - (ii) Irrevocable Bank Guarantee;
 - (iii) Government Securities including State Loan Bonds at 5% below the market value;
 - (iv) Deposit Receipts, Pay Orders, Demand Drafts and Guarantee Bonds. These forms of

Signature of tenderer (s)
Date:



Performance Guarantee could be either of the State Bank of India or of any of the Nationalized Banks;

- (v) Guarantee Bonds executed or Deposits Receipts tendered by all Scheduled Banks;
 - (vi) Deposit in the Post Office Saving Bank;
 - (vii) Deposit in the National Savings Certificates;
 - (viii) Twelve years National Defence Certificates;
 - (ix) Ten years Defence Deposits;
 - (x) National Defence Bonds and
 - (xi) Unit Trust Certificates at 5% below market value or at the face value whichever is less.
Also, FDR in favour of DFCCIL (free from any encumbrance) may be accepted.
- (c) The Performance Guarantee shall be submitted by the successful bidder after the Letter of Acceptance (LOA) has been issued, but before signing of the contract agreement. This P.G. shall be initially valid upto the stipulated date of completion plus 60 days beyond that. In case, the time for completion of work gets extended, the Contractor shall get the validity of P.G. extended to cover such extended time for completion of work plus 60 days.
- (d) The value of PG to be submitted by the Contractor will not change for variation upto 25% (either increase or decrease). In case during the course of execution, value of the contract increases by more than 25% of the original contract value, an additional Performance Guarantee amounting to 5% (five percent) for the excess value over the original contract value shall be deposited by the Contractor. On the other hand, if the value of contract decreases by more than 25% of the original contract value, Performance Guarantee amounting to 5% (five percent) of the decrease in the contract value shall be returned to the Contractor. The PG amount in excess of required PG for decreased contract value, available with DFCCIL, shall be returned to Contractor as per his request duly safeguarding the interest of DFCCIL.
- (e) The Performance Guarantee (PG) shall be released after physical completion of the work based on 'Completion Certificate' issued by the competent authority stating that the Contractor has completed the work in all respects satisfactorily.
- (f) Whenever the contract is rescinded, the Performance Guarantee already submitted for the contract shall be encashed in addition to forfeiture of Security Deposit available with DFCCIL.
- (g) The Engineer shall not make a claim under the Performance Guarantee except for amounts to which the President of India is entitled under the contract (not withstanding and/or without prejudice to any other provisions in the contract agreement) in the event of:
- (i) Failure by the Contractor to extend the validity of the Performance Guarantee as described herein above, in which event the Engineer may claim the full amount of the Performance Guarantee.

Signature of tenderer (s)

Date:



- (ii) Failure by the Contractor to pay DFCCIL any amount due, either as agreed by the Contractor or determined under any of the Clauses/Conditions of the Agreement, within 30 days of the service of notice to this effect by Engineer.
- (iii) The Contract being determined or rescinded under clause 62 of the GCC.
- (h) All BGs have to be issued by Scheduled Commercial banks in India other than Cooperative Banks. Schedule Commercial banks are the banks which are listed in the second schedule of the Reserve Bank of India Act 1934 (Usually private, Foreign and Nationalized Bank operating in India)

Not with standing the guidelines stated below in the case of packages/procurement funded by funding agency (JICA/World Bank etc.) the specific procedure as agreed with the concern funding agency in this regard shall be followed. However, in absence of any requirements from the funding agency, the procedure prescribed below shall be followed for packages/procurements being done in DFCCIL (*Considered as per GM/Finance/CF Circular No. 47, Letter no. HQ/F&A/bills/Circulars/2018 dated 21.08.2018.*

17. Force Majeure Clause: If at any time, during the continuance of this contract, the performance in whole or in part by either party of any obligation under this contract shall be prevented or delayed by reason of any war, hostility, acts of public enemy, civil commotion, sabotage, serious loss or damage by fire, explosions, epidemics, strikes, lockouts or acts of God (hereinafter, referred to events) provided, notice of the happening of any such event is given by either party to the other within 30 days from the date of occurrence thereof, neither party shall by reason of such event, be entitled to terminate this contract nor shall either party have any claim for damages against the other in respect of such non-performance or delay in performance, and works under the contract shall be resumed as soon as practicable after such event has come to an end or ceased to exist, and the decision of the Engineer as to whether the works have been so resumed or not shall be final and conclusive, PROVIDED FURTHER that if the performance in whole or in part of any obligation under this contract is prevented or delayed by reason of any such event for a period exceeding 120 days, either party may at its option terminate the contract by giving notice to the other party.

17-A Extension of Time in Contracts: Subject to any requirement in the contract as to completion of any portion or portions of the works before completion of the whole, the Contractor shall fully and finally complete the whole of the works comprised in the contract (with such modifications as may be directed under conditions of this contract) by the date entered in the contract or extended date in terms of the following clauses:

(i) Extension due to Modification: If any modifications have been ordered which in the opinion of the Engineer have materially increased the magnitude of the work, then such extension of the contracted date of completion may be granted as shall appear to the Engineer to be reasonable in the circumstances, provided moreover that the Contractor shall be responsible for requesting such extension of the date as may be considered necessary as soon as the cause thereof shall arise and in any case not less than one month before the expiry of

Signature of tenderer (s)

Date:



the date fixed for completion of the works.

(ii) Extension for Delay not due to DFCCIL or Contractor: If in the opinion of the Engineer, the progress of work has any time been delayed by any act or neglect of DFCCIL's employees or by other Contractor employed by the DFCCIL under Sub-Clause (4) of Clause 20 of these Conditions or in executing the work not forming part of the contract but on which Contractor's performance necessarily depends or by reason of proceeding taken or threatened by or dispute with adjoining or to neighbouring owners or public authority arising otherwise through the Contractor's own default etc. or by the delay authorized by the Engineer pending arbitration or in consequences of the Contractor not having received in due time necessary instructions from the DFCCIL for which he shall have specially applied in writing to the Engineer or his authorized representative then upon happening of any such event causing delay, the Contractor shall immediately give notice thereof in writing to the Engineer within 15 days of such happening, but shall nevertheless make constantly his best endeavours to bring down or make good the delay and shall do all that may be reasonably required of him to the satisfaction of the Engineer to proceed with the works. The Contractor may also indicate the period for which the work is likely to be delayed and shall be bound to ask for necessary extension of time. The Engineer on receipt of such request from the Contractor shall consider the same and shall grant such extension of time as in his opinion is reasonable having regard to the nature and period of delay and the type and quantum of work affected thereby. No other compensation shall be payable for works so carried forward to the extended period of time; the same rates, terms and conditions of contract being applicable as if such extended period of time was originally provided in the original contract itself.

(iii) Extension for Delay due to DFCCIL: In the event of any failure or delay by the DFCCIL to hand over the Contractor possession of the lands necessary for the execution of the works or to give the necessary notice to commence the works or to provide the necessary drawings or instructions or any other delay caused by the DFCCIL due to any other cause whatsoever, then such failure or delay shall in no way affect or vitiate the contract or alter the character thereof or entitle the Contractor to damages or compensation therefore, but in any such case, the DFCCIL may grant such extension or extensions of the completion date as may be considered reasonable.

17-B Extension of Time for delay due to Contractor:

(i) With liquidated Damage (LD): The time for the execution of the work or part of the works specified in the contract documents shall be deemed to be the essence of the contract and the works must be completed not later than the date(s) as specified in the contract. If the Contractor fails to complete the works within the time as specified in the contract for the reasons other than the reasons specified in Clause 17 and 17-A, the DFCCIL may, if satisfied that the works can be completed by the Contractor within reasonable short time thereafter, allow the Contractor for further extension of time (Proforma at Form No.14) as the Engineer may decide. On such extension the DFCCIL will be

Signature of tenderer (s)

Date:



entitled without prejudice to any other right and remedy available on that behalf, to recover from the Contractor as agreed damages and not by way of penalty for each week or part of the week, a sum calculated at the following rates of the contract value of the works.

For the purpose of this Clause, the contract value of the works shall be taken as value of work as per contract agreement including any supplementary work order/contract agreement issued. Provided also, that the total amount of liquidated damages under this condition shall not exceed 5% of the contract value or of the total value of the item or groups of items of work for which a separate distinct completion period is specified in the contract.

S.No.	Duration of extension of time under Clause 17-B	Rate of Penalty
(i)	Up to Twenty percent of original period of completion including period of extension of DOC granted under Section 17A(i)	As decided by Engineer, between 0.01% to 0.10% of contract value for each week or part of the week
(ii)	Above Twenty percent but upto Thirty percent of original period of completion including period of extension of DOC granted under Section 17A(i)	0.20% of contract value for each week or part of the week
(iii)	Above Thirty percent but upto Forty percent of original period of completion including period of extension of DOC granted under Section 17A(i)	0.30% of contract value for each week or part of the week
(iv)	Above Forty percent of original period of completion including period of extension of DOC granted under Section 17A(i)	0.50% of contract value for each week or part of the week

Provided further, that if the DFCCIL is not satisfied that the works can be completed by the Contractor and in the event of failure on the part of the contractor to complete the work within further extension of time allowed as aforesaid, the DFCCIL shall be entitled without prejudice to any other right or remedy available in that behalf, to appropriate the contractor's Security Deposit and rescind the contract under Clause 62 of these Conditions, whether or not actual damage is caused by such default.

18.(1) Illegal Gratification:- Any bribe, commission, gift or advantage given, promised or offered by or on behalf to the contractor or his partner, agent or servant or, anyone on his behalf, to any officer or employee of the DFCCIL, or to any person on his behalf in relation to obtaining or execution of this or any other contract with the DFCCIL shall, in addition to any criminal liability which he may incur, subject contractor to the rescission of the contract and all other contracts with the DFCCIL and to the payment of any loss or damage resulting from such decision and the DFCCIL shall be entitled to deduct the amounts so payable from the Contractor's bills/Security Deposit or any other dues of Contractor with the DFCCIL.

Signature of tenderer (s)

Date:



- 18.(2) The contractor shall not lend or borrow from or have or enter into any monetary dealings and transactions either directly or indirectly with any employee of the DFCCIL and if he shall do so, the DFCCIL shall be entitled forthwith to rescind the contract and all other contracts with the DFCCIL. Any question or dispute as to the commission or any such offence or compensation payable to the DFCCIL under this clause shall be settled by the General Manager/ROB /CGM of the DFCCIL, in such a manner as he shall consider fit and sufficient and his decision shall be final and conclusive. In the event of rescission of the contract under this clause, the contractor will not be paid any compensation whatsoever except payments for the work done up to the date of rescission.

EXECUTION OF WORKS

- 19.(1) **Contractor's understanding:-** It is understood and agreed that the contractor has, by careful examination, satisfied himself as to the nature and location of the work, the conformation of the ground, the character, quality and quantity of the materials to be encountered, the character of equipment and facilities needed preliminary to and during the progress of the works, the general and local conditions, the labour conditions prevailing therein and all other matters which can in any way affect the works under the contract.
- 19.(2) **Commencement of works:-**The contractor shall commence the works within 15 days after the receipt by him of an order in writing to this effect from the Engineer and shall proceed with the same with due expedition and without delay.
- 19.(3) **Accepted Programme of work:-** The contractor who has been awarded the work shall as soon as possible but not later than 30 days after the date of receipt of the acceptance letter in respect of contracts with initial completion period of two years or less or not later than 90 days for other contracts have to submit the detailed programme of work indicating the time schedule of various items of works in the form of Bar Chart/PERT/CPM. He shall also submit the details of organization (in terms of labour and supervisors) plant and machinery, that he intends to utilize (from time to time) for execution of the work within stipulated date of completion. The programme of work amended as necessary by discussions with the Engineer, shall be treated as the agreed programme of the work for the purpose of this contract and the contractor shall endeavour to fulfill this programme of work. The progress of work will be watched accordingly and the liquidated damages will be with reference to the overall completion date. Nothing stated herein shall preclude the contractor in achieving earlier completion of item or whole of the works than indicated in the programme.
- 19.(4) **Setting out of works:-** The contractor shall be responsible for the correct setting out of all works in relation to original points, lines and levels of reference at his cost. The contractor shall execute the work true to alignment, grade, levels and dimensions as shown in the drawing and as directed by the Engineer's representative and shall check these at frequent intervals. The contractor shall provide all facilities like labour and instruments and shall co-operate with the Engineer's representative to check all

Signature of tenderer (s)

Date:

alignment, grades, levels and dimensions. If, at any time, during the progress of the works any error shall appear or arise in any part of the work, the contractor, on being required so to do by the Engineer's representative shall, at his own cost rectify such errors, to the satisfaction of the Engineer's representative.

Such checking shall not absolve the contractor of his own responsibility of maintaining accuracy in the work. The contractor shall carefully protect and preserve all bench marks, sight rails, pegs and other things used in setting out the work.

- 20.(1) Compliance to Engineer's instructions:-**The Engineer shall direct the order in which the several parts of the works shall be executed and the contractor shall execute without delay all orders given by the Engineer from time to time but the contractor shall not be relieved thereby from responsibility for the due performance of the works in all respects.
- 20.(2) Alterations to be authorized:-**No alterations in or additions to or omissions or abandonment of any part of the works shall be deemed authorized, except under instructions from the Engineer, and the contractor shall be responsible to obtain such instructions in each and every case in writing from the Engineer.
- 20.(3) Extra works:-** Should works over and above those included in the contract require to be executed at the site, the contractor shall have no right to be entrusted with the execution of such works which may be carried out by another contractor or contractors or by other means at the option of the DFCCIL.
- 20.(4) Separate contracts in connection with works:-** The DFCCIL shall have the right to let other contracts in connection with the works. The contractor shall afford other contractors reasonable opportunity for the storage of their materials and the execution of their works and shall properly connect and coordinate his work with theirs. If any part of the contractor's work depends upon proper execution or result upon the work of another contractor(s), the contractor shall inspect and promptly report to the Engineer any defects in such works that render it unsuitable for such proper execution and results. The contractor's failure so-to inspect and report shall constitute an acceptance of the other contractor's work as fit and proper for the reception of his work, except as to defects which may develop in the other contractor's work after the execution of his work.
- 21. Instruction of Engineer's Representative:-** Any instructions or approval given by the Engineer's representative to contractor in connection with the works shall bind the contractor as though it had been given by the Engineer provided always as follows:
- (a) Failure of the Engineer's representative to disapprove any work or materials shall not prejudice, the power of the Engineer thereafter to disapprove such work or material and to order the removal or breaking up thereof.
 - (b) If the Contractor shall be dissatisfied by reason of any decision of the Engineer's representative, he shall be entitled to refer the matter to the Engineer who shall there upon confirm or vary such decision.

Signature of tenderer (s)

Date:



- 22.(1) Adherence to specifications and drawings:-** The whole of the works shall be executed in perfect conformity with the specifications and drawings of the contract. If contractor performs any works in a manner contrary to the specifications or drawings or any of them and without such reference to the Engineer he shall bear all the costs arising or ensuing therefore and shall be responsible for all loss to the DFCCIL.
- 22.(2) Drawings and specifications of the works:-** The contractor shall keep one copy of drawings and specifications at the site, in good order, and such contract documents as may be necessary available to the Engineer or the Engineer's representative.
- 22.(3) Ownership of drawings and specifications:-** All drawings and specifications and copies thereof furnished by the DFCCIL to the Contractor are deemed to be the property of the DFCCIL. They shall not be used on other works and with the exception of the signed contract set, shall be returned by the contractor to the DFCCIL on completion of the work or termination of the contract.
- 22.(4) Compliance with Contractor's request for details:-** The Engineer shall furnish with reasonable promptness, after receipt by him of the contractor's request for the same, additional instructions by means of drawings or otherwise, necessary for the proper execution of the works or any part thereof. All such drawing and instructions shall be consistent with the contract Documents and reasonably inferable there from.
- 22.(5) Meaning and intent of specification and drawings:-** If any ambiguity arises as to the meaning and intent of any portion of the specifications and drawings or as to execution or quality of any work or material, or as to the measurements of the works the decision of the Engineer thereon shall be final subject to the appeal (within 7 days of such decision being intimated to the contractor) to the Chief Engineer/ General Manager/ROB./CGM who shall have the power to correct any errors, omissions, or discrepancies in aforementioned items and whose decision in the matter in dispute or doubt shall be final and conclusive.
- 23 Working during night:-** The contractor shall not carry out any work between sun-set and sun-rise without the previous permission of the Engineer. However, if the Engineer is satisfied that the work is not likely to be completed in time except by resorting to night work, he may order the same without confirming any right on the Contractor for claiming any extra payment for the same.
- 24. Damage to Railway / DFCCIL property or private life and property:-** The contractor shall be responsible for all risk to the work and for trespass and shall make good at his own expense all loss or damage whether to the works themselves or to any other property of the Railway or the lives, persons or property of others from whatsoever cause in connection with the works until they are taken over by the Railway / DFCCIL and this although all reasonable and proper precautions may have been taken by the contractor, and in case the Railway / DFCCIL shall be called upon to make good any costs, loss or damages, or to pay an compensation, including that payable under the provisions of the Workmen's Compensation Act or any statutory amendments thereof to any

Signature of tenderer (s)

Date:



person or persons sustaining damages as aforesaid by reason of any act, or any negligence or omissions on the part of the contractor the amount of any costs or charges including costs and charges in connection with legal proceedings, which the Railway / DFCCIL may incur in reference thereto, shall be charged to the contractor. The Railway / DFCCIL shall have the power and right to pay or to defend or compromise any claim of threatened legal proceedings or in anticipation of legal proceedings being instituted consequent on the action or default of the contractor, to take such steps as may be considered necessary or desirable to ward off or mitigate the effect of such proceedings, charging to contractor, as aforesaid any sum or sums of money which may be paid and any expenses whether for reinstatement or otherwise which may be incurred and the propriety of any such payment, defence or compromise, and the incurring of any such expenses shall not be called in question by the contractor.

25. Sheds, stores houses and Yards:-The contractor shall at his own expense provide himself with sheds, stores houses and yards in such situations and in such numbers as in the opinion of the Engineer is requisite for carrying on the works and the contractor shall keep at each such sheds, stores houses and yard a sufficient quantity of materials and plant in stock as not to delay the carrying out of the works with due expedition and the Engineer and the Engineer's representative shall have free access to the said sheds, store houses and yards at any time for the purpose of inspecting the stock of materials or plant so kept in hand, and any materials or plan which the Engineer may object to shall not be brought upon or used in the works, but shall be forthwith removed from the sheds, store houses or yards by the contractor. The contractor shall at his own expenses provide and maintain suitable mortar mills, soaking vats or any other equipments necessary for the execution of the works.

26. Provision of efficient and competent Staff at work sites by the Contractor :-

26.1 The contractor shall place and keep on the works at all times efficient and competent staff to give the necessary directions to his workmen and to see that they execute their work in sound and proper manner and shall employ only such supervisors, workmen and labourers in or about the execution of any of these works as are careful and skilled in the various trades.

26.2 The contractor shall at once remove from the works any agents, permitted sub-contractor, supervisor, workman or labourer who shall be objected to by the Engineer and if and whenever required by the Engineer, he shall submit a correct return showing the names of all staff and workmen employed by him.

26.3 In the event of the Engineer being of the opinion that the contractor is not employing on the works a sufficient number of staff and workmen as is necessary for the proper completion of the works within the time prescribed, the contractor shall forthwith on receiving intimation to this effect deploy the additional number of staff and labour specified by the Engineer within seven days of being so required and failure on the part of the contractor to comply with such instructions will entitle the DFCCIL to rescind the contract under clause 62 of these conditions.

Signature of tenderer (s)

Date:



26A. Deployment of Qualified Engineers at Work Sites by the Contractor:-

26A.1. The contractor shall also employ Qualified Graduate Engineer or Qualified Diploma Holder Engineer, based on value of contract, as may be prescribed by the Ministry of Railways through separate instructions from time to time.

26A.2 In case the contractor fails to employ the Engineer, as aforesaid in Para 26A.1, he shall be liable to pay penalty at the rates, as may be prescribed by the Ministry of Railways through separate instructions from time to time for the default period for the provisions, as contained in Para 26A.1.

26A.3 No. of qualified Engineers required to be deployed by the Contractor for various activities contained in the works contract shall be specified in the tender documents as 'Special Condition of Contract' by the tender inviting authority."

27.(1) Workmanship and testing:- The whole of the works and / or supply of materials specified and provided in the contract or that may be necessary to be done in order to form and complete any part thereof shall be executed in the best and most substantial workman like manner with materials of the best and most approved quality of their respective kinds, agreeable to the particulars contained in or implied by the specifications and as referred to in and represented by the drawings or in such other additional particulars, instructions and drawings may be found requisite to be given during the carrying on of the works and to the entire satisfaction of the Engineer according to the instructions and directions which the contractors may from time to time receive from the Engineer. The materials may be subjected to tests by means of such machines, instruments and appliances as the Engineer may direct and wholly at the expense of the contractor.

27.(2) Removal of improper work and materials:- The Engineer or the Engineer's Representative shall be entitled to order from time to time:

- (a) The removal from the site within the time specified in the order of any materials which in his opinion are not in accordance with the specifications or drawings.
- (b) The substitution of proper and suitable materials, and
- (c) The removal and proper re-execution, notwithstanding any previous tests thereof or on account payments therefore, of any work which in respect of materials or workmanship; is not in his opinion in accordance with the specifications and in case of default on the part of the contractor in carrying out such order the DFCCIL shall be entitled to rescind the contract under clause 62 of these conditions.

28. Facilities for inspection:- The contractor shall afford the Engineer and the Engineer's Representative every facility for entering in and upon every portion of the work at all hours for the purpose of inspection or otherwise and shall provide all labour, materials, planks, ladders, pumps, appliances and things of every kind required for the purpose and the Engineer and the Engineer's Representative shall at all times have free access to

Signature of tenderer (s)

Date:



every part of the works and to all places at which materials for the works are stored or being prepared.

- 29. Examination of work before covering up:-** The contractor shall give 7 days' notice to the Engineer or the Engineer's representative whenever any work or materials are intended to be covered up in the earth, in bodies or walls or otherwise to be placed beyond the reach of measurements in order that the work may be inspected or that correct dimensions may be taken before being so covered, placed beyond the reach of measurement in default whereof, the same shall at the option of the Engineer or the Engineer's representative be uncovered and measured at the contractor's expense or no allowance shall be made for such work or materials.
- 30. Temporary Works:-** All temporary works necessary for the proper execution of the works shall be provided and maintained by the contractor and subject to the consent of the Engineer shall be removed by him at his expenses when they are no longer required and in such manner as the Engineer shall direct. In the event of failure on the part of the contractor to remove the temporary works, the Engineer will cause them to be removed and cost as increased by supervision and other incidental charges shall be recovered from the contractor. If temporary huts are provided by the contractor on the Railway / DFCCIL land for labour engaged by him for the execution of works, the contractor shall arrange for handing over vacant possession of the said land after the work is completed; if the contractor's labour refuse to vacate, and have to be rejected by the Railway / DFCCIL necessary expenses incurred by the Railway / DFCCIL in connection therewith shall be borne by the contractor.
- 31.(1) Contractor to supply water for works:-** Unless otherwise provided in the contract, the contractor shall be responsible for the arrangements to obtain supply of water necessary for the works.
- 31.(2) Deleted**
- 31.(3) Deleted**
- 31.(4)(a) Contractor to arrange supply of Electric power for works:-** Unless otherwise provided in the contract, the contractor shall be responsible for arrangements to obtain supply of electric power for the works.
- 31.(4)(b) Deleted**
- 32. Property in materials and plant:-** The materials and plant brought by the Contractor upon the site or on the land occupied by the Contractor in connection with the works and intended to be used for the execution thereof shall immediately be deemed to be the property of the Railway / DFCCIL. Such of them as during the progress of the works are rejected by the Engineer under Clause 25 of these conditions or are declared by him not to be needed for the execution of the works or such as on the grant of the certificate of completion remain unused shall immediately on such rejection,

Signature of tenderer (s)

Date:



declaration or grant cease to be deemed the property of the Railway / DFCCIL and the Contractor may then (but not before) remove them from the site or the said land. This clause shall not in any way diminish the liability of the Contractor nor shall the Railway / DFCCIL be in any way answerable for any loss or damage which may happen to or in respect of any such materials or plant either by the same being lost, stolen, injured or destroyed by fire, tempest or otherwise.

- 33.(1) Tools, Plant and Materials Supplied by DFCCIL:-** The Contractor shall take all reasonable care of all tools, plant and materials or other property whether or a like description or not belonging to the DFCCIL and committed to his charge for the purpose of the works and shall be responsible for all damage or loss caused by him, his agents, permitted subcontractor, or his workmen or others while they are in his charge. The Contractors shall sign accountable receipts for tools, plants and materials made over to him by the engineer and on completion of the works shall hand over the unused balance of the same to the Engineer in good order and repair, fair wear and tear excepted, and shall be responsible for any failure to account for the same or any damage done thereto.
- 33.(2) Hire of DFCCIL / Railway's Plant:-** The DFCCIL may hire to the Contractor such plant as concrete mixers, compressors and portable engines for use during execution of the works on such terms as may be specified in the special conditions or in a separate agreement for Hire of Plant.
- 34.(1) Precaution during progress of works:-** During the execution of works, unless otherwise specified, the Contractor shall at his own cost provide the materials for and execute all shoring, timbering and strutting works as is necessary for the stability and safety of all structures, excavations and works and shall ensure that no damage, injury or loss is caused or likely to be caused to any person or property.
- 34.(2) Roads and Water courses:-** Existing roads or water courses shall not be blocked cut through, altered, diverted or obstructed in any way by the Contractor, except with the permission of the Engineer. All compensations claimed for any unauthorized closure, cutting through, alteration, diversion or obstruction to such roads or water courses by the Contractor or his agent or his staff shall be recoverable from the Contractor's bills/Security Deposit or any other dues of Contractor with the Government of India.
- 34.(3) Provision of access to premises:-** During progress of work in any street or thoroughfare, the Contractor shall make adequate provision for the passage of traffic, for securing safe access to all premises approached from such street or thoroughfare and for any drainage, water supply or means of lighting which may be interrupted by reasons of the execution of the works and shall react and maintain at his own cost barriers, lights and other safeguards as prescribed by the Engineer, for the regulation of the traffic, and provide watchmen necessary to prevent accidents. The works shall in such cases be executed night and day if so ordered by the Engineer and with such vigour so that the traffic way be impeded for as short a time as possible.

Signature of tenderer (s)

Date:



- 34.(4) Safety of Public:-** The Contractor shall be responsible to take all precautions to ensure the safety of the public whether on public or DFCCIL/railway property and shall post such look out men as may, in the opinion of the Engineer, be required to comply with regulations appertaining to the work. Contractor shall ensure placement of barricading / partitions at the place of work to ensure safety of habitants of adjacent area, failing which Engineer may advise stoppage of work as per his discretion.
- 34.(5) Display Board:** The Contractor shall be responsible for displaying the details of works i.e. name of work, approximate cost, expected date of completion, name and address of the Contractor and address of Engineer on a proper steel Board of size not less than 1m x 1m.
- 35. Use of Explosives:** Explosives shall not be used on the works or on the site by the Contractor without the permission of the Engineer and then also only in the manner and to the extent to which such permission is given. Where explosives are required for the works, they shall be stored in a special magazine to be provided by and at the cost of the Contractor in accordance with the Explosive Rules. The Contractor shall obtain the necessary license for the storage and the use of explosives. All operations in which or for which explosives are employed shall be at the sole risk and responsibility of the Contractor and the Contractor shall indemnify the DFCCIL in respect thereof.
- 36.(1) Suspension of works:-** The Contractor shall on the order of the Engineer, suspend the progress of the works or any part thereof for such time or times and in such manner as the Engineer may consider necessary and shall during such suspension properly protect and secure the work so far as is necessary in the opinion of the Engineer. If such suspension is:-
- (a) Provided for in the contract, or
 - (b) Necessary for the proper execution of the works or by the reason of weather conditions or by some default on the part of the Contractor, and/or
 - (c) Necessary for the safety of the works or any part thereof.
- 36.(2)** The Contractor shall not be entitled to the extra costs, if any, incurred by him during the period of suspension of the works, but in the event of any suspension ordered by the Engineer for reasons other than aforementioned and when each such period of suspensions exceeds 14 days, the contractor shall be entitled to such extension of time for completion of the work as the Engineers may consider proper having regard to the period or periods of such suspensions and to such compensations as the Engineer may consider reasonable in respect of salaries or wages paid by the Contractor to his employees during the periods of such suspension.

Signature of tenderer (s)

Date:



- 36.(3) Suspension lasting more than 3 months:-** If the progress of the works or any part thereof is suspended on the order of the Engineer for more than three months at a time, the Contractor may serve a written notice on the Engineer requiring permission within 15 days from the receipt thereof to proceed with the works or that part thereof in regard to which progress is suspended and if such permission is not granted within that time the Contractor by further written notice so served may, but is not bound to, elect to treat the suspension where it affects part only of the works as an omission of such part or where it affects the whole of the works, as an abandonment of the contract by the DFCCIL.
- 37. Rates for items of works:-** (i) The rates, entered in the accepted Schedule of Rates of the Contract are intended to provide for works duly and properly completed in accordance with the general and special (if any) conditions of the contract and the specifications and drawings together with such enlargements, extensions, diminutions, reductions, alterations or additions as may be ordered in terms of Clause 42 of these conditions and without prejudice to the generality thereof and shall be deemed to include and cover superintendence and labour, supply, including full freight, of materials, stores, patterns, profiles, moulds, fittings, centring, scaffolding, shoring props, timber, machinery, barracks, tackle, roads, pegs, posts, tools and all apparatus and plant required on the works, except such tools, plant or materials as may be specified in the contract to be supplied to the Contractor by the DFCCIL, the erection, maintenance and removal of all temporary works and, buildings, all watching, lighting, bailing, pumping and draining, all prevention of or compensation for trespass, all barriers and arrangements for the safety of the public or of employees during the execution of works, all sanitary and medical arrangements for labour camps as may be prescribed by the DFCCIL, the setting of all work and of the construction, repair and upkeep of all centre lines, bench marks and level pegs thereon, site clearance, all fees duties, royalties, rent, taxes and compensation to owners for surface damage or taxes and impositions payable to local authorities in respect of land, structures and all material supplied for the work or other duties of expenses for which the Contractor may become liable or may be put to under any provision of law for the purpose of or in connection with the execution of the contract, and all such other incidental charges or contingencies as may have been specially provided for in the specifications.

However, if rates of existing GST or cess on GST for Works Contract is increased or any new tax /cess on Works Contract is imposed by Statute after the date of opening of tender but within the original date of completion/date of completion extended under clause 17 & 17A and the Contractor thereupon properly pays such taxes/cess, the Contractor shall be reimbursed the amount so paid.

Further, if rates of existing GST or cess on GST for Works Contract is decreased or any tax/cess on Works Contract is decreased / removed by Statute after the date of opening of tender, the reduction in tax amount shall be recovered from Contractor's bills/Security Deposit or any other dues of Contractor with the Government of India.

- 38. Deleted**

Signature of tenderer (s)

Date:



- 39.(1) Rates for extra items of works:-** Any type of work carried out by the Contractor on the instructions of the Engineer which is not included in the accepted schedules of rates shall be executed at the rates set forth in the “Schedule of Rates of Railway/ Schedule of Rates of State Govt./NS items” modified by the tender percentage and such items are not contained in the latter, at the rate agreed upon between the Engineer and the Contractor before the execution of such items of work and the Contractors shall be bound to notify the Engineer at least seven days before the necessity arises for the execution of such items of works that the accepted schedule of rates does not include rate or rates for the extra work involved. The rates payable for such items shall be decided at the meeting to be held between the Engineer and Contractor, in as short a period as possible after the need for the special item has come to the notice. In case the Contractor fails to attend the meeting after being notified to do so or in the event of no settlement being arrived at, the DFCCIL shall be entitled to execute the extra works by other means and the Contractor shall have no claim for loss or damage that may result from such procedure.
- 39.(2)** Provided that if the Contractor commences work or incurs any expenditure in regard thereto before the rates as determined and agreed upon as lastly hereunto fore-mentioned, then and in such a case the Contractor shall only be entitled to be paid in respect of the work carried out or expenditure incurred by him prior to the date of determination of rates as aforesaid according to the rates as shall be fixed by the Engineer. However if the Contractor is not satisfied with the decision of the Engineer in this respect he may appeal to the CGM/General Manager/ROB within 30 days of getting the decision of the Engineer, supported by analysis of the rates claimed. The CGM's/ General Manager's decision after hearing both the parties in the matter would be final and binding on the Contractor and the DFCCIL.
- 40.(1) Handing over of works:-** The Contractor shall be bound to hand over the works executed under the contract to the DFCCIL complete in all respects to the satisfaction of the Engineer. The Engineer shall determine the date on which the work is considered to have been completed, in support of which his certificate shall be regarded as sufficient evidence for all purposes. The Engineer shall determine from time to time, the date on which any particular section of the work shall have been completed, and the contractor shall be bound to observe any such determination of the Engineer.
- 40.(2) Clearance of site on completion:-** On completion of works, the Contractor shall clear away and remove from the site all constructional plant, surplus materials, rubbish and temporary works of every kind and leave the whole of the site and works clean and in a workman like condition to the satisfaction of the Engineer. No final payment in settlement of the accounts for the works shall be paid, held to be due or shall be made to the, Contractor till, in addition to any other condition necessary for final payment, site clearance shall have been affected by him, and such clearance may be made by the Engineer at the expense of the Contractor in the event of his failure to comply with this provision within 7 days after receiving notice to that effect. Should it become necessary for the Engineer to have the site cleared at the expenses of the Contractor, the DFCCIL shall not be held liable for any loss or damage to such of the Contractor's property as

Signature of tenderer (s)

Date:



may be on the site and due to such removal there from which removal may be effected by means of public sales of such materials and property or in such a way as deemed fit and convenient to the Engineer.

VARIATIONS IN EXTENT OF CONTRACT

- 41. Modification to contract to be in writing:-** In the event of any of the provisions of the contract requiring to be modified after the contract documents have been signed, the modifications shall be made in writing and signed by the DFCCIL and the Contractor and no work shall proceed under such modifications until this has been done. Any verbal or written arrangement abandoning, modifying, extending, reducing or supplementing the contract or any of the terms thereof shall be deemed conditional and shall not be binding on the DFCCIL unless and until the same is incorporated in a formal instrument and signed by the DFCCIL and the Contractor, and till then the DFCCIL shall have the right to repudiate such arrangements.
- 42.(1) Powers of modification to contract:-** The Engineer on behalf of the DFCCIL shall be entitled by order in writing to enlarge or extend, diminish or reduce the works or make any alterations in their design, character position, site, quantities, dimensions or in the method of their execution or in the combination and use of materials for the execution thereof or to order any additional work to be done or any works not to be done and the contractor will not be entitled, to any compensation for any increase/reduction in the quantities of work but will be paid only for the actual amount of work done and for approved materials supplied against a specific order.
- 42.(2)** (i) Unless otherwise specified in the contract, the accepted variation in quantity of each individual item of the contract would be up to 25% of the quantity originally contracted, except in case of foundation work.
- (ii) The contractor shall be bound to carry out the work at the agreed rates and shall not be entitled to any claim or any compensation whatsoever up to the limit of 25% variation in quantity of individual item of works.
- (iii) In case an increase in quantity of an individual item by more than 25% of the agreement quantity is considered unavoidable, then same shall be executed at following rates
- (a) Quantities operated in excess of 125% but upto 140% of the agreement quantity of the concerned item, shall be paid at 98% of the rate awarded for that item in that particular tender;
- (b) Quantities operated in excess of 140% but upto 150% of the agreement quantity of the concerned item shall be paid at 96% of the rate awarded for that item in that particular tender;
- (c) Variation in quantities of individual items beyond 150% will be avoided and would be permitted only in exceptional unavoidable circumstances and shall be paid at 96% of the rate awarded for that item in that particular tender.

Signature of tenderer (s)

Date:



(d) Variation to quantities of Minor Value Item:

The limit for varying quantities for minor value items shall be 100% (as against 25% prescribed for other items). A minor value item for this purpose is defined as an item whose original agreement value is less than 1 % of the total original agreement value.

d.(i) Quantities operated upto and including 100% of the agreement quantity of the concerned minor value item, shall be paid at the rate awarded for that item in that particular tender;

d.(ii) Quantities operated in excess of 100% but upto 200% of the agreement quantity of the concerned minor value item, shall be paid at 98% of the rate awarded for that item in that particular tender;

d.(iii) Variation in quantities of individual minor value item beyond 200% will be avoided and would be permitted only in exceptional unavoidable circumstances and shall be paid at 96% of the rate awarded for that item in that particular tender.

(iv) In case of earthwork, the variation limit of 25% shall apply to the gross quantity of earthwork and variation in the quantities of individual classifications of soil shall not be subject to this limit.

(v) In case of foundation work, no variation limit shall apply and the work shall be carried out by the Contractor on agreed rates irrespective of any variation.

(vi) As far as SOR items are concerned, the limit of 25% would apply to the value of SOR schedule as a whole and not on individual SOR items. However, in case of NS items, the limit of 25% would apply on the individual items irrespective of the manner of quoting the rate (single percentage rate or individual item rate).

42.(3) Valuation of variations:- The enlargements, extensions, diminution, reduction, alterations or additions referred to in sub-clause (2) of this clause shall in no degree affect the validity of the contract but shall be performed by the Contractor as provided therein and be subject to the same conditions, stipulations and obligations as if they had been originally and expressively included and provided for in the specifications and drawings and the amounts to be paid therefore shall be calculated in accordance with the accepted schedule of rates. Any extra items / quantities of work falling outside the purview of the provisions of sub-clause (2) above shall be paid for at the rates determined under clause-39 of these conditions.

CLAIMS

43.(1) Monthly Statement of Claims:- The Contractor shall prepare and furnish to the Engineer once in every month an account giving full and detailed particulars of all claims for any additional expenses to which the Contractor may consider himself entitled to and of all extra or additional works ordered by the Engineer which he has executed during the preceding month and no claim for payment for and such work will be considered which has not been included in such particulars.

Signature of tenderer (s)

Date:



- 43.(2) Signing of “No Claim” Certificate:-** The Contractor shall not be entitled to make any claim whatsoever against the DFCCIL under or by virtue of or arising out of this contract, nor shall the DFCCIL entertain or consider any such claim, if made by the Contractor, after he shall have signed a “No Claim” Certificate in favour of the DFCCIL in such form as shall be required by the DFCCIL after the works are finally measured up. The contractor shall be debarred from disputing the correctness of the items covered by “No Claim” Certificate or demanding a clearance to arbitration in respect thereof.

MEASUREMENTS, CERTIFICATES AND PAYMENTS

- 44. Quantities in schedule annexed to Contract:-** The quantities set out in the accepted schedule of rates with items of works quantified are the estimated quantities of the works and they shall not be taken as the actual and correct quantities of the work to be executed by the Contractor in fulfilment of his obligations under the contract.
- 45. (i) Measurement of works by DFCCIL:-** The Contractor shall be paid for the works at the rates in the accepted schedule of rates and for extra works at rates determined under Clause 39 of these conditions on the measurements taken by the Engineer or the Engineer’s representative in accordance with the rules prescribed for the purpose by the DFCCIL. The quantities for items the unit of which in the accepted schedule of rates is 100 or 1000 shall be calculated to the nearest whole number, any; fraction below half being dropped and half and above being taken as one; for items the unit of which in the accepted schedule of rates is single, the quantities shall be calculated to two places of decimals. Such measurements will be taken of the work in progress from time to time and at such intervals as in the opinion of the Engineer shall be proper having regard to the progress of works. The date and time on which “on account” or final measurements are to be made shall be communicated to the Contractor who shall be present at the site and shall sign the results of the measurements (which shall also be signed by the Engineer or the Engineer’s representative) recorded in the official measurements book as an acknowledgement of his acceptance of the accuracy of the measures. Failing the Contractor’s attendance the work may be measured up in his absence and such measurements shall, notwithstanding such absence, be binding upon the Contractor whether or not he shall have signed the measurement books provided always that any objection made by him to measurement shall be duly investigated and considered in the manner set out below:-
- (a) It shall be open to the Contractor to take specific objection to any recorded measurements or Classification on any ground within seven days of the date of such measurements. Any re-measurement taken by the engineer or the Engineer’s representative in the presence of the Contractor or in his absence after due notice has been given to him in consequence of objection made by the Contractor shall be final and binding on the Contractor and no claim whatsoever shall thereafter be entertained regarding the accuracy and classification of the measurements.

Signature of tenderer (s)

Date:



- (b) If an objection raised by the Contractor is found by the Engineer to be incorrect the Contractor shall be liable to pay the actual expenses incurred in measurements.

45(ii). Measurement of Works by Contractor's Authorized Representative (in case the contract provides for the same):

(a) The Contractor shall be paid for the works at the rates in the accepted Schedule of Rates and for extra works at rates determined under Clause 39 of these Conditions on the measurements taken by the Contractor's authorized Engineer in accordance with the rules prescribed for the purpose by the DFCCIL. The quantities for items the unit of which in the accepted Schedule of Rates is 100 or 1000 shall be calculated to the nearest whole number, any fraction below half being dropped and half and above being taken as one; for items the unit of which in the accepted Schedule of Rates is single, the quantities shall be calculated to two places of decimals. Such measurements will be taken of the work in progress from time to time. The date and time on which 'on account' or 'final' measurements are to be made shall be communicated to the Engineer.

The date and time of test checks shall be communicated to the Contractor who shall be present at the site and shall witness the test checks, failing the Contractor's attendance the test checks may be conducted in his absence and such test checks shall notwithstanding such absence be binding upon Contractor provided always that any objection made by Contractor to test check shall be duly investigated and considered in the manner set out below:

- (i) It shall be open to the Contractor to take specific objection to test checks of any recorded measurement within 7 days of date of such test checks. Any re-test check done by the concerned DFCCIL's authority in the presence of the Contractor or in his absence after due notice given to him in consequent of objection made by the Contractor shall be final and binding on the Contractor and no claim whatsoever shall thereafter be entertained regarding the accuracy and classification of the measurements.
- (ii) If an objection raised by the Contractor is found by the Engineer to be incorrect the Contractor shall be liable to pay the actual expenses incurred in measurements.

(b) Incorrect measurement, actions to be taken: If in case during test check or otherwise, it is detected by the Engineer that agency has claimed any exaggerated measurement or has claimed any false measurement for the works which have not been executed; amounting to variation of 5% or more of claimed gross bill amount, action shall be taken as following:

Signature of tenderer (s)
Date:



- (i) On first occasion of noticing exaggerated/ false measurement, Engineer shall impose a penalty of 10% of claimed gross bill value.
- (ii) On any next occasion of noticing any exaggerated/false measurement, DFCCIL shall impose penalty of 15% of claimed gross bill value. In addition the facility of recording of measurements by Contractor as well as release of provisional payment shall be withdrawn. Once withdrawn, measurements shall be done by DFCCIL as per clause 45(i) above.

46.(1) “On-Account” Payments:- The Contractor shall be entitled to be paid from time to time by way of “One-Account” payment only for such works as in the opinion of the Engineer he has executed in terms of the contract.

All payments due on the Engineer’s or the Engineer’s representative’s certificates of measurements shall be subject to any deductions which may be made under these presents and shall further be subject to, unless otherwise required by Clause 16 of these conditions, a retention of ten percent by way of security deposits, until the amount of security deposit by way of retained earnest money and such retentions shall amount to 5% of the total value of the contract provided always that the Engineer may by any certificate make any correction or modification in any previous certificate which shall have been issued by him and that the Engineer may withhold any certificate if the works or any part thereof are not being carried out to his satisfaction.

46.(2) Rounding off amounts: - The total amount due on each certificate shall be rounded off to the nearest rupee i.e. sum less than 50 paise shall be omitted and sums of 50 paise and more upto Re. 1/- will be reckoned as Re. 1/-

46.(3) On Account Payments not Prejudicial to Final Settlement: "On-Account" payments made to the Contractor shall be without prejudice to the final making up of the accounts (except where measurements are specifically noted in the Measurement Book as "Final Measurements" and as such have been signed by the Contractor and Engineer/Engineer's Representative) and shall in no respect be considered or used as evidence of any facts stated in or to be inferred from such accounts nor of any particular quantity of work having been executed nor of the manner of its execution being satisfactory.

46.(4) Manner of payment: - Unless otherwise specified payments to the Contractor will be transferred electronically to his bank account.

46A. Price Variation Clause (PVC):

46A.1 Applicability: Price Variation Clause (PVC) shall be applicable only in those contracts where tender conditions specifically permits it and irrespective of the contract completion period. Materials supplied free of cost by DFCCIL to the Contractors and any extra item(s) included in

Signature of tenderer (s)

Date:



subsequent variation falling outside the purview of the Schedule of Items of tender shall fall outside the purview of Price Variation Clause. If, in any case, accepted offer includes some specific payment to be made to consultants or some materials supplied by DFCCIL free or at fixed rate, such payments shall be excluded from the gross value of the work for the purpose of payment/recovery of price variation.

46A.2 Base Month: The Base Month for 'Price Variation Clause' shall be taken as month 28 days prior to opening of tender including extensions, if any, unless otherwise stated elsewhere. The quarter for applicability of PVC shall commence from the month following the month of opening of tender. The Price Variation shall be based on the average Price Index of the quarter under consideration.

46A.3 Validity:

Rates accepted by DFCCIL Administration shall hold good till completion of work and no additional individual claim shall be admissible except:

- (a) Payment/recovery for increase/decrease in GST on works contract or imposition/removal of any tax/cess on Works Contract as per Clause 37,
- (b) Payment/recovery for overall market situation as per Price Variation Clause given hereunder.

46A.4 Adjustment for variation in prices of material, labour, fuel, explosives, detonators, steel, concreting, ferrous, non-ferrous, insulators, zinc and cement shall be determined in the manner prescribed.

46A.5 Components of various items in a contract on which variation in prices be admissible, shall be Material, Labour, Fuel, Explosives & Detonators, Steel, Cement, Concreting, Ferrous, Non-ferrous, Insulator, Zinc, Erection etc. However, for fixed components, no price variation shall be admissible.

46A.6 The percentages of labour component, material component, fuel component etc. in various types of Engineering contracts shall be as under:

Sl. No	Component	E/Work & Minor Bridges Contracts, Ballast Supply Contracts, Tunneling Contracts (without explosive)	Tunneling Contracts (with explosives)	Major and Important Bridges Contracts	Building Contracts	Permanent Way linking Contracts (Manual)	Other Works Contracts

Signature of tenderer (s)

Date:



1	Labour Component	20	20	20	40	50	20
2	Other Material Components	10	15	30	35	5	20
3	Plant Machinery & Spares	30	15	20	5	15	30
4	Fuel & Lubricants Component	25	15	15	5	15	15
5	Fixed Component*	15	15	15	15	15	15
6	Detonators & Explosive Component	-	20	-	-	-	-

* It shall not be considered for any price variation.

46A.7 Formulae: The Amount of variation in prices in several components (labour, material etc.) shall be worked out by the following formulae:

$$(i) \quad L = \frac{W \times (L_Q - L_B)}{L_B} \times \frac{L_C}{100}$$

$$(ii) \quad M = \frac{W \times (M_Q - M_B)}{M_B} \times \frac{M_C}{100}$$

$$(iii) \quad F = \frac{W \times (F_Q - F_B)}{F_B} \times \frac{F_C}{100}$$

$$(iv) \quad E = \frac{W \times (E_Q - E_B)}{E_B} \times \frac{E_C}{100}$$

$$(v) \quad PM = \frac{W \times (PM_Q - PM_B)}{PM_B} \times \frac{PM_C}{100}$$

$$(vi) \quad S = \frac{S_W \times (S_Q - S_B)}{S_B}$$

$$(vii) \quad C = C_V \times (C_Q - C_B) / C_B$$

For DFCCIL Electrification Works:

$$(viii) \quad T = [(C_S - C_O) / C_O \times 0.4136] \times T_C$$

$$(ix) \quad R = [(R_T - R_O) / R_O + (Z_T - Z_O) / Z_O \times 0.06] \times R_C$$

$$(x) \quad N = [(P_T - P_O) / P_O] \times N_C$$

Signature of tenderer (s)

Date:



$$(xi) Z = [(Z_T - Z_O) / Z_O] \times Z_C$$

$$(xii) I = [(I_T - I_O) / I_T] \times 85$$

Where,

L	Amount of price variation in Labour
M	Amount of price variation in Materials
F	Amount of price variation in Fuel
E	Amount of price variation in Explosives
PM	Amount of price variation in Manufacture of machinery for mining, Quarrying and Construction
S	Amount of price variation in Steel
C	Amount of price variation in Cement
T	Amount of price variation in Concreting
R	Amount of price variation in Ferrous Items
N	Amount of price variation in Non-Ferrous Items
Z	Amount of price variation in Zinc
I	Amount of price variation in Insulator
L _C	% of Labour Component
M _C	% of Material Component
F _C	% of Fuel Component
E _C	% of Explosive Component
PM _C	% of Manufacture of machinery for mining, Quarrying and Construction Component
T _C	% of Concreting Component
R _C	% of Ferrous Component
N _C	% of Non-Ferrous Component
Z _C	% of Zinc Component
W	Gross value of work done by Contractor as per on-account bill(s) excluding cost of materials supplied by DFCCIL at fixed price, minus the price values of cement and steel. This will also exclude specific payment, if any, to be made to the consultants engaged by Contractors (such payment shall be indicated in the Contractor's offer)
L _B	Consumer Price Index for Industrial Workers - All India : Published in R.B.I. Bulletin for the base period
L _Q	Consumer Price Index for Industrial Workers - All India : Published in R.B.I. Bulletin for the average price index of the 3 months of the quarter under consideration
M _B	Wholesale Price Index: All commodities – as published in the R.B.I. Bulletin for the base period
M _Q	Wholesale Price Index: All commodities – as published in the R.B.I. Bulletin for the average price index of the 3 months of the quarter under consideration
F _B	Wholesale Price Index for the group Fuel & Power as published in the R.B.I. Bulletin for the base period
F _Q	Index Number of Wholesale Price Index – By Groups and Sub-Groups for the group Fuel & Power as published in the R.B.I. Bulletin for the average price index of the 3 months of the quarter under consideration

Signature of tenderer (s)

Date:



E _B	Index number of Monthly Whole Sale Price Index for the category ‘Explosive’ of (g).Manufacture of other chemical products under (J). MANUFACTURE OF CHEMICALS AND CHEMICAL PRODUCTS, published by Office of Economic Adviser, Govt. of India, Ministry of Commerce & Industry, Department of Industrial Policy & Promotion (DIPP), for the base period.
E _Q	Index number of Monthly Whole Sale Price Index for the category ‘Explosive’ of (g).Manufacture of other chemical products under (J). MANUFACTURE OF CHEMICALS AND CHEMICAL PRODUCTS, published by Office of Economic Adviser, Govt. of India, Govt. of India, Ministry of Commerce & Industry, Department of Industrial Policy & Promotion (DIPP), for the average price index of 3 months of the quarter under consideration.
PM _B	Index number of Monthly Whole Sale Price Index for the category ‘k. Manufacture of machinery for mining, quarrying and construction’ under (R) MANUFACTURE OF MACHINERY AND EQUIPMENT, published by Office of Economic Adviser, Govt. of India, Ministry of Commerce & Industry, Department of Industrial Policy & Promotion (DIPP), for the base period.
PM _Q	Index number of Monthly Whole Sale Price Index for the category ‘k. Manufacture of machinery for mining, quarrying and construction’ under (R) MANUFACTURE OF MACHINERY AND EQUIPMENT, published by Office of Economic Adviser, Govt. of India, Ministry of Commerce & Industry, Department of Industrial Policy & Promotion (DIPP), for the average price index of 3 months of the quarter under consideration.
S _W	Gross value of steel supplied by the Contractor as per the ‘on-account’ bill for the month under consideration
S _B	Index number of Monthly Whole Sale Price Index for the relevant category of mild steel item as mentioned in Clause 46A.9, published by Office of Economic Adviser, Govt. of India, Ministry of Commerce & Industry Department of Industrial Policy & Promotion (DIPP); for the base period.
S _Q	Index number of Monthly Whole Sale Price Index for the relevant category of mild steel item as mentioned in Clause 46A.9, published by Office of Economic Adviser, Govt. of India, Ministry of Commerce & Industry Department of Industrial Policy & Promotion (DIPP); for the average price index of the 3 months of the quarter under consideration.
C _V	Value of Cement supplied by Contractor as per on account bill in the quarter under consideration
C _B	Index No. of Wholesale Price Index of sub-group Cement, Lime & Plaster as published in RBI Bulletin for the base period
C _Q	No. of Wholesale Price Index of sub-group Cement, Lime & Plaster as published in RBI Bulletin for the average price index of the 3 months of the quarter under consideration
C _S	RBI wholesale price index for Cement, Lime & Plaster for the month which is six months prior to date of casting of foundation
C _o	RBI wholesale price index for Cement, Lime & Plaster for the month which is one month prior to date of opening of tender
R _T	IEEMA price index for Iron & Steel for the month which is two months prior to date of inspection of material.
R _O	IEEMA price index for Iron & Steel for the month which is one month prior to date of opening of tender.

Signature of tenderer (s)

Date:



P _T	IEEMA price index for Copper wire bar for the month which is two months prior to date of inspection of material.
P _O	IEEMA price index for Copper wire bar for the month which is one month prior to date of opening of tender.
Z _T	IEEMA price index for Zinc for the month which is two months prior to date of inspection of material
Z _O	IEEMA price index for Zinc for the month which is one month prior to date of opening of tender
I _T	RBI wholesale price index for the sub-group “other Portland and Ceramic product” for the month which is two months prior to date of inspection of material
I _O	RBI wholesale price index for the sub-group “other Portland and Ceramic product” for the month which is one month prior to date of opening of tender

46A.8 The demands for escalation of cost shall be allowed on the basis of provisional indices as mentioned above in Clause 46A.7. Any adjustment needed to be done based on the finally published indices shall be made as and when they become available.

46A.9: Relevant categories of steel for the purpose of operating Price Variation formula as mentioned in this Clause shall be as under:

SL	Category of Steel Supplied in Railway/DFCCIL Work	Category of Steel Items as mentioned in Office of Economic Adviser, Govt. of India, Ministry of Commerce & Industry Department of Industrial Policy & Promotion (DIPP).
1.	Reinforcement bars and other rounds	‘MS Bright Bars’ individual commodity of group item (d) Mild Steel-Long Products under (N) MANUFACTURE OF BASIC METAL.
2.	All types and-sizes of angles, channels and joists-	‘Angles, Channels, Sections, Steel’ individual commodity of group item (d) Mild Steel-Long Products under (N) MANUFACTURE OF BASIC METAL.
3.	All types and sizes of plates	‘e. Mild Steel – Flat Products’ of (N) MANUFACTURER OF BASIC METAL.
4.	Any other section of steel not covered in the above categories and excluding HTS	Average of price for the 3 categories covered under SL 1, 2 & 3 above

46A.10 Price Variation During Extended Period Of Contract

The price adjustment as worked out above, i.e. either increase or decrease shall be applicable upto the stipulated date of completion of work including the extended period of completion where such extension has been granted under Clause 17-A of the General Conditions of Contract. However, where extension of time has been granted due to contractor’s failure under Clause 17-B of the General Conditions of Contract, price adjustment shall be done as follows :

Signature of tenderer (s)

Date:



(a) In case the indices increase above the indices applicable to the last month of original completion period or the extended period under Clause 17-A, the price adjustment for the period of extension granted under Clause 17-B shall be limited to the amount payable as per the Indices applicable to the last month of the original completion period or the extended period under Clause 17-A of the General Conditions of Contract; as the case may be.

(b) In case the indices fall below the indices applicable to the last month of original/extended period of completion under Clause 17-A, as the case may be; then the lower indices shall be adopted for the price adjustment for the period of extension under Clause 17-B of the General Conditions of Contract.

47.0 Maintenance of works:- The Contractor shall at all times during the progress and continuance of the works and also for the period of maintenance specified in the Tender Form after the date of issue of the certificate of completion by the Engineer or any other earlier date subsequent to the completion of the works that may be fixed by the Engineer be responsible for and effectively maintain and uphold in good substantial, sound and perfect condition all and every part of the works and shall make good from time to time and at all times as often as the Engineer shall require, any damage or defect that may during the above period arise in or be discovered or be in any way connected with the works, provided that such damage or defect is not directly caused by errors in the contract documents, act of providence or insurrection or civil riot, and the contractor shall be liable for and shall pay and make good to the DFCCIL or other persons legally entitled thereto whenever required by the Engineer so to do, all losses, damages, costs and expenses they or any of them may incur or be put or be liable to by reasons or in consequence of the operations of the Contractor or of his failure in any respect.

48.(1) Certificate of Completion of Works: As soon as in the opinion of the Engineer, the work has been completed and has satisfactorily passed any final test or tests that may be prescribed, the Engineer shall issue a certificate of completion duly indicating the date of completion in respect of the work and the period of maintenance of the work shall commence from the date of completion mentioned in such certificate. The certificate, inter alia, should mention that the work has been completed in all respects and that all the contractual obligations have been fulfilled by the Contractor and that there is no due from the Contractor to DFCCIL against the contract concerned.

The Engineer may also issue such a certificate indicating date of completion with respect to any part of the work (before the completion of the whole of work), which has been both completed to the satisfaction of the Engineer and occupied or used by the DFCCIL. When any such certificate is given in respect of part of a work, such part shall be considered as completed and the period of maintenance of such part shall commence from the date of completion mentioned in the completion certificate issued for that part of the work.

48.(2) Contractor not absolved by completion Certificate:- The Certificate of completion in respect of the works referred to in sub-clause (1) of this clause shall not absolve the

Signature of tenderer (s)

Date:



Contractor from his liability to make good any defects imperfections, shrinkages or faults which may appear during the period of maintenance specified in the tender arising in the opinion of the Engineer from materials or workmanship not in accordance with the drawings or specifications or instruction of the Engineer, which defects, imperfections, shrinkages or faults shall upon the direction in writing of the Engineer be amended and made good by the Contractor at his own cost: and in case of default on the part of Contractor the Engineer may employ labour and materials or appoint another Contractor to amend and make good such defects, imperfections, shrinkages and faults and all expenses consequent thereon and incidental thereto shall be borne by the Contractor and shall be recoverable from any moneys due to him under the contract.

48(3) Final Supplementary Agreement: After the work is completed and taken over by the DFCCIL as per terms and conditions of the contract agreement or otherwise concluded by the parties with mutual consent and full and final payment is made by the DFCCI to the Contractor for work done, and there is unequivocal no claim on either side under the contract, the parties shall execute the final supplementary agreement.

49.0 Approval only by maintenance Certificate:- No certificate other than maintenance certificate referred to in Clause 50 of the conditions shall be deemed to constitute approval of any work or other matter in respect of which it is issued or shall be taken as an admission of the due performance of the contract or any part thereof.

50.(1) Maintenance Certificate:- The Contract shall not be considered as completed until a Maintenance Certificate shall have been signed by the Engineer stating that the works have been completed and maintained to his satisfaction. The Maintenance Certificate shall be given by the Engineer upon the expiration of the period of maintenance or as soon thereafter as any works ordered during such period pursuant to sub clause (2) Clause 48 of these conditions shall have been completed to the satisfaction of the Engineer and full effect shall be given to this Clause notwithstanding the taking possession of or using the works or any part thereof by the DFCCIL.

The Competent Authority to issue above Maintenance Certificate shall normally be the authority who is competent to sign the contract. The certificate, inter alia, should mention that the work has been completed in all respects and that all the contractual obligations have been fulfilled by the Contractor and that there is no due from the Contractor to DFCCIL against the contract concerned.

50.(2) Cessation of DFCCIL Liability: - The DFCCIL shall not be liable to the Contractor for any matter arising out of or in connection with the contract for execution of the works unless the contractor has made a claim in writing in respect thereof before the issue of the Maintenance Certificate under this clause.

50.(3) Unfulfilled Obligations:- Notwithstanding the issue of the Maintenance certificate the Contractor and (subject to sub-clause 2 of this clause) the DFCCIL shall remain liable for the fulfilment of any obligation incurred under the provision of the contract prior to the issue of the maintenance Certificate which remains unperformed at the time such

Signature of tenderer (s)

Date:



certificate is issued and for the purposes of determining the nature and extent of any such obligations the contract shall be deemed to remain in force between the parties thereto.

51.(1) Final Payment: On the Engineer's certificate of completion in respect of the works, adjustment shall be made and the balance of account based on the Engineer or the Engineer's representative's certified measurements or Engineer's certified "contractor's authorized engineer's measurements" of the total quantity of work executed by the Contractor upto the date of completion and on the accepted schedule of rates and for extra works on rates determined under Clause 39 of these Conditions shall be paid to the Contractor subject always to any deduction which may be made under these presents and further subject to the Contractor having signed delivered to the Engineer enclosing either a full account in detail of all claims he may have on the DFCCIL in respect of the works or having delivered No Claim Certificate and the Engineer having after the receipt of such account given a certificate in writing that such claims are not covered under excepted matter i.e. Clauses 8, 18, 22(5), 39, 43(2), 45(a), 55, 55-A(5), 57, 57A, 61(1), 61(2) and 62(1) to (xiii)(B) of Standard General Conditions of Contract or in any Clause of the Special Conditions of the Contract, that the whole of the works to be done under the provisions of the Contracts have been completed, that they have been inspected by him since their completion and found to be in good and substantial order, that all properties, works and things, removed, disturbed or injured in consequence of the works have been properly replaced and made good and all expenses and demands incurred by or made upon the DFCCIL for or in the respect of damage or loss by from or in consequence of the works, have been satisfied agreeably and in conformity with the contract.

51.(2) Post Payment Audit: It is an agreed term of contract that the DFCCIL reserves to itself the right to carry out a post-payment audit and/ or technical examination of the works and the final bill including all supporting vouchers, abstracts etc. and to make a claim on the Contractor for the refund of any excess amount paid to him till the release of security deposit or settlement of claims, whichever is later, if as a result of such examination any over-payment to him is discovered to have been made in respect of any works done or alleged to have been done by him under the contract.

51A. Production of vouchers etc. by the Contractor:-

- (i) For a contract of more than one crore of rupees, the contractor shall, whenever required, produce or cause to be produced for examination by the Engineer any quotation, invoice, cost or other account, book of accounts, voucher, receipt, letter, memorandum, paper of writing or any copy of or extract from any such document and also furnish information and returns verified in such manner as may be required in any way relating to the execution of this contract or relevant for verifying or ascertaining cost of execution of this contract (the decision of the engineer on the question of relevancy of any documents, information or return being final and binding in the parties). The contractor shall similarly produce vouchers; etc., if required to prove to the Engineer, that materials supplied by him, are in accordance with the specifications laid down in the contract.

Signature of tenderer (s)

Date:



- (ii) If any portion of the work in a contract of value more than one crore of rupees be carried out by a sub-contractor or any subsidiary or allied firm or company (as per Clause 7 of the General Conditions of Contract), the Engineer shall have power to secure the books of such sub-contract or any subsidiary or allied firm or company, through the contractor, and such books shall be open to his inspection.
- (iii) The obligations imposed by sub clause (i) & (ii) above is without prejudice to the obligations of the contractor under any statute rules or orders binding on the contractor.

52.0 Withholding and lien in respect of sums claimed:- Whenever any claim or claims for payment of a sum of money arises out of or under the contract against the contractor, the DFCCIL shall be entitled to withhold and also have a lien to retain such sum or sums in whole or in part from the security, if any, deposited by the contractor and for the purpose aforesaid, the DFCCIL shall be entitled to withhold the said cash security deposit or the security if any, furnished as the case may be and also have a lien over the same pending finalization or adjudication of any such claim. In the event of the security being insufficient to cover the claimed amount or amounts or if no security has been taken from the contractor, the DFCCIL shall be entitled to withhold and have a lien to the extent of the such claimed amount or amounts referred to supra, from any sum or sums found payable or which at any time thereafter may become payable to the contractor under the same contract or any other contract with this or any other DFCCIL or any Department of the Central Government pending finalization or adjudication of any such claim.

It is an agreed term of the contract that the sum of money or moneys so withheld or retained under the lien referred to above, by the DFCCIL will be kept withheld or retained as such by the DFCCIL till the claim arising out of or under the contract is determined by the arbitrator (if the contract governed by the arbitration clause) or by the competent court as the case may be and that the contractor will have no claim for interest or damages whatsoever on any account in respect of such withholding or retention under the lien referred to supra and duly notified as such to the contractor. For the purpose of this clause, where the contractor is a partnership firm or a limited company, the DFCCIL shall be entitled to withhold and also have a lien to retain towards such claimed amount or amounts in whole or in part from any sum found payable to any partner/company, as the case may be whether in his individual capacity or otherwise.

52A. Lien in respect of claims in Other Contracts:-

(i) Any sum of money due and payable to the contractor (including the security deposit returnable to him) under the contract may be withheld or retained by way of lien by the DFCCIL, against any claim of this or any other DFCCIL or any other Department of the Central Government in respect of a payment of a sum of money arising out of or under any other contract made by the contractor with this or any other Department of the Central Government.

Signature of tenderer (s)

Date:



(ii) However, recovery of claims of DFCCIL in regard to terminated contracts may be made from the Final Bills, Security Deposits and Performance Guarantees of other contract or contracts, executed by the contractor. The Performance Guarantees submitted by the Contractor against other contracts, if required, may be withheld and encashed. In addition, 10% of each subsequent 'on-account bill' may be withheld, if required, for recovery of DFCCIL's dues against the terminated contract.

(iii) It is an agreed term of the contract that the sum of money so withheld or retained under this clause by the DFCCIL will be kept withheld or retained as such by the DFCCIL till the claim arising out of or under any other contract is either mutually settled or determined by arbitration, if the other contract is governed by arbitration clause or by the competent court as the case may be and contractor shall have no claim for interest or damages whatsoever on this account or on any other ground in respect of any sum of money withheld or retained under this clause and duly notified as such to the contractor.

53.0 Signature on Receipts for Amounts:- Every receipt for money which may become payable or for any security which may become transferable to the Contractors under these presents, shall, if signed in the partnership name by anyone of the partners of a Contractor's firm be a good and sufficient discharge to the DFCCIL in respect of the moneys or security purported to be acknowledged thereby and in the event of death of any of the Contractor, partners during the pendency of the contract it is hereby expressly agreed that every receipt by anyone of the surviving Contractor partners shall if so signed as aforesaid be good a sufficient discharge as aforesaid provided that nothing in this clause contained shall be deemed to prejudice or effect any claim which the DFCCIL may hereafter have against the legal representative of any contractor partner so dying for or in respect to any breach of any of the conditions of the contract, provided also that nothing in this clause contained shall be deemed to prejudice or effect the respective rights or obligations of the Contractor partners and of the legal representatives of any deceased Contractor partners interest.

LABOUR

54.0 Wages to Labour: The Contractor shall be responsible to ensure compliance with the provision of the Minimum Wages Act, 1948 (hereinafter referred to as the "said Act") and the Rules made there under in respect of any employees directly or through petty Contractors or sub-contractors employed by him for the purpose of carrying out this contract.

If, in compliance with the terms of the contract, the Contractor supplied any labour to be used wholly or partly under the direct orders and control of the DFCCIL whether in connection with any work being executed by the Contractor or otherwise for the purpose of the DFCCIL such labour shall, for the purpose of this Clause, still be deemed to be persons employed by the Contractor.

Signature of tenderer (s)

Date:



If any moneys shall, as a result of any claim or application made under the said Act be directed to be paid by the DFCCIL, such money shall be deemed to be moneys payable to the DFCCIL by the Contractor and on failure by the Contractor to repay the DFCCIL any moneys paid by it as aforesaid within seven days after the same shall have been demanded, the DFCCIL shall be entitled to recover the same from Contractor's bills/Security Deposit or any other dues of Contractor with the Government of India.

- 54A. Apprentices Act:-** The Contractor shall be responsible to ensure compliance with the provisions of the Apprentices Act, 1961 and the Rules and Orders issued there under from time to time in respect of apprentices directly or through petty contractors or sub-contractors employed by him for the purpose of carrying out the Contract.

If the contractor directly or through petty contractors or sub-contractors fails to do so, his failure will be a breach of the contract and the DFCCIL may, in its discretion, rescind the contract. The contractor shall also be liable for any pecuniary liability arising on account of any violation of the provisions of the Act.

- 55.0 Provisions of Payments of Wages Act:** The Contractor shall comply with the provisions of the Payment of Wages Act, 1936 and the rules made there under in respect of all employees employed by him either directly or through petty Contractors or sub-contractors in the works. If in compliance with the terms of the contract, the Contractor directly or through petty Contractors or sub-contractors shall supply any labour to be used wholly or partly under the direct orders and control of the Engineer whether in connection with the works to be executed hereunder or otherwise for the purpose of the Engineer, such labour shall nevertheless be deemed to comprise persons employed by the Contractor and any moneys which may be ordered to be paid by the Engineer shall be deemed to be moneys payable by the Engineer on behalf of the Contractor and the Engineer may on failure of the Contractor to repay such money to the DFCCIL deduct the same from any moneys due to the Contractor in terms of the contract. The DFCCIL shall be entitled to recover the same from Contractor's bills/Security Deposit or any other dues of Contractor with the Government of India all moneys paid or payable by the DFCCIL by way of compensation of aforesaid or for costs of expenses in connection with any claim thereto and the decision of the Engineer upon any question arising out of the effect or force of this Clause shall be final and binding upon the Contractor.

55A. Provisions of Contract labour (Regulation and Abolition) Act, 1970:

- 55A.(1)** The contractor shall comply with the provision of the contract labour (Regulation and Abolition) Act, 1970 and the Contract labour (Regulation and Abolition) Central Rules 1971 as modified from time to time, wherever applicable and shall also indemnify the DFCCIL from and against any claims under the aforesaid Act and the Rules.

- 55A.(2)** The Contractor shall obtain a valid licence under the aforesaid Act as modified from time to time before the commencement of the work and continue to have a valid licence until the completion of the work. Any failure to fulfil the requirement shall

Signature of tenderer (s)

Date:



attract the penal provision of the Act.

55A.(3) The Contractor shall pay to the labour employed by him directly or through subcontractors the wages as per provision of the aforesaid Act and the Rules wherever applicable. The Contractor shall notwithstanding the provisions of the contract to the contrary, cause to be paid the wages to labour indirectly engaged on the works including any engaged by subcontractors in connection with the said work, as if the labour had been immediately employed by him.

55A.(4) In respect of all labour directly or indirectly employed in the work for performance of the contractor's part of, the contract, the Contractor shall comply with or cause to be complied with the provisions of the aforesaid Act and Rules wherever applicable.

55A.(5) In every case in which, by virtue of the provisions of the aforesaid Act or the Rules, the DFCCIL is obliged to pay any amount of wages to a workman employed by the Contractor or his sub contractor in execution of the work or to incur any expenditure on account of the Contingent, liability of the DFCCIL due to the contractor's failure to fulfil his statutory obligations under the aforesaid Act or the rules the DFCCIL will recover from the Contractor, the amount of wages so paid or the amount of expenditure so incurred, and without prejudice to the rights of the DFCCIL under the section 20, sub-section (2) and section 2, sub-section (4) of the aforesaid Act, the DFCCIL shall be at liberty to recover such amount or part thereof from Contractor's bills/Security Deposit or any other dues of Contractor with the Government of India. The DFCCIL shall not be bound to contest any claim made against it under Sub-Section (1) of Section 20 and Sub-Section (4) of Section 21 of the aforesaid Act except on the written request of the Contractor and upon his giving to the DFCCIL full security for all costs for which the DFCCIL might become liable in contesting such claim. The decision of the DFCCIL regarding the amount actually recoverable from the Contractor as stated above shall be final and binding on the Contractor.

55B. Provisions of Employees Provident Fund and Miscellaneous Provisions Act, 1952 : The Contractor shall comply with the provisions of Para 30 & 36-B of the Employees Provident Fund Scheme, 1952; Para 3 & 4 of Employees' Pension Scheme, 1995; and Para 7 & 8 of Employees Deposit Linked Insurance Scheme, 1976; as modified from time to time through enactment of "Employees Provident Fund & Miscellaneous Provisions Act, 1952", wherever applicable and shall also indemnify the DFCCIL from and against any claims under the aforesaid Act and the Rules.

55C. (i) Contractor is to abide by the provisions of Payment of Wages act & Minimum Wages act in terms of clause 54 and 55 of Indian Railways General Condition of Contract. In order to ensure the same, an application has been developed and hosted on website 'www.shramikkalyan.indianrailways.gov.in'. Contractor shall register his firm/company etc. and upload requisite details of labour and their payment in this portal. These details shall be available in public domain. The Registration/ updation of Portal shall be done as under.

Signature of tenderer (s)

Date:



- (a) Contractor shall apply for onetime registration of his company/firm etc. in the Shramikkalyan portal with requisite details subsequent to issue of Letter of Acceptance. Engineer shall approve the contractor's registration in the portal within 7 days of receipt of such request.
- (b) Contractor once approved by any Engineer, can create password with login ID (PAN No.) for subsequent use of portal for all LoAs issued in his favour.
- (c) The contractor once registered on the portal, shall provide details of his Letter of Acceptances (LoA) / Contract Agreements on shramikkalyan portal within 15 days of issue of any LoA for approval of concerned engineer. Engineer shall update (if required) and approve the details of LoA filled by contractor within 7 days of receipt of such request.
- (d) After approval of LoA by Engineer, contractor shall fill the salient details of contract labours engaged in the contract and ensure updating of each wage payment to them on shramikkalyan portal on monthly basis.
- (e) It shall be mandatory upon the contractor to ensure correct and prompt uploading of all salient details of engaged contractual labour & payments made thereof after each wage period.
- (ii) While processing payment of any 'On Account bill' or 'Final bill' or release of 'Advances' or 'Performance Guarantee / Security deposit', contractor shall submit a certificate to the Engineer or Engineer's representatives that "I have uploaded the correct details of contract labours engaged in connection with this contract and payments made to them during the wage period in Railway's Shramikkalyan portal at 'www.shramikkalyan.indianrailways.gov.in' till ____Month, ____Year."

55D. Provisions of "The Building and Other Construction Workers (Regulation of Employment and Conditions of Service) Act, 1996" and "The Building and Other Construction Workers' Welfare Cess Act, 1996" :

The tenderers, for carrying out any construction work, shall get themselves registered with the Registering Officer under Section-7 of the Building and Other Construction Workers Act, 1996 and rules made thereto by the concerned State Govt., and submit certificate of Registration issued from the Registering Officer of the concerned State Govt. (Labour Dept.). The Cess shall be deducted from contractor's bills as per provisions of the Act.

56.0 Reporting of Accidents of Labour:- The Contractor shall be responsible for the safety of all employees directly or through petty contractors or sub-contractor employed by him on the works and shall report serious accidents to any of them however and wherever occurring on the works to the Engineer or the Engineers Representative and shall made every arrangements to render all possible assistance.

57.0 Provision of Workmen's Compensation Act:- In every case in which by virtue of the provisions of section 12 sub-section (1) of the Workmen's Compensation Act 1923, DFCCIL is obliged to pay compensation to a workman directly or through petty contractor or subcontractor employed by the Contractor in executing the work, DFCCIL will recover from the Contractor the amount of the compensation so paid, and, without

Signature of tenderer (s)

Date:



prejudice to the rights of DFCCIL under Section 12 Sub-section (2) of the said Act, DFCCIL shall be at liberty to recover such amount or any part thereof by deducting it from the security deposit or from any sum due by DFCCIL to the Contractor whether under these conditions or otherwise, DFCCIL shall not be bound to contest any claim made against it under Section 12 Sub-section (1) of the said Act except on the written request of the Contractor and upon his giving to DFCCIL full security for all costs for which DFCCIL might become liable in consequence of contesting such claim.

57A. Provision of Mines Act:- The contractor shall observe and perform all the provisions of the Mines Act, 1952 or any statutory modifications or re-enactment thereof for the time being in force and any rules and regulations made there under in respect of all the persons directly or through the petty contractors or sub-contractors employed by him under this contract and shall indemnify the DFCCIL from and against any claims under the Mines Act, or the rules and regulations framed there under, by or on behalf of any persons employed by him or otherwise.

58.0 DFCCIL not to provide quarters for Contractors:- No quarters shall normally be provided by the DFCCIL for the accommodation of the Contractor or any of his staff employed on the work. In exceptional cases where accommodation is provided to the Contractor at the DFCCIL's discretion, recoveries shall be made at such rates as may be fixed by the DFCCIL for the full rent of the buildings and equipments therein as well as charges for electric current, water supply and conservancy.

59.(1) Labour Camps:- The contractor shall at his own expense make adequate arrangements for the housing, supply of drinking water and provision of latrines and urinals for his staff and workmen, directly or through the petty contractors or sub-contractors and for temporary crèche (Bal-mandir) where 50 or more women are employed at a time. Suitable sites on DFCCIL land/State Govt. Land, if available, may be allotted to the contractor for the erection of labour camps, either free of charge or on such terms and conditions that may be prescribed by the DFCCIL. All camp sites shall be maintained in clean and sanitary conditions by the contractor at his own cost.

59.(2) Compliance to rules for employment of labour:- The contractor(s) shall conform to all laws, by-laws rules and regulations for the time being in force pertaining to the employment of local or imported labour and shall take all necessary precautions to ensure and preserve the health and safety of all staff employed directly or through petty contractors or sub-contractors on the works.

59.(3) Preservation of peace:- The contractor shall take requisite precautions and use his best endeavours to

(i) prevent any riotous or unlawful behaviour by or amongst his workmen and other employed directly or through the petty contractors or sub-contractors on the works and for the preservation of peace and protection of the inhabitants and

(ii) Security of property in the neighbourhood of the works. In the event of the DFCCIL requiring the maintenance of a special Police Force at or in the vicinity of the site during the tenure of works, the expenses thereof shall be borne by the contractor and

Signature of tenderer (s)

Date:



if paid by the DFCCIL shall be recoverable from the contractor.

- 59.(4) Sanitary arrangements:-** The contractor shall obey all sanitary rules and carry out all sanitary measures that may from time to time be prescribed by the Railway Medical Authority and permit inspection of all sanitary arrangements at all times by the Engineer, the Engineer's Representative of the Medical staff of the DFCCIL. Should the contractor fail to make the adequate sanitary arrangements, these will be provided by the DFCCIL and the cost therefore recovered from the contractor.
- 59.(5) Outbreak of infectious disease:-** The contractor shall remove from his camp such labour and their families as refuse protective inoculation and vaccination when called upon to do so by the Engineer or the Engineer's representative on the advice of the DFCCIL. Should cholera, plague or other infectious disease break out, the contractor shall burn the huts, beddings, clothes and other belongings of or used by the infected parties and promptly erect new huts on healthy sites as required by the engineer, failing which within the time specified in the Engineer's requisition, the work may be done by the DFCCIL and the cost thereof recovered from the contractor.
- 59.(6) Deleted**
- 59.(7) Medical facilities at site: -** The Contractor shall provide medical facilities at the site as may be prescribed by the Engineer on the advice of the DFCCIL in relation to the strength of the Contractor's resident staff and workmen.
- 59.(8) Use of intoxicants: -** The sale of ardent spirits or other intoxicating beverages upon the work or in any of the buildings, encampments or tenements owned, occupied by or within the control of the contractor or any of his employees shall be forbidden and the Contractor shall exercise his influence and authority to the utmost extent to secure strict compliance with this condition.
- 59.(9) Non-employment of female labour: -** The Contractor shall see that the employment of female labour on / in Cantonment areas, particularly in the neighbourhood of soldier's barracks, should be avoided as far as possible.
- 59.(10) Restrictions On The Employment Of Retired Engineers Of Railway/DFCCIL Services Within one Year Of Their Retirement :** The Contractor shall not, if he is a retired Government Engineer of Gazetted rank, himself engage in or employ or associate a retired Government Engineer of Gazetted rank, who has not completed one year from the date of retirement, in connection with this contract in any manner whatsoever without obtaining prior permission of the President and if the Contractor is found to have contravened this provision it will constitute a breach of contract and administration will be entitled to terminate the contract at the risk and cost of the Contractor and forfeit his Security Deposit.
- 60.(1) Non-employment of labourers below the age of 15:-** the Contractor shall not employ children below the age of 15 as labourers directly or through petty contractors or subcontractors for the execution of work.

Signature of tenderer (s)

Date:



- 60.(2) Medical Certificate of fitness for labour:** - It is agreed that the contractor shall not employ a person above 15 and below 19 years of age for the purpose of execution of work under the contract unless a medical certificate of fitness in the prescribed form (Proforma at Form No.15) granted to him by a certifying surgeon certifying that he is fit to work as an adult is obtained and kept in the custody of the contractor or a person nominated by him in this behalf and the person carries with him, while at work; a token giving a reference to such certificate. It is further agreed that the responsibility for having the adolescent examined medically at the time of appointment or periodically till he attains the age of 19 years shall devolve entirely on the contractor and all the expenses to be incurred on this account shall be borne by him and no fee shall be charged from the adolescent or his parent for such medical examination.
- 60.(3) Period of validity of medical fitness certificate:-** A certificate of fitness granted or renewed for the above said purposes shall be valid only for a period of one year at a time. The certifying surgeon shall revoke a certificate granted or renewed if in his opinion the holder of it is, no longer fit for work in the capacity stated therein. Where a certifying surgeon refuses to grant or renew a certificate or revoke a certificate, he shall, if so required by the person concerned, state his reasons in writing for doing so.
- 60.(4) Medical re-examination of labourer:-** Where any official appointed in this behalf by the Ministry of labour is of the opinion that any person employed in connection with the execution of any work under this contract in the age group 15 to 19 years is without a certificate of fitness or is having a certificate of fitness but no longer fit to work in the capacity stated in the certificate, he may serve on the Contractor, or on the person nominated by him in this regard, a notice requiring that such persons shall be examined by a certifying surgeon and such person shall not if the concerned official so directs, be employed or permitted to do any work under this contract unless he has been medically examined and certified that he is fit to work in the capacity stated in the certificate.

EXPLANATIONS:-

- (1) Only qualified medical practitioners can be appointed as “Certifying Surgeons” and the term “Qualified Medical Practitioners” means a person holding a qualification granted by an authority specified in the Schedule to the Indian Medical Degrees Act, 1916 (VII to 1916) or in the Schedule to the Indian Medical Council Act, 1933 (XXVII) of 1933.
- (2) The Certifying surgeon may be a medical officer in the service of State or Municipal Corporation.

DETERMINATION OF CONTRACT

- 61.(1) Right of DFCCIL to determine the contract:-** The DFCCIL shall be entitled to determine and terminate the contract at any time should, in the DFCCIL’s opinion,

Signature of tenderer (s)

Date:



the cessation of work becomes necessary owing to paucity of funds or from any other cause whatever, in which case the value of approved materials at site and of work done to date by the Contractor will be paid for in full at the rate specified in the contract. Notice in writing from the DFCCIL of such determination and the reasons therefore shall be conclusive evidence thereof.

61.(2) Payment on determination of contract:- Should the contract be determined under sub clause (1) of this clause and the Contractor claims payment for expenditure incurred by him in the expectation of completing the whole of the work, the DFCCIL shall admit and consider such claims as are deemed reasonable and are supported by vouchers to the satisfaction of the Engineer. The DFCCIL's decision on the necessity and propriety of such expenditure shall be final and conclusive.

61.(3) The contractor shall have no claim to any payment of compensation or otherwise, howsoever on account of any profit or advantage which he might have derived from the execution of the work in full but which he did not derive in consequence of determination of contract.

62.(1) Determination of contract owing to default of contractor:- If the Contractor should:-

- (i) Becomes bankrupt or insolvent, or
- (ii) Make an arrangement for assignment in favour of his creditors, or agree to carry out the contract under a Committee of Inspection of his creditors, or
- (iii) Being a Company or Corporation, go into liquidation (other than a voluntary liquidation for the purposes of amalgamation or reconstruction), or
- (iv) Have an execution levied on his goods or property on the works, or
- (v) Assign the contract or any part thereof otherwise than as provided in Clause 7 of these conditions, or
- (vi) Abandon the contract, or
- (vii) Persistently disregard the instructions of the Engineer, or contravene any provision of the contract, or
- (viii) Fail to adhere to the agreed programme of work by a margin of 10% of the stipulated period, or
- (ix) Fail to Execute the contract documents in terms of Clause 8 of the Regulations for Tenders and Contracts.
- (x) Fails to submit the documents pertaining to identity of JV and PAN in terms of Clause 18.11 of Tender Form available in the Regulations for Tenders and Contracts.

Signature of tenderer (s)

Date:



- (xi) Fail to remove materials from the site or to pull down and replace work after receiving from the Engineer notice to the effect that the said materials or works have been condemned or rejected under clause 25 and 27 of these conditions, or
- (xii) Fail to take steps to employ competent or additional staff and labour as required under clause 26 of the conditions, or
- (xiii) Fail to afford the Engineer or Engineer's representative proper facilities for inspecting the work or any part thereof as required under clause 28 of the conditions, or
- (xiv) Promise, offer or give any bribe, commission, gift or advantage either himself or through his partner, agent or servant to any officer or employee of the DFCCIL or to any person on his or on their behalf in relation to the execution of this or any other contract with this DFCCIL.

(xv)

A. At any time after the tender relating to the contract, has been signed and submitted by the Contractor, being a partnership firm admit as one of its partners or employee under it or being an incorporated company elect or nominate or allow to act as one of its directors or employee under it in any capacity whatsoever any retired engineer of the gazetted rank or any other retired gazetted officer working before his retirement, whether in the executive or administrative capacity, or whether holding any pensionable post or not, in the DFCCIL for the time being owned and administered by the President of India before the expiry of one year from the date of retirement from the said service of such Engineer or Officer unless such Engineer or Officer has obtained permission from the President of India or any officer duly authorized by him in this behalf to become a partner or a director or to take employment under the contract as the case may be, or

B. Fail to give at the time of submitting the said tender:-

- a. The correct information as to the date of retirement of such retired engineer or retired officer from the said service, or as to whether any such retired engineer or retired officer was under the employment of the Contractor at the time of submitting the said tender, or
- b. The correct information as to such engineers or officers obtaining permission to take employment under the contractor, or
- c. Being a partnership firm, the correct information as to, whether any of its partners was such a retired engineer or a retired officer, or
- d. Being in incorporated company, correct information as to whether any of its directors was such a retired engineer or a retired officer, or
- e. Being such a retired engineer or retired officer suppress and not disclose at

Signature of tenderer (s)

Date:



the time of submitting the said tender the fact of his being such a retired engineer or a retired officer or make at the time of submitting the said tender a wrong statement in relation to his obtaining permission to take the contract or if the contractor be a partnership firm or an incorporated company to be a partner or director of such firm or company as the case may be or to seek employment under the contractor.

- f. Submits copy of fake documents / certificates in support of credentials, submitted by the tenderer

Then and in any of the said clause, the Engineer on behalf of the DFCCIL may serve the Contractor with a notice (Proforma at Form No.16) in writing to that effect and if the contractor does not within seven days after the delivery to him of such notice proceed to make good his default in so far as the same is capable of being made good and carry on the work or comply with such directions as aforesaid of the entire satisfaction of the Engineer, the DFCCIL shall be entitled after giving 48 hours notice (Proforma at Form No. 17) in writing under the hand of the Engineer to rescind the contract as a whole or in part or parts (as may be specified in such notice) and after expiry of 48 hours notice, a final termination notice (Proforma at Form No. 18) should be issued.

Note: Engineer at his discretion may resort to the part termination of contract with notices (Proforma at Form No.16, 17, 18), only in cases where progress of work is more than or equal to 80% of the original scope of work.

To measure up or the whole or part of the work from which the contractor has been removed and get it completed by another contractor, the manner and method in which such work is completed shall be in the entire discretion of the Engineer whose decision shall be final.

62.(2) Right of DFCCIL after, rescission of contract owing to default of contractor:

In the event of any or several of the courses, referred to in sub-clause (1) of this clause, being adopted.

- (a) The contractor shall have no claim to compensation for any loss sustained by him by reason of his having purchased or procured any materials or entered into any commitments or made any advances on account of or with a view to the execution of the works or the performance of the contract and contractor shall not be entitled to recover or be paid any sum for any work thereto for actually performed under the contract unless and until the Engineer shall have certified the performance of such work and the value payable in respect thereof and the contractor shall only be entitled to be paid the value so certified.

Signature of tenderer (s)

Date:



- (b) In the contract which has been rescinded as a whole, the Security Deposit already with DFCCIL under the contract shall be encashed/ forfeited and the Performance Guarantee already submitted for the contract shall be encashed. The balance work shall be got done independently without risk & cost of the failed Contractor. The failed Contractor shall be debarred from participating in the tender for executing the balance work. If the failed Contractor is a JV or a Partnership firm, then every member/partner of such a firm shall be debarred from participating in the tender for the balance work in his/her individual capacity or as a partner of any other JV /partnership firm. Further the authorized representative of failed Contractor cannot be accepted as authorized representative in new contract.
- (c) In the contract rescinded in part or parts,
- (i) The full Performance Guarantee for the contract shall be recovered. No additional Performance Guarantee shall be required for balance of work being executed through the part terminated contract. The contract value of part terminated contract stands reduced to the balance value of work under the contract.
 - (ii) The Security Deposit of part terminated contract shall be dealt as per clause 16(2) of GCC.
 - (iii) The defaulting Contractor shall not be issued any completion certificate for the contract.
 - (iv) The balance work shall be got done independently without risk & cost of the failed Contractor. The failed Contractor shall be debarred from participating in the tender for executing the balance work. If the failed Contractor is a JV or a Partnership firm, then every member/partner of such a firm shall be debarred from participating in the tender for the balance work in his/her individual capacity or as a partner of any other JV /partnership firm.
 - (v) Further the authorized representative of failed Contractor will not be accepted as authorized representative in new contract.
- (d) The Engineer or the Engineer's representative shall be entitled to take possession of any materials, tools, implements, machinery and buildings on the works or on the property on which these are being or ought to have been executed, and to retain and employ the same in the further execution of the works or any part thereof until the completion of the works without the contractor being entitled to any compensation for the use and employment thereof or for wear and tear or destruction thereof.
- (e) The Engineer shall as soon as may be practicable after removal of the contractor fix and determine ex-parte or by or after reference to the parties or after such investigation or enquiries as he may consider fit to make or institute and shall certify what amount(if any) had at the time of rescission of the contract been reasonably earned by or would reasonably accrue to the contractor in respect of the work then actually done by him under the contract and what was the value of any unused, or partially used materials, any constructional plan and any

Signature of tenderer (s)

Date:



temporary works upon the site. The legitimate amount due to the contractor after making necessary deductions and certified by the Engineer should be released expeditiously.

STATEMENT OF DISPUTES - INDIAN RAILWAY ARBITRATION AND CONCILIATION RULES

63.0 Reconciliation of disputes: All disputes and differences of any kind whatsoever arising out of or in connection with the contract, whether during the progress of the work or after its completion and whether before or after the determination of the contract, shall be referred by the Contractor to the "Chief General Manager/CGM DFCCIL through "Notice of Dispute" provided that no such notice shall be served later than 30 days after the date of issue of Completion Certificate by the Engineer. Chief General Manager/CGM -DFCCIL shall, within 30 days after receipt of the Contractor's "Notice of Dispute", notify the name of conciliator(s) to the Contractor.

The Conciliator(s) shall assist the parties to reach an amicable settlement in an independent and impartial manner within the terms of contract.

If the parties reach agreement on a settlement of the dispute, they shall draw up and sign a written settlement agreement duly signed by Engineer In-charge, Contractor and conciliator(s). When the parties sign the settlement agreement, it shall be final and binding on the parties.

The parties shall not initiate, during the conciliation proceedings, any arbitral or judicial proceedings in respect of a dispute that is the subject matter of the conciliation proceedings.

The conciliation proceedings shall be terminated:

By the signing of the settlement agreement by the parties on the date of agreement; or

- By written declaration of the conciliator, after consultation with the parties, to the effect that further efforts at conciliation are no longer justified, on the date of declaration; or
- By a written declaration of any party to the conciliator to the effect that the conciliation proceedings are terminated, on the date of declaration; or

63.1 Matters finally determined by the DFCCIL – All disputes and differences of any kind whatsoever arising out of or in connection with the contract, whether during the progress of the work or after its completion and whether before or after the determination of the contract, shall be referred by the contractor to the GGM/Director /MD, DFCCIL and the GGM/Director /MD, DFCCIL shall within 120 days after receipt of the contractor's representation make and notify decisions on all matters referred to by the contractor in writing provided that matter for which provision has been made in clauses 8, 18, 22.(5), 39, 43.(2), 45.(a), 55, 55A.(5), 57, 57A, 61.(1), 61.(2) and 62.(1) to (xiii)(B) of Standard General Conditions of contract or in any clause of the special conditions of the contract shall be deemed as 'excepted matters' (matters not arbitrable) and decisions of the DFCCIL authority, thereon shall be final and binding on the contractor; provided further that 'excepted matters' shall stand specifically excluded from the purview of the

Signature of tenderer (s)

Date:



arbitration clause.

64. (1) Demand for Arbitration:-

64. (1) (i) In the event of any dispute or difference between the parties hereto as to the construction or operation of this contract, or the respective rights and liabilities of the parties on any matter in question, dispute or difference on any account or as to the withholding by the DFCCIL of any certificate to which the contractor may claim to be entitled to, or if the DFCCIL fails to make a decision within 120 days, then and in any such case, but except in any of the 'excepted matters' referred to in clause 63.1 of these conditions, the contractor, after 120 days but within 180 days of his presenting his final claim on disputed matters shall demand in writing that the dispute or difference be referred to arbitration.

64.(1) (ii)(a) The demand for arbitration shall specify the matters which are in question, or subject of the dispute or difference as also the amount of claim item wise. Only such dispute or difference, in respect of which the demand has been made, together with counter claims or set off, given by the DFCCIL, shall be referred to arbitration and other matters shall not be included in the reference.

64.(1)(ii)(b) The parties may waive off the applicability of Sub-Section 12(5) of Arbitration and Conciliation (Amendment) Act 2015, if they agree for such waiver in writing, after dispute having arisen between them.

64.(1) (iii) (a) The arbitration proceedings shall be assumed to have commenced from the day, a written and valid demand for arbitration is received by the DFCCIL.

(b) The claimant shall submit his claim stating the facts supporting the claims along with all the relevant documents and the relief or remedy sought against each claim within a period of 30 days from the date of appointment of the Arbitral Tribunal.

(c) The DFCCIL shall submit its defence statement and counter claim(s), if any, within a period of 60 days of receipt of copy of claims from Tribunal thereafter, unless otherwise extension has been granted by Tribunal.

(d) Place of Arbitration: The place of arbitration would be within the geographical limits of the DFCCIL where the cause of action arose or the Headquarters of the concerned DFCCIL or any other place with the written consent of both the parties.

64.(1) (iv) No new claim shall be added during proceedings by either party. However, a party may amend or supplement the original claim or defence thereof during the course of arbitration proceedings subject to acceptance by Tribunal having due regard to the delay in making it.

64.(1) (v) – If the contractor(s) does/do not prefer his/their specific and final claims in writing, within a period of 90 days of receiving the intimation from the DFCCIL that the final bill is ready for payment, he/they will be deemed to have waived his/their claim(s) and the DFCCIL shall be discharged and released of all liabilities under the contract in respect of

Signature of tenderer (s)

Date:



these claims.

64.(2) Obligation During Pendency of Arbitration:– Work under the contract shall, unless otherwise directed by the Engineer, continue during the arbitration proceedings, and no payment due or payable by the DFCCIL shall be withheld on account of such proceedings, provided, however, it shall be open for Arbitral Tribunal to consider and decide whether or not such work should continue during arbitration proceedings.

64.(3) Appointment of arbitrator

64.(3)(a)(i) In cases where the total value of all claims in question added together does not exceed Rs1,00,00,000/- (Rupees One Crore), the Arbitral tribunal shall consist of a sole arbitrator nominated by the MD/DFCCIL. The sole arbitrator shall be appointed within 60 days from the day when a written and valid demand for arbitrator is received by MD/DFCCIL.

64.(3)(a)(ii) In cases not covered by the clause 64(3)(a)(i), the Arbitral Tribunal shall consist of a Panel of three officials, as the arbitrators. For this purpose, the DFCCIL will send a panel of more than 3 names of DFCCIL/Railway officers which may also include the name(s) of Officer(s) empanelled to work as Arbitrator to the contractor within 60 days from the day when a written and valid demand for arbitration is received by the MD/DFCCIL.

Contractor will be asked to suggest to MD/DFCCIL at least 2 names out of the panel for appointment as contractor's nominee within 30 days from the date of dispatch of the request by DFCCIL. The MD/DFCCIL shall appoint at least one out of them as the contractor's nominee and will, also simultaneously appoint the balance number of arbitrators either from the panel or from outside the panel, duly indicating the 'presiding arbitrator' from amongst the 3 arbitrators so appointed. MD/DFCCIL shall complete this exercise of appointing the Arbitral Tribunal within 30 days from the receipt of the names of contractor's nominees. While nominating the arbitrators it will be necessary to ensure that one of them is from the Accounts department. An officer of selection grade of accounts department shall be considered of equal status to the officers in SA grade of other department of DFCCIL for the purpose of appointment of arbitrator.

64.3.(a).iii : The serving railway officer working in arbitral tribunal in the ongoing arbitration cases as per clause 64.(3)(a)(i) and clause 64.(3)(a)(ii) above, can continue as arbitrator in the tribunal even after his retirement.

64. (3)(b) Appointment of Arbitrator where applicability of section 12(5) of A&C Act has not been waived off:

(i) In cases where the total value of all claims in question added together does not exceed Rs. 50,00,000/- (Rupees Fifty Lakh), the Arbitral Tribunal shall consist of officer nominated by the DFCCIL as the arbitrator. For this purpose, the DFCCIL will send a panel of at least four (4) names of Officer(s) empanelled to work as Arbitrator to the Contractor within 60 days from the day when a written and valid demand for arbitration is received by the MD/Director/DFCCIL.

Signature of tenderer (s)

Date:



Contractor will be asked to suggest to GGM/MD/Director/DFCCIL at least 2 names out of the panel for appointment as arbitrator within 30 days from the date of dispatch of the request by DFCCIL. The GGM/MD/Director/DFCCIL shall appoint at least one out of them as the arbitrator.

(ii) In cases where the total value of all claims in question added together exceed Rs 50,00,000/- (Rupees Fifty Lakh), the Arbitral Tribunal shall consist of a Panel of three (3) Officer, as the arbitrators. For this purpose, the DFCCIL will send a panel of at least four (4) names of Officer(s) empanelled to work as DFCCIL Arbitrator to the Contractor within 60 days from the day when a written and valid demand for arbitration is received by the GGM/MD/Director/DFCCIL.

Contractor will be asked to suggest to GGM/MD/Director/DFCCIL at least 2 names out of the panel for appointment as Contractor's nominee within 30 days from the date of dispatch of the request by DFCCIL. GGM/MD/Director/DFCCIL shall appoint at least one out of them as the Contractor's nominee and will, also simultaneously appoint the balance number of arbitrators either from the panel or from outside the panel, duly indicating the 'Presiding Arbitrator' from amongst the 3 arbitrators so appointed. GGM/MD/Director/DFCCIL shall complete this exercise of appointing the Arbitral Tribunal within 30 days from the receipt of the names of Contractor's nominees. While nominating the arbitrators, it will be necessary to ensure that one of them has served in the Accounts Department.

64.(3)(c)(i) If one or more of the arbitrators appointed as above refuses to act as arbitrator, withdraws from his office as arbitrator, or vacates his/their office/offices or is/are unable or unwilling to perform his functions as arbitrator for any reason whatsoever or dies or in the opinion of the MD/Director/DFCCIL fails to act without undue delay, the MD/Director/DFCCIL shall appoint new arbitrator/arbitrators to act in his/their place in the same manner in which the earlier arbitrator/arbitrators had been appointed. Such re-constituted Tribunal may, at its discretion, proceed with the reference from the stage at which it was left by the previous arbitrator(s).

64.(3) (c)(ii)(a) The arbitral Tribunal shall have power to call for such evidence by way of affidavits or otherwise as the arbitral Tribunal shall think proper, and it shall be the duty of the parties hereto to do or cause to be done all such things as may be necessary to enable the arbitral Tribunal to make the award without any delay. The proceedings shall normally be conducted on the basis of documents and written statements.

64.(3)(c)(ii)(b) Before proceeding in to merits of any dispute, the Arbitral Tribunal shall first decide and pass its orders over any plea submitted/objection raised by any party, if any regarding appointment of Arbitral Tribunal, validity of arbitration agreement jurisdiction and scope of the Tribunal to deal with dispute(s) submitted to arbitration, applicability of time "limitation" to any dispute, any violation of agreed procedure regarding conduct of arbitral proceedings or plea for interim measures of protection and record its order in day to day proceedings. A copy of the proceedings duly signed by all the members of tribunal should be provided to both the parties.

Signature of tenderer (s)

Date:



64.(3)(c)(iii)(i) Qualification of arbitrator(s)

(a) Deleted.

(b) Deleted.

(c) Age of arbitrator at the time of appointment shall be below 70 years

(ii) An Arbitrator may be appointed notwithstanding the total number of arbitration cases in which he has been appointed in the past.

(iii) While appointing arbitrator(s) under sub-clause (i), (ii) & (iii) above, due care shall be taken that he/they is/are not the one/those who had an opportunity to deal with the matters to which the contract relates or who in the course of his/their duties as DFCCIL servant(s) expressed views on all or any of the matters under dispute or differences.

64.(3)(d)(i) The arbitral award shall state item wise, the sum and reasons upon which it is based. The analysis and reasons shall be detailed enough so that the award could be inferred there from.

64.(3)(d)(ii) A party may apply for corrections of any computational errors, any typographical or clerical errors or any other error of similar nature occurring in the award of a tribunal and interpretation of a specific point of award to tribunal within 60 days of receipt of the award.

64.(3)(d)(iii) A party may apply to tribunal within 60 days of receipt of award to make an additional award as to claims presented in the arbitral proceedings but omitted from the arbitral award.

64.(4) In case of the Tribunal, comprising of three Members, any ruling on award shall be made by a majority of Members of Tribunal. In the absence of such a majority, the views of the Presiding Arbitrator shall prevail.

64.(5) Where the arbitral award is for the payment of money, no interest shall be payable on whole or any part of the money for any period till the date on which the award is made.

64.(6)(a) The cost of arbitration shall be borne by the respective parties. The cost shall inter-alia include fee of the arbitrator(s), as per the rates fixed by DFCCIL from time to time and the fee shall be borne equally by both the parties. provided parties sign an agreement. Further, the fee payable to the arbitrator(s) would be governed by the instructions issued on the subject by DFCCIL from time to time irrespective of the fact whether the arbitrator(s) is/are appointed by the DFCCIL Administration or by the court of law unless specifically directed by Hon'ble court otherwise on the matter.

64(7) Subject to the provisions of the aforesaid Arbitration and Conciliation Act 1996 and the rules there under and relevant para of General Conditions of Contract (GCC) and any statutory modifications thereof shall apply to the appointment of arbitrators and arbitration proceedings under this Clause.

NOTE:- Arbitrator shall be appointed by DFCCIL as per extent policy of DFCCIL.

Signature of tenderer (s)

Date:



JOINT VENTURE (JV) IN WORKS TENDERS (as per IR GCC, Nov.2018)

65. Participation of Joint Venture (JV) in Works Tender: This Clause shall be applicable for works tenders wherein tender documents provide for the same.

65.1 Separate identity/name shall be given to the Joint Venture.

65.2 Number of members in a JV shall not be more than three, if the work involves only one department (say Civil or S&T or Electrical or Mechanical) and shall not be more than five, if the work involves more than one Department. One of the members of the JV shall be its Lead Member who shall have a majority (at least 51%) share of interest in the JV. The other members shall have a share of not less than 20% each in case of JV with upto three members and not less than 10% each in case of JV with more than three members. In case of JV with foreign member(s), the Lead Member has to be an Indian firm/company with a minimum share of 51%.

65.3 A member of JV shall not be permitted to participate either in individual capacity or as a member of another JV in the same tender.

65.4 The tender form shall be purchased and submitted only in the name of the JV and not in the name of any constituent member.

65.5 Earnest Money Deposit (EMD) shall be deposited by JV or authorized person of JV through e-payment gateway or as mentioned in tender document.

65.6 A copy of Memorandum of Understanding (MoU) duly executed by the JV members on a stamp paper, shall be submitted by the JV alongwith the tender. The complete details of the members of the JV, their share and responsibility in the JV etc. particularly with reference to financial, technical and other obligations shall be furnished in the MoU.

65.7 Once the tender is submitted, the MoU shall not be modified / altered / terminated during the validity of the tender. In case the tenderer fails to observe/comply with this stipulation, the full Earnest Money Deposit (EMD) shall be liable to be forfeited.

65.8 Approval for change of constitution of JV shall be at the sole discretion of the DFCCIL. The constitution of the JV shall not be allowed to be modified after submission of the tender bid by the JV, except when modification becomes inevitable due to succession laws etc. and in any case the minimum eligibility criteria should not get vitiated. However, the Lead Member shall continue to be the Lead Member of the JV. Failure to observe this requirement would render the offer invalid.

65.9 Similarly, after the contract is awarded, the constitution of JV shall not be allowed to be

Signature of tenderer (s)

Date:



altered during the currency of contract except when modification become inevitable due to succession laws etc. and minimum eligibility criteria should not get vitiated. Failure to observe this stipulation shall be deemed to be breach of contract with all consequential penal action as per contract conditions.

65.10 On award of contract to a JV, a single Performance Guarantee shall be submitted by the JV as per tender conditions. All the Guarantees like Performance Guarantee, Bank Guarantee for Mobilization Advance, Machinery Advance etc. shall be accepted only in the name of the JV and no splitting of guarantees amongst the members of the JV shall be permitted.

65.11 On issue of LOA (Letter of Acceptance), the members of the JV to whom the work has been awarded, shall form a legal entity if not already formed, which shall have the same shareholding pattern, as was declared in the MOU/JV Agreement submitted alongwith the tender. This entity shall be got registered before the Registrar of the Companies under 'The Companies Act -2011' (in case of Company) or before the Registrar/Sub-Registrar under the 'Registration Act, 1908' (in case of Partnership Firm) or under 'The LLP Act 2008' (in case of LLP). A separate PAN shall be obtained for this entity. The documents pertaining to this entity including its PAN shall be furnished to the DFCCIL before signing the contract agreement for the work. In case the tenderer fails to observe/comply with this stipulation within 60 days of issue of LOA, contract is liable to be terminated. In case contract is terminated DFCCIL shall be entitled to forfeit the full amount of the Earnest Money Deposit and other dues payable to the Contractor under this contract. This Joint Venture Agreement shall have, inter-alia, following Clauses:

65.11.1 Joint And Several Liability - Members of the JV to which the contract is awarded, shall be jointly and severally liable to the DFCCIL for execution of the project in accordance with General and Special Conditions of Contract. The JV members shall also be liable jointly and severally for the loss, damages caused to the DFCCIL/Railways during the course of execution of the contract or due to non-execution of the contract or part thereof.

65.11.2 Duration of the Joint Venture Agreement - It shall be valid during the entire currency of the contract including the period of extension, if any and the maintenance period after the work is completed.

65.11.3 Governing Laws - The Joint Venture Agreement shall in all respect be governed by and interpreted in accordance with Indian Laws.

65.12 Authorized Member - Joint Venture members in the JV MoU shall authorize one of the members on behalf of the Joint Venture to deal with the tender, sign the agreement or enter into contract in respect of the said tender, to receive payment, to witness joint measurement of work done, to sign measurement books and similar such action in respect of the said tender/contract. All notices/correspondences with respect to the contract would be sent only to this authorized member of the JV.

Signature of tenderer (s)
Date:



65.13 No member of the Joint Venture shall have the right to assign or transfer the interest right or liability in the contract without the written consent of the other members and that of the DFCCIL in respect of the said tender/contract.

65.14 Documents to be enclosed by the JV alongwith the tender:

65.14.1 In case one or more of the members of the JV is/are partnership firm(s), following documents shall be submitted:

- (a) A copy of the Partnership Deed,
- (b) A copy of consent of all the partners or individual authorized by partnership firm, to enter into the Joint Venture Agreement on a stamp paper,
- (c) A copy of Power of Attorney (duly registered as per prevailing law) in favour of the individual to sign the MOU/JV Agreement on behalf of the partnership firm and create liability against the firm.

65.14.2 In case one or more members is/are Proprietary Firm or HUF, the following documents shall be enclosed:

A copy of notarized affidavit on Stamp Paper declaring that his/her Concern is a Proprietary Concern and he/she is sole proprietor of the Concern OR he/she is in position of "KARTA" of Hindu Undivided Family (HUF) and he/she has the authority, power and consent given by other partners to act on behalf of HUF.

65.14.3 In case one or more members of the JV is/are companies, the following documents shall be submitted:

- (a) A copy of resolutions of the Directors of the Company, permitting the company to enter into a JV agreement,
- (b) A copy of Memorandum and Articles of Association of the Company.
- (c) A copy of Authorization/copy of Power of Attorney issued by the Company (backed by the resolution of Board of Directors) in favour of the individual to sign the tender, sign MOU/JV Agreement on behalf of the company and create liability against the company.

65.14.4 All the Members of JV shall certify that they are not blacklisted or debarred by Railways/DFCCIL or any other Ministry / Department / PSU (Public Sector Undertaking) of the Govt. of India/State Govt. from participation in tenders/contract on the date of opening of bids either in their individual capacity or as a member of the JV in which they were/are members.

65.15 Credentials & Qualifying Criteria: Technical, financial eligibility and Bid capacity of the JV shall be adjudged based on satisfactory fulfillment of the following criteria:

Signature of tenderer (s)

Date:



65.15.1 Technical Eligibility Criteria ('a' or 'b' mentioned hereunder):

(a) For Works without composite components

The technical eligibility for the work shall be satisfied by either the 'JV in its own name & style' or 'lead member of the JV'. Each other member of JV shall have technical capacity of minimum 10% of the cost of work.

(b) For works with composite components

- (i) The technical eligibility for each component of work shall be satisfied by either the 'JV in its own name & style' or 'lead member of the JV'. Each other member of JV shall have technical capacity of minimum 10% of the cost of any component of work.

OR

- (ii) The technical eligibility for major component of work shall be satisfied by either the 'JV in its own name & style' or 'lead member of the JV' and technical eligibility for other components of work shall be satisfied by either the 'JV in its own name & style' or 'any member of the JV'. Each other member of JV shall have technical capacity of minimum 10% of the cost of any component of work.

Note:

- (a) The Major component of the work for this purpose shall be the component of work having highest value. In cases where value of two or more component of work is same, any one work can be classified as Major component of work.
- (b) Value of a completed work done by a Member in an earlier JV shall be reckoned only to the extent of the concerned member's share in that JV for the purpose of satisfying his/her compliance to the above mentioned technical eligibility criteria in the tender under consideration.

65.15.2 Financial Eligibility Criteria

The JV shall satisfy the requirement of "Financial Eligibility criteria". The "financial capacity" of the lead partner of JV shall not be less than 51% of the financial eligibility criteria. The "financial capacity" of each of other partners (excluding lead partner) shall not be less than 10% of the financial eligibility criteria mentioned.

The arithmetic sum of individual "financial capacity" of all the members shall be taken as JV's "financial capacity" to satisfy this requirement.

Note: Contractual payment received by a Member in an earlier JV shall be reckoned only to the extent of the concerned member's share in that JV for the purpose of satisfying compliance of the above mentioned financial eligibility criteria in the tender under consideration.

65.15.3 Bid Capacity

The JV shall satisfy the requirement of "Bid Capacity". The arithmetic sum of individual "Bid

Signature of tenderer (s)

Date:



capacity” of all the members shall be taken as JV’s “Bid capacity” to satisfy this requirement.

66. Participation of Partnership Firms in works tenders *(as per IR GCC, Nov.2018)*:

66.1 The Partnership Firms participating in the tender should be legally valid under the provisions of the Indian Partnership Act.

66.2 The partnership firm should have been in existence or should have been formed prior to submission of tender. Partnership firm should have either been registered with the Registrar or the partnership deed should have been notarized prior to date of tender opening as per the Indian Partnership Act.

66.3 Separate identity / name should be given to the partnership firm. The partnership firm should have PAN / TAN number in its own name and PAN / TAN number in the name of any of the constituent partners shall not be considered. The valid constituents of the firm shall be called partners.

66.4 Once the tender has been submitted, the constitution of the firm shall not be allowed to be modified / altered / terminated during the validity of the tender as well as the currency of the contract except when modification becomes inevitable due to succession laws etc., in which case prior permission should be taken from DFCCIL and in any case the minimum eligibility criteria should not get vitiated. The re-constitution of firm in such cases should be followed by a notary certified Supplementary Deed. The approval for change of constitution of the firm, in any case, shall be at the sole discretion of the DFCCIL and the tenderer shall have no claims what-so-ever. Any change in the constitution of Partnership firm after opening of tender shall be with the consent of all partners and with the signatures of all partners as that in the Partnership Deed. Failure to observe this requirement shall render the offer invalid and full EMD shall be forfeited.

If any Partner/s withdraws from the firm after opening of the tender and before the award of the contract, the offer shall be rejected. If any new partner joins the firm after opening of tender but prior to award of contract, his / her credentials shall not qualify for consideration towards eligibility criteria either individually or in proportion to his share in the previous firm. In case the tenderer fails to inform DFCCIL beforehand about any such changes / modification in the constitution which is inevitable due to succession laws etc. and the contract is awarded to such firm, then it will be considered a breach of the contract conditions liable for determination of the contract under Clause 62 of General Conditions of Contract.

66.5 A partner of the firm shall not be permitted to participate either in his individual capacity or as a partner of any other firm in the same tender.

66.6 The tender form shall be submitted only in the name of partnership firm. The EMD shall be deposited by partnership firm through e-payment gateway or as mentioned in tender document. The

Signature of tenderer (s)

Date:



EMD submitted in the name of any individual partner or in the name of authorized partner (s) shall not be considered.

66.7 One or more of the partners of the firm or any other person (s) shall be designated as the authorized person (s) on behalf of the firm, who will be authorized by all the partners to act on behalf of the firm through a “Power of Attorney”, specially authorizing him / them to submit & sign the tender, sign the agreement, receive payment, witness measurements, sign measurement books, make correspondences, compromise / settle / relinquish any claim (s) preferred by the firm, sign “No Claim Certificate”, refer all or any dispute to arbitration and to take similar such action in respect of the said tender / contract. Such “Power of Attorney” shall be notarized / registered and submitted along with the tender.

66.8 On issue of Letter of Acceptance (LOA) to the partnership firm, all the guarantees like Performance Guarantee, Guarantee for various Advances to the Contractor shall be submitted only in the name of the partnership firm and no splitting of guarantees among the partners shall be acceptable.

66.9 On issue of Letter of Acceptance (LOA), contract agreement with partnership firm shall be executed in the name of the firm only and not in the name of any individual partner.

66.10 In case the Letter of Acceptance (LOA) is issued to a partnership firm, the following undertakings shall be furnished by all the partners through a notarized affidavit, before signing of contract agreement.

(a) Joint and several liabilities:

The partners of the firm to which the Letter of Acceptance (LOA) is issued, shall be jointly and severally liable to the DFCCIL for execution of the contract in accordance with General and Special Conditions of the Contract. The partners shall also be liable jointly and severally for the loss, damages caused to the DFCCIL during the course of execution of the contract or due to non-execution of the contract or part thereof.

(b) Duration of the partnership deed and partnership firm agreement:

The partnership deed/partnership firm agreement shall normally not be modified/altered/terminated during the currency of contract and the maintenance period after the work is completed as contemplated in the conditions of the contract. Any change carried out by partners in the constitution of the firm without permission of DFCCIL, shall constitute a breach of the contract, liable for determination of the contract under Clause 62 of the General Conditions of Contract.

(c) Governing laws: The partnership firm agreement shall in all respect be governed by and interpreted in accordance with the Indian laws.

Signature of tenderer (s)

Date:



(d) No partner of the firm shall have the right to assign or transfer the interest right or liability in the contract without the written consent of the other partner/s and that of the DFCCIL.

66.11 The tenderer shall clearly specify that the tender is submitted on behalf of a partnership firm. The following documents shall be submitted by the partnership firm, with the tender:

(a) A copy of partnership deed.

(b) A copy of Power of Attorney (duly registered as per prevailing law) in favour of the individual to tender for the work, sign the agreement etc. and create liability against the firm.

(c) An undertaking by all partners of the partnership firm that they are not blacklisted or debarred by Railways/DFCCIL or any other Ministry / Department of the Govt. of India / any State Govt. from participation in tenders / contracts as on the date of opening of bids, either in their individual capacity or in any firm in which they were / are partners. Concealment / wrong information in regard to above shall make the contract liable for determination under Clause 62 of the General Conditions of Contract.

66.12 Evaluation of eligibility of a partnership firm:

Technical and financial eligibility of the firm shall be adjudged based on satisfactory fulfillment of the eligibility criteria laid down by the partnership firm:

Signature of tenderer (s)

Date:



PART - I

CHAPTER-V

SPECIAL CONDITIONS OF CONTRACT

Signature of tenderer (s)
Date:

Page **91** of **411**


For CGM/DFCCIL/ADI

PART - I CHAPTER V

SPECIAL CONDITIONS OF CONTRACT

- 1.5.1** This Tender shall be governed by Preamble and General instructions to tenderers, General condition of Contract, Special conditions of contract, Technical Specifications, Additional Technical specifications (if any), Drawings, Forms, Annexures, etc.
- 1.5.2** If there are varying or conflicting provisions in the documents forming part of the contract, DFCCIL shall be deciding authority with regard to the intentions of the provision and decision of DFCCIL will be final and binding on the contractor.
- 1.5.3** **Scheme of work:-** Within a period of 30 days beginning from the date of issue of Letter of Acceptance of Tender, the Contractor shall submit the detailed time schedule for execution of work and various documents enumerated in tender papers to the DFCCIL.
- 1.5.4** DELETED
- 1.5.5 Quality Assurance Plan for Superstructure including bearings**
- (a) All materials used in the work shall be of the best quality as per codes / Specifications for fabrication and erection of steel girder bridges (B1-2001) amended till date. Quality Assurance Plan shall include for materials used and for workmanship of work. Quality Assurance Plan shall also be prepared for erection of girder and casting of deck slab. The contractor shall submit Quality Assurance Plan for the superstructure and bearing. The contractor shall also ensure that the Employer's prescribed Quality Assurance Standards are rigidly followed for the construction of superstructure including bearing. Since, the superstructure is Composite girder. Quality Assurance Plan shall be in line with Quality Assurance plans prepared by RDSO for Open Web Girder and POT & POT-PTFE / Elastomeric bearings. These plans are to be approved from the DFCCIL.
- (b) The contractor shall ensure quality at all necessary points, whether at manufacturer's works, or in his depot or at work site as well as during erection through Quality Assurance Plan.
- (c) The Contractor shall adopt a suitable Quality Assurance Programme according to approved instructions, drawings, specifications, etc.
- (d) The erection scheme of composite girder shall be approved by DFCCIL before start of erection of girder.
- (e) Fabrication of composite girder will be inspected by DFCCIL's Engineer in Charge / RDSO / or agency approved by DFCCIL.
- 1.5.6** DELETED.

Signature of tenderer (s)
Date:

1.5.7 The decision of the DFCCIL shall be final in respect of acceptability or otherwise of any material, fittings, component or equipment required for the work.

1.5.8 This programme of the Contractor shall generally cover the followings: -

1.5.8.1 The organization to manage and implement the Quality Assurance programme.

1.5.8.2 The documentation control system:

- (i) Basic control system.
- (ii) Adopted at manufacturer's work
- (iii) Adopted at the Contractor Depot and work site.

1.5.8.3. Procedure adopted for:

- (i) Source Inspection.
- (ii) Incoming raw material inspection.
- (iii) Verification of material purchased.
- (iv) Fabrication Controls.
- (v) Site erection controls.

1.5.8.4 Inspection and Test Procedure for:

- (i) Manufacture and quality control procedure.
- (ii) Field activity.

1.5.8.5 System of handling and storage.

1.5.8.6 System of quality audit.

1.5.8.7 System of maintenance of records.

1.5.8.8 For the purpose of obtaining 'On Account Payment', the Contractor shall submit along with the invoice, the documents indicated in the prescribed quality Assurance standards which should inter alia cover the following as may be applicable in each case.

- (i) Material test reports on raw materials used.
- (ii) Material type and routine test report on components specification.
- (iii) Inspection Plan with reports of the inspection Plan check points.
- (iv) Routine test report.
- (v) Factory test results as required under the specification.
- (vi) Quality audit report including test check report of Employer's representative if any.

Signature of tenderer (s)

Date:



1.5.9 Traffic Blocks / Power Blocks / Shut Down:

- (a) The contractor shall obtain Power / Traffic / Shut down in the name of authorized representative of DFCCIL. Engineer/Engineer's representative will facilitate to make arrangements to obtain power blocks / shutdown (hereinafter referred to as blocks) for works to be carried out along or adjacent to the track work. Works such as foundations of abutments/piers shall generally be done without blocks. However if block is required due to safety considerations, the construction shall be done under block. The requirement of shut down, power blocks etc. shall be assessed by the contractor and will be submitted to the Engineer/Engineer's representative. All the erection of girders etc. shall be done under minimum power block/shut down. Contractor will arrange minimum two gangs of labours i.e. expert of TR line fitters, Semi skilled fitters, labours etc. with supervisors and sufficient tools and tackles required as per site conditions. Work will be done day & night with war foot level with the approval of the Engineer/Engineer's representative. Block will be provided for each ROB individually.
- (b) Blocks will be granted during day & night hours continuous. The Contractor shall confirm that he will equip himself to carry out all construction during night blocks efficiently by suitable special lighting equipments without any extra cost.
- (c) Block period shall be counted from the time the TR-line is placed at the Contractor's disposal at the work-spot till it is cleared by the Contractor.
- (d) Blocks will be subject to normal operating conditions and rules of the Railway. All formalities of exchanging private number etc. with the traffic control/traction power controller will be carried out by the Engineer staff and for this purpose the Engineer will depute a representative for each ROB, who will be responsible for imposing power blocks/shut down and also removing the same after men, material and equipment have been cleared by the Contractor from running tracks and the same declared safe for traffic by Engineer/Engineer's representative in case of works involving safety of running tracks.
- (e) The works required to be done under traffic block shall be carried out only in the presence of DFCCIL officials. The Railway supervisor shall certify safe conditions for passage of trains before resumption of traffic. The works to be done under traffic block shall be carried out under the provision of banner flag and protection of engineering flagman.
- (f) Any charges which may be levied by IR on account of "Possessions" shall be payable by the contractor and penalties, if any, levied by Indian Railways caused due to any careless working or otherwise of violation of the Terms and Conditions of the track block, shall also be payable by the contractor.

1.5.10 Work By Other Agencies

- (a) Any other works undertaken at the same time by the Engineer direct or through some other agency at the same time or section where the contractor is carrying out his work will not entitle the contractor to prefer any claim regarding any delays or hindrances he may have to face on this account but the Employer shall grant a reasonable extension of time to the contractor. The contractor shall comply with any instruction which may be given to him by the DFCCIL in order to permit simultaneous execution of his own works and those undertaken by other contractors or the DFCCIL without being entitled on this account on any extra charge.
- (b) The contractor shall not be entitled to any extra payment due to hindrance resulting from normal Railway operations, such as delay on account of adequate number of and duration of blocks not being granted, operational delay in movement of work trains extension of time to the contractor.

1.5.11 Infringement of patents:

- (a) The Contractor is forbidden to use any patents or registered drawings, process or pattern in fulfilling his contract without the previous consent in writing of the owner of such patent, drawing, pattern or trade mark, except where these are specified by the Employer himself. Royalties where payable for the use of such patented processes, registered drawings of patterns shall be borne exclusively by the Contractor. The contractor shall advise the Employer of any proprietary right that may exist on such processed drawings or patterns which he may use of his own accord.
- (b) In the case of patent taken out by the Contractor of the drawings or patterns registered by him, or of those patents, drawings, or patents for which he holds a licence, the signing of the Contract automatically gives the Employer the right to repair by himself the purchased articles covered by the patent or by any person or body chosen by him and to obtain from any sources he desires the component parts required by him in carrying out the repair work. In the event of infringement of any patent rights due to above action of the Employer, he shall be entitled to claim damages from the contractor on the grounds of any loss of any nature which he may suffer e.g. in the case of attachment because of counterfeiting.
- (c) **Indemnification by contractor:-** In the event of any claim or demand being made or action being brought against the Employer for infringement of later patent in respect of any equipment, machine, plant, work or thing used or supplied by the Contractor under this contract or in respect of any methods of using or working by the Employer of such equipment machine, plant work or thing, the contractor shall indemnify the employer and keep him indemnified and harmless against all claims, costs, charges and expenses arising from or incurred by reason of such claim provided that the Employer shall notify the contractor immediately any claim is made and that the contractor shall be at liberty, if he so desires with the assistance of the Employer if required but at the Contractor's expense, to conduct all negotiations

Signature of tenderer (s)

Date:



for the settlement of the same or any litigation that may arise there from and provided that no such equipment, machine, plant work or thing, shall be used by the Employer for any purpose or in any manner other than that for which they have been supplied by the Contractor and specified under this contract.

1.5.12 Insurance:-

Before commencing of works, it shall be obligatory for the contractor to obtain, at his own cost, insurance cover in the joint name of the contractor and employer from reputed companies under the following requirements:

- (a) Liability for death of or injury to any person/ employer's staff / animals or things or loss of or damage to any property / things / the work of other contractor (other than the work) arising out of the performance of the Contract.
- (b) Construction Plant, Machinery and equipment brought to site by the Contractor.
- (c) Any other insurance cover as may be required by the law of the land.

The contractor shall provide evidence to the employer / Engineer before commencement of work at site that the insurances required under the contract have been effected and shall from the commencement date, provide the insurance policies to the Employer/Engineer, the contractor shall, whenever, called upon, produce to the engineer or his representative the evidence of payment of premiums paid by him to ensure that the policies indeed continue to be in force.

The Contractor shall also obtain any additional insurance cover as per the requirements of the Contract.

The Employer/Engineer shall not be liable for or in respect of any damages or compensation payable to any workman or other person in the employment of the Contractor or his sub-contractor or petty contractor / other contractor working there. The Contractor shall indemnify and keep indemnified the employer / Engineer against all such damages and compensation for which the contractor is liable.

The Policies of the contractor shall remain in force throughout the period of execution of the works and till the expiry of the defect liability period except for any specific insurance covers necessary for shorter period.

If the Contractor fails to effect or keep in force or provide adequate cover as acceptable to the engineer in the insurance policies mentioned above, then in such cases, the engineer may effect and keep in force any such insurance or further insurance on behalf of the Contractor. The recovery shall be made at the rate of 1.5 times the premium/premiums paid by the engineer in this regard from the payment due to the Contractor or from the contractor's Performance security. However, the Contractor shall not be absolved from his responsibility and /or liability in this regard.

Signature of tenderer (s)

Date:



1.5.13 Accident:-

- (a) The contractor shall, in respect of all staff engaged by him or by his sub-contractor, indemnify and keep the employer at all times indemnified and protected against all claims made and liabilities incurred under Workman's Compensation Act, the Factories Act and the Payment of Wages Act, and rules made there under from time to time or under any other labour and Industrial Legislation made from time to time.
- (b) The contractor shall indemnify and keep the employer indemnified and harmless against all actions, suits, claim demands, costs, charges or expenses arising in connection with any death or injury sustained by any person or persons sustained due to the acts or omission of the contractor, his sub-contractors, his agents or his staff during the executions of this contract irrespective of whether such liability arises under the Workman's Compensation Act, or Fatal Accident Act or any other statute in force for the time being.
- (c) The contractor's liability to meet third party claims of the type outlined above will be applicable only in cases where accidents have been caused by workmanship, material, execution or negligence on the part of the contractor and further the liability of the contractor will be limited to Rs.5 lakh for any one accident.
- (d) The contractor shall be responsible for all repairs and rectification of damages to completed works or works under execution due to DFCCIL accidents, thefts, pilferage or any other cause, without delay to minimize or to avoid traffic detentions, in a section until the installation are provisionally handed over to the employer.

1.5.14 Safety Measures:-

- (a) The contractor shall take all precautionary measures in order to ensure the protection of his own personnel moving about or working on the railway premises, but shall then conform to the rules and regulations of the Railway if and when, in the course of the work there is likely to be any danger to persons in the employment of the contractor due to running traffic while working in the Railway siding and premises, the contractor shall provide flagman or look out men for protection of such persons. The employer shall remain indemnified by the contractor in the event of any accident occurring in the normal course of work, arising out of the failure of contractor or his men to exercise reasonable precaution at all places of work. Before execution of work beside / nearby Railway track the contractor shall get approved the safety and protection plan from the DFCCIL.
- (b) Blasting of rocks for foundation work shall be done only after due notice is given to the employer and time/s and date /s for blasting operations agreed to by the employer. Blasting, if required to be done in the vicinity of the track, shall not

be undertaken until the Employer's flagmen on duty take necessary step to protect trains and the track is adequately protected by the contractor against damage by blasted rock. The contractor shall follow detailed instructions which will be issued to him regarding blasting operations in the vicinity of tracks.

- (c) The contractor shall abide by all Railway regulations in force for the time being and ensure that the same are followed by his representatives, Agents or sub-contractors or workmen. He shall give due notice to his employees and workers about provision of this para.
- (d) The works must be carried out most carefully without any infringement of the Indian Railway Act or the General and Subsidiary Rules in force on the Railway, in such a way that they do not hinder Railway operation or affect the proper functioning of or damage any DFCCIL equipment, structure or rolling stock except as agreed to by the employer, provided that all damage and disfiguration caused by the contractor at his own cost failing which cost of such repairs shall be recovered from the contractor.
- (e) If safety of track or track drainage etc. is affected as a consequence of works undertaken by the contractor, the contractor shall take immediate steps to restore normal conditions. In case of delay, the employer shall, after giving due notice to the contractor in writing, take necessary steps and recover the costs from the contractor.

1.5.15 Guarantee / Defect Liability Period:-

- (a) The Contractor shall guarantee that all the works executed under this contract shall be free from all defects and faults in material, workmanship and manufacture and shall be of acceptable standards for the contracted work and in full conformity with the technical specifications, drawings and other contract stipulations, **for a period of 6 months from the date of taking over by the DFCCIL/Employer.**
- (b) During the period of guarantee the Contractor shall keep available an experienced engineer / man power to attend to any defective works / installations resulting from defective erection and/or defect in the installation supplied by the Contractor. This engineer shall not attend to rectification of defects which arise out of normal wear and tear and come within the purview of routine maintenance work. The contractor shall bear the cost of modifications, additions or substitutions that may be considered necessary due to faulty materials or workmanship for the satisfactory working of the equipment. The final decision shall rest with the Engineer his successor(s)/Nominee.
- (c) During the period of Guarantee the Contractor shall be liable for the replacement at site of any parts which may be found defective in the executed work whether such parts / structural elements of his own manufacture or those of his sub-contractor / supplier whether arising from faulty materials, workmanship or negligence in any manner on the part of the

Signature of tenderer (s)

Date:



Contractor provided always that such defective parts as are not repairable at site are promptly returned to the Contractor if so required by him at his (Contractor's) own expenses. In case of parts of executed work detected during guarantee period, contractor should replace all such items irrespective of the fact whether all such items have failed or not. The Contractor shall bear the cost of repairs carried out on his behalf by the Employer at site. In such a case, the contractor shall be informed in advance of the works proposed to be carried out by the Employer.

- (d) If it becomes necessary for the Contractor to replace or renew any defective portion of the structural elements until the expiration of six month from the date of such replacement or renewal or until the end of the above mentioned period whichever is later.

Such extension shall not apply in case of defects of a minor nature, the decision of the Dy.CPM/DFCCIL being final in the matter. If any defect be not remedied within a reasonable time during the aforesaid period the Employer may proceed to do work at the Contractor's risk and expense, but without prejudice to any other rights and remedies which the Employer may have against the Contractor in respect of such defects or faults.

- (e) The repaired or renewal parts structure shall be delivered / supplied and erected / executed on site free of charge to the employer.
- (f) Any materials, fittings, components or equipments / structure supplied under items for supplying / providing and fixing in schedule shall also be covered by the provisions of this paragraph. The liability of the Contractor under the guarantee will be limited to re-supply of components / structure installation and fittings.

1.5.16 Final Acceptance:-

- (a) The final acceptance of the entire work executed shall take effect from the date of expiry of the period of guarantee / Defect Liability period as defined in paragraph 1.5.15 above of the expiry of the last of the respective periods of guarantee of various ROB's, provided in any case that the Contractor has complied fully with his obligations under clause 1.5.15 in respect of each R O B , provided also that the attention has been paid by way of maintenance by the Employer.
- (b) If on the other hand the contractor has not so complied with his obligation under Para 1.5.15 above in respect of any work, the Employer may either extend the period of guarantee in respect of that work until the necessary works are carried out by the Contractor or carry out those works or got them carried out suo moto on behalf of the Contractor at the Contractor's expenses. After expiry of the period of guarantee for each work, a certificate of final acceptance for the section shall be issued by the Employer and the last of such certificate will be called the last and final acceptance certificate. The contract shall not be

Signature of tenderer (s)

Date:



considered as completed until the issue of final acceptance certificate by the Employer.

- (c) The Employer shall not be liable to the Contractor for any matter arising out of or in connection with the contract or execution of the work unless the Contractor shall have made a claim in writing in respect thereof before the issue of final acceptance certificate under this clause.

Notwithstanding the issue of final acceptance certificate the Contractor and the Employer (subject to sub-clause as above) shall remain liable for fulfilment of any obligation incurred under the provision of the contract prior to the issue of final acceptance certificate which remains unperformed at the time such certificate is issued and for determining the nature and extent of such obligation the contract shall be deemed to remain in force between the parties hereto.

1.5.17 Payment:-

Payment will be governed by the terms specified in accordance with accepted schedule of prices, read with relevant para of the other parts and Chapters of the Tender Papers. The employer retains the right to withhold money due to the contractor arising out of this contract for any default of the contractor.

- (i) The Contractor shall, whenever required, produce or cause to be produced for examination by the Employer any quotation / invoice, cost of other account, book of account, voucher, receipt letter, memorandum paper or writing or any copy of or extract from any such document and also furnish information and returns verified in such manner as may be required in anyway relating to the execution of this contract or relevant for verifying or ascertaining the cost of the execution of this Contract (the decision of the employer on the question of relevancy of any documents, information or return being final and binding on the parties). The Contractor shall similarly produce vouchers etc., if required, to prove to the Employer that materials supplied by him are in accordance with the specifications laid down in the contract.
- (ii) If any portion of the work be carried out by a sub-contractor or any subsidiary or allied firm or company the Employer shall have power to secure the books of such sub-contractor or any subsidiary or allied firm or company, through the Contractor, and such books shall be open to his inspection. The Contractor should seek prior permission from the employer for subletting whole and/or part of the work to any sub-contractor.
- (iii) The obligations imposed by sub-clause (i) and (ii) above are without prejudice to the obligation of the Contractor under any statute, rules or order binding to the Contractor or other conditions of the contract.
- (iv) It is an agreed term of the contract that the employer reserves the right to carry

out post-payment Audit and/or technical examination of the works and the final bill, including all supporting vouchers, abstracts etc. and to make a claim on the Contractor for the refund of any excess amount paid to him if as a result of such examination any over payment to him is discovered to have been made in respect of any work done or alleged to have been done by him under the contract.

1.5.18 All payments in respect of the contract during the currency of the contract shall be made through Electronic Clearing System (ECS) / National Electronic Funds Transfer (NEFT/RTGS). The successful tenderer on award of contract must submit ECS/NEFT/RTGS Mandate Form complete in all respects as detailed at Form No. 8 of the tender document. However, if the facility of ECS/NEFT/RTGS is not available at a particular location, the payments shall be made by cheque.

1.5.18.1 The Contractor and concerned staff/Engineer shall ensure that every 1st, 3rd, 5th, 7th, 9th, etc. Running bill & Final Bill shall be technically checked by DFCCIL before making payment. The Contractor shall produce the original documents/Register for which copy is attached with "On Account" Bill at time of checking and/or Technical Scrutiny of the "On Account Bill" as and when asked by Engineer/his representative / DFCCIL / Investigating Agency to do so.

1.5.19 Performance Guarantee:- as per 16.(4) Part I, Chapter IV

1.5.20 Mobilization Advance:- (Applicable for Advertised tender of value more than Rs. 25.00 crore) {As per standard bidding documents for ROB construction vide GM/ROB/WC's email dated 05.01.16}

- (a) The Tenderer/Contractor may be granted a recoverable interest bearing mobilization advance up to 10% of the contract value provided mobilization advance is admissible as per the tender conditions and he specifically applies for it while tendering. If the tenderer fails to apply specifically for Mobilization Advance while giving his offer at the tendering stage in case where grant of Mobilization Advance is permissible, no subsequent requests from him for grant of this advance will be entertained. The rate of interest is 4.5% per annum above the Base Rate of State Bank of India, as effective on the date of approval of payment of Mobilisation Advance by the competent authority.
- (b) The advance will be granted in two installments viz., 5% of the contract value on signing of the contract agreement and the balance 5% on Mobilisation of site establishment, setting up offices, bringing in equipment and actual commencing of work. Each installment will be released on submission of a security in a form acceptable to the DFCCIL (similar to Performance Guarantee notified in Clause 16.(4) (b) of General conditions of contract for the amount of the at least 110% of the value of the sanctioned advance amount covering installment together with interest

Signature of tenderer (s)

Date:



charges calculated upto the end of the contract period. The tenderer who seeks Mobilisation Advance should be specific about the course of action proposed to be followed in producing the security to the satisfaction of the DFCCIL. Each security should be at least not less than one lakh rupees. These securities shall be returned as and when the value of the advance plus interest is recovered from the running bill.

- (c) The recovery of the advance and interest thereon will be made through the every on account bills, pro-rata, commencing from the time the value of the work executed under the contract reaches 15% of the contract value and completed when the value of the work executed under the contract reaches 85% of the contract value or assessed value whichever is less.
- (d) The Mobilisation Advance granted shall be returned back to the DFCCIL in case the work is not completed in the original contract completion period.
- (e) The Bank Guarantee shall be from a Nationalised Bank in India or State Bank of India, in a form acceptable to DFCCIL. (Tender Form No. 19 placed at Part IV of the tender documents).

Note: The instruments as listed under Performance Guarantee vide Clause 16.(4) (b) of General conditions of contract will also be acceptable for Guarantee in case of Mobilisation Advance.

1.5.21 Arbitration:- Refer to clause 63 of GCC.

Signature of tenderer (s)
Date:

PART - II

TECHNICAL SPECIFICATION

Signature of tenderer (s)
Date:

PART - II

TECHNICAL SPECIFICATIONS

The Materials and workmanship specification as follow have been based on Indian Standards and International Standards as scheduled below. Apart from the basic data, specifications etc. all items of works shall be governed by the Codes & Specifications as detailed hereunder and as revised / corrected / amended up to 28 days before the due date of submission of the Bid Proposal.

For technical specifications, refer Indian Railways Unified Standard Specifications (Works and Materials), 2010 amended upto date/ Gujarat State SOR/Codes/Manual / NH SOR /Codes/Manual as shall be relevant. and the specification for fabrication and erection of steel girder bridges and Locomotive Turn Table (Fabrication Specification), Serial No B1 - 2001 amended up to date. The decision of DFCCIL is final and binding to the contractor.

Indian Railways Unified Standard Specifications (Works and materials), Volume I & II are available for sale at the offices of General Managers and DRMs at all Zonal Railways & Production Units.

2.1 GENERAL GUIDELINES REGARDING SPECIFICATIONS AND SPECIAL CONDITIONS FOR SUPPLY OF CEMENT FOR CONSTRUCTION WORKS

2.1.1 SUPPLY OF CEMENT:

2.1.1.1 Supply of cement to various specifications as required for various items under different schedules will be paid under the items in Schedule.

2.1.1.2 The cement required for various items of work under Schedule shall be supplied by the Contractor at the site of work in accordance with the requirements and specifications.

2.1.1.3 For supply and use of cement in various works, relevant Indian Railways Unified Standard Specifications (Works and Materials), Volume I & II - 2010, IRS codes/ Guj. State SOR/Codes/Manual/MORTH Code IS Specifications & design requirement as relevant will be applicable. Wherever, relevant specifications are not available, decision of the Engineer shall be final and binding on the contractor.

2.1.2 SPECIFICATIONS FOR CEMENT:

2.1.2.1 The cement used shall conform to any of the following standards.

- (i) 33 Grade Ordinary Portland Cement conforming to IS: 269
- (ii) 43 Grade Ordinary Portland Cement conforming to IS: 8112
- (iii) 53 Grade Ordinary Portland Cement conforming to IS: 12269
- (iv) Rapid Hardening Ordinary Cement conforming to IS: 8041
- (v) High Strength Portland Cement conforming to IRS: T: 40

Signature of tenderer (s)

Date:



- (vi) Hydrophobic Portland cement conforming to IS: 8043
- (vii) Low heat Portland cement conforming to IS: 12600
- (viii) Sulphate Resistance Cement conforming to IS: 12330

2.1.3 SOURCE AND PACKAGING:

2.1.3.1 Cement to be used on the works shall be procured from the main / reputed cement plants or from their authorized dealers. Decision of DFCCIL regarding reputed firms shall be final and binding on the contractor.

2.1.3.2 Cement shall be packed in jute sacking bags conforming to IS: 2580-1982, double hessian bituminised (CRI type) or woven HDPE conforming to IS: 11652-1986, woven polypropylene conforming to is: 11653:1986, Jute synthetic union conforming to IS: 12174:1987, or any other approved composite bags, bearing the following information in legible markings:

- (i) Manufacturer's name or Registered Trade Mark of manufacturer, if any.
- (ii) Grade of cement
- (iii) Type of cement
- (iv) Weight of each bag in Kg.
- (v) Date of manufacture,
- (vi) IS Code No. to which the cement conforms.
- (vii)

2.1.3.2.1 If loose Cement supplied by bulker etc, cement shall be conforming to IS: 2580-1982, Manufacturer's name or Registered Trade Mark of manufacturer shall provided.

2.1.3.3 All cement bags shall have company stitches intact and if any sign of tampering with company stitches is noticed, the same will be rejected without any test and no compensation shall be payable in this regard.

2.1.4 TEST CERTIFICATE REGARDING QUALITY OF CEMENT:

2.1.4.1 Necessary test certificates will have to be produced by the contractor regarding the quality of the cement conforming to the specification in addition to the manufacturer's certificates.

2.1.4.2 DFCCIL reserves the right to take samples during the course of the work and get the cement tested in reputed laboratories to ascertain the conformity to the specification. Cost of such testing shall be borne by the contractor without any extra payment.

2.1.4.3 Tests on cement shall be done as per relevant IS Codes. These tests are as follows:

- (i) Compressive strength
- (ii) Initial and final setting time
- (iii) Consistency
- (iv) Soundness.
- (v) Fineness

Signature of tenderer (s)

Date:



2.1.4.4 The Contractor shall arrange to carryout above tests for every 50 Tonnes of cement, and for every change in lot/batch, contractor will submitted test report from manufacturing company and shall submit to the DFCCIL and take approval of the DFCCIL before using in work. No extra payment will be made for conducting such tests.

2.1.4.5 Any temporary structure required for storage of cement, has to be provided by the tenderer at his cost and shall be removed after completion of work. The DFCCIL will only provide suitable land wherever land is available and is free for use. On completion of the work or as directed by the Engineer, the shed if put up by the Contractor, should be removed by the contractor and site cleared at his cost.

2.1.5 CONSUMPTION OF CEMENT:

2.1.5.1 The cement consumption for other than design mix concrete, shall be as per *WR USSOR*, as applicable and relevant. The quantity of cement will be decided based on the approved design mix keeping in mind Minimum and Maximum cement content specified for various grades. Excess cement used will not be paid for and the decision of the Engineer in this connection shall be final and binding on the Contractor.

2.1.6 PAYMENT FOR CEMENT:-

Cement supplied for the work and measured under the Schedule will be paid if specified separately only after its use in various works under the Schedules of the contract as per conditions and no advance payment for supply will be admissible.

2.1.7 GENERAL:-

2.1.7.1 No wastage of any of the materials supplied and used in the work by the contractor including cement is payable by DFCCIL, contractor shall make his own arrangements for storing cement for use in work.

2.1.7.2 Contractor should take proper precautionary measures to store the cement in good condition against rains, etc. Storage of cement at the work site shall be at the contractor's expense and risk. Any damage occurring to cement due to faulty storage in contractor's shed or on account of negligence on his part shall be the liability of the contractor.

2.1.7.3 53 Grade/43 Grade/33 Grade of cement should be stacked separately in countable manner.

2.1.7.4 Admixture as per IS: 9103 of approved manufacturer by the Engineer shall be permitted to be used in concrete wherever required. However, no extra payment for the admixtures used shall be payable unless otherwise specified in the Schedule.

2.1.7.5 Cement for temporary and enabling works shall be arranged by the contractor at his own cost and no extra payment will be paid on this account.

Signature of tenderer (s)
Date:

2.1.7.6 Empty Cement bags on release from the work is the property of the Contractor and shall be disposed off by the Contractor himself.

2.2 GENERAL GUIDELINES REGARDING SPECIFICATIONS AND SPECIAL CONDITIONS FOR CONCRETE WORKS

2.2.1 Specifications:-

2.2.1.1 Concrete for PCC/ RCC/PSC (Including piling , piers, abutments and RCC deck slab/girders etc.) shall be as per relevant IS Specifications. Some important guide lines are listed below. Along with these, all other relevant IRS, IRC and IS specifications with their up to date versions shall also govern. These govern all concrete works in bridges, etc., as applicable.

- (i) IRS Concrete Bridge Code.
- (ii) IS 456 : Code of Practice for Plain and Reinforced Concrete.
- (iii) Relevant Indian Railway Unified Standard Specifications (Works & Materials) Volume I & II, Engineering Department, 2010
- (iv) Relevant IRS/IRC/MORTH/IS Specifications/Codes
- (v) Relevant PSC Codes & specification.

2.2.1.2 Specifications for cement, steel, binding wire, used in concrete construction shall be as per IRS/IRC/MORTH/IS specifications with latest corrections slips/revisions. Any other specifications/rules/guidelines issued from time to time by Railway Board/RDSO/DFCCIL.

2.2.1.3 In all matters of execution, including testing of various components, where the above codes/specifications/guidelines are not clear or explicit or at variance, the directions given by the Engineer shall be final and binding on the contractor.

2.2.2 Cement:-

2.2.2.1 The cement used in concrete construction shall be 43/53 Grade Ordinary Portland cement as per the design and as specified in the relevant schedules. Specifications for cement are covered under the supply schedule.

2.2.3 Reinforcement:-

2.2.3.1 All Reinforcement Steel (TMT Bars of Grade Fe 500D) shall be procured as per specification mentioned in IS : 1786. Independent tests shall be conducted, wherever required, to ensure that the materials procured conform to the Specifications.

These steel shall be procured only from those firms, which are Established, Reliable, Indigenous & Primary Producers of Steel, having Integrated Steel Plants (ISP), using iron ore as the basic raw material and having in house iron rolling facilities, followed by production of liquid steel and crude steel, as per Ministry of Steel's guidelines.

Signature of tenderer (s)

Date:



- 2.2.3.2** Bars shall be cut, bent and placed correctly and accurately to the size and shape as shown in the detailed drawing. Preferably bars of full length shall be used. The reinforcement shall be tied with annealed/ mild steel binding wire. Overlapping of bars, where necessary, shall be done as directed by Engineer. Rates quoted include the cost of annealed/mild steel steel binding wire of appropriate specifications. Rate also include necessary cost of straightening, cutting, bending, binding and placing in appropriate position as per approved drawing to the satisfaction of Engineer.
- 2.2.3.3** Welding of reinforcement will not be generally permitted except in special circumstances under the written approval of the Engineer.
- 2.2.3.4** A register shall be maintained by the Contractor with full details of reinforcement provided for accountal and payment of steel reinforcement shall be made as per approved drawing. The contractor should sign such register approved by DFCCIL before undertaking concreting works, as a token of acceptance of the details of reinforcement steel provided in works, failing which the details as recorded by DFCCIL shall be binding on the contractor for the purpose of payment and no dispute will be entertained by DFCCIL on this account.
- 2.2.3.5** Contractor shall remove from site any steel materials rejected by the Engineer within a reasonable time as specified by him.
- 2.2.3.6** Protective Coatings:- In order to offer adequate resistance against corrosion, reinforcement bars may be provided with suitable protective coatings depending upon the environmental conditions In aggressive environments (severe, and extreme) application of cement slurry coating after removal of rust and other loose material from the surface of the reinforcement bar will generally be sufficient.
- 2.2.3.7** The steel consumption shall be as per the drawings issued by the DFCCIL. Quantity of steel reinforcement consumption shall be as per reinforcement actually utilized in the work based on approved bar bending schedule. Nothing extra will be paid for wastage or for cut rods, if any, which will be property of the contractor. The weight of the steel will be calculated from the nominal weight given in the producer's hand / IRUSS (W & M),2010-Volume-I books.
- 2.2.4 Coarse & Fine Aggregates:-**
- 2.2.4.1** Aggregates shall comply with the requirements of IS: 383 and shall be subjected to the tests in accordance with IS: 2386. Coarse aggregates shall be from crushed stone from approved quarries. Sand shall be from good river sources of approved quarries only.
- 2.2.4.2** The size of the coarse aggregates shall be as per relevant IRS / IS specifications.
- 2.2.4.3** The size of the fine aggregates shall be as per relevant IRS / IS specifications.
- 2.2.4.4** Coarse aggregate shall be crushed and roughly cubical in shape. Fine aggregate shall be naturally produced. Creek/ Marine sand shall not be used in permanent works.

2.2.4.5 The grading of the sand shall conform to relevant IS specification. The sand shall be screened on a 4.75 mm size screen to eliminate over size particles. The sand, if required, shall be washed in screw type mechanical washers in potable water to remove excess silt, clay and chlorides wherever required. The screening and washing of sand shall be completed at least one day before using it in concrete. The washed sand shall be stored on a sloping platform and in such a manner as to avoid contamination.

2.2.5 Water:-

2.2.5.1 Water used for washing of aggregates and for mixing and curing concrete shall be clean, potable and free from injurious amounts of oils, acids, alkalis, salts, sugar, organic materials or other substances that may be deleterious to concrete or steel and shall conform to clause 5.4 of IS : 456.

2.2.5.2 In case of doubt regarding development of strength, the suitability of water for making concrete shall be ascertained by the compressive strength as per IS : 4031 (Part VI) and initial setting time tests IS : 4031 (Part V).

2.2.5.3 Water found satisfactory for mixing is also suitable for curing concrete. However, water used for curing should not produce any objectionable stain or unsightly deposit on the concrete surface. The presence of tannic acid or iron compounds is objectionable.

2.2.6 Admixtures:-

2.2.6.1 In bridges, use of admixtures is governed by clause 4.4 of IRS Concrete Bridge Code.

2.2.6.2 The admixtures, when permitted, shall conform to IS: 9103. Calcium chloride or admixtures containing calcium chloride shall not be used in structural concrete containing reinforcement, prestressing tendon or other embedded metal. The admixture containing Cl & SO₃ ions shall not be used. Admixtures containing nitrates shall also not be used. Admixtures based on thiocyanate may promote corrosion and therefore shall be prohibited.

2.2.6.3 Concrete admixtures shall be obtained only from established manufactures with proven track record or as per approved list wherever available.

2.2.6.4 The contractor shall provide the following information concerning each admixture after obtaining the same from the manufacturer before the same is put to use:

- (a) The chemical names of the main ingredients in the admixtures.
- (b) The chloride iron content, if any, expressed as a percentage by mass of the total admixture.
- (c) Values of dry material content, ash content and relative density of the liquid admixture which can be used for Uniformity Tests.
- (d) Whether or not the admixture leads to the entrainment of air when used as per the manufacturer's recommended dosage, and if so to what extent.

Signature of tenderer (s)

Date:



- (e) Where two or more admixtures are proposed to be used in any one mix, confirmation as to their compatibility.
- (f) There would be no increase in risk of corrosion of the reinforcement or other embodiments as a result of using the admixture.
- (g) Retardation achieved in initial setting time.
- (h) Normal dosage and detrimental effects, if any, of under dosage and over dosage.
- (i) Recommended dosages and expected results, including proof for the same wherever required. Independent test results shall be produced by the contractor on demand/as specified.

2.2.7 Storage of materials:-

2.2.7.1 Storage of materials shall be as per IS: 4082. All materials may be stored at proper places so as to prevent their deterioration or intrusion by foreign matter and to ensure their satisfactory quality and fitness for the work. The storage space must also permit easy inspection, removal and restoring of the materials. All such materials even though stored in approved godowns / places, must be subjected to acceptance test prior to their immediate use.

2.2.7.2 Aggregate shall be stored at site on a hard and dry level patch of ground. If such a surface is not available, a platform of planks or of corrugated iron sheets, or a floor of dry bricks, or a thin layer of lean concrete shall be made so as to prevent the admixture of clay, dust, vegetable and other foreign matter.

Stacks of fine and coarse aggregate shall be kept in separate stack piles, sufficiently removed from each other to prevent the materials at the edge of the piles getting intermixed. On a large job it is desirable to construct dividing walls to give each type of aggregate its own compartment. Fine aggregate shall be stacked in place where loss due to the effect of wind is minimum.

Unless specified otherwise or necessitated by site conditions, stacking of aggregate should be carried out in regular sizes.

2.2.7.3 Cement shall be transported, handled and stored at the site in such a manner as to avoid deterioration or contamination. Cement shall be stored above ground level in perfectly dry and water-tight sheds and shall be stacked not more than eight bags high. Wherever bulk storage containers are used their capacity should be sufficient to cater to the requirement at site and should be cleaned at least once every 3 to 4 months. Cement older than 3 months from the date of manufacture shall not be used. Each consignment shall be stored separately so that it may be readily identified and inspected and cement shall be used in the sequence in which it is delivered at site. Any consignment or part of a consignment of cement which had deteriorated in any way, during storage, shall not be used in the works and shall be removed from the site by the Contractor without charge to DFCCIL. For more details regarding stacking and storage of cement etc of Indian Railway Unified Standard

Specifications (Works & Materials), Volume II, - 2010 as shall be applicable or relevant. The decision of DFCCIL is final and binding to the contractor.

2.2.7.4 The reinforcement bars, when delivered on the job, shall be stored above the surface of the ground level by at least by 150mm and shall ordinarily be stored in such a way as to avoid distortion and to prevent deterioration and corrosion. Every bar shall be inspected before assembling on the works and any defective, brittle, excessively rusted or burnt bars shall be removed. Cracked ends of bars shall be cut out.

2.2.8 Testing of cement & others:-

Cement and other items shall be tested as per specifications. However, the contractor shall also arrange for additional tests at his own cost as required by the Engineer as and when required. The decision of the Engineer shall be final in this regard.

2.2.9 Concreting:

2.2.9.1 The contractor shall make his own arrangements for supply of water and electricity for all his works at his own cost. He shall arrange potable quality water for use in all concrete works and samples of water shall be got tested from approved laboratory/approved by the Engineer before being used in concreting. Apart from water, fine & coarse aggregates and all other materials shall be tested from time to time by the contractor at his cost to ensure proper quality works.

2.2.9.2 Maximum / minimum size of aggregates, standards of quality of materials, minimum cover for concrete, use of admixtures / chemicals, treatment to reinforcement / finished surfaces, etc., shall be as per relevant Codes, IS / IRS specifications and conditions of contract as specified.

2.2.9.3 All exposed concrete surfaces shall be finished smooth by the contractor at his own cost. Shuttering materials for RCC in superstructure shall be strictly of steel only to permit vigorous vibration and to ensure no deviation of finished dimensions by more than +5/-0 mm and wooden shutters are not permitted. For other works also, proper quality of shuttering materials which will permit vibrating and will not require additional finishing shall only be used. If there is any variation in the surface, alignment or lines in the products beyond permissible rejection limits indicated in these conditions, the DFCCIL reserves the right to reject the same and the contractor shall not have any claim in this regard and cost of DFCCIL materials involved will be recovered from the contractor including penalties, if any imposed.

2.2.10 Weigh batching, vibrating, curing & testing:

2.2.10.1. All concrete shall be machine batched, machine mixed and machine vibrated, by using appropriate vibrators. Weigh batching plant, mixers, vibrators, etc., of appropriate capacity, as specified/directed by the Engineer, shall be arranged by the contractor at his cost. In this case, Weigh batching plants shall have computerized control for weighing, loading, mixing and delivery.

Signature of tenderer (s)

Date:



- 2.2.10.2.** Batching plants, transit mixers, concrete pumps, etc., shall be installed by the contractor necessarily at site. In case of failure of any of the above, standby arrangements for ensuing continuous concreting has to be provided by the contractor at his cost. For piling works concreting shall be done continuously as per the volumes designed without break and accordingly standby arrangements shall be ensured by the contractor.
- 2.2.10.3.** Curing & vibrating shall be arranged by the contractor at all locations/heights at his own cost and no extra payment on this account will be admissible. Curing of concrete shall be done as per relevant IS Codes / Specifications. If curing is not done by the contractor properly, DFCCIL may get it done through any other means at the Contractor's cost without any notice to him and recover from his bills the same including penalty if any at the discretion of the Engineer. The concrete shall be kept wet constantly by ponding or covered with a layer of sacking canvas etc.
- 2.2.10.4.** Test cubes shall be cast at regular intervals and tested to ascertain the strength of concrete. The contractor shall establish a cube testing facility along with operator at the site or nearby area to facilitate prompt testing of concrete. Test cube moulds as required as per IS Codes shall be made available by the contractor at his cost.

2.2.11 Design Mix Concrete:

(a) **General:** Design Mix is mandatory for grades higher than M20. For concrete of compressive strength greater than M55, specialized literature should be consulted. Admixtures may be used while designing. Only design mix shall be used for all items of concrete. Prior to the start of construction, the contractor shall submit details of each trial mix of each grade of concrete to the Engineer for approval. When the proportions of the mix are approved, the contractor shall not vary any of the design parameters or the source of the materials without the approval of the Engineer. Wherever there is a significant change in materials used, fresh trial mix shall be arranged by the contractor as required by the Engineer. The concrete shall be designed keeping in view the minimum cement content and maximum cement content. Minimum cement content depends upon the environmental exposure conditions but maximum Cement Content shall be limited to 500kg/m.³

(b) **Mix Design and Proportioning:** Recommended guidelines for Concrete Mix Design are given in IS: 10262 which may be referred to for details. As mentioned therein in order that not more than the specified proportion of test results is likely to fall below the characteristic strength, the concrete mix has to be designed for a somewhat higher target average compressive strength. In terms of clause 9.2.2 of IS: 456, the Target Mean Strength of Concrete mix should be equal to the characteristic strength plus 1.65 times the Standard Deviation. Mix proportion shall be designed to ensure that the workability of fresh concrete is suitable for conditions of handling and placing, so that after compaction it surrounds all reinforcement and completely fill the form work. When concrete is hardened, it shall have the stipulated strength, durability and impermeability.

Determination of the proportions of by weight of cement, aggregate and water shall be based on design mix.

As a trial the manufacturer of concrete may prepare a preliminary mix according to provisions of SP: 23-1982. (Special Publications 23-1982 of Bureau of Indian Standards) Mix design shall be tried and the mix proportions checked on the basis of tests conducted at a recognized laboratory approved by the Engineer. All concrete proportions for various grades of concrete shall be designed separately and mix proportions established keeping in view the workability for various structural elements, methods of placing and compacting.

- (c) **Standard deviation:** Standard deviation calculations of test results based on tests conducted on the same mix design for particular grade designation shall be done in accordance with Clause 9.2.4 of IS 456. Table 8 of IS 456 gives the standard deviation that can be assumed for design of mix in the first instance. The final standard deviation figures may be determined based on test results for the particular grade of concrete when available.

Max size of Aggregate, Target Mean Strength			
Grade of Concrete	Max size of Aggregate (mm)	Characteristic Strength (f_{ck}) at 28 days (N/mm^2)	Target Mean Strength (f_{ck}) 28 days (N/mm^2)
M20	20	20	26.60
M25	20	25	31.60
M30	20	30	38.25
M35	20	35	43.25
M40	20	40	48.25
M45	20	45	53.25

- (d) **Approval of Design Mix:** The contractor shall submit details of each trial mix of each grade of concrete designed for various workability conditions to the Engineer for his comments and approval. Concrete of any particular design mix and grade shall be produced / manufactured for works only on obtaining written approval of the Engineer.

2.2.12 Requirements of Consistency:- The mix shall have the consistency which will allow proper placement and consolidation in the required position. Every attempt shall be made to obtain uniform consistency. The optimum consistency for various types of structures shall be as indicated in table below or as directed by the Engineer.

Slump Required for workability		
	Type	Slump (mm)
1	(a) Structures with exposed inclined surface requiring low slump concrete to allow proper compaction	25

Signature of tenderer (s)

Date:



	(b) Plain Cement Concrete	25
2	RCC structures with widely spaced reinforcements; e.g. solid columns, piers, abutments, footings, well steining	40-50
3	RCC structures with fair degree of congestion of reinforcement; e.g. pier and abutment caps, box culverts well curb, well cap, walls with thickness greater than 300mm	50-75
4	RCC and PSC structures with highly congested reinforcements e.g. deck slab girders, box girders, walls with thickness less than 300mm	75-125
5	Underwater concreting through tremie e.g. bottom plug, cast-in-situ piling	100-200

The minimum slump of concrete in case of bored cast in situ pile shall be 150 to 200 mm.

2.2.13 Durability:- The durability of concrete depends on its resistance to deterioration & environment in which it is placed. The resistance of concrete to weathering, chemical attack, abrasion, frost and fire depends largely upon its quality and constituent materials. Susceptibility to corrosion of the steel is governed by the cover provided and the permeability of concrete. The cube crushing strength alone is not a reliable guide to the quality and durability of concrete; it must also have adequate cement content and a low water-cement ratio. The general environment to which the concrete will be exposed during its working life is classified into three levels of severity that is moderate, severe, and extreme as described below:

Environment	Exposure condition
MODERATE	Concrete surface protected against weather or aggressive conditions. Concrete surface sheltered from severe rain or freezing whilst wet. Concrete exposed to condensation. Concrete structure continuously under water. Concrete in contact with non aggressive soil /ground water.
SEVERE	Concrete surface exposed to severe rain, alternate wetting & drying or occasional freezing or severe condensation. Concrete exposed to aggressive subsoil / ground water or coastal environment.
EXTREME	Concrete surface exposed to sea water spray, corrosive fumes or severe freezing conditions whilst wet. Concrete structure surfaces exposed to abrasive action, surfaces of members in tidal zone. All other exposure conditions which are adverse to exposure conditions covered above.

Signature of tenderer (s)

Date:



Maximum water-cement ratio, grade of concrete and cementitious material content for various environment conditions for achieving durability are indicated below for guidance:

2.2.13.1 Maximum Water Cement Ratio:-

The limits for maximum water cement ratio for design mix shall be based on environmental conditions as defined in durability clause. The limits for maximum water cement ratio for different environmental conditions shall be as given in Table below:

Environment	Maximum Water-Cement Ratio		
	Plain Concrete (PCC)	Reinforced Concrete (RCC)	Pre stressed Concrete (PSC)
Moderate	0.50	0.45	0.40
Severe	0.45	0.40	0.40
Extreme	0.40	0.35	0.35

2.2.13.2 Grade of Concrete:- From durability consideration, depending upon the environment to which the structure is likely to be exposed during its service life, minimum grade of concrete shall be as given in table below.

Minimum Grade of Concrete

(A) For Bridges in Pre stressed Concrete and important Bridges.

Structural member	Moderate exposure	Severe Exposure	Extreme exposure
PCC member	M-25	M-30	M-35
RCC member	M-30	M-35	M-40
PSC member	M-35	M-40	M-45

(B) For Bridges other than mentioned above and sub-structure

Structural member	Moderate exposure	Severe Exposure	Extreme exposure
PCC Member	M-15	M-20	M-25
RCC member	M-20	M-25	M-30

2.2.13.3 Cementitious Material Content:- Maximum Cementitious Material Content shall be limited to 500kg/m³. Depending upon the environment to which the structure is likely to be exposed during its service life, minimum Cementitious Material Content in concrete shall be as given in table below:

Minimum Cementitious Material Content				
Environment	Minimum Cementitious Material Content in Kg/cum			
	Plain Concrete		Reinforced Concrete	
	(PCC)		(RCC)	
	Grade	Content	Grade	Content
Moderate	M25	240	M30	300

Signature of tenderer (s)

Date:



Severe	M30	250	M35	350
Extreme	M35	300	M40	400

2.2.13.4 Clear cover is the least distance from outer most surface of steel or binding wire or its end to the face of concrete. It is also dimension used in design and indicated on the drawings. From durability consideration, minimum clear cover shall be as under.

Minimum Covers			
Type of structure	Extreme Environment	Severe Environment	Moderate Environment
Slab	50	35	25
Beam/Girder	60	50	35
Column	75	75	50
Piles	75	75	50

2.2.14 Permeability of concrete: Permeability requirements are as specified in IRS Concrete Bridge Code. Permeability test shall be mandatory for all RCC bridges under severe and extreme environment. Under moderate environment, permeability test shall be mandatory for all major bridges and for other bridges and structures.

2.2.15 Mixing of concrete:

2.2.15.1 Concrete shall be mixed either in a mini mobile batching plant or in a batching and mixing plant as per the specifications. Hand mixing shall not be permitted. The mixer or the plant shall be at an approved location considering the properties of the mixes and the transportation arrangements available with the Contractor. The mixer or the plant shall be approved by the Engineer.

2.2.15.2 Mixing shall be continued till materials are uniformly distributed and a uniform colour of the entire mass is obtained, and each individual particle of the coarse aggregate shows complete coating of mortar containing its proportionate amount of cement.

2.2.15.3 Mixers which have been out of use for more than 30 minutes shall be thoroughly cleaned before putting in a new batch. The first batch of concrete from the mixer shall contain only two thirds of the normal quantity of coarse aggregate. Mixing plant shall be thoroughly cleaned before changing from one type of mix to another.

2.2.16 Transporting, Placing and Compaction of Concrete:

2.2.16.1 The method of transporting and placing concrete shall be approved by the Engineer. Concrete shall be transported and placed as near as practicable to its final position, so that no contamination, segregation or loss of its constituent materials takes place. Concrete shall not be freely dropped into place from a height exceeding 1.5 metres.

2.2.16.2 When concrete is conveyed by chute, the plant shall be of such size and design as to ensure practically continuous flow. Slope of the chute shall be so adjusted that the

concrete flows without the use of excessive quantity of water and without any segregation of its ingredients. The delivery end of the chute shall be as close as possible to the point of deposit. The chute shall be thoroughly flushed with water before and after each working period and the water used for this purpose shall be discharged outside the formwork.

- 2.2.16.3 All formwork and reinforcement contained in it shall be cleaned and made free from standing water, dust, immediately before placing of concrete.
- 2.2.16.4 No concrete shall be placed in any part of the structure until approval of the Engineer has been obtained.
- 2.2.16.5 If concreting is not started within 24 hours of the approval being given, it shall have to be obtained again from the Engineer. Concreting then shall proceed continuously over the area between the construction joints. Fresh concrete shall not be placed against concrete which has been in position for more than 30 minutes unless a proper construction joint is formed.
- 2.2.16.6 Except where otherwise agreed to by the Engineer, concrete shall be deposited in horizontal layers to a compacted depth of not more than 450 mm when internal vibrators are used and not exceeding 300 mm in all other cases.
- 2.2.17 Concrete when deposited shall have a temperature of not less than 5⁰ C and not more than 40°C. It shall be compacted in its final position within 30 minutes of its discharge from the mixer, unless carried in properly designed agitators, operating continuously. It may be necessary to add retarding admixtures to concrete if trials shows that the period indicated above are unacceptable. In all such matters, engineer's decision shall be final.
- 2.2.18 Concrete shall be thoroughly compacted by vibration or other means approved by Engineer, during placing and worked around the reinforcement, embedded fixtures and into corners of the formwork to produce a dense homogenous void-free mass having the required surface finish. When vibrators are used, vibration shall be done continuously during the placing of each batch of concrete until the expulsion of air has practically ceased and in a manner that does not promote segregation. Over vibration shall be avoided to minimize the risk of forming a weak surface layer. When external vibrators are used, the design of formwork and disposition of vibrator shall be such as to ensure efficient compaction and to avoid surface blemishes. Vibrators shall not be applied through reinforcement and where vibrators of immersion type are used, contact with reinforcement and all inserts like ducts etc., shall be avoided. The internal vibrators shall be inserted in an orderly manner and the distance between insertions should be about one and half times the radius of the area visibly affected by vibration. Additional vibrators in serviceable condition shall be kept at site so that they can be used in the event of breakdowns.
- 2.2.19 Mechanical vibrators used shall be of appropriate specifications, type and capacity and as directed by the Engineer.

2.2.20 Equipment and machinery for concreting:

2.2.20.1 For concrete works, the following equipments in numbers indicated are considered necessary for efficient and speedier concreting at each site. However, the actual numbers may be arranged as required by the Engineer, taking into account the site conditions.

Indicative List of Equipment and Machinery		
1.	Concrete Batching plant (10 to 20 cum/hr capacity)	1 No.
2.	Transit Mixers (4 to 7 cum capacity)	2 Nos.
3.	Concrete Vibrators (2 HP capacity)	4 Nos.
4.	Vibrators of Needles (60mm & 40mm)	4 Nos.
5.	Screed vibrator (for ROBs)	2 Nos.
6.	Form vibrator (500 watts capacity)	2 Nos.
7.	Generator (35 KV capacity)	1 No.
8.	Welding set (3 to 5 KV capacity)	1 No.
9.	Reinforcement Steel Cutting Machine	2 No.
10.	Reinforcement Steel Bending Machine	2 No.
11.	Concrete Pumps (10 to 20 HP capacity with 40m pipe length)	1 No.
12.	Hydra 12.0 T capacity crane	1 No.
13.	Concrete Funnel Bucket	1 No.
14.	Air compressor (100 to 150 cum capacity)	1 No.
15.	Concrete Dumpers	2 Nos.
16.	Any other including power lifts etc., as required to suit site	Adequate No.

2.2.20.2 All the machinery are required to be arranged by the contractor at his own cost and the agreement rates for concreting include the same. No extra payment is admissible for any machinery arranged by the contractor.

2.2.21 TRANSPORTATION OF CONCRETE & PUMPING OF CONCRETE**2.2.21.1 General**

Fresh concrete can be transported to the placement area by a variety of methods. Common among them are:

- Mixer trucks
- Stationary truck bodies with or without agitators.
- Buckets hauled by trucks.
- Conveyor belts.
- Hose or pipe line by pumping.

Signature of tenderer (s)

Date:



Each type of transportation has specific advantages and limitations depending on the condition of use, mix, accessibility and location of placing.

2.2.21.2 Transportation by Mixer Trucks

2.2.21.2.1 These are essentially revolving drums mounted on truck chassis. Truck mixers used in the job shall be labelled permanently to indicate the manufacturer's specifications for mixing like:-

- Capacity of drum.
- Total number of drum revolutions for complete mixing.
- Mixing speed
- Maximum time limit before completion of discharge and after cement has entered the drum.
- Reduction in time period of discharge due to warm weather or other variables.

All above information shall only form guidelines for the manufacturer/producer of concrete.

2.2.21.2.2 Fulfilment of the stipulated number of revolutions or elapsed time shall not be the acceptable criterion. As long as the mixing water limit is not exceeded and the concrete has satisfactory plastic physical properties and is of satisfactory consistency and homogeneity for satisfactory placement and consolidation and is without initial set, the concrete shall be acceptable.

2.2.21.2.3 When the concrete is totally mixed in transporting trucks volume of concrete being transported shall not exceed 63% of the rated capacity of the drum. In case the concrete is totally mixed in the central batching plant, the transporting truck may be loaded up to 80% of the rated capacity of the drum. In this case the drum shall be rotated at charging speed during loading and reduced to agitating speed after loading is complete.

2.2.21.2.4 When transporting concrete by truck mixers, delivery time shall be restricted to 90 minutes or initial setting time whichever is less from the time cement has entered the mixer to completion of discharge.

2.2.21.3 Transporting by Agitating / Non-agitating Trucks.

2.2.21.3.1 Transporting ready mix concrete by this method shall consist of truck chassis mounted with open top bodies. The metal body shall be smooth and streamlined for easy discharge. Discharge may be from the rear when the body is mechanically tilted. Body of the truck shall have a provision of discharge gate. Mechanical vibrators shall be installed at the discharge gate for control of discharge flow.

2.2.21.3.2 Agitators, if mounted, also aid in the discharging of concrete from the truck in addition to keeping the concrete alive.

2.2.21.3.3 Water shall not be added to concrete in transport through this system.

2.2.21.3.4 Bodies of trucks shall be provided with protective covers during period of inclement weather.

2.2.21.3.5 Delivery period, when adopting this system of transporting concrete shall be restricted to 30 minutes from the moment all ingredients including cement and water enter in mixer to completion of discharge.

2.2.21.4 Transporting by Buckets

This method of transportation is very common for transportation of centrally mixed concrete. Buckets of suitable capacities may be filled with concrete which is totally mixed in central plant and hauled to the job site. Buckets then may be conveyed to the actual point of placement either with the help of crane/hoist or they may be carted

As in the case of open truck transportation, extra water shall not be added to concrete transported in buckets. Concrete shall be protected from inclement weather by necessary covering arrangements. Also, maximum delivery period for this system of transportation from the time cement is introduced into the mixer to completion of discharge shall not exceed 30 minutes.

2.2.21.5 Cleaning

Before loading concrete in either truck mixer, open bodied trucks or buckets, the containers shall be thoroughly cleaned, washed and dried, so that there is no water or moisture in the container which may affect the designed water content of the concrete.

2.2.21.6 Other Methods of Transportation

Transportation of concrete either by belt conveyors or by pumping is envisaged in some works.

If, the producer/manufacturer/purchaser/contractor of ready mix concrete desires to use such methods of transportation, they may do so provided their scheme and complete specifications are submitted to the Engineer for his record and approval.

2.2.21.7 Objective

Method of transportation used shall ensure:-

Efficient delivery of concrete

No significant alteration of properties with regard to water cement ratio, slump, air content and homogeneity.

All variables in transportation, considering type and accessibility of placement locations, distance, time interval etc., shall be carefully studied before arriving at the method used.

2.2.21.8 Pumpable Concrete (Extracted from Para 8.9 of Concrete Bridge Code, 1997)

General- Pumpable concrete is the concrete which is conveyed by pressure through either rigid pipe or flexible hose and discharged directly into the desired area. It is especially used where space for construction equipment is very limited.

Pumping Rate and Range – Depending on the equipment, pumping rate should be 10 to 70 cum. per hour. Effective pumping range is up to 300m horizontally and 90m vertically.

(i) Proportioning Pumpable Concrete

- a) Basic Consideration - More emphasis on quality control is essential to the proportioning and use of a dependable pump mix. Concrete mixes for pumping must be plastic/flow able. Particular attention must be given to the mortar and to the amounts and sizes of coarse aggregates.
- b) The maximum size of angular coarse aggregate is limited to one-third of smallest inside diameter of the hose or pipe. Provisions should be made for elimination of oversized particles in the concrete by finish screening or by careful selection of aggregates.

(ii) Pumping Concrete

- a) Proper planning of concrete supply, pump locations, line layout, placing sequences and the entire pumping operation will result in saving of cost and time. The pump should be placed as near the placing area as practicable and the entire surrounding area must have adequate bearing strength. Lines from the pump to the placing area should be laid out with a minimum of bends. The pipe line shall be rigidly supported.
- b) While pumping downward 15m or more, it is desirable to provide an air release valve at the middle of the top bend to prevent vacuum or air build up. When pumping upward, it is desirable to have a valve near the pump to prevent reverse flow.

2.2.22 Construction Joints:-

- 2.2.22.1 Construction joints shall be avoided as far as possible and in no case the locations of such joints shall be changed or increased from those shown on the drawings, except with express approval of the Engineer. The joints shall be provided in a direction perpendicular to the member axis. Sequencing of concrete placement should be organized in such a way that cold joints are totally eliminated. The sequence of concreting shall be submitted for approval of Engineer prior to concreting of the structural element. Concreting shall be carried out continuously up to the construction joints, the position and arrangement of which shall be predetermined by the designer.
- 2.2.22.2 Construction joints should be positioned to minimize the effect of the discontinuity on the durability, structural integrity and appearance of the structure. Joints should be located away from regions of maximum stress caused by loading particularly where shear and bond stresses are high.

Signature of tenderer (s)

Date:



- 2.2.22.3 Laitance, both on the horizontal and vertical surfaces of the concrete, should be removed before fresh concrete is cast. The surface should be roughened to promote good adhesion. Various methods for removal can be used but they should not dislodge the coarse aggregate particles. Concrete may be brushed with a stiff brush soon after casting while the concrete is still fresh and while it has only slightly stiffened. If the concrete has partially hardened, it may be treated by wire brushing or with a high pressure water jet, followed by drying with an air jet, immediately before the new concrete is placed. Fully hardened concrete should be treated with mechanical hand tools or grit blasting, taking care not to split or crack aggregate particles.
- 2.2.22.4 Where there is likely to be a delay before placing the next concrete lift, protruding reinforcement should be protected. Before the next lift is placed, rust loose mortar, or other contamination should be removed from the bars and where conditions are particularly aggressive and there has been a substantial delay between lifts, the concrete should be cut back to expose the bars for a length of about 50 mm to ensure that contaminated concrete is removed.
- 2.2.22.5 In all cases, when construction joints are made, it should be ensured that the joint surface is not contaminated with release agents, dust, or curing membrane and that the reinforcement is fixed firmly in position at the correct cover.
- 2.2.22.6 When the formwork is fixed for the next lift, it should be inspected to ensure that no leakage can occur from the fresh concrete. It is a good practice to fix a 6 mm thick sponge which seals the gap completely. The practice of first placing a layer of mortar or grout is not recommended. The old surface should be soaked with water without leaving puddles, immediately before starting concreting; then the new concrete should be thoroughly compacted against it. When fresh concrete is cast against existing mature concrete or masonry the older surfaces should be thoroughly cleaned and soaked to prevent the absorption of water from the new concrete. Standing water should be removed shortly before the new concrete is placed and the new concrete should be thoroughly vibrated in the region of the joint.
- 2.2.23 **Finishing of concrete:** The finished surface of concrete after removal of formwork shall be such that no touching up is required. All fins/holes caused by form joints, supports, rods etc., shall be ground/filled up effectively using appropriate machinery shutters, formwork etc., used in construction shall be as specified in the conditions and the labour used shall be skilled to suit the quality requirements of the work. Any surface, finished poorly in the opinion of the Engineer shall require repair/remedial measures at the cost of the contractor and the Engineer's decision in this regard shall be final. Any structure, which has deficiencies in finishing including product parameters beyond the rejection limits, as specified in these conditions, are liable to be rejected and the decision of the Engineer shall be final in this regard.
- 2.2.24 **Coatings for concrete:** Normally finished concrete structures do not require any surface protective coatings in non aggressive environment (moderate) for all structures. For aggressive environment (severe and extreme conditions), Epoxy phenolic IPN coating or

CECRI Integrated four coat system can be used in superstructure of bridges and coal tar epoxy coating for sub structure of bridges (in affected part only).

2.2.25 Shuttering, Formwork & False work:-

2.2.25.1 Shuttering, Formwork & False work shall be designed to meet the requirements of the permanent structure, taking into account the actual conditions of materials, environment and site conditions. Careful attention shall be paid to the detailing of connections and functions. All the materials used for shuttering, formwork & false work shall conform to the specified quality consistent with the intended purpose and actual site condition as applicable. All shuttering, form work, false work, etc., shall be got approved by the Engineer before it is put into use.

2.2.25.2 Forms shall not be struck until the concrete has reached strength at least twice the stress to which the concrete may be subjected at the time of removal of formwork or as approved by the Engineer. In normal circumstances and where Ordinary Portland Cement is used, forms may generally be removed after the expiry of the following periods:-

Stripping Time	
a) Walls, columns and vertical faces of all structural members	24 to 48 hours as may be decided by the Engineer
b) Slabs (props left under)	3 days
c) Beam soffits (props left under)	7 days
d) Removal of props under slabs 1) Spanning up to 4.5 m 2) Spanning over 4.5 m	7 days 14 days
e) Removal of props under beams 1) Spanning up to 6 m 2) Spanning over 6 m	14 days 21 days

Where the shape of the element is such that the formwork has re-entrant angles, the formwork shall be removed as soon as possible after the concrete has set, to avoid shrinkage crack occurring due to the restraint imposed.

2.2.26 Defective Concrete and Measurement of concrete:

2.2.26.1 Should any concrete be found honeycombed or in any way defective which may be, at the discretion of the Engineer suspected to affect the performance of the structure, shall be rejected outright. Contractor shall have no claim in this regard and the decision of the Engineer shall be final. The member, structurally independent, in which the concrete is found to be defective, shall be replaced by the contractor at his cost fully. The damages arising on account of such defective concreting shall also be recoverable from the dues of

the contractor, including penalties if any. DFCCIL reserves the right to get the member replaced by any means at the cost of the contractor at any cost if the contractor delays reproduction.

2.2.26.2 However, some surface defects, not affecting the structural properties shall, on the instruction of the Engineer, be repaired as per the approved procedures. The complete cost of such repairs shall be borne by the contractor and no compensation shall be payable. Records of such repairs done shall be maintained by the contractor.

Tolerances for Finished Concrete Bridge Structure		
S No	Description of defects in any part or full member or the structure at the decision of the Engineer.	Permissible limits (unless otherwise specified in designs/drawings)
1	Shift from alignment	1) ± 25 mm in member.
2	Deviation from plumb in piers or variation from specified batter.	1 in 250 subjected to a maximum value of 0.5 times the least lateral dimension of pier.
3	Deviation from plumb in abutments or variation from specified batter.	1 in 125
4	Cross sectional dimensions of piers, abutments and girders	+20mm/-5mm
5	Thickness of deck slab of bridges	+ 6 mm / - 3 mm
6	Size and location of openings	± 12 mm
7	Plan dimensions of footings (formed excavation)	+ 50 mm / - 25 mm
8	Plan dimensions of footings (unformed excavation)	+ 75 mm / - 00 mm
9	Thickness of footings	- 5%, + No limit
10	Footing eccentricity	0.02 times the width of the footing in the direction of deviation, but not more than 50 mm
11	Reduced level of top of footing / pier / bed block	± 5 mm
12	Centre to centre distance of pier and abutments at pier top	± 30 mm
13	Centre to centre distance of bearings along span	± 5 mm
14	Centre to centre distance of pier bearings across span	± 5 mm

2.2.26.3 The tolerances for finished concrete bridge structures shall be governed by IRS Concrete Bridge Code and shall be followed; deviations beyond the permissible limits shown are liable to be rejected. These tolerances apply to other structures also appropriately.

2.2.27 Sampling and Strength Testing of Concrete:

2.2.27.1 General: Samples from fresh concrete shall be taken as per IS: 1199 (method of sampling and analysis of concrete). Concrete for making 3 test cubes shall be taken from a batch of concrete at point of delivery into construction according to procedure laid down in IS:

Signature of tenderer (s)

Date:



1199 and 150 mm cubes shall be made, cured and tested at the age of 28 days for compressive strength in accordance with IS:516. The 28 days test strength result for each cube shall form an item of sample.

Concrete shall conform to the surface finish and tolerance as prescribed in Unified specifications. Random sampling and lot by lot of acceptance / inspection shall be made for the 28 days cube strength of concrete.

Concrete under acceptance shall be notionally divided into lots for the purpose of sampling, before commencement of work. The delimitation of lots shall be determined by the following:

- (i) No individual lot shall be more than 30 cum in volume.
- (ii) At least one cube forming an item of the sample representing the lot shall be taken from concrete of the same grade and mix proportions cast on any day.
- (iii) Different grades of mixes of concrete shall be divided into separate lots.
- (iv) Concrete of a lot shall be used in the same identifiable component of the bridge.

2.2.27.2 Sampling .

2.2.27.2.1 Frequency of Sampling

Sampling procedure: A random sampling procedure shall be adopted to ensure that each concrete batches forming the lot under acceptance / inspection shall have a reasonable chance of being tested that is, sampling should be spread over the entire period of concreting and cover all mixing units.

Frequency: The minimum frequency of sampling of concrete of each grade shall be in accordance with table below. At least one sample shall be taken from each shift of work.

Minimum Frequency of Sample	
Quantity of concrete in work, (M ³)	No. of samples
1-5	1
6-15	2
16-30	3
31-50	4
51 and above	4 plus one additional sample for each additional 50 M ³ or part thereof

2.2.27.2.2 Test Specimen: Three test specimens shall be made from each sample for testing at 28 days. Additional samples may be required for various purposes such as to determine the strength of concrete at 7 days or at the time of striking the formwork, or to determine the duration of curing, or to check the testing error. Additional samples may also be required

for testing samples cured by accelerated methods as described in IS: 9013. The specimen shall be tested as described in IS: 516.

2.2.28 Test Results of Sample: The test results of the sample shall be the average of the strength of 3 specimens. The individual variation should not be more than ± 15 percent of average. If more, test results of the sample are invalid.

2.2.29 Acceptance Criteria of Concrete: Acceptance criteria shall be acceptance of concrete as per Clause No 16 of Annexure 4.2 of Indian Railway Unified Standard Specifications (Works & Materials), Volume I, 2010. The decision of DFCCIL is final and binding to the contractor.

Also refer criteria of concrete vide clause no 20.3.11.5 of Indian Railway Unified specifications. The 28 days compressive strength shall be the criterion for acceptance or rejection of the concrete.

The followings shall also be strictly followed.

- (i) Whenever a mix is redesigned due to a change in the quality of aggregate or cement or for any other reason, it shall be considered a new mix and initially subject to the acceptability criteria above.
- (ii) If the concrete produced at site does not satisfy the above strength requirements, the Engineer shall reserve the right to require the contractor to improve the methods of batching, the quality of the ingredients and redesign the mix with increased cement content, if necessary. The Contractor shall not be entitled to claim any extra cost for the extra cement used for the modifications stipulated by the Engineer for fulfilling the strength requirement specified.
- (iii) It is the complete responsibility of the contractor to redesign the concrete mixes by approved standard methods and to produce the reinforced concrete conforming to the specification and the strength requirements approved by the Engineer. It is expected that the Contractor will have competent staff to carry out this work.

2.2.30 Setting of field laboratory by the Contractor:

2.2.30.1 For all works, the Contractor shall set up a field laboratory of his own for testing of cement/water/concrete at work site, which should be open for use and inspection by the DFCCIL officials at any time and carryout the tests with his own equipments, gauges, machinery, consumables and operators, at his own cost. The laboratory shall be equipped with necessary equipment to carry out various tests such as property tests, sieve analysis, setting time of cement, compression tests on cubes, slump test, workability test etc., on aggregate, cement, water and concrete required for ensuring the required quality. For steel however, test reports of reputed institutes/laboratories are acceptable.

2.2.30.2 The cost of setting up the laboratory, equipping the same, maintaining conducting all tests on materials and cubes shall be borne by the contractor, within his quoted rates for works and no extra payment is eligible for the same.

Signature of tenderer (s)

Date:



- 2.2.30.3 All gauges, machines, equipments and other measuring and testing equipments of the laboratory shall be got checked / calibrated regularly and the necessary certificates furnished to the Engineer by the Contractor.
- 2.2.30.4 All the equipments, machinery etc., shall be kept in good working condition. Contractor shall also maintain the required qualified / experienced staff at the laboratory.
- 2.2.30.5 The following is the minimum laboratory facilities at the site which are to be provided and operated by the contractor at his cost.
- (i) Testing of fine and coarse aggregates as per IS:383 and IS:2386.
 - (ii) Testing of cement concrete as per IS: 8142 and IS:516.
 - (iii) Testing of water as per IS: 456 and IS: 3025.
 - (iv) Certain non-routine testing such as (a) Testing of admixtures, (b) Chemical testing of fine and coarse aggregates (c) Permeability of concrete (permeability test on concrete shall be got done when the mix design is approved / changed of the reputed laboratories as approved by Engineer). The frequency and need for these tests shall be decided by the Engineer, based on stipulations contained in conditions of contract or on the basis of accepted Engineering practice (e.g. whenever source of admixture is changed, tests stipulated in the codes will have to be carried out afresh, etc).
- 2.2.30.6 As frequently as the Engineer may require, testing shall be carried out in the field for:
- (a) Moisture content and absorption and density of sand and aggregate.
 - (b) Silt content of sand.
 - (c) Grading of sand and aggregates.
 - (d) Slump test of concrete.
 - (e) Concrete cube test.
 - (f) Permeability test for concrete
 - (g) Density of Plasticizer.
 - (h) PH Value of water
- 2.2.31 Ladders for inspections:** Steel ladders are to be provided at the abutments and all pier locations on both sides of girder bridges to enable inspecting officials to get down from the ROB Road level to the top of the piers / abutments.
- 2.2.32 Expansion joints:** Expansion joints – strip seal elastomeric type expansion joint shall be for 70mm/80mm expansion gap in RCC deck slab as per drawings.
- 2.2.33 Seating of foundations:**

As far as possible, open foundations should be located on the firm ground having stable strata. The strata shall be well compacted before levelling course and foundations are laid on the levelling.

In case foundations resting on rock, no foundation shall be laid on sloping rock. The rock shall be made level for the width of the foundation before levelling course is laid. Before seating on the rock, capacity of the rock shall be assessed properly and safe bearing capacity assessed in the designs is to be confirmed.

The seating of the rock shall be achieved by cutting into the rock atleast by 0.50m depth to ensure removal of all weak layers and for obtaining adequate anchorage in case of open foundations. After level surface is made on the rock, a rich mix layer of 150mm thick shall be laid to even the bedding surface.

If the rock is encountered while piling, pile shall be anchored into rock to the depth as per codal provision.

2.2.34 Drainage outlets: 100mm GI/PVC pipes in case of deck slab in bridges will serve as drainage spouts.

2.3 GENERAL GUIDELINES AND SPECIFICATIONS FOR BORED CAST-IN-SITU RCC PILE FOUNDATIONS:

2.3.1 The piles shall be bored cast-in-situ. The scope of the work included in relevant schedules is for the provision and testing of bored cast-in-situ RCC pile foundations with the pile cap. Items for piling in soil has been provided in schedule. If any boulder in the form of obstruction comes in the boring, no extra payment for piling in boulders shall be made. Bore log provided by the DFCCIL for construction are only indicative in this regard and it is the contractors' responsibility to make correct assessment of ground conditions before starting the piling operation. Rate of piling is divided into four items (a) item of empty boring (b) payment of concrete in M: 35 from pile item (c) Payment of reinforcement in MT from pile item.(d) Payment of liner in MT. Rate of Item of piling includes cost of all materials, Cement and labour involved in all operations. The Payment of empty boring, concrete M35, reinforcement and liner paid separately in respective items.

2.3.2 CONCRETING IN BORED CAST-IN-SITU PILES

- (i) Bored Cast-in-situ concrete piles shall be installed by making a bore into the ground by removal of material. Cast-in-situ concrete piles may be cast in metal liners which may remain permanently in place. The metal casing shall be of sufficient thickness and strength to hold its original form and show no harmful distortion after it and adjacent casings have been driven and the driving core, if any, has been withdrawn.
- (ii) Concreting and reinforcement work will be done in accordance with relevant clauses in Chapters 3 and 4 of Indian Railway Unified Standard Specifications (Works & Materials)

Volume - I, 2010 supplemented by these specifications. The decision of DFCCIL is final and binding to the contractor.

- (iii) Any liner or bore-hole which is improperly located or shows partial collapse that would affect the load carrying capacity of the pile, shall be rejected or repaired as directed by the Engineer at the cost of the Contractor.
- (v) Bored cast-in-situ piles in soils which are stable may often be installed with only a small casing length at the top. A minimum of 2.0m length of top of bore shall invariably be provided with casing to prevent any loose soil falling into the bore. In cases in which the side soil lower down can fall into the hole, it is necessary to stabilise the side of the bore hole with drilling mud, or a suitable steel casing. The casing may be left in position permanently specially in cases where the aggressive action of the ground water is to be avoided, or in the cases of piles built in water or in cases where significant length of piles could be exposed due to scour.
- (vi) For bored cast-in-situ piles, casing / liner shall be driven open ended with a pile driving hammer capable of achieving penetration of the liner to the length as approved by the Engineer. Materials inside the casing shall be removed progressively by air lift, grab or percussion equipment or other approved means. Unless otherwise approved by the Engineer, the diameter of the bore-holes shall be not more than the inside diameter of the liner.
- (vii) Where bored cast-in-situ piles are used in soils liable to flow, the bottom of the casing shall be kept enough in advance of the boring tool to prevent the entry of soil into the casing, thus preventing the formation of cavities and settlements in the adjoining ground. The water level in the casing should generally be maintained at the natural ground water level for the same reasons. The joints of the casing shall be made as tight as possible to minimise inflow of water or leakage of slurry during concreting. Where mud flow conditions exist, the casing of cast-in-situ piles shall not be allowed to be withdrawn. Prior to the lowering of the reinforcement cage into the pile shaft, the shaft shall be cleaned of all loose materials. Cover to reinforcing steel shall be maintained by suitable spacers, tied in advance to the reinforcement.
- (viii) Wherever practicable, concrete should be placed in a clean dry hole. Where concrete is placed in dry condition and there is casing present, the top 3m of the pile shall be compacted using internal vibrators.
- (ix) Before concreting under water, the bottom of the hole shall be cleaned of drilling mud and all soft or loose material very carefully. In case a hole is bored with use of drilling mud, concreting should not be taken up when the specific gravity of bottom slurry is more than 1.2. The drilling mud should be maintained at 1.5m above the ground water level.
- (x) Where the casing is withdrawn from cohesive soils for the formation of cast-in-situ pile, the concreting should be done with necessary precautions to minimise the softening of the soil by excess water. Care shall be taken during concreting to prevent as far as possible the segregation of the ingredients. The displacement or distortion of reinforcement during concreting and also while extracting the tube shall be avoided.

- (xi) The concrete shall be properly graded, shall be self-compacting and shall not get mixed with soil, excess water, or other extraneous matter. Special care shall be taken in silty, clays and other soils with the tendency to squeeze into the newly deposited concrete and cause necking. Sufficient head of green concrete shall be maintained to prevent inflow of soil or water into the concrete.
- (xii) The placing of concrete shall be a continuous process from the toe level to the top of the pile. To prevent segregation, a tube or tremie pipe as appropriate shall be used to place concrete in all piles.
- (xiii) To ensure compaction by hydraulic static heads, rate of placing concrete in the pile shaft shall not be less than 6m (length of pile) per hour. Under water concreting should be done with tremie.
- (xiv) The maximum water cement ratio shall be 0.50 for cast in situ piles.
- (xv) The cement content shall not be less than 400 kg/cum of concrete.
- (xvi) The minimum slump of concrete for bored cast-in-situ piles shall 150mm to 200mm, but the slump should not exceed 200mm in any case.
- (xvii) **Concreting under water :-**General requirements and precautions for concreting under water shall be as given in concreting chapter 3 of IR Unified Standard Specifications (Work & Materials), Volume - I, 2010.This would be further supplemented by given following instructions. The decision of DFCCIL is final and binding to the contractor.
 - (a) The concreting of a pile must be completed in one continuous operation. Also, for bored holes, the finishing of the bore, cleaning of the bore, lowering of reinforcement cage and concreting of pile for full height must be accomplished in one continuous operation without any stoppage.
 - (b) The concrete should be coherent, rich in cement with high slump and restricted water cement ratio.
 - (c) The tremie pipe will have to be large enough with due regard to the size of aggregate. For 20mm aggregate the tremie pipe should be of diameter not less than 150mm and for larger aggregate, larger diameter tremie pipes may be necessary.
 - (d) The first charge of concrete should be placed with a sliding plug pushed down the tube ahead of it to prevent mixing of water and concrete.
 - (e) The tremie pipe should always penetrate well into the concrete with an adequate margin of safety against accidental withdrawal if the pipe is surged to discharge the concrete.
 - (f) The pile should be concreted wholly by tremie and the method of deposition should not be changed part way up the pile to prevent the laitance from being entrapped within the pile.
 - (g) All tremie tubes should be scrupulously cleaned after use.

- (h) In special circumstances, the Engineer may permit use of any other proved method of concrete placement designed for under water concrete. In such cases, a detailed method statement should be prepared and got approved by the Engineer.
- (xviii) The diameter of the finished pile shall not be less than that specified and a continuous record shall be kept by the Engineer as to the volume of concrete placed in relation to the pile length cast.
- 2.3.3 The schedule of quantities in this contract is based on bored cast-in-situ pile of required capacity and for approximate anticipated depth as indicated in the drawings. Depth of piles is likely to vary and contractor shall have no claim whatsoever irrespective of the depth of piles provided at any and all locations. Installation of piles shall be carried out as per layout drawings, installation criteria and the instructions of the Engineer. The method of installing the piles, including details of the equipment shall be submitted by the contractor and got approved by the Engineer before start of work.
- 2.3.4 Piling work shall conform to specifications IS: 2911 Parts 1 & 4 unless otherwise specified.
- 2.3.5 Workmanship of bored cast-in-situ piles includes the provisions for control of piling installation, use of drilling mud, cleaning of borehole, tremie concreting, defective pile, recording of data shall be as per Clause 8 of IS: 2911(Part 1/Section 2).
- 2.3.6 The specifications for safe load, test load, total displacement, net displacement etc., shall also conform to provisions as per IS: 2911 (Part 4).
- 2.3.7 The contractor shall set out piles with precision survey duly erecting permanent bench marks and other references. He shall be responsible for correct maintenance of position and plumb thereafter and these shall be checked periodically. The control of alignment and inclination of piles shall be as per IS: 2911(Part 1/Section 2). Tolerances as specified in the above code or as specified shall govern.
- 2.3.8 Level marks shall be put accurately on each pile immediately after it is installed. If any pile shows subsequently a tendency to heave up due to installation of other piles later or due to any other reason, corrective course of action shall be suggested and taken by the contractor after approval by the Engineer at the cost of contractor.
- 2.3.9 Durability provisions such as clear cover to reinforcements, minimum and maximum cement content, maximum water-cement ratio and permeability of concrete shall be adhered to as mentioned earlier and below. The exposed area of pile above the ground level. In case of harmful chemical constituents found in subsoil and in water such as chlorides and sulphides, special provisions as per relevant codes of practice shall be followed for protection against reinforcement corrosion and disintegration of concrete and for such protection against corrosion and bio-fouling, the pile concrete/liner below cut-off level shall be painted with appropriate material, if ordered by Engineer for which payment will be made separately as specified in relevant schedules.

- 2.3.10 Sulphate resistant cement may be used on need based consideration after conducting the soil investigation and water investigation. It shall not be used under such conditions where concrete is exposed to risk of excessive chlorides and sulphate attack both. Requirements of concrete exposed to sulphate attack shall be as per Table 4 of IS: 456. Where chloride is encountered along with sulphate in soil or ground water, Ordinary Portland Cement with C3A contents from 5 to 8 % shall be desirable to be used in concrete instead of sulphate resisting cement. For pH around 4, steel and concrete both have to be specially quoted. If sulphate resistant cement is used which has faster setting properties, curing shall start within five hours of concreting.
- 2.3.11 Method of boring, namely, Bailer and Chisel, Rotary, Direct Mud Circulation (DMC), Reverse Mud Circulation (RMC), Percussion, etc., shall be chosen as appropriate to strata and site conditions. The agreement rates for piling are inclusive of any type of boring/any type of supporting arrangements adopted by the contractor and no extra payments are admissible for any type of scheme adopted by the contractor.
- 2.3.12 Borehole stability shall be maintained with casing and/or mud circulation..
- 2.3.13 Use of drilling mud (Bentonite) in stabilizing the sides of bore holes is mandatory in soils of inadequate capacity. The decision on the need of use of Bentonite will be taken by the Engineer which is final. The bentonite slurry shall be maintained at 1.5m above the ground water level during boring operations and till the pile is concreted. The bentonite slurry shall be under constant circulation till start of concreting and shall meet the requirements stipulated in the subsequent clauses. Agreemental rates for piling includes the cost of Bentonite and related operations and the contractor cannot claim any extra cost on this account.
- 2.3.14 Providing MS Liners: This item is for supply and fixing contractor's permanent MS liners for the pile from the top of working platform upto the required depth as may be decided by the Engineer. The contractor shall fabricate the MS liners from his own MS sheets to suit the diameter of the pile as directed. Required length of MS liners will be made up by welding each unit outside by the contractor with his own equipments and plants. It shall be clearly noted that the MS sheets required for manufacture of the liners shall not be supplied by the DFCCIL. The welding shall be of proper quality so as to withstand the hammering forces. The payable depth shall however, be measured only from the cut off level though the liner might have been provided right from the level of working platform on practical considerations, since the length above the cut off level has to be necessarily removed by gas cutting for facilitating peeling of the top portion of the pile and for interlacing its reinforcement bars into the capping slab. Therefore, the rate quoted shall cater for the element of cutting and removing the surplus length of MS liners. There is, however, no objection for the surplus pieces, if usable, are united and are re-welded to the required length for reuse on some of the other piles. No claim shall be entertained if the cut pieces cannot be reused by the contractor.
- 2.3.15 The contractor shall take all necessary precautions while piling close to existing structures/other foundations/track so as to minimize vibrations and ground movement. Bores shall be encased as directed by the Engineer and boring shall commence only after

precautionary measures are taken. While working near the existing track, infringements and other safety aspects shall be specially considered and taken care of.

- 2.3.16 The contractor shall indemnify the DFCCIL Administration against any claim or obligations arising out of any damage to structure or out of any injury to any person/persons due to piling working done by him.
- 2.3.17 The contractor shall mobilize and maintain requisite resources for piling including concreting. Additional resources, as a standby shall also be available in advance of work, to take care of any eventualities. Admixtures as approved by Engineer shall be kept in readiness before concreting to meet any exigencies. After boring and/or cage lowering to avoid borehole instability and settlement of bentonite, boreholes shall not be left unconcreted for long.
- 2.3.18 The spoils arising out of boring shall be disposed off as directed by Engineer within the agreemental rates. In case of piling close to Railway track or near the existing road, contractor shall make adequate arrangements for disposing the muck away properly. Contractor shall also make adequate drainage arrangement for mud slurry so that the same does not affect the tracks or roads or adjoining properties.
- 2.3.19 The bored spoils may be dumped in a low lying area as directed by Engineer so that work site is restored back to normal condition after completion of work.
- 2.3.20 When the bore has reached its final depth, it shall be free from any foreign matter before placing the reinforcement cage and concreting for the pile is started. Reinforcement for the pile shall be carefully placed in position and concreting then started. The cover block used also shall satisfy strength and permeability criteria.
- 2.3.21 If hard rock is encountered, socketing in hard rock shall also be provided as per codal provision.
- 2.3.22 In case of sloping bedrock profile, the requisite depth of socketing shall be ensured as minimum all round piling and the payment will be made for the least depth of socketing only and no claims of differential depth of socketing are admissible.
- 2.3.23 The bottom level of pile cap will be decided by Engineer, depending upon capacity and ground level.
- 2.3.24 Care shall be taken for free flow of concrete through splices and congested reinforcement zones with proper detailing and monitoring.
- 2.3.25 The quantity of concrete required for a particular pile shall be calculated as per depth of the pile and nominal diameter of the pile. This quantity shall be checked with the actual quantity of concrete used, which is to be recorded and signed jointly by the contractor and representative of the DFCCIL. Theoretical quantity of concrete, calculated as per depth and nominal diameter of the pile shall form the basis of calculating the cement quantity as per approved design mix, for payment to the contractor,

- 2.3.26 For the finishing of pile heads, the clearances of reinforcements in the pile cap and the keying of the pile head into the pile cap shall be as given in IS: 2911.
- 2.3.27 The contractor shall maintain bore log register and bored samples for each pile boring and concreting. The details shall contain various operations in pile boring with time, type of soil met with depth of penetration with levels, liner welding and lowering details, obstruction to boring, if any, machine down time, rock touch level and final socketed level. The flushing out details before cage lowering and before concreting shall also be recorded. The concreting details such as mix proportions, sounding at various depths vis-à-vis cement / concrete consumption, unusual observations while concreting, interruption to concreting, if any and overflow concrete shall be recorded. The swelling and/or squeezing of borehole in uncased portion shall be specially monitored with recording of sounding depth, quantity concreted actually and quantity theoretically estimated corresponding to that sounding depth.
- 2.3.28 The payable depth of piles shall be taken up to the clear distance from the cut-off level (bottom of pile cap) to the founding level of pile as per approved drawing. The depth so measured shall be rounded off to the nearest first decimal of a metre (0.05 metre or more to be reckoned as 0.10 metre whereas below 0.05 metre to be reckoned as 0.00 metre) for the purpose of making payment.
- 2.3.29 In group of two or more piles, piles of same diameter and same load carrying capacity shall be installed. The distance between centre to centre of such piles shall be governed by IS: 2911. In case the contractor offers to install the piles closer than this spacing, he shall state the reduction in the working load of the pile which will be subject to the approval of Engineer. The additional piles required on this account shall be provided by the contractor without any extra cost to the DFCCIL. Also cost of cement and steel reinforcement used on this score will have to be borne by the contractor. New MS liners shall also be to contractors account.
- 2.3.30 If any pile during boring has deviated from the design position or from the verticality or if the safe allowable load of the pile is not obtainable as per the design, all these facts shall be reported promptly to the Engineer during the execution of the work with suggestion from the contractor regarding adequate corrective measures. The Engineer shall consider the suggestions of the contractor and shall give necessary directions for the corrective measure which shall be done by the contractor at his own cost and risk. However, if certain piles are rejected by the Engineer on account of improper location / verticality / alignment / capacity, the Engineer may allow the rejected piles to be left in their places and additional piles may be installed to take up the safe working load of the rejected piles with satisfaction of Engineer without any extra cost to the DFCCIL. If any such changes involve additional expenditure due to increase in size of pile cap, etc., the same shall also be borne by the contractor including the extra cost involved in the usage of the extra quantity of cement and steel used in such changes.
- 2.3.31 No payment will be made for rejected piles and also for the cement, steel and the MS liners provided for the rejected piles.

- 2.3.32 **Pile load Test:** IS: 2911 (Part 4) prescribes various guidelines and procedures for load tests on piles. Pile load test shall be conducted as per IS: 2911 (Part 4) and as directed by the Engineer. Vertical load tests (compression) and lateral load tests shall be adopted for testing of piles. There shall be two categories of tests on piles for each type of loading (vertical and lateral), namely, initial tests and routine tests. Initial tests should be carried out on test piles which are not to be incorporated in the work. Routine tests shall be carried out as a check on working piles.

Initial load test is carried out to determine the ultimate load capacity and arrival at the safe load by application of factor of safety whereas routine test is conducted to determine the safe load of pile, checking the safety load and extent of safety. In other words, routine test is conducted to check whether the pile is capable of taking the working load assigned to it.

Non-destructive testing i.e. Integrity testing of pile using Low Strain / Sonic Integrity Test / Sonic Echo test method in accordance with IS: 14893 shall be carried out for integrity testing of concrete in the installed pile.

The vertical load test and lateral load test shall be carried out as per clause 6 and 7 of IS: 2911 (Part 4).

Safe load on a pile is derived by applying a factor of safety on ultimate load capacity of pile as determined by a load test whereas working load is the load assigned to pile according to design. The safe loads on single pile and on group of piles for the initial test and routine test shall be in accordance clause 6.1.5 and 6.1.6 of IS : 2911(Part 4). Test load shall be 2.5 times the safe capacity load for Initial Load. For routine test, test load shall be at least 1.5 times the working load for maximum settlement not exceeding 12mm in case of single pile whereas test load shall be equal to the working load for maximum settlement not exceeding 25mm in case of group piles.

The test shall be carried out at cut off level wherever practicable, otherwise suitable allowance shall be made in the interpretation of the test results / test load if the test is not carried out at cut-off level.

The contractor shall submit all data along with load vs settlement, time vs settlement, interpretation of the pile load test, etc., in a report along with characteristics of the pile as per IS 2911 and as directed by the Engineer.

For any other type of test such as pullout tests, etc. if considered necessary, the contractor shall make arrangements in consultation with the Engineer and payments for the same will be eligible as decided mutually in advance.

Payment for initial vertical load test, routine vertical load test and lateral load test will be made against a separate item provided in the schedule.

- 2.3.33 The contractor is required to carry out load test in pile or group of piles as per provisions contained in IS : 2911 (Part 4) of and shall provide all the designing, testing, loading, supporting, instrumenting, recording & reporting arrangements at the agreement rates. The

- design, instrumentation etc., shall be approved by the GM/ROB/CGM/DFCCIL-Ahmedabad.
- 2.3.34 The payment for the test of the pile or group of piles shall be made to the contractor only when the test is found to be satisfactory. For tests which are found to be unsatisfactory or which are not completed due to any reasons whatsoever, no payment shall be made to the contractor.
- 2.3.35 The agreemental rates for tests include instrumentation, reporting, arranging of necessary kentledge, R.S. Joists, sand bags, etc, required for loading the platform for successful testing of the pile or group of piles and removing the same from the site of work after the test is completed and clearing the site to the satisfaction of the Engineer and no extra payment shall be made on this account.
- 2.3.36 In case of defective piles, DFCCIL reserves the right to order, at the cost of contractor, non-destructive test for integrity and / or capacity assessment or additional static load tests as confirmatory tests at the cost of the contractor. The test shall be considered satisfactory only if the criteria laid in specifications are satisfied and the behaviour of the pile or pile group during the period of test does not disclose any defects as specified in relevant codes and as directed by the Engineer.
- 2.3.37 Each pile shall be identified with a reference member. Level marks shall be accurately painted on each pile immediately after its installation. The contractor shall record all the information during installation of piles as directed by the Engineer. Pile records in triplicate shall be submitted by the contractor.
- 2.3.38 Approval of the termination depth of the pile by the Engineer shall, in no way, absolve the contractor on the integrity of the pile.
- 2.3.39 **Control of Position and Alignment:** Piles shall be installed as accurately vertical (for vertical piles) as possible. The permissible limits for deviation with respect to position and alignment shall confirm to IS: 2911 (Part 1/Section 2).
- 2.3.40 Working level shall be above the cut-off-level. After the initial boring of about 1m, temporary guide casing of suitable length shall be lowered in the pile bore for vertical pile. The diameter of guide casing shall be such as to give the necessary finished diameter of the concrete pile. The centre line of guide casing shall be checked before continuing further boring. Guide casing shall be minimum of 1.0m length. Additional length of casing may be used depending on the condition of the strata, ground water level etc. The temporary guide casing (if provided) shall be withdrawn cautiously, after concreting is done up to the required level. While withdrawing the casing, concrete shall not be disturbed.
- 2.3.41 Permanent MS Liners shall be provided for piles up to point of refusal or as directed by the Engineer. The bottom end of the MS Liner shall be stiffened by welding additional plates to withstand the impact during driving.

- 2.3.42 In case hard rock is encountered, chiseling is essentially required for softening of the rock, the same may be adopted only on approval of the Engineer, at no extra cost to the DFCCIL. Advancement of pile bore shall be done by drilling only, in case of use of rotary hydraulic drilling rig.
- 2.3.43 Specifications for Bentonite shall be as follows: Liquid limit of bentonite when tested in accordance with IS: 2720 (Part V) shall be 400 percent or more. Bentonite solution should be made by mixing it with fresh water using pump for circulation. The density of the freshly prepared bentonite suspension shall be between 1.03 and 1.10 gm / ml depending upon the pile dimensions and type of soil in which the pile is to be installed. However, the density of bentonite suspension after mixing with deleterious materials in the pile bore may be up to 1.25 gm / ml. The marsh viscosity when tested by a marsh cone shall be between 30 to 60 Seconds/stroke. The pH value of the bentonite suspension shall be between 9 and 11.5.
- 2.3.44 Cleaning of borehole:- After completion of borehole up to the required depth, the borehole shall be cleaned as per clause 8.3 of IS : 2911 (Part 1/Section 2).
- 2.3.45 A protocol shall be maintained regarding the strata at the founding level, SPT value, percent core recovery, Unconfined Compressive Strength (UCS) from the nearest borehole, socketing horizon, flushing of pile bore, time interval between end of boring and start of concreting, bentonite density before start of concreting.
- 2.3.46 Top of Concrete in Pile and Cut off-level (COL):- Cut-off-Level of piles shall be as indicated in drawings released for construction. The top of concrete in pile as cast shall be above the cut-off-level by 1.0 metre (maximum) to remove all laitance and weak concrete and to ensure good concrete at cut-off-level, for proper embedment into the pile cap. The area surrounding the piles shall be excavated up to the bottom of the pile caps. After seven days of concreting of pile, the exposed part of concrete above the COL shall be removed / chipped off and made rough at COL. The projected reinforcement above COL shall be properly cleaned and bent to the required shape and level to be anchored into the pile cap. The pile top shall be embedded into the pile cap by 150 mm or clear cover to reinforcement, whichever is higher. All loose material on the top of pile head after chipping to the desired level shall be removed and disposed off as directed by the Engineer.
- 2.3.47 Reinforcement: The longitudinal reinforcement shall project 50 times its diameter above cut-off-level unless otherwise indicated. Proper cover to reinforcement and central placement of the reinforcement cage in the pile bore shall be ensured by use of suitable concrete spacers or rollers, cast specifically for the purpose. Placement of reinforcement cage to its full length shall be ensured before concreting. Minimum clear cover to the reinforcement shall be 75 mm, unless otherwise mentioned.
- 2.3.48 Building Up of Piles: If any pile, already cast as per construction drawing, requires any extra casting due to any change in cut-off-level, then the pile shall be built up by using at least one grade higher concrete than specified for piles, ensuring proper continuity with the existing concrete and to the satisfaction of the Engineer. Necessary reinforcement, as per

design requirement and suitable shuttering shall be provided, before casting the concrete. Surrounding soil shall also be built up to the required level by proper compaction, to ensure lateral capacity of the pile.

- 2.3.49 Breaking Off: If any pile already cast requires breaking, due to subsequent change of Pile's cut-off-level, then the same shall be carried out, not before seven days of casting without affecting the quality of existing pile, such as loosening, cracking etc., and to the satisfaction of the Engineer. If any pile is cracked, the same shall be replaced by the contractor at his own cost.
- 2.3.50 Bore Hole testing: Bore hole shall be made as per IS:1892.

2.3.51 IMPORTANT CONSIDERATIONS, INSPECTION / PRECAUTIONS

- (i) While concreting uncased piles, voids in concrete shall be avoided and sufficient head of concrete shall be maintained to prevent inflow of soil or water into the concrete. It is also necessary to take precautions during concreting to minimise the softening of the soil by excess water. Uncased cast-in-situ piles shall not be permitted where mudflow conditions exist.
- (i) The drilling mud such as bentonite suspension shall be maintained at a level sufficiently above the surrounding ground water level to ensure the stability of the strata which is being penetrated all through the boring operation and until the pile has been concreted.
- (ii) Where bentonite suspension is used to maintain the stability of the bore-hole, it is essential that the properties of the material be carefully controlled at stages of mixing, circulating through the bore-hole and immediately before concrete is placed. It is advisable to limit:
 - (a) The density of bentonite suspension to 1.05 g/cc and maintain it.
 - (b) The marsh cone viscosity between 30 and 40 seconds.
 - (c) The pH value between 9.5 and 11.50
 - (d) The silt content less than 1 per cent
 - (e) The liquid limit of bentonite not less than 400 per centThese aspects shall act as controlling factors for preventing contamination of bentonite slurry by clay and silt.
- (iii) The bores shall be washed by bentonite flushing to ensure clean bottom at two stages viz. (a) after completion of boring and (b) prior to concreting after placing of reinforcement cage. Flushing of bentonite shall be done continuously with fresh bentonite slurry till the consistency of inflowing and out flowing slurry is similar.
- (iv) Tremie of 150mm to 200mm diameter shall be used for concreting. The tremie should have uniform and smooth cross-section inside, and shall be withdrawn slowly ensuring adequate height of concrete outside the tremie pipe at all stages of withdrawal. Other precautions to be taken while tremie concreting are:

- (a) The sides of the bore-hole have to be stable throughout
- (b) The tremie shall be water tight throughout its length and have a hopper attached at its head by a water tight connection.
- (c) The tremie pipe shall be large enough in relation to the size of aggregates. For 20mm aggregate the tremie pipe shall be of diameter not less than 150mm and for larger size aggregate tremie pipe of larger diameter is required.
- (d) The tremie pipe shall always be kept full of concrete and shall penetrate well into the concrete in the bore-hole with adequate margin of safety against accidental withdrawal if the pipe is surged to discharge the concrete.
- (e) For very long or large diameter piles, use of retarding plasticiser in concrete is desirable.

2.3.52 Pile Data:

The contractor shall submit data in the following proforma for each pile indicating all technical details along with date and time of various operations in adequate permanent forms/copies for record.

Proforma

- (i) Reference No. Location (Co-ordinates) ___ area.
- (ii) Sequence of installation of piles in group
- (iii) Pile diameter & type
- (iv) Working level (Platform level)
- (v) Cut off level (COL)
- (vi) Actual length below COL
- (vii) Pile termination level
 - (a) Start of socket (Level)
 - (b) Termination of pile (Level):
- (viii) Top of finished concrete level
- (ix) Date and time of start and completion of boring.
- (x) Depth of ground water table in the vicinity.
- (xi) Type of soil/ rock at pile tip
- (xii) Method of boring operation

(xiii) Details of drilling mud (Bentonite) as used:

(a) Freshly supplied mud:

Liquid limit
Sand content
Density
Marsh viscosity
Swelling index,
PH value

(b) Contaminated mud:

Density
Sand content

(xiv) (a) Standard Penetration Test (SPT) Penetration for 100 blows at Socketing Level for reference pile:

(b) Unconfined Compression Strength (UCS) Value in rock (from the nearest bore hole): Core recovery (from the nearest bore hole):

(c) Rate of drilling in mm / hr:

- (1) At start of socketing horizon
- (2) At termination level

(xv) Date and time of start and completion of concreting.

(xvi) Method of placing concrete

(xvii) Concrete quantity

Actual:

Theoretical:

(xviii) Ref. number of test cubes

(xix) Grade and slump of concrete

(xx) Results of test cubes

(xxi) Reinforcement details:

Main reinforcement Stirrups: Type

No. _____ No. _____

Dia _____ Dia _____

Depth _____ Spacing _____

(xxii) Any other information regarding obstructions, delay and other interruption to the Sequence of work.

Signature of tenderer (s)

Date:



(xxiii) Pile bore log details (in brief).

2.3.52 Such structure or parts of the structure which fail or pass the specified tests, shall be removed from the site by the tenderer/contractor at his cost and the contractors shall redo the work. Payments made on account of the rejected structure/part structure work shall be recovered from the contractor and the work will be redone by him at the same rates.

2.4 GENERAL GUIDLINES AND SPECIFICATIONS FOR SUPPLY OF REINFORCEMENT AND STRUCTURAL STEEL

2.4.1 SUPPLY OF STEEL FOR VARIOUS WORKS:

Supply of steel to various specifications as required under various schedules in the contract are governed by the Technical specifications and Special Conditions specified hereunder.

All steel shall be supplied by the Contractor at the site of work and stacked, stored, protected and maintained by him at his cost till they are put into use. Any temporary structure required for storage of steel etc., has to be provided by the Contractor at his cost and should be removed after completion of the work. The DFCCIL will only provide suitable land for construction of the above temporary shed free of cost wherever available.

For supply and use of steel in various works, relevant IRS Codes Specifications, IS Specifications and Railways/MORTH specification will be applicable or relevant. The decision of DFCCIL shall be final and binding to the contractor.

2.4.2 SPECIFICATIONS FOR STEEL:

2.4.2.1 The steel supplied by the contractor must satisfy any of the following material specifications as required for the work along with other concerned specifications.

- (i) The reinforcement steel shall be Thermo mechanical Treated bars of grade Fe 500D conforming / satisfying to IS 1786 (Up to date).
- (ii) The structural steel shall be conforming to IS 2062 (Up to date) as specified as per RDSO Drawing. It shall have Sub quality 'B0' & Grade E250 (Fe 410 W) as mentioned in the tender schedule and the requirements of IRS B1-2001 shall be fulfilled for all components for all spans. 12 mm thick & above plates are fully killed and fully normalized / controlled cooled as mentioned in the tender schedule. 'B0' sub quality indicate the requirement of impact test at room temperature and should conform to Charpy Impact Test at room temperature in accordance with relevant I.S. Code.
- (iii) Relevant other IS and IRS Specifications with regard to properties, testing and use of the above steel items also shall govern.

Signature of tenderer (s)

Date:



2.4.2.2 The contractor shall produce the manufacturers test certificate for each lot of supply satisfying the requirements of relevant IS specifications and at the specific frequency as laid down.

2.4.2.3 The Contractor shall arrange to carryout additional tests on physical properties of steel for every 40 metric tonne (t) of steel, and for every change in lot / batch for reinforcement steel and structural steel, Contractor shall submitted test report from manufacturer at his cost. DFCCIL reserve to right for carry out additional test if need arise. No extra payment will be made for conducting such tests and the agreemental rate is inclusive of above testing charges.

2.4.3 PROCUREMENT OF STEEL:

2.4.3.1 All Reinforcement steel (TMT bars) and Structural Steel shall be procured as per specification mentioned in BIS's documents – IS: 1786 and IS: 2062. Independent tests shall be conducted, wherever required, to ensure that the materials procured conform to the Specifications.

These steel shall be procured only from those firms, which are Established, Reliable, Indigenous & Primary Producers of Steel, having Integrated Steel Plants (ISP), using iron ore as the basic raw material and having in-house iron rolling facilities, followed by production of liquid steel and crude steel, as per Ministry of Steel's (Government of India) guidelines.

However, only certain isolated sections of structural steel, not being rolled by ISPs, can be procured from the authorized re-rollers of ISPs or authorized licensee of BIS having traceability system and who use billets produced by ISPs with the approval of Engineer.

2.4.3.2 The contractor shall have to submit the cash memo and challans along with the lot / batch of steel purchased in token of proof of purchase of steel from reputed dealers. Steel shall be approved by Engineer only after production of necessary certificates before use in works.

2.4.4 REINFORCEMENT AND STRUCTURAL STEEL:

2.4.4.1 Payment for supply of all types of steel shall be made for the quantity required / used as per the drawings issued from time to time. No payment will be admissible for quantity supplied in excess of the required quantity as per drawings. However, contractor will be permitted to take the excess quantity back by his own means, but no claim for payment for transportation so involved will be admissible. No payment will be made for more supply of steel at the site / excess used in Construction. No payment will be made for steel used in temporary or enabling works unless explicitly provided for in the Schedules. Steel for enabling/temporary works shall be arranged by the Contractor at his own cost.

2.4.5 STAGE PAYMENTS FOR STRUCTURAL STEEL:

2.4.5.1 No Advance Payment shall be made. However, stage payment for manufacturer of steel girders shall be made as per Bills of Quantities by the DFCCIL for steel physically brought to workshop/site by the contractor.

2.4.5.2 Stage payment for steel will be released subject to the following conditions:

- (i) The steel shall be delivered at site and properly stored under covered sheds in measurable stacks and separately maintained for various sizes, sections and dates of supply.
- (ii) The quantities of steel shall be brought to the site/ Factory only in such instalments that would facilitate smooth progress of work and consumed in reasonable time. The payment will be restricted to a maximum of 30% of the schedule quantity at any point of time.
- (iii) Proper accountable in the Steel Register is to be maintained in the prescribed format at the site for the receipt and use of the steel.
- (iv) Ownership of such steel shall be deemed to vest with the DFCCIL.
- (v) Before releasing the stage payment, the contractor shall insure the steel at his own cost in favour of DFCCIL against theft, misuse, damages, fire etc.
- (vi) The price variation claim for steel will continue to be governed as per extant PV clause and with reference to delivery at site.
- (vii) The Stage payment will be made, only when the Engineer or his authorized representative certifies that the said quantity of steel is received at site and entered in the register and that in his opinion the steel is actually required in accordance with the contract.
- (viii) No Stage payment is permitted for steel required for temporary and enabling works.

2.4.5.3

- (i) 30% payment shall be released after fabrication material received at fabrication workshop and after necessary test (UT test, physical and chemical test) of material & approved by engineer in charge of work. Payment shall be released after submission of indemnity bond of appropriate amount.
- (ii) 50% payment shall be released after assembling the fabricated components as per drawing at ROB site. Payment shall be released after submission of indemnity bond of appropriate amount.
- (iii) 20 payment shall be released after erection and completion of item.

2.4.5.4 Any Stage payment found to be made against the materials brought to the site in excess over the actual materials consumed in work shall be recovered from the contractor dues.

Signature of tenderer (s)

Date:



2.4.6 OTHERS:

- 2.4.6.1 Reinforcement steel and structural steel, shall be stored in such a way so as to avoid distortion and to prevent deterioration by corrosion. All steel used should be free from loose Mill scale, loose rust, paints and oil covering / coating etc.
- 2.4.6.2 Steel material, for which stage payment has been availed by the Contractor, shall be property of DFCCIL and will be issued to contractor by Engineer whenever required for the work. Contractor will be solely responsible for guarding against theft / misuse of the consignment due to any cause what so ever. The stage payment will be made, only when the Engineer certifies that in his opinion that the materials are actually required in accordance with the contract. It is the responsibility of the agency to ensure that steel as per the requirement is brought to site as per approved drawings / requirements.
- 2.4.6.3 The contractor shall be bound to store the materials at site of work earmarked for the purpose by the Engineer and shall not remove from the site nor use for any other purposes than exclusively for execution of the work for which the materials are intended for. Safe guarding of the materials is the responsibility of the contractor even if the material is deemed to be owned by the DFCCIL and insurance etc., have been arranged by the contractor.
- 2.4.6.4 Contractor shall remove from site any steel materials rejected by the Engineer within reasonable time as specified by him.
- 2.4.6.5 Before the test pieces are selected, the Contractor shall furnish copies of the mill records of the reinforcement steel giving number of coils in each cast with sizes and identity marks to enable identification of the material with the bill produced.

2.5 GENERAL GUIDELINES AND SPECIFICATIONS FOR FABRICATION & ERECTION OF COMPOSITE GIRDER AND SPECIAL CONDITIONS

2.5.1 GENERAL:

This chapter covers the supply of material, fabrication, assembly and erection of Composite/BOW string/Open Web Girders and bearings.

The composite girder shall be fabricated / erected as per approved GAD/ Design and launching scheme provided.

The following are the brief specifications and general guidelines for fabricating and erecting the girders but not limited to.

For detailed technical specifications for fabrication and erection of girders, refer special condition and specification for “Schedule-E”, added to superseded by Additional Specifications if any, appended to or as modified from time to time and Indian Railway Specification for Fabrication and Erection of Steel Girder Bridges and Locomotive Turn-Tables (Serial No B1-2001) shall be followed.

The superstructure of these ROB's in Railway portion is composite girder.

Composite girder is a combination of plate girders/ Bow string/ Open Web Girders and deck slab. These girders involve the use of shear connector also. The Width of bridge is as per approved GAD and approved design. The superstructure includes two RCC crash barriers and two RCC railings as per MORTH design. The wearing coat is made of plain concrete. The wearing coat is 75 mm thick or as per GAD and design. The cross drainage slope of 1 : 40 is in the deck slab to drain the water. 100 mm dia GI/PVC pipe shall be used as drainage spouts.

The environmental exposure condition of this area where these ROB's are being constructed is moderate. As per moderate condition, minimum grade of concrete required as per Addendum and Corrigendum slip no 12 of Concrete Bridge Code - 1997 is M30. Minimum grade of concrete requirement is for durability of the structure. Hence, M35 satisfies the codal provisions of Concrete Bridge Code.

The bearings used in these girders are Elastomeric / POT cum PTFE Bearing as per approved GADs & design. The contractor has to purchase the bearings from the approved manufacturers of Railways/RDSO/State Government as may be applicable or relevant, as per approved drawing. The decision of DFCCIL shall be final and binding to the contractor.

Bearing design shall be done by bearing manufacture as per load/forces on bearing given in the drawing and design/ drawing of bearing shall be got approved from Consultant. The cost of design of bearing shall be borne by the contractor. The decision of the DFCCIL shall be final and binding to the contractor.

The 18m, 22m, 24m, 30m, 36m, 48m and 62m etc as per GADs span Composite plate girder/ Bow string girder/ Open Web Girders are to be fabricated as per Indian Railway Specification for Fabrication and Erection of Steel Girder.

Bridges and Locomotive Turn-Tables (Serial No B1-2001).

High Strength Friction Grip Bolts (HSFGB) shall be used as per drawings of RDSO. Notes for use of HSFGB are given in drawing no. RDSO/B-11760/R and as per report no. BS-111 Revision 6.

For skew ROB's, please refer drawing no. RDSO/B-11759/R.

Protection screen is to be provided as per RDSO Drawing No RDSO/ETI/0068 in each ROB.

The protective coating is to be given to the composite girder by metalizing with sprayed aluminium as recommended in RDSO drawings.

The Contractor will be required to develop jigs & Masters for each components of composite Girder and same will be approved by DFCCIL/ Railway authorized inspecting

officials. Masters templates should be stored & handled carefully and should be used only for checking the correctness of the jigs from time to time.

After successful inspection of the fabricated components, appropriate surface treatment i.e. metalizing shall be rendered & components transported to bridge sites.

Contractor will be responsible for making material dumping and girder erection yard as per the requirement for which no extra payment will be made by the DFCCIL to the Contractor.

2.5.2 Site Inspection

Tenderers are requested to inspect the site and carry out careful examination to satisfy them as to the nature of work involved and facilities available at the site. They should note carefully all the existing structures and those under construction through other agencies. They should also study the suitability of utilizing the different equipments and the machinery that they intend to use for the execution of the work. The tenderers should also select suitable sites for the purpose of locating their store yard, laboratory, staff quarters etc., and satisfy themselves with regard to the feasibility of transporting the plate girders from the yard to the final site of placement etc.

2.5.3 Brief Design Data

The composite girders has been designed as per relevant IRS / IRC / RDSO codes and other guidelines.

2.5.4 Codes and Specifications:

The materials as well as execution of works shall be confirming to the following specifications and codes of practice (Latest Revision of the Specification /Codes & upto date correction slips to be referred).

2.5.4.1 Indian Railway Standard Codes and Specifications:

- (i) IR Specification for Fabrication of steel girder bridge & Locomotives turn tables (fabrication specification) – SERIAL NO. B1-2001 issued by RDSO, Reprint -2008 incorporating A & C slip upto 4 (upto date).
- (ii) IRS : Welded Bridge Code (1989)
- (iii) IRS : Steel Bridge Code (2003)
- (iv) IRS: M-28 Specifications for electrodes.
- (v) IRS: M-39 Specification for wire flux for SAW.

2.5.4.2 Indian Standard Specification:

- (i) IS: 2062-2011 Specification for structural steel.
- (ii) IS: 813-1986 Scheme of symbols for welding.
- (iii) IS: 800-2007.

Signature of tenderer (s)

Date:



- (iv) IS: 9595-1996 Manual for metal arc welding.
- (v) IS: 818-1968 Code of Practice for safety and Health requirements in electric and gas welding operations.
- (vi) IS: 5666-1970 Etch (Pre-treatment) Primer
- (vii) IS: 104-1979 Specification for Ready mixed paint, brushing, zinc chrome, Priming
- (viii) IS : 2339-1963 : Aluminium paint
- (ix) IS: 2004-1991 Carbon steel forgings for general engineering purposes.
- (x) IS: 1852-1985 Rolling and cutting tolerances for hot-rolled steel products.
- (xi) IS: 1148-2009 Rivet bars for structural purposes.
- (xii)IS: 4353-1995 Recommendations of Sub-merged Arc welding of mild steel and low alloy steel.
- (xiii) IS: 3935-1966 (shear connector)

2.5.5 Materials

- 2.5.5.1** Steel (Plates and Rolled sections) should conform to IS: 2062-2011 as specified in RDSO Drawing. It shall have Sub quality 'B0' & Grade E250 (Fe 410 W) as mentioned in the tender schedule and the requirements of IRS B1-2001 shall be fulfilled for all components for all spans. 12 mm thick & above plates are fully killed and fully normalized / controlled cooled as mentioned in the tender schedule. B0 sub quality indicate the requirement of impact test at room temperature and should conform to Charpy Impact Test at room temperature in accordance with relevant I.S. Code. The Grade of Steel for Fabrication of Girder shall confirm the grade of steel as mentioned in Detailed Design Drawing of respective girder Issued by RDSO and/or approved by DFCCIL. In case of any ambiguity regarding material of structural steel the Decision of DFCCIL shall be final and binding to the contractor.

Material supplied by the manufacturers shall be ultrasonically tested as per codal provisions at the manufacturer's premises before dispatch. The contractor on receipt of supply in his factory premises/fabrication workshop may have to carry out random USFD testing as per standards laid down in various codes and verify them with the list received from manufacturers, if instructed by the inspection agency/ Site Engineer. Only tested steel shall be used for fabrication. The steel shall comply in all respects with the requirements of approved drawings and relevant codes and specifications and it may be noted that quality of steel used for fabrication shall be the essence of the contract & shall be rigidly followed.

- 2.5.5.2** Structural Steel shall be procured as per specification mentioned in BIS's documents – IS : 2062-2011. Independent tests shall be conducted, wherever required, to ensure that the materials procured conform to the Specifications.

These steel shall be procured only from those firms, which are Established, Reliable, Indigenous & Primary Producers of Steel, having Integrated Steel Plants (ISP), using iron ore as the basic raw material and having in – house iron rolling facilities, followed by production of liquid steel and crude steel, as per Ministry of Steel's (Government of India) guidelines.

However, only certain isolated sections of structural steel, not being rolled by ISPs, can be procured from the authorized re-rollers of ISPs or authorized licensee of BIS having traceability system and who use billets produced by ISPs with the approval of Engineer.

2.5.5.3 Bolts and nuts shall be as per RDSO report no. BS-111 Revision 6.

2.5.5.4 Washer for HSFG bolts, washer shall be confirming IS 6649 (1985). Plain washers shall be confirming to IS 5639 (1975), unless otherwise specified. Double coil helical washer shall confirm to IS 6755(1980).

2.5.5.5 Stud Shear Connectors – The stud shear connectors shall be high tensile steel and the testing procedure shall be as per BS 5400-6-199.

2.5.6 Test Certificates & Testing

All materials for the work shall pass Mechanical test, Charpy test, Chemical Analysis, etc. prescribed by the relevant IS specifications or such other equivalent specifications.

For all materials including HSFG bolts, the contractor shall furnish copies of test certificates from the manufacturers including proof sheets, mill test certificates, etc. showing that the materials have been tested in accordance with the requirements of various specifications and codal provisions.

If any further testing of materials is required by Engineer in respect of these and other items, it shall be arranged for by the contractor at a reputed laboratory/National test house as approved by Engineer. For this, nothing extra shall be payable and accepted rates in the schedule of items shall be deemed to include this.

Even satisfactory outcome of such tests or analysis shall in no way limit, dilute or interfere with the absolute right of the Engineer to reject the whole or part of such materials supplied, which in the judgement of the inspecting authority does not comply with the conditions of the contract. The decision of the Engineer in this regard shall be final, binding and conclusive for all purposes.

The Engineer shall be empowered, at his/her discretion to make or have made under the supervision, any of the tests specified in the specifications mentioned herein in addition to such other tests as he/she may consider necessary, at any time up to the completion of the contract and to such an extent as he/she may think necessary to determine the quality of all materials used therein. In doing so, he/she shall be at liberty under any reasonable procedure, he/she may think fit to select, identify, have cut-off and take possession of test pieces from the material either before, during or after its being worked up into the finished product.

The Engineer shall also be empowered to call for a duly authenticated series of mechanical tests to be obtained from the maker for this materials used in the work and to accept the same in lieu of other tests to the extent he/she deems fit. The Contractor shall supply the material required for the test pieces and shall also prepare the test pieces necessary.

The test shall be carried out by the Contractor, for which Contractor shall provide all facilities including supply of labour and plant. Engineer may at his/her discretion direct the Contractor to despatch such test pieces as he/she may require to the National Test House or elsewhere as he/she may think fit for such testing purposes.

The Engineer may at his/her discretion, check test results obtained at Contractor's work by independent tests at National Test House.

The Engineer shall at all times be empowered to examine and check the working of the Contractor's plant before and after using it. Should the Contractor's plant be found, in the Engineer's opinion, unreliable, he/she is empowered to cancel any tests already carried out in this contract and have these tests carried out at any National Test House or elsewhere, as he/she may think fit.

2.5.7 Packing

All projecting plates or bars shall be kept in shape by timber or angle bars spiked or bolted to them and the ends of chord lengths, end posts etc at their shipping joints shall be protected and stiffened so as to prevent damage or distortion in transit as the Engineer may direct.

All threaded ends and machined surfaces are to be efficiently protected against damage in transit. The parts shall be transported in convenient lengths.

All straight bars and plates except small pieces are to be transported in convenient bundles temporarily riveted or bolted together or bound with wrought iron or suitable wire as the Engineer may direct. All bolts, nuts, washers, plates under 300mm square and small articles generally are to be packed separately for each span in cases each weighing when full not more than 350 kg or in strong petroleum casks, or barrels as approved by Engineer. If not entirely filled by the contents the space left shall be closely packed with wood shaving or other suitable material. HSFG & other temporary Bolts of different sizes shall be separately packed in bags, each bag having a label indicating its contents. A list of contents shall be placed on top of each case or cask.

2.5.8 Stacking Materials:

- (a) The materials, on receipt at site, shall be carefully unloaded, examined for defects, checked, sorted and stacked securely on a level bed out of danger from flood and out of contact with water or ground moisture. All materials shall be available for inspection by the Engineer.
- (b) The materials shall be verified with the marking shown on the marking plan of part list, which shall be supplied by the manufacturers or the Engineer.
- (c) Any materials found damaged during transit or while unloading should be stacked separately and damaged portions shall be indicated by paint with distinctive colour. All such materials shall be dealt with under the orders of the Engineer without delay. If any

component after receipt at site, has in the opinion of the Engineer or Purchaser, been damaged in transit, such component shall be replaced or repaired to the satisfaction of the Engineer or Purchaser free of cost.

- (d) All such damaged material shall be dealt with as per the orders of the Engineer. Badly damaged portions may require replacement. Slightly distorted parts may be straightened by gradual pressure without heat or annealing. Badly distorted or broken parts must be dealt with as the case demands and as directed by the Engineer.
- (e) Where the work has been passed in the manufacturer's works as strictly interchangeable, all members bearing the same marks can be stacked together without reference to any particular span.
- (f) The tenderer shall unload the material promptly on delivery; otherwise the tenderer shall be responsible for demurrage charges.
- (g) On receipt of rolled steel at workshop or fabrication yard, they shall be carefully unloaded and stacked properly to avoid bending, twisting, corrosion etc.

2.5.9 Manufacturing – The whole work shall be representative of the highest class of workmanship. The greatest accuracy shall be observed in the design, manufacture and erection of every part of the work to ensure that all parts will fit accurately together on erection and similar parts shall be strictly interchangeable as explained interchangeability paragraph. The contractor shall state which of the following alternative methods of manufacture, he intends to adopt.

- (i) The whole of work to be erected complete and pieces marked to place.
- (ii) All spans to be made strictly interchangeable as specified below

2.5.10 Interchangeability :

- (i) Every span is to be temporarily erected complete in Contractor's works. and all parts as marked to their place, unless the whole of the work is made completely interchangeable by the use of steel jigs and hard steel bushes controlled by master gauges, in which case the first span must be completely erected to test the accuracy of the templates. Further spans or part span assemblies built from parts selected at random by the Engineer shall be erected from time to time to check the accuracy of the work as the Engineer may require.
- (ii) If the work is considered interchangeable by the Engineer a simplified scheme of marking will be permitted, i.e. all pieces which are identical shall bear one distinguishing mark irrespective of the span to which they belong. Should the interchangeability not to the satisfaction of the Engineer, the whole of the spans must be erected complete and all parts marked to their place without additional charge. The tenderers must state in their tenders whether they intend to adopt complete interchangeability or not.

- (iii) Under special arrangement with the Engineer, it shall be permissible for approved portions of the work to be despatched before complete erection of the first span, provided the Contractor satisfies the Engineer that such portions of the work are strictly interchangeable and will assemble correctly and accurately in the complete structure.

2.5.11 The tenderer may fabricate the steel work at his workshop or at the site of the work as is convenient to him. If the fabrication is done in his own workshop, the transportation of the fabricated materials may be done by Road or Rail transport at his own cost. The tenderer must inspect the approach roads right from the workshop and should ensure that it would be possible for him to transport the materials by Road.

2.5.12 If the tenderer propose to fabricate the steel at site, land / site would be given to the tenderer to make temporary workshop free of cost, if available, but on completion of work, the site would be restored to normal condition.

2.5.13 HSFG bolts shall be provided as per RDSO drawing.

2.5.14 The responsibility of custody of the materials, in Tenderer's workshop or site will remain with tenderer till the completion of work and then handed over to the DFCCIL.

2.5.15 All welding consumables (electrodes, wire, flux etc.) shall be procured only from the manufacturers approved by RDSO subject to final approval by Engineer.

2.5.16 Removal of Unused Materials etc:

- (a) The contractor shall take steps as desired by the Engineer to ensure that rejected work is not resubmitted for inspection.
- (b) On the completion of the work, the tenderer shall remove all his unused and surplus materials, plant, stagings and refuse, or other materials produced by his operations and shall leave the site in a clean and tidy condition.

2.5.17 Fabrication

2.5.17.1 General

The fabrication of the girders and its accessories shall be carried out by the contractor in his factory premises or in a well-established fabrication workshop to be set up by the contractor at bridge site or any other location as approved by the Engineer. The workshop staff shall have requisite experience, proven skill and experience in the technique of fabricating large components. Accuracy of fabrication shall be realized through controlled high precision jigs, fixtures and templates, which shall be inspected and passed by Engineer specifically approved in prior by DyCPM, DFCCIL. The fabrication shall be preceded by Quality Assurance plans to be submitted by the contractor and every activity shall be documented in detail. The Quality Assurance Plans shall clearly indicate how individual processes such as cutting of raw steel, making, drilling, assembly bolting, welding, painting, handling etc. shall be monitored for quality. The quality parameters for monitoring shall be identified.

Signature of tenderer (s)

Date:



These identified quality parameters shall also be specified in these quality plans .The contractor shall get these quality plans approved from Engineer before start of fabrication work. The Engineer shall be empowered to check the manufacturing process from time to time to ensure that the work is executed as per approved quality plans. The quality records shall be submitted to Engineer for record, after completion of fabrication work.

The works of fabrication in contractor's fabrication shop will at all times be open for inspection by Engineer / agency as nominated by Engineer. Before dispatch of fabricated steel work from the shops, the same will be inspected in the contractor's fabrication workshop by Engineer who will thereafter issue inspection certificate.

Any defect noticed during inspection in the execution of work shall be rectified or replaced by the contractor at his own cost. The decision of Engineer or any other agency nominated for inspection as to be rectified or replaced, shall be final and conclusive.

2.5.17.2 Fabrication Drawings

The contractor shall prepare detailed shop drawings including drawing office dispatch lists (DODL's) on the basis of design drawings supplied by Engineer in such size and in such details as may be specified by Engineer. The shop drawings shall be submitted to Engineer in triplicate. No work of fabrication will be started without such approval being obtained. Contractor has to arrange the proof checking of the working fabrication drawings from the nominated Institution / Consultant. The cost will be borne by the contractor. Nomination of the Institution/Consultant for proof checking works will be decided by concerned GM/ROB/CGM, DFCCIL. Engineer will make all efforts to approve the drawings submitted by the contractor within reasonable time but no claim from contractor for any delay on this account shall be entertained by Engineer.

For Engineer's use and record, the contractor shall supply free of charge, four sets of prints on string paper and one set of neatly executed tracings of all approved detailed drawings and fabrication drawings, soon after communication of approval for use at site.

2.5.17.3 Maintenance of records by Fabricators

The records of fabrication shall be maintained in the registers such as Jigs register, HSFG bolt checking register, Material offering and inspection register, RDSO inspection notes and compliance register, Welding procedure data register, Radiographic inspection register and Statement of material test certificates, etc. The formats are given in Appendix I of IRS B1 – 2001.

2.5.17.4 Tolerance in Fabrication

Basically, composite girders are plate girders. Fabrication tolerance for plate girders shall be as stipulated in Appendix II of IRS–B1– 2001.

All members of the girder and joints are to be either welded or bolted as shown in the approved structural drawings. No welding except where approved by the Engineer is to be

carried out at site. All welding and bolting are to be carried out as per relevant IRS Specifications.

2.5.18 Steel Tape

The Contractor shall maintain a master steel tape of approved make for which he/she has obtained a certificate of accuracy from any National Test House or Government recognised institutions competent to do so.

2.5.19 Flattening and Straightening

2.5.19.1 All steel materials, plates, bars and structural shall have straight edges, flat surfaces and be free from twist. If necessary, they shall be cold straightened or flattened by pressure before being worked or assembled unless they are required to be of curvilinear form. Pressure applied for straightening or flattening shall be such as it would not injure the material and adjacent surfaces or edges shall be in close contact or at uniform distance throughout.

2.5.19.2 Flattening and straightening under hot condition shall not be carried out unless authorized and approved by the Engineer.

2.5.20 Planing and Shearing

2.5.20.1 Except where otherwise indicated, cutting of all plates and sections shall be affected by shearing or sawing. All edges shall be clean, reasonably square and true. Wherever possible the edges shall be cut in a shearing machine, which will take the whole length of the plate in one cut.

2.5.20.2 Should the inspection find it necessary, the cut edges shall be ground afterwards.

2.5.20.3 Planning or machining of the edges or surface shall be carried out when so specified in the contract drawings or where specifically ordered by the Engineer. Where machining is specified, the plates or all sections shall be cut in the first instance to such a size so as to permit not less than 3mm of metal being removed from each sheared edge or end, in the case of plates or sections of 12mm or less in thickness and not less than 6mm of metal being removed in the case of plates and sections exceeding 12mm in thickness.

2.5.20.4 The butting ends of all booms and struts where spliced shall be faced in an end milling machine after members have been completely fabricated. In the case of compression members the face shall be machined so that the faces are at right angle to the axis of the members and the joint when made, will be in close contact throughout. At the discretion of the Engineer, a tolerance of 0.4mm may be permitted at isolated places on the butting line.

2.5.21 Flame Cutting

2.5.21.1 Flame cutting by mechanically controlled torch/torches shall be accepted both in the case of mild steel and high tensile steelwork. Provided the edge as given by the torch is

reasonably clean and straight, plates may be cut to shape and beams and other sections cut to length with a gas cutting torch, preferably oxyacetylene gas should be used.

2.5.21.2 All flame cut edges shall be ground to obtain reasonably clean square and true edges. Draglines produced by flame cut should be removed.

2.5.21.3 Unless machining has been specifically provided for, special care is to be taken to ensure that ends of all plates and members are reasonably in close contact and the faces are at right angles to the axis of the members and joints, when made, are also reasonably in close contact.

2.5.21.4 Use of multi-head flame cutting machine having multiple oxy acetylene torches is desirable for higher productivity and reducing the distortion due to cutting operation. Plasma-arc cutting method can also be employed. This process offers less heat input causing less distortion.

2.5.22 Method of fabrication

Considering the length and height of span, jigs and fixtures shall be used to guide and support drilling of holes and fixtures during entire fabrication work.

Jigs after manufacture shall be checked and approved by Engineer or any other Inspecting agency as nominated by GM/ROB,/Dy CPM, DFCCIL. Only approved and stamped jigs shall be used for fabrication.

2.5.22.1 Tack Assembly

Tack assembly is the next step in fabrication which assembles the components to get the form of component or girder. This activity is to be done carefully so that the final components/ girders are fabricated to correct geometric shape and the size is within the tolerance specified.

For tack assembly, the components shall be kept on a firm hard bed and shall be held in position using suitable fixtures so that once the measurements are taken to set a component at proper location, these shall not move till the final tack assembly is done. The entire work shall be done in area where arrangements for manipulating the member such turning over, shifting etc can be conveniently done using EOT or other type of cranes and suitable covered shelter for sufficient protection against the weather is available.

Quality of tack Welds: as per clause 24 of Welded Bridge Code,

- (i) Tack welds shall be not less than the throat thickness or leg length of the root run to be used in the joint.
- (ii) Length of the tack weld shall not be less than four times the thickness of the thicker part or 50mm whichever is the smaller.

- (iii) Where tack weld is incorporated in a welded joint, the shape, size and quality shall be suitable for incorporation in the finished weld and it shall be free from all cracks and other welding defects. Tack welds, which have poor quality and can crack, shall be cut out, ground and re-welded.
- (iv) Tack welds shall not be made at extreme ends of joints.
- (v) Tack welds are equally important in the overall quality and performance of the girder and these shall also be made by qualified welders.
- (vi) After the tack assembly is complete, the girder./ component shall be checked for dimensional accuracy as per clause 13 of IRS B1. Drilling Jig and tacked members shall be clamped to a fixture to avoid shifting of jig during handling and drilling.

Tack welding may be permitted only at ends or locations, which will eventually be cut and removed. No active part of the component shall be tack welded as this would initiate crack formation in service.

2.5.23 Template

The contractor shall supply and provide templates at his own cost. **No separate payment shall be made for this and accepted rates shall be deemed to include this aspect.** The templates throughout the work shall be of steel of similar category. The templates shall be used for marking of cutting materials and as well as for profile machining for girders. Templates shall be used for marking of drilling holes in steel structure. In case where actual materials from a bridge have been used as templates for drilling similar pieces the Engineer will decide whether these are fit to be used as part of finished structure.

2.5.24 Template Shop

Fully covered template shop consisting of uninterrupted steel or concrete floor as approved having true and correct level covering adequate area shall be provided by the contractor.

2.5.25 Drilling and Sub punching

All holes shall be drilled but the Contractor may, if he/she so prefers sub-punch them to a diameter 6mm less than that of finished holes, e.g. a punched hole which is to be drilled out to 25mm in diameter shall not exceed 19mm in diameter at the die end. When the bolt holes are to be sub-punched, they shall be marked with a centre punch and made with a nipple punch or preferably, shall be punched in a machine in which the position of the hole is automatically regulated. The punching shall be so accurate that when the work has been put together before drilling, a gauge 1.5mm less in diameter than the size of the punched holes can be passed easily through all the holes.

Holes for turned bolts, should be 1mm under drilled in shop and should be reamed at site to suit the diameter of turned bolt.

The steel bushes shall be case hardened by an approved process and checked for diameter after the heat-treatment. The bores of bushes shall initially have a tolerance of -0mm, 0.1mm. The tolerance shall be checked from time to time and when the bores exceed a tolerance of, -0mm, +0.4mm, the bushes shall be rejected. For this purpose, go and no-go gauges are to be used. Tolerances for checking jigs from master plates shall be +0mm-0.13mm.

The work shall be taken apart after drilling and all burrs left by the drill and the sharp edges of all the bolt holes completely removed.

Drifting to enlarge unfaired holes is prohibited. The holes required to be enlarged shall be reamed provided the Engineer permits such reaming after satisfying himself about the extent of inaccuracy and the effect of reaming on the soundness of the structure. The Engineer reserves the right to reject all steel work if the holes are not properly matched.

On completion of drilling of holes in each component and before shifting the jig, it shall be ensured that all holes are drilled to their correct diameter to reconfirm quality of work.

2.5.26 Temporary Bolts, Nuts & Washers:

Refer Cl.28.1 to Cl.28.8 of IR Fabrication specification Serial No. IRS-B1-2001 issued by RDSO.

2.5.27 Alterations in the Work:

The Contractor shall not in any case or in any circumstances have authority to make any alterations in, modifications of, substitution for, addition to, or omission of work or any method or system of construction, unless an alteration order in writing directing such alteration, modification, substitution, addition, omission or change shall have been given by the DFCCIL prior to the commencement of the work or part of work nor shall the Contractor be entitled to any payment for or in respect of any such alteration, modification, substitution, addition, omission or change may have been actually made and executed and no course of conduct shall be taken to be a waiver of the obligation and conditions hereby imposed.

All altered, modified, substituted, additional and changed work, labour and materials and all omitted work shall be valued by the Purchaser on the basis of the rates specified in the schedule.

2.5.28 Welding

Welded construction work shall be carried out generally in accordance with the provisions of Indian Railway Standard Welded Bridge Code and subject to further specifications given in the following paragraphs.

All welds should be done by submerged-arc welding process either fully automatic or semi-automatic. Carbon di oxide welding or manual metal-arc welding may be done only for welds of very short runs or of minor importance or where access of the locations of weld do not permit automatic or semi-automatic welding.

Except for special types of edge preparation, such as single and double 'U' single and double 'J' the fusion edges of all the plates which are to be joined by welding may be prepared by using mechanically controlled automatic flame cutting equipment and then ground to a smooth finish. Special edge preparation should be made by machining or gouging.

Site welding should not be undertaken except in special circumstances with the approval of the Chief Bridge Engineer/ CGM/DFCCIL/Agency/Officers nominated by CGM-DFCCIL. Site welding should be confined to connections having low stresses, secondary members, bracings etc.

Manual metal arc welding may be done taking adequate precautions as per IS: 9595 and under strict supervision.

2.5.29 Welding Procedure

The welding procedure shall be such as to avoid distortion and minimize residual shrinkage stresses. Properly designed jigs should be used for assembly. The welding techniques and sequences, quality, size of electrodes, voltage and current required shall be as prescribed by manufacturers of the material and welding equipment. The contractor should submit full details of welding procedure in proforma given at Appendix-V of IRS B1-2001.

2.5.30 Sequence of welding and welding pass

For fabrication of welded composite girders, channel shear connectors shall be welded on top flange plate prior to assembly of I-section. This facilitates correction of any distortion of flange plate developed during the welding of channel shear connectors.

In making a typical I-section four fillet welds are to be made. The welding sequence to be followed is indicated by number 1 to 4 as shown in the Fig. 3 of IR Fabrication specification Serial No. IRS-B1-2001 issued by RDSO.

Whenever a square butt weld in a 10 or 12mm thick plate is required to be made, the sequence to be adopted is shown in Fig. 3 of IR Fabrication specification Serial No. IRS-B1-2001 issued by RDSO.

2.5.31 Procedure Trials for welding and cutting

Where required by the Engineer, welding and flame cutting trials as per following shall be carried out and completed before fabrication on representative samples of materials to be used in the work, as follows.

- (i) The samples of material shall be selected and marked by the ENGINEER when the materials for the work are inspected at the mills.
 - (ii) The trials of flame cutting shall be carried out in material representative of all thicknesses to be used in the work.
 - (i) The welding & flame cutting trials shall be commensurate to the satisfaction of Engineer and the procedures to be adopted in the fabrication of work which shall include:
 - (a) Welding procedure in accordance with IRS Welded Bridge Code supplemented by IS 813 and IS 1980.
 - (b) Heat control techniques required to ensure that the flame cut surface of steel are suitable for inclusion in welds.
 - (ii) The trials shall include specimen weld details from the actual construction which shall be welded in a manner simulating the most unfavourable instances of fit-up and preparation. After welding the specimens shall be held as long as possible at room temperature but in any case not less than 72 hours, and then shall be sectioned and examined for cracking. Six representative samples of each weld joint similar to joint used in fabrication of all components shall be prepared by qualified and certified welding operators.
 - (v) Procedure trials: Testing shall be to relevant IS code or if approved to BS 709. The following groups of tests shall be carried out with the type of welds.
 - (a) **Butt welds:** Transverse tensile test, transverse & longitudinal bend test with the root of weld in tension and compression respectively, charpy V-notch impact test.
 - (b) **Fillet welds:** Fillet weld fracture test.
 - (c) **Track welds:** Inspection for cracking.
 - (d) **All welds:** Macro examination.
- Additional tests may also be carried out as per requirement and instruction of Engineer, the cost of which shall be borne by the contractor.
- Shop welded joints will be radio graphically examined for 100 %.
- Following tests are normally performed on welds.
- (a) **Non Destructive Tests (NDT):**
 - Visual inspection/profile gauge for dimensional check of size and throat thickness of weld.

- Etching test for penetration of joint.
- Magnetic particle or Ultra Sonic Pulse Velocity (USPV)
- Gamma Radiography & x-ray (only for butt welds)
- Dye penetration of all welds joints.

(b) Destructive Test :

- Tensile test
- Bend test
- Impact test
- Load test.

Once samples representing the weld joint used in fabrication of all components are tested and test results are found satisfactory, then approval shall be taken from the Engineer for the welding of built up components by approved welding operators. Welding Procedure Qualification Records (WPQR'S) shall include joint details, welding consumables (i.e. electrode/wire & flux combination), weld parameters (i.e. welding current, wire feed speed), welding position, welding equipment carriage speed (for SAW process), are Length, arc voltage etc.

2.5.32 Preparation of Faces

Preparation of joint face: Except for special types of edge preparation such as single or double 'U' & 'J' joints, the fusion edges of all plates which are to be joined by welding shall be prepared by using mechanically controlled automatic flame cutting equipment with the cutting allowance.

It shall be ensured by Non-destructive tests that the fusion face and adjacent surface are free from cracks, notches or other irregularities that are likely to cause defects during service or interfere with deposition of the weld.

Fusion faces and the surrounding surface up to 50 mm shall be free from mill scale, moisture, oil, paint dirt or any other substance which may affect the quality of the weld, and same shall be removed by grinding or flame cleaning/grit blasting.

Details of joint, fusion faces, root face and gap shall be as per details given in fabrication drawing or as stipulated in IS:9595.

2.5.33 Welding Operation

Parts to be welded shall be assembled such that the joints to be welded are accessible and visible to the operator. Assembly jig and fixture shall be used for accuracy.

Manipulators should preferably be used to execute the sequence of welding without disturbance, in the most suitable position. Fixture shall maintain the alignment with minimum restraint in order to reduce the possibility of locked up stresses.

Run in and run out plate shall be provided for fabrication of built up members or truss to ensure that weld will start on run in plate and weld will stop on run out plate and thus avoid crater defects on the components.

The size and length of weld shall not be less than those specified in the drawing nor shall they be in excess of the requirement without prior approval of the Inspecting Officer. The location of weld shall not be changed without prior approval of the Engineer.

During design and detailing of component lengths, care is to be taken to avoid butt weld in built up members of truss. Therefore it is essential to use only nearest size and length or rolled sections that have been procured to scheduled sizes and lengths by proper planning. No butt weld shall be carried out without approval of Engineer.

Fabrication of components subject to dynamic loading in the structure need careful inspection during fabrication by qualified, experienced and certified Engineer from contractor's side and final approval by Inspecting Officer. This inspection shall be carried out as stipulated in Indian Railway Welded Bridge Code before, during and after welding.

2.5.34 Precautions during welding

The Contractor shall submit list of weld joints of different combined thickness for approval of welding procedure for all members.

The welding of built up component shall be carried out only by approved welding operators and in accordance with Welding Procedure Qualification Records. WPQR's shall be prepared in advance and approved by the Engineer. Proper welding sequence shall be followed to avoid distortion and minimize residual shrinkage stress, and surface defects, within acceptable tolerance limits.

To ensure sound and defect free welding of built up members, record of welding adopted as per approved qualifying procedure shall be maintained in Performa prescribed in guidelines for welded fabrication issued by TPIA (Third Party Inspecting Agency) specifically approved in prior by GM/ROB/ CGM, DFCCIL OR authorised representative of DFCCIL.

Any change during welding for fabrication of built up member, such as welding sequence, welding process, positioning, wire and flux combination joint details, increase or decrease in combined thickness of joint by 5 mm etc. shall be carried out only after representative samples test and procedure qualification, is accepted. **In no case deviation from WPQR's without approval of Engineer shall be adopted.**

2.5.35 Additional Precautions during Welding

Following precautions shall further be observed during fabrication.

- (i) All equipment's shall be provided with calibrated gauges to observe limits of variation for parameters prescribed in WPQR'S for welding current, arc voltage, speed of travel of equipment etc.

- (ii) Covered shed for environmental control (particularly against dust, moisture and water) shall be provided to avoid entrapment of hydrogen which is likely to cause crack initiation in weld or under bed of weld (i.e. Heat Affected Zone HAZ). Also baking of flux use for submerged arc welding in oven for an hour at 200 degree C shall be carried out to ensure that no moisture is contained in flux during welding.
- (iii) All tack welds shall be carried out by qualified and approved welder only. As tack weld will become part of the final weld, it shall be free from all cracks and other welding defects.
- (iv) If multiple runs are used for fabrication of built up member, inter run cleaning shall be carried out and subsequent weld bed made only after approval of inspecting officer or his authorized representative. This is to check free defects in the weld. Also visible defects such as cracks, cavities, if any, shall be removed by grinding. It shall be ensured during welding that craters are avoided.
- (v) Stray arcing of components, which cause local hard spots or cracking of parent metal, shall be avoided.
- (vi) Flux of approved quality will be permitted for use.
- (vii) The Auto melt grade wire spools of wires for Submerged Arc Welding and Carbon Dioxide (CO₂) consumables of only the approved quality will be permitted.
- (viii) Pre Heat Treatment will be given to the consumables to remove the moisture if any.
- (ix) No violation of welding procedure will be permitted on any account.

2.5.36 Technical Organisation/tools, equipments and plants

- (A) Contractor should have qualified and trained manpower suitable to do the work in terms of technical specifications and contract conditions.
- (B) Contractor should have suitable and adequate plants, machinery and equipment's required to execute the work like:
 - (i) Cutting machine
 - (ii) Radial drilling machine.
 - (iii) Edge milling machine, end milling machines.
 - (iv) Plate/structural steel straightening machine.
 - (v) Pneumatic grinding machine, drilling machines, chipping machines and wrenches etc.
 - (vi) Sand blasting equipment and metalizing equipment's.
 - (vii) Welding machines.
 - (a). SAW
 - (b). MIG/MAG

- (viii) Welding transformers3+
- (ix) Cranes of adequate capacity.
- (x) Suitable Jigs and fixtures.
- (xi) To test the raw material and girders to conform to relevant specification, testing facilities, for the following should be available either in house or through outsourcing.
 - (a). Elcometer for measurement of thickness of paints.
 - (b). Steel measuring taps duly calibrated.
 - (c). Ultrasonic flow detection testing facilities for checking internal flaws.
- (xii) Suitable Welding manipulator.
- (xiii) Macro etching/DP or MP testing facilities.
- (xiv) Tongue tester for measuring current and voltage.
- (xv) Gauges for checking weld size throat thickness and edge preparation etc..
- (xvi) All equipment's must meet the requirements of corresponding IS, IRS or other international specifications.

(C) **Manpower:** Adequate No. of trained qualified welders shall be available with the contractor. The welder must be trained in accordance with the provision of IS: 817. They must be trained either from recognized welding institutes or by in house training, where proper training facilities exist. The welder must be tested as per requirements of IS: 7310 and proper records maintained.

List of equipment's mentioned above is only indicated and not exhaustive. The firm shall be required to deploy all other machineries, tools & plants etc. required for successful completion of the work of fabrication, assembly and launching of the girders.

2.5.37 General: Bolting & Welding

Qualified trained, and experienced supervision is essential at all times during fabrication, and for maintenance of records.

After welding of welded components, they shall be finished finally by grinding or matching with the help of a profile template. All the butting ends of components shall be faced in milling machine after members haven completely fabricated. In the case of compression members, the face shall be machined so that the faces are of proper angle as shown in drawing and the joint when made will be in close contact throughout within a gap tolerance of less than 0.15 mm. The Engineer may permit a tolerance of (-) 0.4 mm at isolated points in butting line.

2.5.38 PAINTING

Specification for metalizing and painting will be done as per Clause no 39.2.1 of Indian Railway Specification for Fabrication and Erection of Steel Girder Bridges and Locomotive Turn-Tables (Serial No B1-2001).

2.5.38.1 Surface Preparation

This is the most important factor in ensuring good performance of the steel girder. The surface should be clean, dry and free from contaminants and it should be rough enough to ensure adhesion of the paint film. However it should not be so rough that the film cannot cover the surface peaks.

The cleaning of the surface shall be done initially with the use of emery paper, wire brushes, scrapers etc. for spot cleaning to remove rust, scale etc. Subsequently, sand blasting of the surface shall be done to remove rust, mill scale along with some of the base metal. This will be achieved by high velocity impact of abrasive material against the surface in accordance with the provisions of IS: 6586, which will also create a base for good adhesion. The abrasive material once used for cleaning heavily contaminated surface should not be reused even though re-screened. Washed salt free angular silica sand of mesh size 12 to 30 with a minimum of 40% retained on a 20 mesh screen shall be used for blasting. The material specifications and other requirements shall be as provided in Indian Railways Bridge Manual, 1998.

All site bolts, nuts and washers shall be thoroughly cleaned and dipped in boiled linseed oil. All machined surfaces are to be well coated with a mixture of white lead conforming to IS: 34 and Mutton tallow conforming to IS: 887 as per specifications before despatch to site. Nothing extra shall be payable to contractor on this account.

All the components in the floor and deck system in open web girders and all members in plate & composite girders shall be metalized as IRS specifications.

2.5.38.2 Metal Spraying

The metal spraying shall be carried out as soon as possible after surface preparation but in any case within such period that the surface is still completely clean, dry and without visible oxidation. If deterioration in the surface to be coated is observed by comparison with a freshly prepared metal surface of similar quality which has undergone the same preparation, the preparation treatment should be repeated on the surface to be coated

The wire method shall be used for the purpose of metallising the diameter of the wire being 3mm or 5mm. Specified thickness of coating shall be applied in multiple layers and in no case less than 2 passes of the metal spraying unit shall be made over every part of the surface. At least one layer of the coating must be applied within 4 hours of blasting and the surface must be completely coated to the specified thickness within 8 hours of blasting.

2.5.38.2.1 Purity of Aluminium

The chemical composition of aluminium to be sprayed shall be 99.5% aluminium conforming to IS: 2590.

2.5.38.2.2 Appearance of the Coating

The surface of the sprayed coating shall be of uniform texture and free from lumps, coarse areas and loosely adherent particles.

2.5.38.2.3 Thickness of the Coating

The nominal thickness of the coating shall be 150 μ (microns). The minimum local thickness, determined in accordance with procedure given in clause 2.5.38.3 below, shall be not less than 110 μ (microns).

2.5.38.3 Shop Painting

Any oil, grease or other contamination should be removed by thorough washing with a suitable thinner until no visible traces exist and the surfaces should be allowed to dry thoroughly before application of paint. The coatings may be applied by brush or spray. If sprayed, pressure type spray guns must be used. One coat of wash primer to IS:5666 shall be applied first. After 4 to 6 hours of the application of the wash primer, one coat of Zinc chrome primer to IS:104 with the additional proviso that zinc chrome to be used in the manufacture of primer shall conform to type 2 of IS:51 shall be applied. After hard drying of zinc chrome primer, one coat of Aluminium paint to IS:2339 (brushing or spraying as required) shall be applied.

2.5.38.4 Site Painting

After the steel work is erected at site a second cover coat of Aluminium paint to IS: 2339 (brushing or spraying as required) shall be applied after touching up the primer and the cover coat given in the shop if damaged in transit

2.5.38.5 Method for the Determination of Local Thickness

2.5.38.5.1 Equipment

Any magnetic or electro-magnetic thickness meter that will measure local thickness of a known standard with an accuracy of ± 10 percent.

2.5.38.5.2 Calibration of Instrument

Calibrate and check the meter on one of the following standards (as appropriate):

- (i) (Applicable to magnetic and electro-magnetic meters other than the pull-off type) A soft brass shim, free from burrs, in contact with the grit-blasted surface of the base metal prior to its being sprayed. The thickness of the shim shall be measured by micro meter and shall be approximately the same as the thickness of the coating.

- (ii) A sprayed metal coating of uniform known thickness approximately the same as the thickness of the sprayed coating to be tested, applied to a base of similar composition and thickness to the article being sprayed, grit-blasted in accordance with Clause 2.5.38.1.

2.5.38.5.3 Procedure

For each measurement of local thickness, make an appropriate number of determinations, according to the type of instrument used.

With instrument measuring the average thickness over an area of not less than 0.645 sq cm, the local thickness shall be the result of the one reading.

With instruments having one or more pointed or rounded probes, the local thickness shall be the mean of three readings within a circle of 0.645 cm² area.

With meters having two such probes, each reading shall be the average of two determinations with the probes reversed position.

2.5.38.6 Method of Test For Adhesion

Using a straight edge and hardened steel scribe which has been ground to a sharp 30 degree point, scribe two parallel lines at a distance apart equal to approximately 10 times the average coating thickness. In scribing the two lines, apply enough pressure on each occasion to cut through the coating to the base metal in a single stroke.

2.5.38.7 Inspection

2.5.38.7.1 Determination of Local Thickness

The minimum local thickness shall be determined by the method described above.

2.5.38.7.2 Adhesion

The sprayed metal coating shall be subjected to an adhesion test using the method described above. If any part of the coating between the lines breaks away from the base metal, it shall be deemed to have failed the test. Articles, which have been rejected shall have the defective sections blasted clean of all sprayed metal prior to re-spraying. Where the rejection has been solely due to too thin a coating, sprayed metal of the same quality may be added provided that the surface has been kept dry and is free from visible contamination.

2.5.39 Paints: Source & Quality

Paint and other accessories including those for metallising work will be supplied by the contractor. Paints manufactured by the following firms (or more) may be used subject to their being in the approved list of RDSO and final approval by the Engineer.

Signature of tenderer (s)

Date:



M/s. Jenson Nicholson. Paints
M/s. British / Barger paints.
M/s. Shalimar Paints
M/s. I.C.I. paints
M/s. Nerolac. Paints

The contractor shall furnish to the Engineer, the date of manufacture of paint as certified by the manufacturers with the necessary container marking and test certificate for paint conforming to relevant IS code. In addition to this, he shall also submit the necessary vouchers in respect of paint purchased by him.

The Engineer reserves the right to get the paint tested at contractor's expenses as considered necessary by the Engineer. If the test results do not conform to relevant IS specifications fully, then the lot of paint shall be rejected and got removed from the contractor(s) storage. If the paint has already been applied it shall be removed.

In addition to above, the following tests are required to be carried out in the field.

- Weight per litre
- Consistency test
- Scratch test.
- Flexibility and adhesive test.

The Engineer reserves the right to reject the lot of paint even on the basis of field results.

2.5.40 Painting - General Instructions

Painting shall not be commenced till the surface preparation has been approved by the Engineer or his representative.

Sealed containers of paint of approved brand shall be used. The paint drums must be rolled, turned upside down and shaken before opening. The paint must be stirred well before use. Over stirring which results in invisible air bubbles etc, shall be avoided.

Where brush painting is accepted, the paint must be applied by means of flat brushes not more than 75 mm in width having soft flexible bristles conforming to IS: 384.

Round and oval brushes of approved quality conforming IS: 487 may also be used as per the instructions of the Engineer or his representative or inspecting officer.

All new brushes should be soaked in raw linseed oil conforming to IS: 77 for at least 24 hours before use.

The date of painting shall be marked with paint on the member.

2.5.41 Care during Painting

Signature of tenderer (s)
Date:

Paint should be mixed in small quantities sufficient to be consumed within one hour in the case of red lead paint.

The applied coat of paint shall be uniform, and free from brush marks, sack marks, blemishes, scratching, non-uniform thickness, holes, log marks, fuel staining, cracking, scaling, and other defects.

Paint shall be applied only on dry and clean surface free from moisture or dust (including scrapping dust).

Paint should be used within the prescribed life from the date of manufacture.

2.5.41.1 Each coat of paint shall be left dry till it sufficiently hardens before the subsequent coat is applied. Each coat of paint shall be inspected by the Engineer and certified as satisfactory before applying subsequent coat.

2.5.42 ASSEMBLY & ERECTION

2.5.42.1 General

The contractor shall provide at his own cost all tools, machinery, equipment and erection material, including all temporary works and shall assemble all components in every respect as stipulated in the contract and in accordance with approved drawings and specifications.

Before starting the work the contractor shall seek the Engineer's approval as to the method he proposes to follow and the type and suitability of equipment he proposes to use for assembly of girder components and launching of girder. The approval of the Engineer shall however not in any way relieve the contractor of the responsibility for the adequacy and safety of methods and/or equipments he proposes to use for carrying out work in full accordance with drawings and specifications.

All temporary work shall be properly designed and substantially constructed for the loads, which it will be called upon to support. Adequate allowance and provision of a lateral forces and wind loads shall be made according to local conditions and ensure that support shall not settle during erection.

When chains are used for lashing care must be taken to protect the edges of members from twisting and distortion, damage to paint and similar effects.

Temporary bracing shall be provided to take care of stresses caused by erection equipment or other incidental loads during erection.

The method use for lifting and slinging flexible members shall be brought to the notice of the Engineer and shall be subject to his approval.

The contractor shall observe sufficient accuracy in the assembly of every part of the work to ensure that all parts fit accurately together.

2.5.42.2 Procedure for Assembly in Workshop & Site

The contractor is required to undertake test assembly of the girders in his fabrication workshop to prove accuracy of templates and Jigs. This assembly can be done in horizontal position. In case the fabrication workshop is set up by the contractor at bridge site itself the test assembly may be done at assembly platform and after testing of accuracy of jigs, fixtures & templates and the same assembly can be launched after bolting.

The test assembly shall be certified by Inspecting agency of the Engineer.

Launching of girders: once sufficient number of girders are assembled and the sub structure has been certified to be ready, launching of girders shall be taken up. The scheme for launching shall be submitted by contractor and approved beforehand by RITES LTD / Railway / or Agency approved by DFCCIL and any statutory clearances such as CRS sanction must be obtained. The decision of DFCCIL shall be final and binding to the contractor. Launching can be done by any of the various methods such as using single crane, using multiple cranes, end launching or using derricks. The payment of same shall be borne by Contractor.

2.5.43 Care during Assembly at Workshop

2.5.43.1 Drilling & Drifting of Holes

Drilling of joints shall be avoided as far as possible and when necessary should be done with great care and under expert supervision. Hammers not exceeding 1kg (2 lb) in weight may be used with turned barrel drifts and a number of holes drifted simultaneously, the effect of drifting shall be checked by observation of adjacent unfilled hole.

Any apparent error in shop work which prevents the assembling and fitting of the mating parts by the proper use of drifts shall be investigated immediately.

As all work is rigidly inspected at the fabrication shop before dispatch, these difficulties should not arise and the cause could possibly be due to the use of incorrect components. It is usually important that parts be correctly handed. Should errors still persist, the matter shall be immediately reported to the Engineer who will decide what action is to be taken.

2.5.43.2 Inspection, Testing & Marking

All components shall be offered for inspection prior to painting. All approved components shall be stamped defect free, painted as per specifications prior to dispatch to bridge site.

On final finishing of each component, it shall be marked distinctly with paint with shipping mark for guidance, during assembly of component.

2.5.43.3 Stud shear connectors shall be subjected to the following tests:

Signature of tenderer (s)

Date:



The appearance test and test to check the fixing of shear studs shall be as per approved/RDSO drawings.

2.5.44 Transports from Workshop & Stacking at Site

All items fabricated in the workshop shall be marked and packaged with accompanying package list. The items after fabrication shall be transported by contractor to site by Rail/Road in a manner as to cause no damage to the components. Contractor shall be liable for all losses and damages in transit for the materials consigned by him till materials are erected and work completed and taken over by the Engineer. Insurance against loss or damage in transit, if any, shall be the responsibility of the contractor.

After identification & correct marking, all components of each girder shall be dismantled & similar components shall be grouped together & labelled; bolts and plates of each size shall be packed separately, after approval by the Engineer.

The packages shall be of such size by length & weight that they are safely transportable by Rail/Road. The components shall be provided with necessary packing to avoid damage to painting & members in transit.

Dimensions for transport shall be as per standard schedules.

2.5.45 Assembly at site

2.5.45.1 Holes

After drilling holes in temporary tack assembled components, the components shall be taken apart after match marking and all burrs left by drill and sharp edges of all holes shall be removed by spot grinding to ensure full contact when assembled.

Assembly fixture shall be used to build components for turned bolt connection. These connections will help realize correct position of member and matching of coaxial holes in opposite members besides true alignment and level.

After assembly, all blank holes shall be checked with plug gauge of diameter 0.8mm less than hole diameter, to check fair matching of holes before riveting / bolting.

2.5.45.2 Drifts

Drifts as per IRS specifications may be used for drawing light members into position, but their use on heavy members should be restricted to securing them in their correct position. In no case shall drifting be allowed to such an extent that holes are distorted. Drifting to enlarge unfaired holes is prohibited.

2.5.45.3 Making of joints

Signature of tenderer (s)

Date:



Cleaning of permanent contact surfaces:- Surfaces which will have permanent contact shall be removed of paints and mill scale down to bare metal, clean and dried and immediately a coating of zinc chrome red oxide priming to IS:2074 shall be applied. Care shall be taken to see that all burrs are removed and no surface defects exist before the parts are assembled.

2.5.45.3.1 Reaming

No reaming shall be undertaken without the written authority of Engineer or his authorized representative except for under drilled holes meant for turned bolts. The contractor shall supply special bolts to fill reamed hole, where reaming is approved. Record of all such variations shall be kept. However, these provisions should not apply for under drilled holes meant for turned bolts. Copies of all correspondence pertaining to the recourse of reaming and the use of oversize bolts shall be sent by the contractor for information to Engineer.

2.5.45.3.2 Service Bolts & Drifts

Joints shall normally be made by filling not less than 50% of the holes with service bolts and barrel drifts in the ratio of four to one. The service bolts are to be fully tightened up as soon as the joint is assembled.

2.5.45.3.3 In cases where the joints have to withstand stresses arising from special methods of erection, provision is to be made to take the whole stress that will or may occur. Cylindrical drifts and turned bolts shall be used to withstand such stresses and no reliance is to be placed on service bolts for this purpose. Up to a maximum of 40 percent of the holes of each member of the joint are to be filled with drifts and balance of strength required is to be attained with turned bolts. The position and number of the drifts and bolts will be decided by Engineer.

2.5.45.4 Painting of Joints

All surfaces, which are in permanent contact, shall be thoroughly cleaned down to the bare metal, to remove mill scale, grease etc. They shall be painted immediately before assembly with one coat of suitable primer and raw linseed oil freshly ground and the surface prepared for painting as per painting specification at Clause 2.5.38.

2.5.46 Assembly and Launching

The launching of girders shall be done as per approved drawings. For this purpose, the contractor shall submit in triplicate, detailed launching schemes of all the girders including design calculations, safety procedures and method statement with such plans, sketches and other details as may be necessary to determine the suitability and adequacy of the schemes proposed. The scheme will be checked by RITES Ltd/DFCCIL/Railway/or Agency nominated by the DFCCIL. The Payment for the launching scheme of girders shall be born by contractor. The agency shall provide/arrange all works and full support to obtain CRS sanction. Contractor will be responsible to co-ordinate with Divisional Railway/WR HQ

officials to gate CRS sanction. The methods adopted shall not, under any circumstances, cause the stresses in various members of girder spans to exceed permissible and safe limits at any stage of launching. One copy duly approved by the Engineer shall be returned to the contractor.

For the Engineer's use and record, the contractor shall supply free of charge, four sets of prints of approved detailed drawings of assembly and launching schemes on strong paper with back of linen for use at site and one set of neatly executed tracings.

The launching system & procedure shown on enclosed drawings are purely indicative of the method proposed for launching for which the permanent members of the girders are designed. The contractor shall provide full structural details of the temporary members and their connections to the girder, along with necessary design calculations not only justifying member's sizes but also for the entire launching system adopted. Contractor will be responsible for getting approval of launching scheme submitted by him from the Engineer.

In order to ensure perfect fit of the temporary components, holes may be carefully drilled for the connecting members in between the girders in situ and T & F High tension grip bolts used.

The launching system shall be test tried if directed by the Engineer and no separate payment for this shall be made.

Nothing extra will be paid to the contractor for adopting any scheme for launching. All temporary members shall be removed after launching and may be taken back by the contractor. Erection gussets provided for connecting the members may be cut and edges ground as required by the Engineer.

2.5.47 Field Bolts, Nuts and Service Accessories

2.5.47.1 The work is to include supply of all units, bolts, nuts, washers etc. required to complete erection at site with an allowance for wastage etc. 12.5% of the net number of field bolts and washers required subject to a minimum number of five in each item.

2.5.47.2 The Contractor shall be responsible for supplying site rivets/bolts of approved length. The length of such bolts shall be verified by snapping a few bolts of each length in the presence of the Engineer.

2.5.47.3 Black hexagonal bolts (Service bolts) with nuts and ordinary platter's washers and drifts for use in the erection of the work shall also be supplied at 60% (45% bolts and 15% drifts) of the number of field bolts per span in each size (this includes wastage).

2.5.48 Temporary Strengthening

The launching arrangement may include fabrication of launching nose or restraining girders, sway restraining devices such as sway ropes, restraining cables etc. the supply and fixing of members for temporary strengthening of girder members to take care of erection

Signature of tenderer (s)

Date:



stresses and strains and other relevant components for satisfactory and successful completion of the defined scope of work. Erection stresses must be kept within safe and permissible limits at every stage of erection.

The contractor has to make arrangements at his own cost for the steel for temporary arrangements including sway restraining devices for launching and temporary strengthening of girder, as may be required for the launching operations. The rate quoted should take into account these factors as nothing extra shall be paid.

2.5.49 Inspection and Rectification

During erection of girders, the contractor shall provide all facilities and permit the Engineer to inspect the field assembly, site bolting and erection of spans.

After inspection by the Engineer, the contractor shall identify cause of any defect, imperfection and/or fault noticed during such inspection and initiate corrective action as per the direction of the Engineer. All defects, imperfections or faults for which the contractor is liable under the contract, shall be made good by the contractor to Engineer's satisfaction and the cost of identifying and rectifying such defects, imperfection or faults shall be borne by the contractor.

A neat casting bearing the name of the contractor, the place and date of manufacture, the contact number and the standard of loading to be specified by the Engineer shall be bolted conspicuously on all girders. The drawing of the name plate shall be approved by the Engineer.

2.5.50 Erection & Equipment:.

2.5.50.1 The Contractor shall provide at his/her own cost all tools, machinery, equipment and erection material necessary for the expeditious execution of the work and shall erect the structural steel and iron work, in every respect as covered by the contract and in accordance with the drawings and specifications.

2.5.50.2 If any labour, material, plant staging haulage and storage facilities are to be provided by the Engineer, details of such items and the conditions under which these are to be supplied shall be clearly specified in the contract agreements. In the absence of any such provisions in the agreement, the Contractor shall make his/her own arrangement for such items.

2.5.50.3 Before starting the work, the Contractor shall advise the Engineer fully as to the method he/she proposes to follow and the amount and character of equipment he/she proposes to use, which shall be subjected to the approval of the Engineer. The approval of the Engineer shall not be considered as relieving the Contractor of the responsibility for the safety of his/her method or equipment or from carrying the work in full accordance with the drawings and specifications.

2.5.50.4 All temporary work shall be properly designed and substantially constructed for the loads, which it will be called upon to support. Adequate allowance and provision of a lateral

Signature of tenderer (s)

Date:



forces and wind loads shall be made according to local conditions and ensure that support shall not settle during erection.

2.5.50.5 Careful and periodical inspection of plants shall be made by the Contractor to ensure that all tackle, ropes, chains and other important lifting gear and machinery are in good order and fit for service and well up to the capacity for which they are required.

2.5.50.6 When chains are used for lashing, care must be taken to protect the edges of members to avoid the marking and distortion otherwise caused.

2.5.50.7 Span erected upon staging shall be supported upon suitable blocks, which shall ensure that the girders shall be at the correct elevation and alignment when completed. If other methods of erection be adopted where staging in situ is not employed, special means shall be used to ensure this.

2.5.50.8 The method used for lifting and slinging flexible members shall be brought to the notice of the Engineer and shall be subject to his/her approval.

2.5.50.9 Temporary bracing shall be provided to take care of stresses from erection equipment or other loads carried during erection.

2.5.51 ADDITIONAL SPECIAL CONDITIONS:

2.5.51.1 Land:

DFCCIL will at its discretion, and, if available, arrange land free for use for contractor's office at sites, field workshop, stores, assembly and erection yard. Land required by the contractor for labour or staff colony or other purpose will have to be arranged by him at his own cost.

2.5.52.2 Further Drawing and Instructions:

- (i) GM/ROB/CGM/Dy CPM DFCCIL shall have full power to make and issue further drawings or instructions or direction from time to time as may appear necessary and proper to the contractor for efficient construction, completion and maintenance of the works . The contractor shall be bound by the same as fully as be if they had been mentioned or referred to in the contract, and the contractor shall not be entitled to any extra payment in respect of any work or materials shown or directed to be done supplied by such further drawings or instructions required for completion of unless the GM/ROB,/Dy CPM/ DFCCIL have given an extra order for the same in writing.
- (ii) The tenderer's rate should provide for cutting M. S. Plates for making out M. S. Flats from plates, in case M. S. Flats are not available, No extra payment for such cutting and grinding that may be necessary for converting M. S. Plates to Flats will be admissible.
- (iii) If the works are required to be done in Railway Yards and Tracks are to be crossed, the tenderer shall inspect the site and make himself thoroughly acquainted with site condition and quote rate considering these aspects.

Signature of tenderer (s)

Date:



- (iv) The work shall have to be done in such a manner that the normal working of the Railway within the railway yard does not get disturbed. No material/temporary structures should be kept adjacent to the running track which may infringe rail traffic. The contractor shall take necessary precaution to prevent/cause damage to the Railway property & staff during the execution of the work.

2.5.52.3 Commencement of the Erection Work at site:

The contractor shall commence the erection work when and as soon as, but not until, he receives instructions from Engineer to do so. On such order being given, possession of site/authority shall be given to the contractor of such portion or portions of the site as the Engineer may determine.

2.5.52.4 Contractor to Study Drawing & Specification etc. and His Liability:

The contractor shall be responsible for close scrutiny of the approved drawings supplied by the DFCCIL, For any discrepancies, error or omission in the drawings or other particulars indicated therein, the contractor shall approach the DFCCIL immediately for rectification of indicated therein, the contractor shall approach the DFCCIL immediately for rectification of such discrepancies, errors and omission. If any dimension/figure/features etc. on approved drawings or plans differ from those drawings or plans issued to the contractors at the time of calling the tender, the dimensions as figured upon the approved drawings or plans shall be taken as correct.

2.5.52.5 Contractor to Submit His Time Table:

The contractor shall submit a monthly progress of work done during the month by the 4th day of the following month. He will also give the programme of coming month by 25th of each month. The programme will be subject to alteration at the discretion of the DFCCIL officials.

2.5.52.6 Any Doubted Points to be referred to the GM/ROB, /CGM, DFCCIL:

Should there be any doubt or obscurity as to anything to be done or not to be done by the contractor or as to these instructions or as to any matter or thing, the contractor must set forth such doubt or obscurity in writing and submit the same to GM/ROB,/CGM, DFCCIL. Only such reply as the said GM/ROB,/CGM, DFCCIL may be in writing given shall be taken as the authoritative interpretation of the point in doubt or obscurity.

2.5.52.7 Contractor's Liability:

Any fitting, accessory or apparatus which may not have been mentioned in this specification or the drawings, but which are usual or necessary in the execution of such work, are to be provided by the Contractor without extra payment. The whole work must be completed in all details, whether mentioned in this specification or not, with the exception of such work as has been specified in the schedule of items to be separately provided for in the Contract.

Signature of tenderer (s)

Date:



Notwithstanding the specifications and conditions stated in the contract, the contractor shall keep the Engineer/ Employer authority fully indemnified and free from all liabilities and risks consequential to any lapse on his part in respect of material quality, standard of workmanship, accuracy of fabrication and the like. He shall provide all labour and material required for execution of the work as per all standards and specifications.

2.5.52.8 DFCCIL desires that successful contractor should establish (at his own cost) the fabrication workshop near the site only for close monitoring of all the quality aspects of this contract work. Contractor's request for establishing workshop/using workshop proposed/located away from the bridge site shall require prior approval.

2.5.52.9 Contractor shall establish fully equipped laboratory for all the tests required on materials/processes/products as per provisions of the contract, Specifications and the direction/approval of the Engineer. Costs of these are deemed to be included in the quoted rates. Prior approval of the engineer shall be obtained for non installation of such testing equipments which can not be installed in normal course due to any reason. However, engineer's decision (for installation and non-installation) in this regard shall be final binding and conclusive.

2.5.52.10 Site Facilities by the Contractor:

Contractor shall provide office / site facilities at the bridge site / other locations for ensuring smooth and efficient communication and work execution. Cost of these facilities deemed to be included in the quoted rates and nothing extra shall be paid for this item.

- (i) Contractor shall supply round the clock electricity in site offices of DFCCIL located at the bridge during the entire contract work. Contractor shall also maintain the electric fittings/wirings/plants of both the offices in the good condition.
- (ii) To provide proper communication the contractor shall (at his own cost) establish inter office communication system between DFCCIL office, fabrication workshops and contractor's offices at site. Adequate number of intercom / telephone/ mobile sets or are similar suitable equipments as decided/approved by Engineer fully communicable shall be established in each of the above fabrication shops & at site of bridge work. The entire expenditure incidental to running and maintenance of above shall be borne by the contractor within quoted rates.
- (iii) Contractor shall (at his own cost) depute / nominate safety officers(s) for supervising safety aspects of all works/process including enabling arrangements for execution and inspection of the work. Safety systems/arrangements should be made for each activity of fabrication/erection and its inspection and same should be certified by nominated safety officer. Special care/arrangements are required to be made for supervising the erection/launching process of such high girders and concreting in road deck: arrangements should facilitate satisfactory and fearless inspection of each activity of launching / erection.

2.5.52.11 Declaration of designed fabrication/assembly yard as a part of site:

DFCCIL may issue necessary declaration on specific request of the contractor subject in the condition that the workshop area are earmarked exclusively for fabrication of girder components for this bridge with separate entry/exit arrangements. This is with further stipulation that such an arrangement should be acceptable to excise department by way of a no objection certificate. Necessary follow up with Excise Department will be solely the contractor's responsibility. In the event of excise department not agreeing to such an arrangement, the contractor shall not have any claims whatsoever, and shall pay GST and other extant taxes as per extant rules within quoted rates and nothing extra would be payable to them on this account.

2.5.53 METHOD OF MEASUREMENT FOR PAYMENT

2.5.53.1 Measurement

For the purpose of payment, quoted rates apply to the weights of structural steel work calculated from final working drawings based on theoretical weights given in the producer's hand books / IRUSS (W &M),2010-Volume-I and using minimum square overall dimensions, no deductions being made for skew cuts, holes or notches. Each gusset shall be measured as equivalent to the dimension of the smallest enclosing rectangle. The rates items quoted by the tenderer shall include all wastage. **The wastage of steel in the form of skew cuts etc. shall be the property of the contractor.**

Payment shall be made on the weight to be calculated in the accordance with the nominal weight of the sections as specified on the drawings. No deduction for holes and no addition for rivets/bolts/welds etc. shall be made.

The drawing office dispatch lists (D.O.D.Ls) when prepared according to procedure shall be submitted by the contractor to the Engineer for approval.

The payment for steel work as per item in the schedule of items shall be released in stages of accepted item rates for quantities executed, as mentioned in the tender schedule. The payment after receipt of material in fabrication shop shall be made on the basis of measurements contained in the supplier's vouchers, if required, these measurements shall be further verified by the representative of Engineer in charge by measuring dimensions/sizes of the sections and multiplying the same by standard weight. Sampling for actual weight of the sections shall also be done by him as per procedure and frequency prescribed by Engineer.

The payment for complete metallizing / painting of all components of girders including all accessories, painting of contact surface etc including all labour and material, tools and plants, machinery required for all operations of work is included in the accepted rates of item in the schedule. Nothing extra shall be paid.

Signature of tenderer (s)

Date:



In the event of a dispute arising as to a portion of steel work, weightment shall be made in the presence of the engineer.

No separate payment shall be made for the field bolts, nuts and service accessories for temporary works.

The cost of temporary erection and testing at the Contractor's workshop, marking, packing and delivery at the site of work is to be included in the price quoted on the tender.

Rate include fabrication of all the types of battens, bracings, ties, stiffeners, packing, diaphragms, shop bolts / welding, T&F bolts, drifts, shop welds, templates, jigs, fixtures, back up supports, accessories, transporting various components from fabrication shop to site including loading, unloading, lift and taxes complete including assembly of girders .

Rate of girder item includes assembling of temporary support for side slewing, raising of girders to the bed block level, providing sliding arrangements and slewing the girder in position and lowering of girder on bearings.

Grouting of holes with epoxy based compounds in the bed block for fixing of HD bolts/anchor pins of bed plates as directed by Engineer are included in the bearing rates.

Rate of girder item includes the Assembling, bolting with contractor's own material, erection, launching, lowering, aligning and placing at exact position as per approved scheme of steel plate girder for required span in proper level and alignment, grip bolts and with all necessary works like making holes.

The rate of girder item will inclusive of supplying /erection and dismantling of staging, scaffolding and other temporary arrangement required for assembling, erection, launching and lowering of the girder.

The rate shall be also inclusive of cold straightening of deformed bent girder parts before the assembling including contractor's all labour, materials T & P, testing etc. complete.

2.5.54 BEARING

POT cum PTFE bearings/Elastomeric bearings as per approved drawing shall be utilized under the girder as per approve GAD/ Design and its special conditions and specification.

2.5.55 DEFLECTION TEST:

The deflection test shall be carried out as per additional specifications. Load testing will be paid separately as per relevant item.

PART – III (A)

ADDITIONAL TECHNICAL SPECIFICATION-I

PART – III (A)

ADDITIONAL TECHNICAL SPECIFICATIONS-I

3.1 STUD SHEAR CONNECTOR

3.1.1 Material:-

The stud shear connector and ceramic ferrules shall conform to type SD1/UF as per BS EN ISO 13918-2008. The diameter of ceramic ferrule D 7 as per Figure 13/Table 18 of BS EN ISO 13918 shall be 26. Mechanical properties of stud shear connectors shall be as per ISO 6892/BS EN ISO 13918–2008. Shape of tip of stud shear connectors may be chosen by manufacturer. The stud tip shall be supplied with flux in the form of press fitted aluminium ball or Aluminium spray coating.

3.1.2 Welding:-

The welding of stud shear connectors shall be done by “Drawn arc stud welding with ceramic ferrule” Technique. The stud and the surface to which studs are welded shall be free from scale, moisture, rust and other foreign material. The stud base shall not be painted, galvanized or cadmium plated prior to welding. Welding shall not be carried out when temperature is below 10 degrees Celsius or surface is wet or during periods of strong winds unless the work and the welder are adequately protected. The welds shall be visually free from cracks and shall be capable of developing at least the nominal ultimate strength of studs. The procedural trial for welding the stud shall be carried out when specified by the Engineer

3.1.3 Testing:-

(a) Appearance test

1. The weld to a stud shear connector should form a complete collar around the shank and free from cracks, excessive splashes of weld material, free from injurious laps fins, seams, twist, bends or other injurious defects.
2. Weld material should have a ‘Steel Blue’ appearance.

(b) Test to check the fixing of shear studs

All studs need to be checked by a ring test.

1. Ring Test : Involves striking the side of the head of the stud with a 2 kg hammer. A Ringing tone achieved after striking indicates good fusion whereas dull tone indicates a lack of fusion (BS 5400 – 6).
2. Bend Test : Test requires the head of a stud to be displaced laterally by approximate 25% of its height using a 6 kg hammer.

- The weld should then be checked for signs of cracking or lack of fusion
- Stud should not be bent back as this is likely to damage the weld.
- The testing rate should be 1 in 50 (BG 5400 – 6).

3.1.4 Measurements:- The work shall be enumerated. It's unit is "each".

3.1.5 Rates: - The rate shall include the cost of material, labour, equipments, tools and plants, etc. complete required for all operations described above.

3.2 Load Testing of Bridge

3.2.1 General

These guidelines cover testing of superstructures, excluding arches for evaluation of their flexural capacity. Testing for shear capacity is not considered. This test is not intended to assess ultimate load carrying capacity of bridge superstructure.

3.2.2 Test Procedures – Method of Loading


The method of loading should be such as to either simulate the specific class of vehicle or induce in the member(s) the calculated forces, viz., the bending moments at critical sections.

The test loads may be in the form of static loads on wheel/ track imprints of the specific class of vehicle.

3.2.3 Static Loads

3.2.4 Simulation of the specific IRC vehicle

The load effect on a span can be produced by building up pre weighed units on loading imprints spaced as per codal provisions. The imprints are built either with brick masonry or concrete and rolled steel sections placed across pairs of imprints, so that platforms could be built on a group of four imprints for placement of pre weighed units. The area of each platform depends on the magnitude of the load and unit weight of individual unit. A pre weighed unit normally comprises sand or soil filled gunny bags, concrete cubes, bricks etc., which can be carried manually. Otherwise, large concrete blocks, containers of water or (stone) ballast or steel ingots could be used if mechanical handling facilities are available to load and unload them from test vehicles. Fig. below shows a scheme for building up 2 lanes of IRC Class A loading on the carriageway of a bridge. The loads are placed eccentrically on the carriageway of a bridge in such a way that maximum bending moment is produced in any longitudinal.

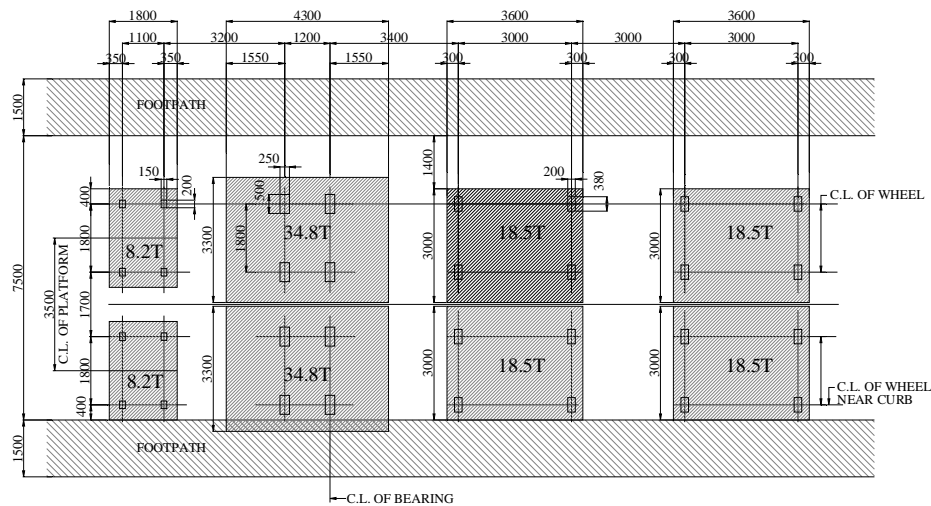

PLACEMENT OF 2-LANES OF IRC CLASS-A LOADING AND FOOTPATH LOADING ON CARRIAGEWAY

3.2.5 Other types of static loads

Any configuration which produces the design forces (load effects) in the member(s) could be adopted, for instance uniformly distributed load. Any of the appropriate methods of load distribution between the girders can be adopted in arriving at the test load and its configuration on the span. But the method of distribution of loads should be the same as adopted in the approved design. However, where the approved designs are not available the owner of the bridge should specify the appropriate method of load distribution. In the case of multiple girders, it is possible that the design moments are simultaneously induced in more than one girder. It may well happen that the magnitude of the test load on the span is greater than that of the design IRC vehicle but the forces induced in any member should be always equal to the specified design force of the load test.

3.2.6 Loading and Unloading Sequence

- 3.2.6.1** The test load shall be applied in stages so that timely action, such as stopping the test, can be taken if any untoward distress is observed at any stage. In most cases, the design live load effect would be equal to or less than that due to dead load. The dead load is already acting the test load it some specified multiple of live load more than one. The suggested stages of test load placement are 30 percent, 50 percent, 70 percent, 80 percent, 90 percent and 100 percent. Unloading should also be in the same stages. The next incremental loading should be added only after the deflections under the previous load have stabilized and all the stipulated observations are completed.

Signature of tenderer (s)

Date:

3.2.6.2 The selection of first stage of loading depends on the general condition of a bridge and the load carrying capacity theoretically assessed. It is advisable to monitor the appearance and widening of flexural cracks at every stage of loading, so as to decide about placement of next incremental load. It is expected that the load deflection characteristics at every increment are linear and any abnormal behaviour is reflected in the load v/s deflection data. If the deflection observed exceeds the limit prescribed in the code the further loading shall be stopped. Subsequent actions shall be taken in consultation with appropriate authorities. Occasionally, crackling sounds at the locations of expansion joints are heard when the rotation capacity is exceeded, particularly, in balanced cantilever bridges. Spalling of delaminated concrete is also possible during load tests.

3.2.7 Preparatory Work

- All visual defects should be measured, mapped and plotted.
- It should be ensured that bearings are functional.
- Expansion gaps, joints should be cleared of all debris.
- It will be useful to give the surface of the superstructure a coat of white wash, so that appearance of cracks becomes immediately perceptible.

3.2.8 Precautions

- Staging should be stable and safe.
- Staging for instruments and that for observers should be quite independent.
- Staging for instruments should be rigid.
- Due to temperature change, the superstructure may tend to hog or sag; therefore, it should be ensured that when this occurs, contact with the spindle of the dial gauge is not lost. Spindle extensions should be fixed to take care of this.

During the 24 hour retention period of built up load, care shall be taken to cover the pre weighed units with tarpaulin, so that rain or strong winds do not affect the stacking on the platforms.

3.2.9 Observations

The following should be observed, measured and recorded at regular intervals of one hour over a period of 24 hours:

- Deflections at critical sections (for instance for simply supported spans at mid-span and at quarter-span. In box girders, it will be useful to record deflections under each of the external ribs).
- Appearance of cracks and their development, length, width, location, orientation correlated with load.
- Deformation of bearings.
- Ambient temperature and related temperature in the body of the structure.

3.2.10 Measurement of deflections

Deflections could be measured with the following devices:


Signature of tenderer (s)

Date:



- (a) Dial gauges
- (b) Scale and cursor
- (c) Deflectometers
- (d) Precision level
- (e) Water level

The methods (a) to (c) could be used wherever dry bed is available under the span. Otherwise, methods (d) and (e) can be used by using a reference station at the nearby abutment. When girder bridges are subjected to load tests, it is essential to clear debris in the expansion gaps and lubricate steel bearings to permit free translation and rotational movements of the spans.

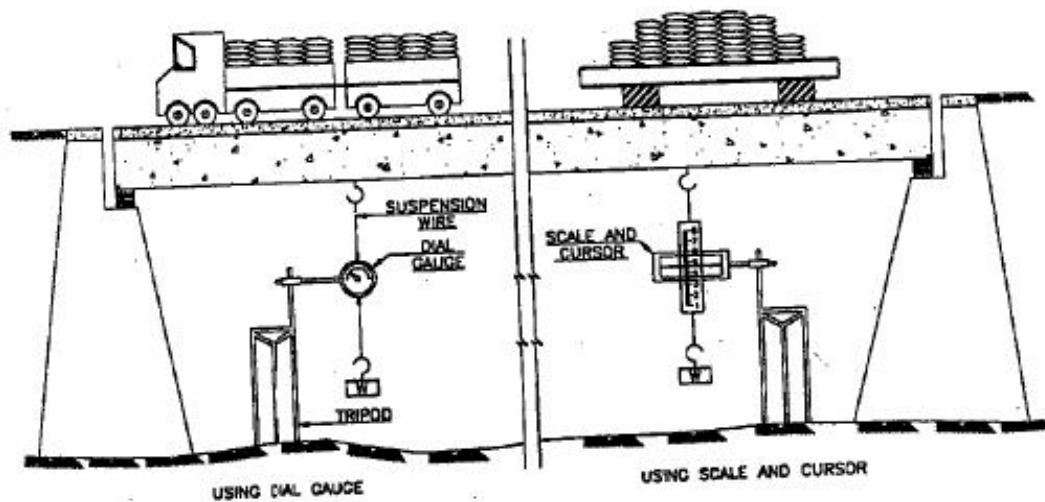


The deflection measurement can be done by suspension wire method at the required locations using dial gauges (Fig.). In this method trestles or posts 1.5m tall would be embedded in firm ground and dial gauges of least count 0.01 mm are clamped to them. The spindles of the dial gauges are connected by a pair of adapters in plumb line with a GI or Invar wire. The wire is made taut by attaching a weight at the end. The method could be partly modified by using a (steel) scale and cursor instead of dial gauge, when the order of anticipated deflection exceeds 100mm. Fig. 2 also shown the scale and cursor method for measurement of large defections.

3.2.11 Procedure for Temperature Correction

A set of thermocouples are to be fixed at different locations of deflection measurement for monitoring temperature of the bridge deck. In absence of thermocouples, hand held instruments could be used wherein a probe could be inserted in a preformed hole in concrete surface, for recording temperature. As a last resort, thermometers could also be suspended from trestles used for deflection measurement to measure the shade temperature. The number of thermocouples/thermometers/probes used could be about half the total number of locations for deflection measurement.

The superstructure tends to hog or sag due to variation in ambient temperature and it is necessary to apply correction to the deflection data during static load test. This is so since the duration of loading or unloading operation in static load test could be for 4-5 hours.

For this purpose, the platforms on masonry imprints meant for building up static loads should be placed in respective positions for observing thermal response of the bridge deck prior to load test. The deflection values and ambient temperature data are generally collected from dawn to dusk for two or three consecutive days at 1 hour intervals. The temperature vs. deflection data are collected on these days and a curve drawn for each station (dial gauge location), which is taken as basic curve for temperature correction. Usually the temperature – deflection characteristic would be a best fit obtained from a cluster of readings. The deflection reading at any location and temperature during load test, is super-imposed on the basic curve. The difference between the two values give the true deflection for the location under reference, corresponding to the same temperature. Fig. below shows typical characteristic of thermal response, super imposed on load vs. deflection data during a proof test.

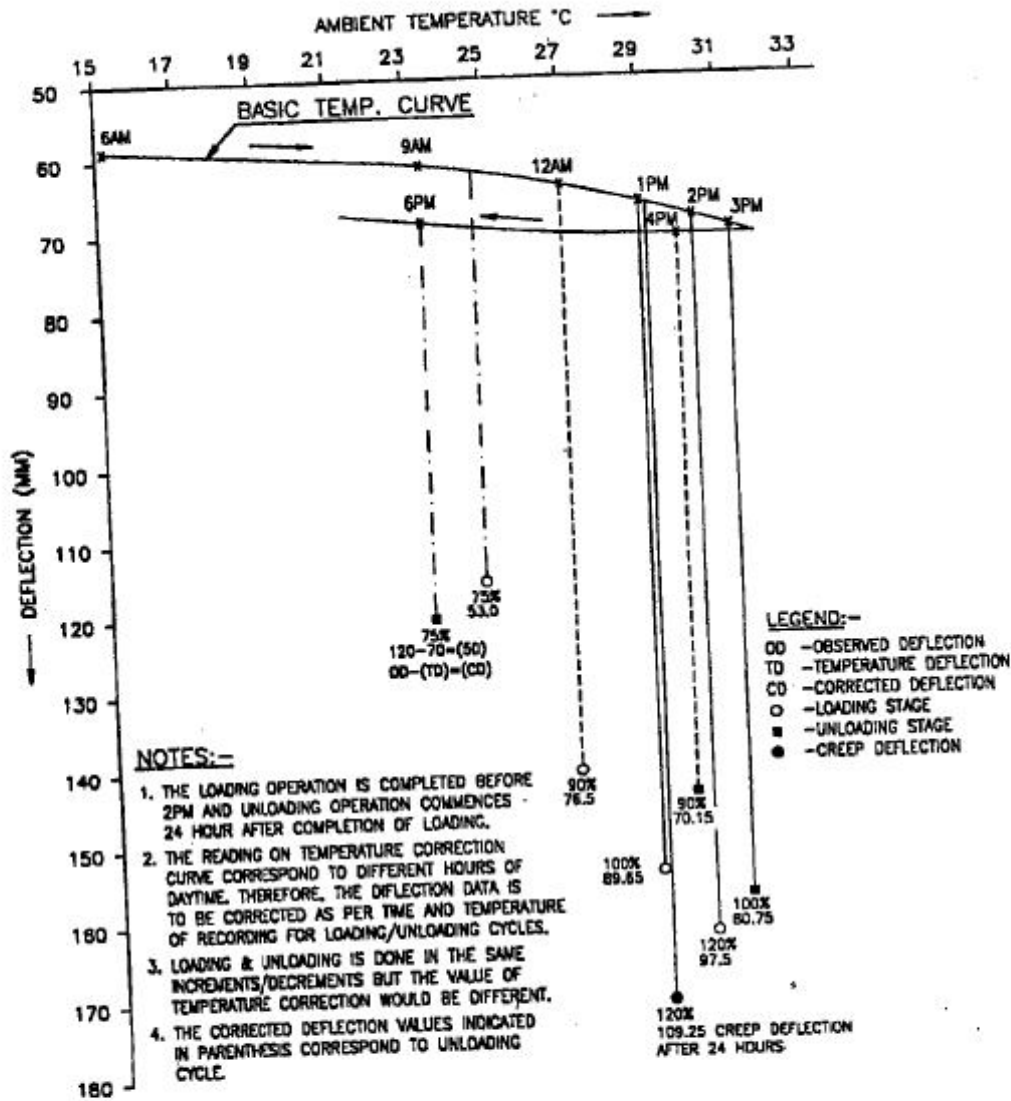

Precaution

The bridge deck temperature gets affected due to variation in humidity and strong winds on the day. Also, the data gathered on sunny and cloudy days would be different, although the ambient temperature is same.

Therefore, to avoid inconsistencies in the data, it is preferable to choose two identical spans, one for load test and the other for temperature – deflection data and should be monitored simultaneously. This approach reduces the total period of load testing by at least two days.

3.2.12 Percentage Recovery of Deflection

The percentage recovery could be calculated for values of deflection. The percentage

Signature of tenderer (s)

Date:

recovery is calculated at 24 hours after removal of load.

The calculation is done as follows after effecting temperature and/or rotation correction to deflection data:

Initial value (on dial gauge)	...	R1
Final value after placement of test load	...	R2
[Thereafter, measurements are to be taken at regular intervals of one hour].		
Value at 24 hours after placement of test load	...	R3
Value immediately after removal of test load	...	R4
[Thereafter, measurement are to be taken at regular intervals of one hour]		
Value at 24 hours after removal of test load		R5
Total deflection	...	R3-R1
Total recovery 24 hrs after removal of test load	R3-R5
Percentage of recovery of deflection	...	$\frac{(R3-R5) \times 100}{(R3-R1)}$
24 hrs after removal of test load		

3.2.13 Acceptance Criteria

3.2.13.1 The criterion of acceptance is based on recovery of deflection after removal of test load. It is necessary to specify the quantum of applied load, the duration of the load on the span and the percentage recovery of deflection on removal of load.

3.2.13.2 For bridges designed for IRC Standard loadings, criteria for load testing of steel, PSC and RCC superstructures are given in table below :

Table Acceptance Criteria

Sl. No.	Type of Bridges	Live Load Intensity for Testing	Duration of Retention of Test Load (Hrs.)	Minimum percentage recovery of Deflection at 24 hrs after removal of Test Load
1	Reinforced concrete	*	24	75
2	Prestressed concrete	*	24	85
3	Steel	*	24	85
4	Composite	*	24	75

(* 1.0L plus corresponding impact as per IRC Codes)

A general acceptance criterion for the behavior of a structure under test load is that it shall not show “visible evidence of failure” which include appearance of cracks of width more than 0.3mm, spalling or deflections which are excessive and incompatible with safety requirements.

3.4 NON-DESTRUCTIVE INTEGRITY TESTING OF PILE

3.4.1 SCOPE

This specifications covers the methods on non-destructive testing as per IS: 14893 of all types of concrete piles covered in IS 2911 (Part I/Sections 1, 2, 3 and 4).

Signature of tenderer (s)

Date:



3.4.2 SITE INFORMATION REQUIRED FOR THE TESTS

The following information is generally required to carry out integrity tests:

- (a) Location of site
- (b) Pile types including size, material and reinforcement
- (c) Layout of piles
- (d) Details of pile installation (including construction and driving sequence and rest periods)
- (e) Number of piles to be tested;
- (f) Subsurface profile/driving details of the piles
(More if variations are noted)
- (g) Depth of water table and soil investigation report, if any
- (h) Density of concrete; Strength of concrete
- (i) Abnormal conditions noted while driving/boring or concreting of piles. The normal daily report produced by the piling site should contain this information. In addition, any other information concerning planning and conducting the tests including relevant past experiences covering similar test(s) in the area, and
- (j) Details of test piles(s), if any.

3.4.3 TYPES OF TESTS

Various methods are available for checking the integrity of concrete piles after installation. In the most widely used method, impulses or vibrations are applied to the pile and measurements made of timings and attenuation of reflected signals.

The commonly used sonic methods, vibration methods, sonic logging techniques, etc, have been tried within the last 15-20 years in different parts of the world. However, the methods based on One Dimensional Stress Wave approach known as Sonic Integrity Testing, a Low Strain Integrity testing or Sonic Echo Testing have been used successfully in various parts of the world. The method is simple and quick enabling dozens of piles to be examined in a single working day without much interference in site activities.

The work carried out on sonic integrity testing of pile in the country has shown its efficiency; in assessing the structural quality of piles and therefore it is appropriate to frame in this code the salient features of this method.

3.4.3.1 The Low Strain Integrity Testing


This is a system of assessing the integrity of piles by the use of low stress wave imparted to the pile shaft and is also known as Sonic Integrity or Sonic Echo Test. A small metal/hard rubber hammer is used to produce a light tap on top of the pile. The shock travelling down the length of the pile is reflected back from the toe of the pile and recorded through a suitable transducer/accelerometer (also held on top of the pile close to the point of impact) in a computer disk or diskette for subsequent analysis.

The primary shock wave which travels down the length of the shaft is reflected from the toe by the change in density between the concrete and sub-strata. However, if the pile has any imperfections or discontinuities within its length these will set up secondary reflections which will be added to the return signal. (*See Fig.*).

By a careful analysis of the captured signal and knowledge of the conditions of the ground, age of concrete, etc, a picture of the locations of such problems can be built up. The reflected stress wave can be monitored using either processing technique; the observed signals are amplified and converted into digital display as velocity versus length or frequency versus mobility records, providing information on structural integrity of piles.

The stress wave velocity and approximate pile lengths are provided as input for the integrity testing. The stress wave velocity is dependent on the Young's modulus and mass density of pile concrete. This value generally lies between 3000-4000 meter per second depending on the grade of concrete used (M15-M25).

- 3.4.3.2** Normally more than one recording of signals is done until repeatability of signals is achieved. If necessary, averaging of signals is also done to achieve more informative signals. In a suspected pile the test should be repeated at more than one location on top of the pile.
- 3.4.3.3** The tests shall be conducted on piles whose length is correctly recorded or on test piles where available, to determine the value of stress wave velocity and characteristic or reference signal for comparing the signals for testing subsequent piles.
- 3.4.3.4** The method of testing involves high skill and use of computerized equipment. Therefore, the tests should be performed and interpreted by trained and experienced personnel.

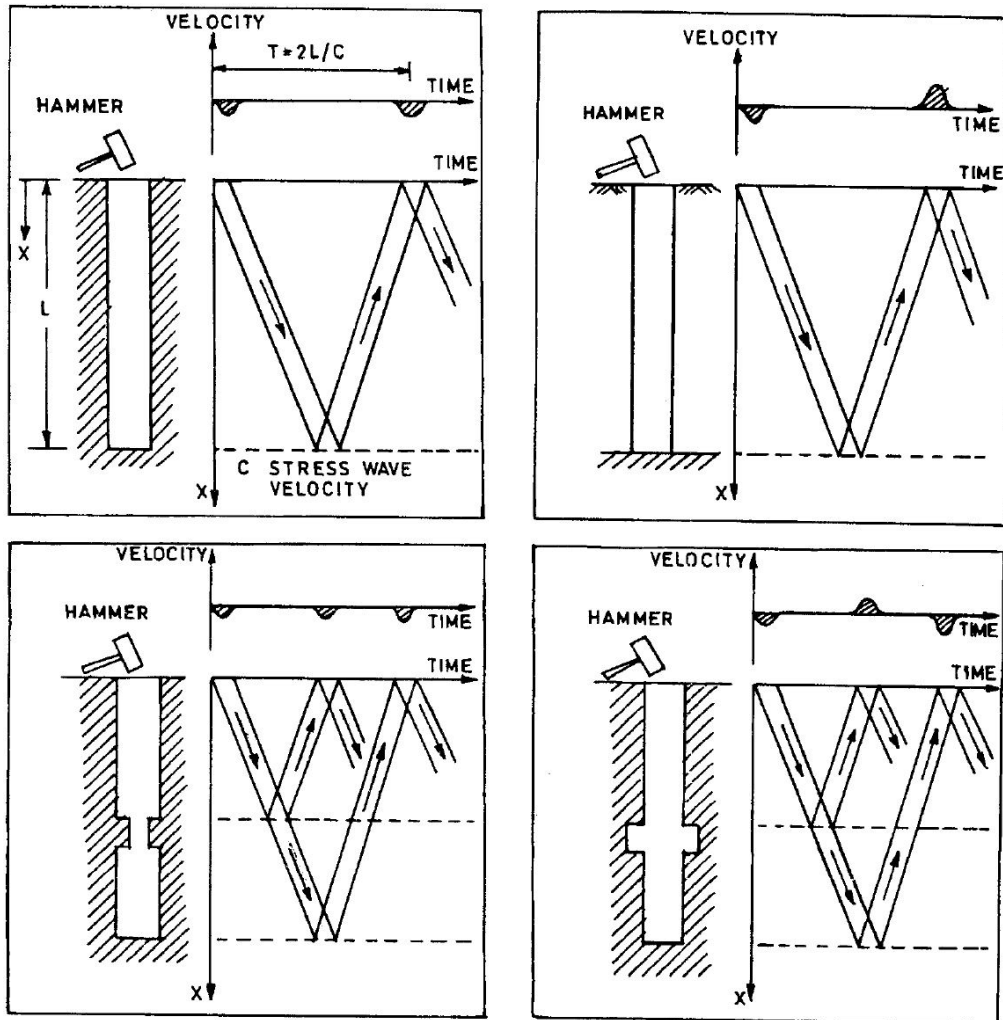

3.4.4 Data and Reporting

- (i) The assessment of structural integrity is based on two equally important aspects:
 - a) Quality of signals, and
 - b) Accurate analysis and interpretation of signal.
- (ii) Piles requiring remedial measures should be so marked immediately on completion of the field integrity testing, and rectification, measures selected.
- (iii) The final report should include signals of each integrity test and reflect on the structural condition of piles.

3.4.5 GENERAL REQUIREMENTS OF THE TESTS

Signature of tenderer (s)

Date:

- (i) Piles shall be trimmed to cut off level or sound concrete level before the test with all laitance removed. No pile cap blindage work should be undertaken prior to the test.
- (ii) The area surrounding the pile should be free from standing water and kept dewatered during the tests.
- (iii) The pile head should be accessible.
- (iv) Testing should be free of work likely to cause disturbance.
- (v) The cast-in-situ piles should not be tested normally before 14 days of casting.
- (vi) The test piles, if available at site, can be used to determine the pulse velocity and characteristic or reference signal generated. Where no test pile is available information can be obtained from cast piles whose length is accurately recorded.

3.4.6 LIMITATIONS OF NDT METHODS

- (i) Non-Destructive Testing of piles does not provide the load carrying capacity of piles.
- (ii) It does not provide information regarding verticality or displacement in position of piles.
- (iii) Minor deficiencies like local loss of cover, small intrusions or type of conditions of materials at the base of piles are undetectable. Integrity testing may not identify all imperfections, but it can be useful tool in identifying major defects within the effective lengths. The test may identify minor impedance variations that may not affect the bearing capacity of piles. In such cases, the engineer should use judgment as to the acceptability of these piles considering other factors such as load redistribution to adjacent pile, load transfer to the soil above the defect, applied safety factors and structural load requirements.
- (iv) Based on the latest information available, the limitations relating to the depths up to which the integrity tests can be carried on piles depends on the surrounding strata and damping within the concrete.
- (v) The present experience of Non-Destructive Testing of piles is up to a diameter of 1500 mm.
- (vi) Soil stiffness or founding on rock of similar density as the pile will attenuate the signals such that there will be little or no toe reflection.
- (vii) The low strain integrity method is applicable to cast – in – situ concrete bored and driven piles. Conclusive results are rarely obtained in case of segmented precast reinforced concrete driven piles or precast piles in pre bored holes.

3.4.7 METHOD OF MEASUREMENTS: It will be measured in number.

3.4.8 PAYMENTS: The rate includes cost of all materials, labour, equipments & operations required to do this test.

Signature of tenderer (s)

Date:



PART – III (B)

ADDITIONAL TECHNICAL SPECIFICATIONS-II

PART – III (B)

ADDITIONAL TECHNICAL SPECIFICATIONS-II

1.1 GENERAL:

In these Special Conditions of Contract the following terms shall have the meaning hereby assigned to them except where the context otherwise requires:

"General Condition of Contract" shall mean General Conditions of Contract – as contained in this Tender/ Bid document vide chapter IV First Sheet.

Standard Specifications shall mean "Indian Railways Unified standard specifications (works and materials) Vol –I &II in Tender form (First sheet).

Standard Schedule Items/Rates shall mean the Items/Rates in the Unified standard schedule of rates (works & materials)-2011

All other terms shall have the same meaning as assigned to them in the General Conditions of Contract and Standard Specifications.

Where there is any conflict in conditions/Specifications contained in various parts, order of precedence will be as given below-

- Any foot note given by the Railway in the schedule of quantities and rates.
- Description of item in the Schedule of Quantities and rates.
- Special Specifications.
- Additional Special Conditions/of Contract.
- Standard Specifications.
- Special Conditions of Contract.
- General Conditions of Contract.

Where there is any conflict in the description, Unit, rate etc. of items based on USSOR-2011 and SOR of state Govt. (R&B deptt.) of the concerned District of work location, as included in the "Schedule of items shall prevail for the respective items of tender.

In the event of conflict between special condition /Technical specification /other guidelines, (available in the tender), the decision of the DFCCIL administration is final and binding to the contractor. No claim in this regard shall be entertained.

Every endeavour has been made to avoid any error which can materially affect the basis of the Tender and it is understood that the Contractor has taken upon himself and provided for the risk of any error which may be subsequently and shall make no subsequent claim on account thereof.

Signature of tenderer (s)

Date:



1.2 Production of Test Certificates:

The contractor shall have to produce Test Certificates for any items of material procured by him for use in the work as may be called for by the Engineer or his representative to establish that the materials conform to the specification for the works. The Contractor shall produce Test Certificates issued by an authority acceptable to the Engineer in regard to the relevant properties of high tensile steel wires, reinforcement steel or structural steel (as supplied and used by the Contractor) including the country name of manufacturer) .

1.3. Payment of Royalty Charges:

All taxes, royalty charges, etc. of whatever nature in connection with the work including extraction and supply of rubble stone/stone ballast/sand/Moorum/earth or any other material used on the work shall have to be borne by the Contractor. The Contractor will be required to obtain a royalty clearance certificate from the concerned Revenue Authorities/Collector and produce the same to the Engineer when asked.

1.4. Royalties And Patent Rights:

The Contractor shall defray the cost of all royalties, fees and other payments in respect of patents, patent rights and licenses which may be payable to patentee, licensee or other person or corporation and shall obtain all necessary licenses. The contractor shall indemnify, the Railway or any agent, servant or employee of the Railway against any action, claim or proceedings relating to infringement use of any patent or design any alleged patent or design rights and shall pay any royalties or other charges which may be payable in respect of any articles or materials or part thereof included in the contract. In the event of any claim being made or action being brought against the Railway /DFCCIL or employee of the Railway/DFCCIL in respect of any such matters , as aforesaid, The contractor shall indemnify notified thereof. Provided that such indemnify shall not apply when such infringement has taken place in complying with the specific direction issued by the Railway but the contractor shall pay any royalties or other charges payable in respect of any such use.

1.5. Income Tax

Income Tax as per rates applicable/amended under the Income Tax Act of work shall be deducted at source unless the contractor is exempted by Income Tax Authorities.

1.6 Permits, Fees, Taxes & Royalties

Unless otherwise provided in the contract documents, the contractor shall secure and pay for all permits, Government fees and licenses necessary for the execution and completion of the works. The contractor shall pay all taxes of State and Central Government.

The DFCCIL authorities will not take any responsibility of refund of such taxes/fees. Any violation, in the legal provision of taxes, duties, permits and fees, carried out by the Contractor and detected subsequently shall be sole responsibility of the Contractor and his legal heirs.

1.6 Statutory Increase In Duties, Taxes Etc

All the taxes and duties levied by the State and Central Govt. and by Local Bodies at the prevailing rates applicable on the date of receipt of tender shall be fully borne by the Contractor and shall not be reimbursed to him on any account. The tender shall be inclusive of all taxes, GST, duties, levies, etc.

Signature of tenderer (s)

Date:



Further **DFCCIL** shall not honour any claim arising out of any increase in any of the prevailing statutory duties, taxes, levies, GST etc. At the time of quoting/bidding contractor should bear the above fact in mind.

1.7. Road Tax Charges:

Road Tax/Charges levied by Government for movement of vehicles of contractor, used in transportation, shall be borne by the contractor and no re-imbursement on this account will be made by the DFCCIL.

1.8 Cutting/Up Rooting Of Trees:

No extra rate shall be paid for cutting or up-rooting trees but the contractor would be authorised to take away the tree observing the forest laws of the land.

1.9 Observance Of Bonded Labour System (Abolition Ordinance Act, 1975):

The “Bonded Labour System (Abolition Ordinance, 1975)” would apply to the present contract. The contractors shall duly observe the provisions thereof.

2.2. Precautions While Working In The Vicinity Of Track:

2.2.1 The contractor shall not commence any work in the vicinity of Railway track without presence of authorised DFCCIL official/ concerned Railway supervisor or his representative and contractor’s supervisor at site.

2.2.2 The look out and whistle caution orders shall be got issued to the trains and speed restrictions where considered necessary shall got imposed, from Railway by DFCCIL. In this regard the contractor shall assist by deploying manpower, providing speed restriction and safety board’s etc. No extra payment shall be made to the contractor in this regard.

2.2.3 The supervisors/Workmen should be counselled about safety measures. Supplementary site specific instructions, wherever considered necessary shall be issued by the Engineer/Engineer’s representative. The methodology along with safety plan proposed to be adopted by the contractor for execution of the work shall be prepared by the contractor and to be submitted to the Engineer for necessary approval. The Engineer shall approve the Methodology for ensuring safety at Site. The Contractor shall co-operate the Engineer in obtaining approval of said safety method statement. No extra payment shall be made to the contractor in this regard.

2.2.4 The contractor shall keep an assurance register at each site which will have to be signed by Engineer/DFCCIL’s authorised official/Engineer’s Representative and the Contractor/ his authorised Representative for respective Site.

2.2.5 The contractor shall not allow any road vehicle belonging to him or his suppliers etc., to ply in railway land next to the running line. If for execution of certain works viz. Earthwork for parallel railway line and supply of ballast for new or existing rail line gauge conversion etc. road vehicles are necessary to be used in railway land next to the railway line, the contractor shall apply to the engineer incharge for permission giving the type and no. of individual vehicles, names and license particulars of the drivers, location, duration and timings for such work/movement. The engineer-in charge or his authorised representative will personally counsel examine & certify, the road vehicle drivers, contractor’s flagmen and supervisor and will give

Signature of tenderer (s)

Date:



written permission giving names of road vehicle drivers, contractor's flagmen and supervisor to be deployed on the work, location, period and timing of the work. This permission will be subject to the following obligatory conditions:

The road vehicles and drivers will ply only between sunrise and sunset. Nominated vehicles and drivers will be utilized for work in the presence of at least one guardman/flagman and one supervisor certified for such work.

The contractor shall provide the suitable barricading at distance not less than 3.5m from centre line of the adjoining track, as directed by Engineer/ Engineers representative according to approved safety plan and the Method statement. No extra payment shall be made to the contractor for such barricading. The vehicles shall ply 6m. Clear of track. Any movement/work at less than 6m and upto minimum 3.5 clear of track centre shall be done only in the presence of DFCIL / Railway employee authorised by the Engineer-incharge. No part of the road; vehicle will be allowed at less than 3.5m from track centre. Cost of such railway employee shall be borne by the railway.

The contractor shall remain fully responsible for ensuring safety & in case of any accident, shall bear cost of all damages to this equipment & men and also damages to railway and its passengers.

Semi-permanent fencing as approved by the DFCCIL/Railway Engineer should be provided by the contractor at his own cost along the running line at a distance of 3.5 metres from the centreline of the nearest track at work sites where vehicles/machineries are likely to ply close to the track. This fencing should remain in position till the vehicles/machinery are required to work adjacent to running line.

Engineer-incharge may impose any other condition necessary for a particular work or site.

Suitable scaffolds should be provided for workmen for all works that cannot safely be done from the ground or from solid construction except for such short period work as can be done safely from ladders. when a ladder is used an extra labour shall be engaged for holding the ladder and if the ladder is used for carrying materials as well, suitable foot holds and hand-holds shall be provided on the ladder and the ladder shall be given an inclination not steeper than 1/4 to 1 (1/4 horizontal to one vertical).

2.2.12 Joint procedure for undertaking digging work in the vicinity of underground signalling, electrical and telecommunication cables.

1	Prior to commencement of the digging work in Railway boundary the contractor shall seek the identification of the underground cables and utilities from the Engineer. The Engineer shall arrange for the joint site inspection with the concerned officers/officials of the relevant departments to locate/identify the underground cables and utilities at site underground cables and utilities. The contractor through Engineer shall approach in writing to Sr.DSTE / DSTE or Sr.DEE/DEE of the section for permitting to undertake the work, after ensuring that the concerned executing agencies, including the contractor have fully understood the S&T and Electrical cable route plan shall permit the work in writing.
2	After getting the permission from S&T or Electrical Deptt. as the case may be, the relevant

Signature of tenderer (s)

Date:



	portion of the cable route plan shall be attached to the letter through which permission is issued to the contractor by Engineer for commencement of work.
3	Engineer/Engineer's representative shall ensure that the contractors have fully understood the cable route plan and the precautions have been taken by the contractor to prevent damage to the underground cables. The contractor shall be asked to study the cable plan and follow it meticulously to ensure that the safety of the cable is not endangered.
4	The Engineer/Engineer's representative shall pass on the information to the concerned SE (P. Way), SE (Works), SE (Sig), SE (Tele), SE (Elect) & Rail Tel official about the works being taken up by the contractors in their sections at least 3 days in advance of the day of the work.
5	On receiving the above information, SE (P. Way), SE (Works), SE (Sig), SE (Tele), SE (Elect) & Rail Tel official shall visit the site on or before the date of taking up the work and issue permission to the contractor to commence the work after checking that adequate precautions have been taken to avoid the damage to the cables. The permission shall be granted within 3 days of submission of such requests. The permission letter shall indicate the contact numbers of Test Room / Network Operations Centre of Rail Tel / TPC/ Elect. Control.
6	Where the nature of the work taken up is such that the OFC or other S&T cables or Electrical cables is to be shifted and relocated, notice of minimum one week shall be given so that the Division / Rail Tel / Construction can plan the works properly for shifting. Such shifting works shall, in addition, for security and integrity of the cables, be supervised by S&T supervisors / Tail Tel supervisors / Electrical Supervisors.
7	The concerned SE(P. Way), SE(Works / SE(Sig) / SE (Tele) SE (Elect) or Rail Tel supervisors, supervising the work of the contractor shall ensure that the existing emergency sockets are not damaged in view of their importance in providing communication during accident / emergency.
8	In case of minor nature of works where shifting of cable is not required, in order to prevent damage to the cable, the Contractor shall take out the S&T or optical fibre cable or Electrical cable carefully from the trench and place it properly alongside at a safe location before starting the earthwork under the supervision of SE (Sig) or SE (Tele) or SE (Electrical). The cable shall be reburied soon after completion of excavation with proper care including placement of the brick over the cable by the concerned S&T supervisors or Electrical Supervisors. However, the work will be charged to the concerned engineering works.
9	In all the sections where major project are to be taken up / going on Rail Tel / S&T Deptt. shall deploy their official to take preventive / corrective action at site of work. The Engineer / Engineer's representative shall help contractor for co-ordination
10	Any damage caused to OFC/Quad cable or Electrical cable during execution of the work, due to negligence of the contractor or his manpower-resources deployed for execution of work necessary debit for corrective action as advised by Railway shall be raised on Contractor and recovery of such debit shall be made from his on account bill or any amount payable for the said ROB work or any other work in DFCCIL.

Signature of tenderer (s)

Date:



3. Special condition for contractor's Vehicle plying near Railway track.

- 3.1.1 The contractor shall not allow any road vehicle belonging to him or his suppliers etc. to ply in railway land next to the running line. If for execution of certain works viz. earthwork for parallel railway line and supply of ballast for new or existing rail line gauge conversation etc. road vehicle are necessary to be used in railway land next to the Railway line, the contractor shall apply to the engineer-in-charge for permission giving the type and number of individual vehicles, names and license particulars of the drive, location, duration and timings for such work / movement. The engineer in charge or his authorized representative will personally counsel, examine and certify, the road vehicle drivers, contractor's flagmen and supervisor and will give written permission giving names of road vehicles drivers, contractor's flagmen and supervisor to be deployed on the work, location, period and timing of the work. This permission will be subject to the following obligatory conditions:
- 3.1.2 Road vehicles can ply along the track after suitable cordoning of track with minimum distance of 6 m from the centre of the nearest track. For plying of road vehicles during nig hours, adequate measures to be communicated in writing along with a site sketch to the contractor / contractor's representative and controlling engineers / supervisors in charge of the work including officers and the in charge of the section.
- 3.1.3 Nominated vehicles and drivers will be utilized for the work in the presence of at least one flagman and one supervisor certified for suck work.
- 3.1.4 The vehicles shall ply 6m clear of track. Any movement / work at less than 6 m and up to minimum 3.5 m clear track centre shall be done only in the presence of railway employee authorized by the engineer-in-charge. No part of the road vehicle will be allowed at less than 3.5 m from track centre. Cost of such railway employee shall be born by the railway.
- 3.1.5 The contractor shall remain fully responsible for ensuring safety and in case of any accident, shall bear cost of all damages to this equipment and men and also damages to Railway and its passengers.
- 3.1.6 Engineer-in-charge may impose other condition necessary for a particular work or site.
- 3.1.7 The staff engaged by the contractor at site should be competent enough for the job. They should possess the certificate of competency certificate, necessary training will be arranged by the contractor at his cost by an expert to enable officer nominated by sectional Sr. DEN/ DEN/Dy CPM- DFCCIL in-charge to accord permission for the job. Without a suitable competency certificate, the contractor's supervisors shall not be allowed to carry out concreting and earthwork.

3.1. Issue of Identity Cards by Contractors:

Signature of tenderer (s)

Date:



- 3.1.1. The contractor is bound to issue identity card to each and every person employed by him and deployed for execution of contract work as per the prescribed format provided in the tender at his cost. Failure on part of the contractor to issue of identity cards to their employees will be treated as breach of contract conditions.

It is mandatory on part of every employee, deployed by the contractor to keep in his possession the identity card, issued by the contractor throughout the execution of the work. Failure to possess such identity card will be treated as unauthorized presence in the railway premises and such person shall be liable for prosecution as per law. It is mandatory for the contractor to submit the list of the employee issued with the identity cards and deployed for the particular contract, to Railway/DFCCIL Engineer at site before commencement of the work and also for any changes made during the execution of the work.

No claims whatsoever arising out of implementation of special conditions pertaining to issue of identity cards shall be admissible.

3.2. Site Lab

- 3.2.1. The contractor shall be set up a site lab with minimum equipment listed below;

1. IS sieve sets for sieve analysis.
2. 15 X 15 X15 cms cubes minimum 15 nos.
3. Cubes for cement test of 7.09 X 7.09 X cm
4. Vicate apparatus.
5. Cube testing machine of minimum 100 T capacities.
6. Measuring cylinder.

In case they have not brought the aforesaid articles or have not set up the lab, DFCCIL shall set up the same and actual cost plus 10% shall be recovered from the bills.

3.3. Disaster management

- 3.3.1. "All the available vehicles and equipment of the contractor can be drafted by the DFC/Railway Administration in case of accidents/natural calamities involving human lives. The payment for such drafting shall be made according to the rates as shall be fixed by the Engineer. However, if the contractor is not satisfied with the decision of the Engineer in this respect he may appeal to the Dy CPM/CGM-DFCCIL/ within 30 Days of getting the decision of the Engineer, supported by analysis of the rates claimed. The Dy CPM/CGM-DFCCIL/'s decision after hearing both the parties in the matter would be final and binding on the contractor and the Railway."

- (1) Non- employment of labourers below the age of 15:- the contractor shall not employ children below the age of 15 as labourers directly or through petty contractors or sub-contractors for the execution of work.

(2) Medical certificate of fitness for Labour:- It is agreed that the contractor shall not employ a person above 15 and below 19 years of age for the purpose of execution of work under this contract unless a medical certificate of fitness in the prescribed form (proforma at annexure II) granted to him by a certifying surgeon certifying that he is fit to work as an adult is obtained and kept in the custody of the contractor or a person nominated by him, in this behalf and he person carries with him, while at

work, a token giving a reference to such certificate. It is further agreed that the responsibility for having the adolescent examined medically at the time of appointment or periodically till he attains the age of 19 years shall devolve on the contractor and all the expenses to be incurred on this account shall be borne by him, and no fee shall be charged from the adolescent or his parent for such medical examination.

- (2) Period of validity of Medical fitness certificate: - A certificate of fitness granted or renewed for the above said purposes shall be valid only for a period of one year at a time. The certifying surgeon shall revoke a certificate granted or renewal if in his opinion the holder of it is, no longer for work in the capacity stated therein. Where a certifying surgeon refuses to grant or renew a certificate or revoke a certificate, he shall, if so required by the person concerned state his reasons in writing for doing so.
- (3) Medical Re-examination of Labourer:- Where any official appointed in this behalf by the Ministry of Labour is of the opinion that any person employed in connection with the execution of any work under this contract in the age group 16-19 years is without a certificate of fitness or is having a certificate of fitness but no longer fit to work in the capacity stated in the certificate, he may serve on the contractor or the person nominated by him in this regard, a notice requiring that such person shall be examined by a certifying surgeon and such person shall not, if the concerned official so directs, be employed or permitted to do any work under this contract unless he has been medically examined and certified that he has been granted a certificate of fitness or a fresh, as the case may be.

3.4. Submission of Photographs and Videos:

- 3.4.1. The contractor shall arrange to submit three sets of minimum 200 Nos. of photographs of size 5"x7" showing various operations and stages of different activities of the project. The photograph shall be taken for every important activity during execution of work as decided by the Engineer for display and record purpose. In addition, the contractor will submit 3 sets of 2 laminated photographs of size 20"x30". If the photograph as listed above are not submitted then recovery of Rs.75,000/- shall be made from the contractor's bill.
- 3.4.2. The successful tenderer will be required to prepare video film (on CDROM) recording of entire construction and edit the same with proper commentary. The same shall cover the whole work in duration of about 2 hours. This film shall pictorially represent the entire work of Linking, Various Execution Stages, CRS Inspection and final completion stages. Two copies of video films (On CDROM) shall be handed over to be DFCCIL along with necessary details, instructions, literature etc. The rate includes cost of such filming. Nothing shall be paid on this account. If the contractor fails to submit the Video Film on CDROM then Rs. 1,00,000/- shall be recovered from bill.

4. Special Conditions for working of Road Cranes:

Signature of tenderer (s)

Date:



- 4.1. No machine shall be selected to do any lifting on a specific job until its size and characteristics are considered against the weights, dimensions and lift radii of the heaviest and largest loads.
- 4.2. The contractor shall ensure that a valid Certificate of Fitness is available before use of Road Cranes.
- 4.3. Contractor can utilise the services of any competent person as defined in Factories Act, 1948 and approve by Chief Inspector of Factories.
- 4.4. The laminated photocopies of fitness certificate issued by competent person, the operator's photo, manufacturer's load chart and competency certificate shall always be either kept in the operator cabin or pasted on the visible surface of the lifting appliances.
- 4.5. All lifting appliances including all parts and gears thereof, whether fixed or movable shall be thoroughly tested and examined by a competent person once at least in every six months or after it has undergone any alterations or repairs liable to affect its strength or stability.
- 4.6. In addition, it is also advised that for all the works being executed by the Road Cranes, the above stipulations should be checked. These instructions should be strictly observed.

5.0 Special Conditions for Site Engineer:

5.1 The Contractor shall assist in deploying 2 nos qualified 'Site Engineer' (in addition to the provisions of clause 26.A of GCC) to the satisfaction of DFCCIL. The Site Engineer will assist DFCCIL in Keeping records and supervision of the day to day work in terms of quality assurance and contract conditions, to chase with local Authorities, upkeeping/updation of required records and other essential works as directed by DFCCIL. The Site Engineer shall be a qualified Graduate Engineer in Civil Engineering from a reputed Institute and shall have at least 03 years' experience in construction of Civil Structure. Experience in execution of Railway/Road fly over shall be preferred.

5.2 The DFCCIL shall deduct Rs 50,000/- per month for each 'Site Engineer', from the "On Account Bills" raised by the contractor and shall pay Rs 50,000/- per month (excluding GST) to the 'Site Engineer (deployed vide above clause 6.1) for his services under this clause, till the completion of work. The Site Engineer shall work on direction of the DFCCIL official. The contractor shall not give any instruction to the 'Site Engineer' deployed vide above clause 5.1

5.3 If the work cannot be commenced due to the reasons not in control of the contractor in such case on request of the contractor Engineer/Employer at his shall examine the genuineness of reason and may postpone the recovery as mentioned in above para 5.2

5.4 The DFCCIL shall reserve right to terminate the services of the Site Engineer at any point of time without giving any notice and/or any reason/explanation to the Contractor or the 'Site Engineer (deployed vide above clause 5.1)'.

5.5 The said Site Engineer shall follow the instructions/ orders of the Engineer/Engineer's Representative. Site Engineer shall also assist the DFCCIL official visited at work site or at the time of inspection of work site.

5.6 The clause of 18.1 & 18.2 of GCC shall be applicable to the 'Contractor' in case of 'Site Engineer (deployed under above clause 5.1).

5.7 The cost of work includes the cost recovered towards 2 nos "Site Engineer (deployed under clause 5.1) under above clause 5.2. The DFCCIL shall not make any extra payment to the Contractor for deployment of 2 nos- Site Engineer under clause 5.2.

6. FOREIGN EXCHANGE REQUIREMENTS:

Any demand of foreign exchange for importing of equipments and materials shall not be accepted.

7. EMERGENCY WORKS

In the event of any accident or failure occurring in the execution of work/ arising out of it which in the opinion of the Engineer requires immediate attention, the DFCCIL/Railway may bring its own workmen or other agency/agencies to execute or partly execute the necessary work or carry out repairs if the Engineer-in-charge considers that the contractor(s) is/are not in a position to do so in time without giving any notice and charge the cost thereof, to be determined by the Engineer-in-charge, to the contractor.

8. CUTTING/UP ROOTING OF TREES:

No extra rate shall be paid for cutting or up-rooting trees but the contractor would be authorised to take away the tree observing the forest laws of the land.

9. JURISDICTION OF COURTS:

If any dispute arises between the parties with respect to this contract, any application or suit shall be instituted only in the court within the local limits of jurisdiction, the CGM / Ahmedabad DFCCIL Office is situated and both the parties shall be bound by this clause.

EXTRA SAFETY PRECAUTIONS

10. SAFE METHODS:

Signature of tenderer (s)
Date:

The Contractor shall at all times, adopt such safe methods of working as will ensure safety of structures, equipment and labour. Safety rules that should be adhered to are given as guidelines in Annexure C. If at any time, the DFCCIL finds the safety arrangements inadequate or method of working unsafe, the Contractor shall take immediate corrective actions as directed by the Engineer's representative. Any directions in the matter shall in no way absolve the Contractor of his sole responsibility to adopt safe working methods. The Contractor is responsible for providing skilled personnel and adequate expert supervision so as to ensure complete safety.

It is the responsibility of the Contractor to ensure safe loading, transportation and unloading of materials and equipment etc. Any loss or damage caused to adjacent Railway property will have to be made good by the contractor at his/their own cost, failing which recoveries shall be effected from the running bill of the contractor as per the Clause No. 46(1) of the General Conditions of Contract. The liability arising out of accidents, if any, to persons will be met by the contractors and the Railway will not be responsible for any damage or compensation thereof. The contractor shall follow the provisions laid down in Contract Labour Act, 1972.

The contractor shall be entirely responsible for ensuring safety of his labour, vehicles, plant or equipment while working along or near the track and highways and shall programme his working so as not to interfere with the movement of trains and road traffic. No extra payment shall be allowed to the contractor for all safety precautions to be observed during the execution of the work. The cost of all such precautions shall be deemed to be included in the rates for all items of the schedule.

10.1 Scaffolding or staging more than 3.5 meters above the ground or floor, swung or suspended from an overhead support or erected with stationary support shall have a guard rail properly attached bolted, braced and otherwise secured at least 1 meter high above the floor or platform or staging and extending along the entire length thereof with only such opening as may be necessary for the delivery of materials. Such scaffolding or staging shall be so fastened as to prevent it from swaying from the building or structure.

10.2 Working platform gangways and stairways should be so constructed that they should not sag unduly or unequally, and where the height of the platform or the gangway or the stairway is more than 3.5 meters above ground level or floor level, they should be closely boarded, should have adequate width and should be suitably fastened as described in the para above.

10.3 Safe means of access shall be provided to all working platform and other working places. Every ladder shall be securely fixed. No portable single ladder shall be over 10 metres in length while the width between side rails in swung ladder shall in no case be less than 300 mm for ladders upto and including 3.5 metres in length. For longer ladders this width should be increased by at least 20 mm for each additional metre of length. Uniform steps spacing shall not exceed 300 mm. Adequate precautions shall be taken to prevent danger from electrical equipments. No materials on any of the sites of work shall be so stacked or placed as to cause danger or inconvenience to any persons or the public. The contractor shall provide all necessary fencing and lights to protect the public from accident and shall be bound to bear the expenses of the defense. of every suit, action

Signature of tenderer (s)
Date:

or other proceeding at Law that may be brought by any person for injury sustained owing to neglect of the above precautions and to pay any damages and cost which may be awarded in any suits, action or proceedings to any such persons or which may with the consent of the contractor be paid to compromise any claim by any such persons.

10.4 Demolition: Before any demolition is commenced and also during the process of the work:

All roads and open areas adjacent to the work site shall either be closed or suitably protected;

No electric cable or apparatus which is liable to be a source of danger over a cable or apparatus used by the operator shall remain electrically charged;

All practical steps shall be taken to prevent danger to persons employed from risk of fire or explosion or flooding;

No floor, roof or other part of the building shall be so overloaded with debris or materials as to render it unsafe.

All necessary personal safety equipment as considered adequate by the Engineer should be kept available for the use of the persons employed on the site and maintained in a condition suitable for immediate use, and the Contractor should take adequate steps to ensure proper use of equipment by those concerned. In addition, workers employed on mixing asphalted materials, cement and lime mortar shall be provided with protective goggles.

workers engaged in white-washing and mixing or stacking of cement bags or any materials which is injurious to the eyes shall be provided with protective goggles;

workers engaged in welding works shall be provided with protective goggles;

stone breakers shall be provided with protective goggles and protective clothing and seated at sufficiently safe intervals.

10.5 The contractor shall submit the methodology proposed to be adopted for execution of works for approval of the DFCCIL/Railway Engineer with a view to ensure safety of trains, passengers & workers and he shall also ensure the methods and arrangements are actually available at site before start of work and contractor's supervisors and workers have clearly understood the safety aspects and requirements to be adopted / followed while executing the work.

10.6 The contractor shall maintain an assurance register at each site, which shall be got signed by both DFCCIL supervisor as well as contractor's supervisor in token of their having understood the safety precautions to be observed at site.

10.7 FORM FOR ENGINEERING WORK PERMIT (EWP)

1. Name of the Railway Supervisor
2. Location of work
3. Nature of work
4. Agency
5. Machineries deployed
6. Working hours

Signature of tenderer (s)

Date:



7. I have personally checked the arrangements of rope barricading, fencing at turning locations, posting of staff by the railway by the Contractor, erection of display boards training of staff, issue of permits to drivers and I am satisfied that it shall be possible to adhere to the standard safety precautions at site as reproduced in the enclosed Annexure 'S' except those indicated in para 8 below. Further I have made all the departmental arrangement require for adherence of safety precautions.
8. In case of following it shall not be possible to adhere to Annexure 'S' provisions as mentioned below.
9. However in view of Para 8 following extra safety provisions will be taken at site to ensure safety.

Executive/ DFCCIL

Remarks of APM/DFCCIL

Remarks of Dy. CPM/DFCCIL

Based on the above certificate, I hereby permit the above work for a period of _____ days i.e. upto _____.

Dy. CPM/Engg/DFCCIL

Date:

Notes

1. A copy of this permit on issue shall be pasted on the site order book.
2. Each work location shall require separate EWP

10.8 ANNEXURE 'C'

Safety precautions: General

Safe working of contractors: A large number of men and machinery are deployed by the contractors for track renewals, gauge conversions, doublings bridge rebuilding etc. it is therefore essential that adequate safety measures are taken for safety of the trains as well as the work force. The following measures should invariably be adopted.

- i) The contractor shall not start any work without the presence of DFCCIL / Railway supervisor or his representative and contractors supervisor at site.
- ii) Where ever the road vehicles and/or machinery are required to work in the close vicinity of railway line, the work shall be so carried out that there is no infringement to the railway's

Signature of tenderer (s)

Date:



schedule of dimensions. For this purpose the area where road vehicles and/or machinery are required to ply, shall be demarcated and acknowledged by the Contractor. Special care shall be taken for turning/reversal of road vehicles/machinery without infringing the running track. Barricading shall be provided wherever justified and feasible as per site conditions.

- iii) The look out and whistle caution orders shall be issued to the trains and speed restrictions imposed where considered necessary. Suitable flagmen/detonators shall be provided where necessary for protection of trains.
- iv) The supervisor/workmen should be counselled about safety measures. A competent certificate to the contractor's supervisor as per proforma annexed shall be issued by APM which will be valid only for the work for which it has been issued.
- v) The unloaded ballast/rails/sleepers/other P. Way materials after unloading along track should be kept clear off moving dimensions and stacked as per the specified heights and distance from the running track.
- vi) Supplementary site specific instructions, wherever considered necessary, shall be issued by the Engineer-in-charge.
- (vii) The Engineer-in-charge shall approve the methodology proposed to be adopted by the contractor, with a view to ensure safety of trains, passengers and workers and he shall also ensure that the methods and arrangements are actually available at site before start of the work and the contractor's supervisors and the workers have clearly understood the safety aspects and requirements to be adopted/followed while executing the work.

There shall be an assurance register kept at each site, which will have to be signed by both, i.e. DFCCIL Supervisor or his representative as well as the contractor's supervisor as a token of their having understood the safety precautions to be observed at site."

10.9 Supplementary Precautions for working at ROB site.

- i) A rope having luminous red strip wrapped around it, must be stretched by tying to the OHE masts to indicate the area not to be infringed under any circumstances. The entire area of work should be demarcated by providing rope barricades and sign boards which will enable the workman posted at site and also the lorry drivers to have clear guidelines on movement of vehicles.
- ii) At every 500 mts, locations having adequate space & level for proper turning of vehicles shall be earmarked and a modular, portable 1 Mt. High steel fencing at a distance of 3.5m shall be erected in a length of 20 mts. for turning of vehicles.
- iii) At places of turning of vehicles planned out a safety guard/flagman in special orange colour luminous/reflective uniform shall be posted during execution of the work who shall

Signature of tenderer (s)

Date:



- supervise the turning of vehicles after seeing the movement of trains and shall ensure that under no circumstances the vehicle touches the fencing erected. These safety guards shall also carry Binoculars so as to watch the vehicles/trains from a distance as well for any necessary action by him if need be. Executive/DFCCIL in charge of the work shall ensure that slopes of the nominated places are kept away from the running lines so as to avoid the possibility of any rolling down of vehicles.
- iii) These nominated places shall have the status as of a Station for a run through train and the safety guard/flagman shall stand attentively facing the track and should hold green and red hand signal flags furled up on separate sticks, the green flag in the left hand and red flag in the right hand during day time and a lighted hand signal lamp with white light pointing towards passing trains during night time. If any unsafe condition is noticed on the train he shall attract the attention of Train crew by blowing whistle as well as showing danger or other signal as warranted. At the nominated turning place of each location, a board with text “Vehicle Turning station/W” shall be erected by the safety guard. ‘W’ indicates the need for whistling by incoming train motorman / driver on the nearest track. In the event of any untoward incident like say a vehicle infringing the track safety guard/flagman shall arrange to stop the train by planting short circuit operating clip and putting detonators, showing red hand signal as in case of obstruction on a track.
- iv) At such nominated places temporary “whistle boards” shall be erected so as to invite the attention of Motorman/drivers to whistle when passing such locations.
- v) At each site where construction vehicles of the contractor are required to ply along the track a patrolman by the Contractor shall be deployed to see that the driver do not have any tendency to come closer to the track and infringe.
- vi) The Drivers/Motormen of trains plying on the nearest track shall be served with caution orders to look out for any obstruction at the places of work that infringes the train movements.
- vii) All the authorized Drivers of the road vehicles/machines shall be given a red flag/ red lamp so that in the event of any obstruction they atleast stop the incoming trains.
- viii) The Executive/DFCCIL incharge shall inspect every site every alternate working day and record his observations in Site order Book clearly indicating if the safety precautions are being adhered to or not /in case of violation or inadequacy, he shall suspend the work and report to APM / DPM or his Superiors.
- ix) APM/incharge shall carry out safety inspection once in a week and record his observations in the site order book pointing out deficiencies if any. In case he finds that safety precautions being taken are not as per the Standing procedure order he shall suspend the work and report to Dy. CPM/Engg/DFCCIL and all others as listed in the permit to work.

- x) Sectional Engineer as well as APM I/C while taking measurements & recording the bill shall certify that all safety precautions stipulated in General/Special conditions of Contract have been followed by the Contractor.
- xi) Dy. CPM/Engg/DFCCIL incharge shall carry out detailed safety inspection once in a month of each site and shall scrutinize site order book in respect of adherence to safety precaution once in a fortnight. It shall be the responsibility of each APM to bring his site order books per bearer once in a fortnight to his Dy. CPM/Engg/DFCCIL incharge & put up to him. Dy. CPM/Engg/DFCCIL I/C must return the site order book the same day so as not to keep the site without site order book for more than a working day.
- xii) All the contractors shall be given copy of the procedure order so that they in turn drill/train their staff.
- xiii) The Contractor shall not allow any road vehicle (even belonging to him or his suppliers etc.) to ply in railway land next to the running line. If for execution of certain works viz. Earthwork for parallel railway line and supply of ballast for new or existing rail line gauge conversion etc. road vehicles are necessary to be used in railway land next to the railway line, the contractor shall apply to the engineer-in-charge for permission giving the type & no. of individual vehicles, names & licence particulars of the drivers, location, duration & timings for such work/movement. The engineer-in-charge or his authorized representative shall personally check the validity of road vehicles, driving license and counsel, examine & certify, the road vehicle Drivers, contractor's flagmen & supervisor and will give written permission giving names or road vehicle drivers, contractor's flagmen and supervisor to be deployed on the work, stating location, period and timing of the work. This permission will be subject to the following obligatory conditions.
- xiv) The road vehicles shall NOT ply between sunset and sunrise and when visibility is impaired due to dust storm/for etc. during day hours.
- xv) Nominated vehicles & drivers will be utilized for work in the presence of atleast one flagman & one supervisor certified for such work.
- xvi) The vehicles shall ply 6 m clear of track. Any movement/work at less than 6 m upto minimum 3.5m clear of track centre, shall be done only in the presence of DFCCIL employee authorized by the Engineer-in-charge. No part of the road vehicle will be allowed at less than 3.5m from track centre.
- xvii) The movement of lorries near the track shall be prohibited during night as well as during day when visibility & adequate protective measures including lighting shall be ensured & specific approval of Dy. Chief Engineer obtained for each such occasion.
- xviii) Machines and vehicles which are required to move at less than 8 mts. away from the track, it shall be in the presence of railway employee authorized by Engineer-in-charge.
- xix) The contractor's representative shall be issued a certificate by DPM/APM to the effect that they have acquired sufficient knowledge about the Safety precautions that are needed to be followed while working near the track.
- xx) On receiving the application for permit to work through APM/DPM, Dy.CPM/Engg/DFCCIL shall issue permit to work.

Signature of tenderer (s)

Date:



11.0 PRE CONTRACT INTEGRITY PACT

- Integrity pact shall be implemented in this contract, pre-bid pre contract agreement (Integrity Pact) shall be made within 15 days after issue of LOA. The Form-20 is attached in this documents. The pre-bid pre contract shall be made on stamp paper of appropriate cost and shall form part of contract agreement.

12.0 Monsoon water way arrangement for drain off water to be planned & developed by the contractor. Necessary item will be paid separately.

PART – III (C)

ADDITIONAL TECHNICAL SPECIFICATIONS-III

Signature of tenderer (s)

Date:



PART – III (C)

ADDITIONAL TECHNICAL SPECIFICATIONS-III

DETAILED SPECIFICATIONS AND SPECIAL CONDITIONS FOR SCHEDULE “A”

Item Sr No. 1

Clearing and grubbing road land including uprooting rank vegetation grass bushes, shrubs, sapling and trees girth up to 300 mm removal of stumps of trees cut earlier and disposal of unserviceable materials (C) By mechanical means in area of light jungle.

1. Before starting the work, the site shown on plans shall be cleared of all obstructions, loose stones and materials, rubbish of all kinds as well as all trees and brush wooden except those marked for preservation, the roots being entirely grubbed up. No trees are to be cut down before obtaining the instruction from Engineer-in-charge.
2. The stuff obtained from clearance shall be stacked in such a place and in such a manner as ordered by the Engineer-in-charge and the ground shall be left in a perfectly clean condition.
3. In jungle clearing, all trees, not specifically marked for preservation, bamboos, jungle wood and brush wood shall be cut down, their roots rubbed up. All wood and material available shall be stacked as directed by the Engineer-in-charge.
4. All holes or hollows, whether originally or produced by digging up roots shall be carefully filled up with earth, well rammed and leveled up neatly as directed.
5. After completion of the work, but before its acceptance, the site shall be cleared of all scaffolding, surplus materials and rubbish etc. as per contract. No extra payment shall be made for site.
6. The rate for this item of work shall be measured in hectare and shall be paid at the Each tendered for the work on completion of the entire work as directed by Engineer-In charge.

Item Sr No. 2

Excavation for foundation in sand, gravel, clay soft soils and murrum etc. including shoring, strutting dewatering as necessary and disposing of the excavated stuff as directed. (A) Depth up to 3.0 M and lead upto 100m for 10Cum

Signature of tenderer (s)

Date:



MORTH 304.1. Scope

Excavation for structures shall consist of the removal of material for the construction of foundations for bridges, culverts, retaining walls, headwalls, cutoff walls, pipe culverts and other similar structures, in accordance with the requirements of these Specifications and the lines and dimensions shown on the drawings or as indicated by the Engineer, work shall include construction of the necessary cofferdams and cribs their subsequent removal; all necessary sheeting, shoring, bracing, and pumping; the removal of all logs, stumps, grubs and other matter and obstructions, necessary for placing the foundations; trimming bottoms of excavations; backfilling and clearing up the site the disposal of all surplus material.

MORTH 304.2 Classification of Excavation

All materials involved in excavation shall be classified by the Engineer in the following manner:

(a) Soil

This shall comprise topsoil, turf, sand, silt, loam, clay, mud, peat, black cotton soil, soft shale or loose moorum, a mixture of these and similar material which yields 10 the ordinary application of pick, spade and/or shovel, rake or other ordinary digging implement. Removal of gravel or any other nodular material having dimension in any one direction not exceeding 75 mm occurring in such strata shall be deemed to be covered under this category.

Authority for classification : The classification of excavation shall be decided by the Engineer and his decision shall be final and binding on the Contractor. Merely the use of explosives in excavation will not be considered as a reason for higher classification unless blasting is clearly necessary in the opinion of the Engineer.

MORTH 304.3. Construction Operations

MORTH 304.3.1. Setting out : After the site has been cleared according to Clause 201, the limits of excavation shall be set out true to lines, curves and slopes to Clause 301.3.1.

MORTH 304.3.2. Excavation : Excavation shall be taken to the width of the lowest step of the footing and the sides shall be left plumb where the nature of soil allows it. Where the nature of soil or the depth of the trench and season of the year do not permit vertical sides, the Contractor at his own expense shall put up necessary shoring, strutting and planking or cut slopes to a safer angle or both with due regard to the safety of personnel and works and to the satisfaction of the Engineer.

The depth to which the excavation is to be carried out shall be as shown on the drawings, unless the type of material encountered is such as to require changes, in which case the depth shall be as ordered by the Engineer. Propping shall be undertaken when any foundation or stressed zone from an adjoining structure is within a line of 1 vertical to 2 horizontal from the bottom of the excavation.

Signature of tenderer (s)

Date:



Where blasting is to be resorted to, the same shall be carried out in accordance with Clause 302 and all precautions indicated therein observed. Where blasting is likely to endanger adjoining foundations or other structures, necessary precautions such as controlled blasting, providing rubber mat cover to prevent flying of debris etc. shall be taken to prevent any damage.

MORTH 304.3.3. Dewatering and protection : Normally, open foundations shall be laid dry. Where water is met with in excavation due to stream flow, seepage, springs, rain or other reasons, the Contractor shall take adequate measures such as bailing, pumping, constructing diversion channels, drainage channels, bunds, depression of water level by well-point system, cofferdams and other necessary works to keep the foundation trenches dry when so required and to protect the green concrete/masonry against damage by erosion or sudden rising of water level. The methods to be adopted in this regard and other details thereof shall be left to the choice of the Contractor but subject to approval of the Engineer. Approval of the Engineer shall, however, not relieve the Contractor of the responsibility for the adequacy of dewatering and protection arrangements and for the quality and safety of the works.

Where cofferdams are required, these shall be carried to adequate depths and heights, be safely designed and constructed and be made as watertight as is necessary for facilitating construction to be carried out inside them. The interior dimensions of the cofferdams shall be such as to give sufficient clearance for the construction and inspection and to permit installation of pumping equipments, etc., inside the enclosed area.

If it is determined beforehand that the foundations cannot be laid dry or the situation is found that the percolation is too heavy for keeping the foundation dry, the foundation concrete shall be laid under water by tremie pipe only. In case of flowing water or artesian springs, the flow shall be stopped or reduced as far as possible at the time of placing the concrete.

Pumping from the interior of any foundation enclosure shall be done in such a manner as to preclude the possibility of the movement of water through any fresh concrete. No pumping shall be permitted during the placing of concrete or for any period of at least 24 hours thereafter, unless it is done from a suitable sump separated from the concrete work by a watertight wall or other similar means.

At the discretion of the Contractor, cement grouting or other approved methods may be used to prevent or reduce seepage and to protect the excavation area.

The Contractor shall take all precautions in diverting channels and in discharging the drained water as not to cause damage to the works, Crops or any other property.

MORTH 304.3.4. Preparation of foundation: The bottom of the foundation shall be levelled both longitudinally and transversely or stepped as directed by the Engineer. Before footing is laid, the surface shall be slightly watered and rammed. In the event of excavation having been deeper than that shown on the drawings or as otherwise ordered the Engineer, the extra depth shall be made up

Signature of tenderer (s)
Date:

with concrete masonry of the foundation at the cost of the Contractor. Ordinary filling shall not be used for the purpose to bring the foundation to level.

When rock or other hard strata is encountered, it shall be freed of all soft and loose material, cleaned and cut to a firm surface either level and stepped as directed by the Engineer. All seams shall be denied out and filled with cement mortar or grout to the satisfaction of die Engineer. In the case of excavation in rock, annular space around footing shall be filled with lean concrete (1:3:6 nominal mix) upto the top level of rock.

If the depth of fill required is more than 1.5m above the top of the footing, filling upto 1.5m above top of footing shall be done with lean concrete (1:3:6 nominal mix) followed by boulders grouted with cement.

When foundation piles are used, the excavation of each pit shall be substantially completed before beginning pile-driving operations therein. After pile driving operations in a given pit are completed, all loose and displaced materials therein shall be removed to the elevation of the bottom of the footings.

MORTH 304.3.5. Slips and slip-outs: If there are any slips or slip-outs in the excavation, these shall be removed by the Contractor at his own cost.

MORTH 304.3.6. Public safety: Near towns, villages arid all frequented places, trenches and foundation pits shall be securely fenced, provided with proper caution signs and marked with red lights at night to avoid accidents. The Contractor shall take adequate protective measures to see that the excavation operations do not affect or damage adjoining structures. For safety precautions, guidance may be taken from IS: 3764.

MORTH 304.3.7. Backfilling: Backfilling shall be done with approved material after concrete or masonry is fully set and carried out in such a way as not to cause undue thrust on any part of the structure. All space between foundation masonry or concrete and the sides of excavation shall be refilled to the original surface in layers not exceeding 150 mm compacted thickness. The compaction shall be done with the help of suitable equipment such as mechanical tamper, rammer, plate vibrator etc., after necessary watering, so as to achieve a density not less than the field density before excavation.

MORTH 304.3.8. Disposal of surplus excavated materials:All the excavated materials shall be the property of the Government. Where the excavated material is to be used in the construction of embankment as directed by Engineer in-charge. It shall be directly deposited at the required location within 100 meters lead. Payment will be made 50% of accepted rate of item no. 2 of Schedule 'B'.

All hard materials, such as, hard moorum, rubble, etc., not intended for use as above shall be stacked neatly on specified land as directed by the Engineer with all lifts

Signature of tenderer (s)
Date:



Unsuitable and surplus material not intended for use within the lead specified above shall also, if necessary, be transported with all lifts and lead and disposed of or used as directed by the Engineer.

MORTH 304.4. Measurements for Payment

Excavation for structures shall be measured in cu. m. for each class of material encountered, limited to the dimensions shown on the drawings or as directed by the Engineer. Excavation over increased width, cutting of slopes, shoring, shuttering and planking shall be deemed as convenience for the Contractor in executing the work and shall not be measured and paid for separately.

Foundation sealing, dewatering, including pumping shall be deemed to be incidental to the work unless separate provision is made for in the Contract

MORTH 304.5. Rates

MORTH 304.5.1. The Contract unit rate for the items of excavation for structures shall be payment in full for carrying out the required operations including full compensation for:

- (i) Setting out;
- (ii) Construction of necessary cofferdams, cribs, sheeting, shoring and bracing and their subsequent removal;
- (iii) Removal of all logs, stumps, grubs and other deleterious matter and obstructions, for placing the foundations including trimming of bottoms of excavations;
- (iv) Foundation sealing, dewatering including pumping when no separate provision for it is made in the Contract;
- (v) Backfilling, clearing up the site and disposal of all surplus material within all lifts and leads and
- (vi) All labour, materials, tools, equipment, safety measures, diversion of traffic and incidentals necessary to complete the work to Specification.

MORTH 304.5.2. The Contract unit rate for preparation of rock foundation shall be full compensation for cutting, trimming and cleaning the foundation surface and filling/sealing of all seams with cement grout or mortar including all materials, labour and incidentals required for completing the work.

Item SR No. 3

Excavation for foundation in sand gravel, clay, soft, soils and murrum etc. including soring strutting and dewatering as necessary and dis posing off the excavated stuff as directed (B) 3.00 mt to 6.00 mt depth and lead upto 100m for 10Cum.

This work shall consist of Excavation for foundation in sand gravel, clay, soft, soils and murrum including shoring, strutting and dewatering as necessary and disposing of the excavated stuff as directed and shall be carried out as per relevant detailed specification of **Item No. 2** of this contract.

MORTH 304.4. Measurements for Payment

Excavation for structures shall be measured in cu. m. for each class of material encountered, limited to the dimensions shown on the drawings or as directed by the Engineer. Excavation over increased width, cutting of slopes, shoring, shuttering and planking shall be deemed as convenience for the Contractor in executing the work and shall not be measured and paid for separately.

Foundation sealing, dewatering, including pumping shall be deemed to be incidental to the work unless separate provision is made for in the Contract

MORTH 304.5. Rates

MORTH 304.5.1. The Contract unit rate for the items of excavation for structures shall be payment in full for carrying out the required operations including full compensation for:

- (i) Setting out;
- (ii) Construction of necessary cofferdams, cribs, sheeting, shoring and bracing and their subsequent removal;
- (iii) Removal of all logs, stumps, grubs and other deleterious matter and obstructions, for placing the foundations including trimming of bottoms of excavations;
- (iv) Foundation sealing, dewatering including pumping when no separate provision for it is made in the Contract;
- (v) Backfilling, clearing up the site and disposal of all surplus material within all lifts and leads and
- (vi) All labour, materials, tools, equipment, safety measures, diversion of traffic and incidentals necessary to complete the work to Specification.

MORTH 304.5.2. The Contract unit rate for preparation of rock foundation shall be included for cutting, trimming and cleaning the foundation surface and filling/sealing of all seams with cement grout or mortar including all materials, labour and incidentals required for completing the work.

Item SR No. 4

Signature of tenderer (s)

Date:



Box cutting the road surface to proper slope and chamber for making a base for road work including removing the excavated stuff and depositing on the road side slope as directed.

- 1.This work shall consist of excavation, removal and satisfactory disposal of all materials necessary for the construction of widening carriageway in accordance with requirements of these specifications and the lines, grades and cross sections shown in the drawings or as indicated by the Engineer.
- 2.After the site has been cleared the limits of excavation/ box cutting the road surface shall be set out true to lines, curves, slopes, grades and sections as shown on the drawings or as directed by the Engineer.
- 3.Box cutting shall be carried out in conformity with the directions laid here in under and in a manner approved by the Engineer. The work shall be so done that the suitable materials available from box cutting/ excavation are satisfactorily utilized as directed.
- 4.The contractor shall not excavate outside the limits of box cutting. Subject to the permitted tolerances, any excess depth/ width excavated beyond the specified levels/ dimensions on the drawings shall be made good at the cost of the contractor with suitable material of characteristics similar to that removed and compacted as directed.
- 5.Cutting shall be done in proper grade & camber as per measurements given. Care must be taken that all slopes are evenly and truly dressed. Cutting shall be done to the exact depth required and shall be as per formation level in proper grade and the camber. If extra depth of cutting is done due to negligence of contractor the same shall be refilled with approved quality of materials duly consolidated to the satisfaction of the Engineer-in-charge (without extra cost).
- 6.The stuff received from the cutting shall be used for filling and correcting side slopes of bank as directed by the Engineer in charge.
- 7.The measurement of box cutting shall be taken on level basis & level shall be taken at 10 mt. interval. Volume shall be computed in cubic meters by average area method.
- 8.The payment shall be made on Cum. basis.
9. The rate includes cost of all labour, machineries required, cost of carting the cutting stuff with all lead and lift and leveling the dumping ground etc. complete.

Item SR No. 5

Empty boring through all sorts of strata for providing 1.20 M dia. R.C.C. bored piles to required depth including providing necessary casting pipe with all plants and equipment's as required complete.

Signature of tenderer (s)
Date:



Work shall be carried out as per specification/condition as per clause No.2.3 of TECHNICAL SPECIFICATION of the Tender Document.

Mode of measurement shall be as per Para 2.3.28 TECHNICAL SPECIFICATION of the Tender Document.

Item SR No.6

Conducting load testing of a single pile Up to following capacity in accordance with IS 2911 including installation of loading platform & preparation of pile head or construction of test cap & dismantling of test cap after test etc. with all labour,material,tool & plants, equipment, machinery, etc. complete as per drawing & specification as directed by the Engineer.

The work shall be carried out as per Indian Railways Unified Standard Specifications for works and materials 2010.

Item SR No. 7

Providing and fixing in position fully moulded restrained elastomeric Bearings as per detailed drawings.

1. The term bearings in this case shall refer to an elastomeric bearing consisting of one or more elastomer slabs bonded to metal plates during manufacture so as to form a sandwich arrangement, while Bearings pads shall denote single unreinforced elastomer slabs.
2. The elastomer to be used for bearings shall be made from natural or synthetic rubber and satisfy the physical properties given below. The test pieces required for the test shall be selected from the centre layer of the bearings while making up the selection.

Table :-

Sr. No.	Items	ASTM Designation	Requirement
1	Durometer Hardness	D-2240	55 to 70 (5 points for the nominated value)
2	Ultimate Tensile Strain percent	D-412	450 to 55 grade 400 for 60 grade 300 for 70 grade
3	Tensile strength kg/cm ²	D-412	175 minimum 135 minimum for natural rubber of hardened greater than 65.
4	Adhesion to metal kg/cm	D-429 (Method-B)	9
5	Tear resistance kg/cm	D-624 40 (DIEC)	

Signature of tenderer (s)

Date:



6	Compression set 22 hrs. at 70 C%	D-395 (Method-B0	25 maximum
7	Ozone resistance 22% strain 100 hrs. at 380 C - 10-C (1 part per million in air by volume)	D-1149	No Cracks
8	Accelerated ageing 70 hours, 1000C hardness increase Tensile strength reduction, Elongation at break reduction.	D-573	10 points 15% of original 25 % of original
9	Low temperature stiffness young's modulus-40 C kg/cm2	D-797	700 maximum

3. Adhesive used in bearing location attachment to bridge decks shall be subject to the approval by the Engineer in charge. It shall be of high viscosity resins, which are cold setting and free of solvent. Adhesive shall not be used to bond layers of cure elastomer. Mild steel used for plate reinforcement shall comply with the requirements of relevant IS the contractor shall furnish to the Engineer in charge a certificate by the Manufacture that the elastomer and fabric (if used) in the elastomeric bearing conforms to all the above requirements. The certification shall be supported by a certified copy of the results of tests, performed by the Manufacturer upon samples of the elastomer and fabric to be used in the bearings.

The contractor shall whenever required, during the course of manufacture arrange and offer all facilities for the purpose of inspection and test of all or any of the material used therein to any officer as directed by the Engineer in charge and the bearings and similar parts shall be used in the superstructure except on the production of certificate of acceptance thereof from the Directorate of inspection whenever necessary. All the inspection charges shall be payable by the contractor.

4. The thickness of a single layer bearing shall not exceed 20 per cent of the least plan dimension. The total thickness of a laminated bearing shall not exceed 40 percent of the least plan dimension. The thickness of any internal layer of elastomer shall not be less than 6 mm nor greater than 12 mm. The thickness of outer plates shall be not less than 3 mm and that on inner plate not less than 1.5 mm. Metal plates in which dowels are located shall be in general not less than 6 mm thick. The edges of all plates shall be lightly rounded to approximately 5 mm raid. The metal plates referred above should not be composed of thinner plates joined together. Laminate Bearings shall have side cover of elasomer of minimum thickness of 6 mm to protect the ends of the steel plates and to give a reduced surface strain to that occurring at the edge of the bonded plates but shall not be considered in evaluation of deformations. The cover of elastomer at the top and bottom surfaces shall not be less than 3 mm or more than half the thickness of internal layer. The outer cover at top and bottom surfaces having thickness less than half that of a single

Signature of tenderer (s)

Date:



internal layer and not exceeding 3 mm may be considered as a simple protection and need not therefore be considered in calculating deflections. Where above elastomer covers are provided,, there is no objection to keeping the thickness of top most and bottom most plates same as that of inner plates.

5. Bearing shall be set back from the edge of a bearing surface a distance not less than the thickness of the layer of elastomer in contact with bearing surface to allow for spreading of the elastomer under load. Bearing may be located in position by means of dowels or studs or other devices, or bonded to the structure with approved adhesives which shall generally be of the high viscosity resin type cold setting and free from solvent. For spans on an inclined grade and without hinge bearing the sole plates shall provided and the same beveled so that masonry surfaces and the bearing shall be kept horizontal. To facilitate maintenance, the ends of trusses an plates girders shall preferably by supported on plates or pedestals so that there is at least 15 centimeters clearance between the bottom chord or flange and the substructure.. The plan dimensions of the bearings to be finally adopted shall preferably be selected from series R 20 of IS: 1076. The arrangement of placing only one bearing under a girder shall be permitted. Further bearings of different sizes must not be place next to each other to support a span. The bearings shall be fully moulded when metal laminations are used. These laminated elastomeric bearings shall consist of one or more elastomer slabs bounded to metal plates so as to form a sandwich arrangement. Such fully moulded bearings shall be manufactured to required size. The bond between elastomers and metal or fabric shall be such that when samples are tested for separation failure shall occur within the elastomers and not between the elastomer a metal.
6. The contractor shall get the bearings tested for the physical properties and performance of bearings. The test pieces required for the test shall be selected from the central layer of bearing making up the selection. For the size of the test pieces and method of tests etc. the relevant ASTM Standard shall be followed. The tests shall be carried out in a recognized laboratory acceptable to the department for all the necessary tests required by the Department. The specimen for tests as may be required shall be supplied by the contractor at his own cost and the testing charges shall also be fully borne by the contractor. Only those bearings which pass the tests satisfactorily will be accepted and will be permitted to be use. The Departmental shall not accept any responsibility for the cost of bearings rejected.
7. (i) Tolerances on length and width 0, +5 mm.
(ii) Tolerances on thickness for single layer pad ± 0.5 mm.
(iii) Tolerance on total thickness
 'h' of finished bearings.

$10 < h \leq 30$ mm	:	± 0.5 mm
$30 < h \leq 50$ mm	:	± 0.8 mm
$50 < h \leq 80$ mm	:	± 0.9 mm
$80 < h \leq 120$ mm	:	± 1.1 mm

- iv) The parallelism of the individual elastomer laminations for a finished bearings, shall not exceed the tolerances specified at (ii) above when measured at the extremities of the laminations.
8. Proper arrangement shall be made to avoid corrosion of metal plates or deteriorating of adhesive by encasing the bearings totally in elastomer or by some other method approved by the Engineer in charge.
9. (i). When bearing assemblies on plates are shown on the drawing to be placed (not embedded) directly on concrete, the concrete bearing area shall be constructed slightly above grade and shall be finished by grinding.
- (ii) It shall be ensured that bearings are set truly level and in exact position as indicated on the drawings so as to have full and even bearing on the seats. Thin mortar pads (not exceeding 12 mm) may be made to meet with this requirement.
- (iii) It shall be ensured that the bottoms of the girders to be received on the bearings are plane at the location of these bearings and care shall be taken that the bearing are to displaced while placing the girders.
- (iv) Before fixing the elastomeric bearings the concrete surface on which the bearing is to be placed shall be wood float finished to a level plane which shall not vary more than 1.5 mm from a straight edge placed in any direction across the areas.
- (v) The position of the bearings shall be accurately marked on the pier/abutment cap and the area where the bearings are to be located leveled accurately.
- (vi) The concrete surface shall be free from any loose material and cleared of any grease oil, paint etc. and it shall be dry at the time of fixing.
- (vii) The surface of elastomer shall be free any foreign material.
- (viii) Once prepared, the concrete or elastomer shall not be touched with bare hand.
- (ix) The bearings shall be covered with canvas or a suitable covering material to protect from erect sun light and weather until the concrete on superstructure is cast.
- (x) The bearings shall be fixed in position with epoxy resin adhesive of approved quality.
- (xi) The concreting of superstructure shall be taken up only after ensuring that the adhesive for fixing the bearings or abutment cap has set.
10. Unit rate shall be cubical contents of the bearing measured in cu. cms.
11. The rate for each type of bearing shall include the cost of supplying and fixing the bearings in position complete. The rate shall also include the cost of samples and their testing as desired by the Engineer in charge. The rate shall also include the cost of adhesives for fixing them.

MORTH 2005

ELASTOMERIC BEARINGS

Elastomeric bearings shall cater for translation and/or rotation of the superstructure by elastic deformation.

MORTH 2005.1 Materials

- i) Chloroprene Rubber(CR) only shall be used.

Signature of tenderer (s)

Date:



- ii) Grades of raw elastomer of proven use in elastomeric bearings, with low crystallization rates and adequate shelf life viz. Neoprene WRT, Neoprene W, Bayprene 110, Bayprene 210, Skyprene B-5, Skyprene B-30, Denka S-40V and Denka M-40, shall be used.
- iii) No reclaimed rubber or vulcanized wastes or natural rubber shall be used.
- iv) The polychloroprene content of the compound shall not be lower than 60 per cent. The ash content shall not exceed 5 per cent of its weight. Polychloroprene content shall be determined in accordance with ASTM D297 and ash content as per IS:3400-Part XXII.
- v) Use of synthetic rubber-like materials such as Ethyl Propylene Dimonomer (EPDM), Isobutane Isoprene Copolymer (IIR) and ChloroIsoprene Copolymer (CIIR) shall not be permitted.

2005.1.2 Properties of Elastomer

The elastomer shall conform to the properties specified in Table 2000-1.

Table 2000-1 : Properties of Elastomer

Property	Unit	Value of the Characteristic Specified			Test Method IS Specification Reference
(1)	(2)	(3)			(4)
1. Physical properties					
1.1 Hardness	IRHD	50 ± 5	60 ± 5	70 ± 5	IS:3400 (Part II)
1.2 Minimum tensile strength	MPa				IS:3400 (Part I)
- Moulded test piece		17	17	17	
- Test piece from bearing		14	14	14	
1.3 Minimum elongation at break					
- Moulded test piece	%	450	400	300	IS:3400 (Part II)
- Test piece from bearing	%	400	350	250	IS:3400 (Part II)

Property	Unit	Value of the Characteristic Specified		Test Method IS Specification Reference
(1)	(2)	(3)		(4)
2. Maximum compression set (%) (24 h, 100 ± 1 °C)	%	< 35		IS:3400 (Part X)

Signature of tenderer (s)

Date:



3. Accelerated aging (72 h, 100 ± 1 °C) (Maximum change from un-aged value)			IS:3400 (Part IV)
3.1 Maximum change in hardness	IRHD	± 5	
3.2 Maximum change in tensile strength	%	± 15	
3.3 Maximum change in elongation	%	± 30	

MORTH 2005.1.3 Shear modulus (G) is the apparent "conventional shear modulus" of the elastomer bearing determined by testing. At nominal temperature of $23 \text{ °C} \pm 2\text{°C}$, the value of G shall comply with the values given in **Table 2000-2**.

Table 2000-2 : Shear Modulus at Nominal Temperature

Hardness (IRHD)	G (MPa)	Tolerances of G (MPa)
(1)	(2)	(3)
50 ± 5	0.7	± 0.15
60 ± 5	0.9	± 0.18
70 ± 5	1.15	± 0.20

MORTH 2005.1.4 The adhesion strength of elastomer to steel plates determined according to IS:3400 (Part XIV) method A, shall not be less than 7 Kn/m.

MORTH 2005.1.5

For elastomeric bearings (CR) used in adverse climatic conditions, the ozone resistance of elastomer shall be proved satisfactory when assessed by test according to IS:3400 (Part XX). The testing shall be carried out for a duration of 96 hours at a temperature of $40 \pm 1\text{°C}$, strain of 30 per cent and ozone concentration of 100 pphm by volume.

If any cracking is detected by visual observation at the end of the test, the material shall be considered unsatisfactory. **No** specific tests for assessment of low temperature resistance are deemed necessary.

Note:

For use of elastomer in extreme cold climates, the Engineer may specify special grade of low temperature resistant elastomer in conformity with operating ambient temperature conditions. The specifications for such special grade elastomer including the tests for low temperature resistance, shall be mutually agreed by the Engineer and the producer/ supplier and are outside

Signature of tenderer (s)

Date:



MORTH 2005.1.6 Laminates of mild steel conforming to IS:2062/IS:1079 or equivalent international grade, shall only be permitted. The yield stress of the material shall not be less than 250 MPa. Use of any other material like fibre glass or similar fabric as laminates, shall not be permitted.

MORTH 2005.1.7 The manufacturers of elastomeric bearings shall satisfy the Engineer that they have in-house facilities for carrying out the following tests on elastomer in accordance with the relevant provisions of ASTM D-297.

Identification of polymers

Ash content

Specific gravity

Polymer content to confirm the usage of chloroprene (Appendix X-2)

to determine the percentage (sub-section 34)

(sub-section 15)

(sub-section 10)

The Engineer shall invariably get the test (a) performed in his presence or in the presence of his authorized representative. In case of any dispute regarding interpretation of results, the Engineer may carry out test as per ASTM S-3452-78 (chromatography test) at the manufacturer's cost in a recognized test house. The elastomer specimen to conduct the test shall be obtained from the bearing selected at random for destructive test. The remaining part of the test bearing shall be preserved by the Engineer for any test to be done later, if required.

MORTH 2005.2 Manufacturing and Workmanship

- i) Plain pad and strip bearing shall be moulded in one piece, or comprise single pieces cut from previously moulded strips or slabs. Cutting shall produce a smooth surface without injurious heating of the elastomer.
- ii) Bearing with steel laminates shall be moulded as a single unit in a mould and vulcanised under heat and pressure. Moulding of elements in separate units and subsequent bonding as well as cutting from large sized cast, shall not be permitted.
- iii) The moulds used shall have standard surface finish adequate to produce bearings free from any surface blemishes.
- iv) Steel plates for laminates shall be sand/grit blasted, clean of all mill scales and shall be free from all contaminants prior to bonding by vulcanization. Rusted plates with pitting shall not be used. The plates shall be rounded so as to be free of sharp edges.

Signature of tenderer (s)

Date:



- v) Bonding shall be carried out during vulcanization using suitable bonding agent for bonding of elastomer to steel such that the bond peel strength is at least 7 N/mm width when tested in accordance with IS:3400 Part XIV method A.
- vi) Spacers used in mould to ensure cover and location of laminates shall be of minimum size and number practicable. Any hole at surface or in edge cover shall be filled in subsequently.
- vii) Care shall be taken to ensure uniform vulcanizing conditions and homogeneity of elastomer through the surface and body of bearings.
- viii) The vulcanizing equipment/press shall be such that between the platens of the press, the pressure and temperature are uniform and capable of being maintained at constant values as required for effecting a uniform vulcanization of the bearing.
- ix) The moulding dies utilized for manufacturing the bearings shall be so set inside the platen of the press that the pressure developed during vulcanization of the product is evenly distributed and the thickness maintained at all places are within acceptable tolerance limits taking into consideration the expansion/shrinkage allowance of vulcanized (the product of vulcanization).
- x) The raw compound which is introduced inside the metal dies for vulcanization shall be accurately weighed each time and shall be of sufficient quantity to ensure proper flow of material to every part of the die so that a homogeneous and compact bearing is produced without any sign of sponginess or deficiency of material at any place.
- xi) Before the rubber mix of any batch is used for producing vulcanized bearings, test pieces in the form of standard slab and buttons shall be prepared in accordance with prescribed standards and salient properties tested and recorded regularly against each batch of production to monitor the quality of the products.
- xii) Bearings of similar size to be used in a particular bridge project shall be produced by identical process and in one lot as far as practicable. Phased production may be resorted to only when the total number of bearings is large.

MORTH 2005.3 Manufacturing Tolerances

The bearings shall be fabricated/manufactured with the tolerances specified in Table 2000-3. Tolerances of thickness of individual layer of elastomer, dimension of laminates, and flatness of laminates are primarily meant for quality control during production. In order to measure thickness of individual layer of elastomer, dimension of laminates and flatness of laminates of a finished bearing, it is essential to cut the bearing, which may be done if agreed upon between the manufacturer and the buyer.

Signature of tenderer (s)
Date:



Table 2000-3: Tolerances

	Items	Tolerances
	Overall linear plan dimensions	-3 mm, +6 mm
	Total mean bearing thickness (The mean thickness is the arithmetic average of the thickness measured at five points on the major surface as indicated for various shaped bearings: Rectangular : corners and centre Circular : corners of inscribed square and centre)	-2.5%, +5%
	Parallelism Of top surface of bearing with respect to the bottom surface as datum of one side surface with respect to the other as datum	1 in 200 1 in 100
	Thickness of individual layer of elastomer Inner layer of elastomer Outer layer of elastomer Side cover	±12% (max of 2 mm) +20% (max of 1 mm) -0 mm, +3 mm
	Dimension of laminates Plan dimensions of laminates Thickness of laminate Parallelism of laminate with respect to bearing base as datum (with respect to diameter for plates circular in plan and shorter side for plates rectangular in plan)	-3 mm, + 0 ± 10% 1 in 100

	Items	Tolerances
6)	Flatness Flatness shall be assessed by placing a straightedge along the diagonal or diameter. The gap between the straightedge and the surface shall not exceed the tolerances specified below	
a)	Load bearing surface of the bearing	0.3% of diameter or diagonal or 2% of mean bearing thickness which ever is higher
b)	Steel laminate	1% of diameter or diagonal (max of 1.5 mm)

Signature of tenderer (s)

Date:



MORTH 2005.4 Acceptance Specifications

The manufacturer shall have all the test facilities required for the process and acceptance control tests installed at his plant to the complete satisfaction of the Engineer. The test facilities and their operation shall be open to inspection by the Engineer on demand.

All acceptance and process control tests shall be conducted at the manufacturer's plant. Cost of all materials, equipment and labour shall be borne by the manufacturer unless otherwise specified or specially agreed to between the manufacturer and Engineer.

A testing programme shall be submitted by the manufacturer to the Engineer and his approval obtained before commencement of acceptance testing.

Any acceptance testing delayed 180 days beyond the date of production shall require special approval of the Engineer and modified acceptance specification, if deemed necessary by him.

All acceptance testing shall be conducted by the inspector with the aid of the manufacturer's personnel having adequate expertise and experience in rubber testing, working under the supervision of the Inspector and to his complete satisfaction.

Inspection and acceptance shall be carried out lot by lot.

MORTH 2005.4.1 Acceptance Lot

A lot under acceptance shaft comprise all bearings, including the pair of extra test bearings where applicable, of equal or near equal size produced under identical conditions of manufacture, to be supplied for a particular project.

The size and composition of acceptance lot shall be got approved by the Engineer.

For the purpose of grading levels of acceptance testing, a lot size of 24 or larger number of bearings shall be defined as a 'large lot', while a lot size of less than 24 number of bearings shall be defined as a 'small lot'.

When the number of bearings of equal or near equal size for a single bridge project is large and phased production and acceptance is permitted, the number of bearings supplied in any single phase of supply shall comprise a lot under acceptance. When such phased supply is made, each such lot shall be considered as a large lot for the purpose of acceptance testing.

MORTH 2005.4.2 Levels of Acceptance Testing

The following two Levels of acceptance testing shall be adopted, depending on lot size:

Signature of tenderer (s)
Date:

Acceptance testing Level 1 is a higher level of inspection and testing and shall be applicable to large lots only, unless otherwise specified. This shall involve manufacture of two extra bearings for each lot to be used as test bearings and eventually consumed in destructive testing.

Acceptance testing Level 2 shall be applicable to small lots only, for which one extra bearing shall be manufactured and shall not involve destructive testing of finished bearing. Out of the lot, one bearing shall be selected at random for carrying out material tests. This bearing shall be excluded from the lot accepted.

Acceptance testing Level 1 may be specified for small lots also at the sole discretion of the Engineer taking into account the special importance of a bridge project. The cost of extra bearings, in such cases shall be borne by the user, while the cost of all other materials, equipment and testing shall be borne by manufacturer.

MORTH 2005.4.3 Testing

Acceptance testing shall comprise general inspection, test on specially moulded test pieces and test on complete bearings or sections for measurement of various quality characteristics detailed below :

MORTH 2005.4.3.1 Acceptance Testing Level 1

General Inspection

- i) All bearings of the lot shall be visually inspected for absence of any defects in surface finish, shape, hardness or any other discernible superficial defects.
- ii) All bearings of the lot shall be checked for tolerances for overall dimensions, mean bearing thickness, parallelism of bearing surfaces and flatness of load bearing surfaces as specified in Table 2000-3.
- iii) The test shall be carried out on all bearings as part of the standard production process. The temperature of the room in which the bearings are tested shall not vary more than 10 °C. The main objective of this test is to eliminate poorly made bearings by visual inspection in a quick and efficient way. All bearings of the lot shall be subjected to an axial load to correspond to the design load at serviceability limit state while visual examination is made to check for discernible defects like:
 - Misalignment of reinforcing plates
 - Poor bond at laminate/steel interface
 - Variation in elastomer layer thickness
 - Any surface defects developed during testing
- iv) During acceptance testing, complete test data shall be furnished by the manufacturer and one bearing per lot shall be selected at random and the same test shall be repeated. The bearings shall then be visually inspected for defects and the stiffness shall also be measured.

- v) During the test, the deflection between 30 percent and 100 percent of the maximum load for the application shall be recorded and used to check the consistency of the stiffness value. Variation in stiffness of any individual bearing from the mean of the measured values for all such bearings of the lot, shall not be larger than 20 percent of the mean value.
- vi) In case of any visual defect or unacceptable stiffness during acceptance testing, ail bearings of the lot shall be subjected to the same test again and only the bearing that passes the test in all respects, shall be accepted.

Tests on Specially Moulded Test Pieces

- i) Test pieces shall be moulded by the manufacturer with identical compound and under identical vulcanising conditions as used in the manufacture of the bearings of the acceptance lot. The process shall be open to inspection by the Inspector/Engineer.
- ii) Test pieces offered for inspection shall be identified by suitable markings and duly certified by the manufacturer.
- iii) The quality characteristics to be tested are listed below. The specification reference in parenthesis shall define the corresponding specification for test piece, test method and criterion for acceptance.

Composition (see Note 1 below)

Hardness (Table 2000-1, 1.1)

Tensile strength (Table 2000-1, 1.2)

Elongation at Break (Table 2000-1, 1.3)

Compression Set (Table 2000-1, 2)

Accelerated Ageing (Table 2000-1, 3)

Adhesion Strength (Clause 2005.1.4)

Ozone Resistance (see Note 2 below)

The properties enumerated in Clause 2005.1 and specific gravity of elastomer of test pieces from test bearing, shall be compared with those for corresponding specially moulded test pieces furnished by the manufacturer. The following variations shall be deemed maximum acceptable:

Specific Gravity + 02.

Ash Content + 0.5 per cent (e.g., if the ash content of elastomer from test bearing is 4%, the ash content of the specially moulded test piece shall be within 3.5% to 4.5% or vice versa)

Hardness (Table 2000-1, 1.1)

Tensile strength (Table 2000-1, 1.2)

Elongation at Break (Table 2000-1, 1.3)

Signature of tenderer (s)

Date:



Compression Set (Table 2000-1, 2)

Accelerated Ageing (Table 2000-1, 3)

Adhesion Strength (Clause 2005.1)

Ozone resistance test can be waived by the Engineer for bearings of CR when satisfactory results of ozone resistance tests on similar grade of elastomer may be available from process control records or development test data furnished by the manufacturer.

Where such process control data are not available or the frequency of testing not deemed adequate, ozone resistance test shall be mandatory for acceptance of bearings of CR.

However, such tests may not be insisted upon for bearings not located in adverse conditions of exposure and where the test on accelerated ageing could be considered as adequate.

Process and acceptance control tests for ozone resistance by an independent testing agency shall be acceptable.

Tests on Complete Bearings or Samples

- i) Two bearings shall be selected at random from the lot as test bearings. The tests to be conducted are:
 - a) Test for determination of shear modulus (on a pair of bearings) and
 - b) Test for determination of compression stiffness (on one bearing out of the selected pair).

The test specifications and acceptance criteria shall conform to those given in Appendix-3 of IRC:83 Part II. The tested bearings shall be part of the lot accepted.

- ii) The test for determination of shear bond strength shall be conducted on two identical bearings selected at random from the lot as test bearings or on two identical specially moulded sample bearings of plan dimension 200 mm x 300 mm and overall thickness 41 mm (3 elastomer layers of thickness 8 mm each, 4 reinforcing plates of thickness 3 mm each, face cover 2.5 mm, and side cover 4 mm) as agreed upon between the manufacturer and buyer:

The test specifications and acceptance criteria shall conform to those given in Appendix-3 of IRC:83 Part II. This is a destructive test and the test bearings shall not be used in the structure.

MORTH 2005.4.3.2 Acceptance Testing Level 2

General Inspection : This shall conform to the provisions in Clause 2005.4.3.1 in all respects.

Test on specially moulded test pieces : This shall conform to the provisions in Clause 2005.4.3.1 in all respects.

Test on complete bearings : Test for determination of shear modulus shall be conducted using two bearings of the lot selected at random and conforming to relevant provisions of Clause 2005.4.3.1. These bearings shall, however, be part of the lot accepted. The remaining tests stipulated in aforesaid clause shall be carried out on two bearings selected at random which shall be excluded from the lot accepted.

MORTH 2005.4.4 Special Acceptance Inspection

Special acceptance inspection shall comprise the following :

- i) Acceptance testing by a NABL accredited independent external agency with separate or supplemental test facilities provided by it for polymer identification and confirmation about percentage of polymer content and ash content by TGA method.
- ii) Acceptance testing on test pieces prepared from the surface or body of the test bearings instead of specially moulded test pieces.
- iii) Acceptance testing on cut sample from finished bearing in order to measure thickness of individual layer of elastomer, dimension of laminates and flatness of laminates.
- iv) Acceptance test at ULS condition. Bearings tested at ULS condition cannot be used in the structure as its performance at SLS condition cannot be guaranteed after such test.
- v) Acceptance tests not covered by these specifications but according to the specifications laid down by the Engineer.

Special acceptance inspection may be specified under the following conditions :

- a) Special contract agreement between the manufacturer and the buyer. Cost of additional bearings to be consumed for special acceptance inspection, shall be borne by buyer.
- b) Evidence of unsatisfactory process or acceptance control

MORTH 2005.4.5 Inspection Certificate

A lot under inspection shall be accepted by the Inspector and so certified, when no defect is found with respect to any of the quality characteristics tested on samples drawn from the lot, according to specifications laid down to Clause 2005.4.3 covering general inspection tests on specially moulded test pieces and on complete bearings.

Signature of tenderer (s)

Date:



In case any bearing is found defective, the lot shall be rejected by the Inspector and so certified.

In case any bearing is found to be defective with respect to any quality characteristic, discerned by general inspection tests specified in Clauses 2005.4.3.1 and 2005.4.3.2, tests on specially moulded test pieces and complete bearings as applicable according to those Clauses, shall nevertheless be completed. If the said lot, rejected by general inspection, satisfies the acceptance criteria in respect of these other tests, the lot and individual bearings found defective shall be clearly identified in the inspection certificate.

Immediately on completion of inspection by the Inspector authorized by the Engineer, the manufacturer shall obtain an inspection certificate which shall include the details of a lot or lots accepted/rejected by him and records of all test measurements.

MORTH 2005.4.6 Quality Control Certificate

The manufacturer shall certify for each lot of bearings under acceptance that :

- a) an adequate system of continuous quality control was operated in his plant.
- b) the entire process remained in control during the production of the lot of bearings under acceptance, as verified from the quality control records/charts which shall be open to inspection of Engineer/Inspector on demand.

A certified copy of results of process control testing done on samples of elastomer used in the production of the lot shall be appended and shall include the following information :

Composition of compound — raw elastomer and ash content, the grade of raw elastomer used (including name, source, age on shelf), test results of hardness, tensile strength, elongation at break, compression set, accelerated ageing, etc.

A higher level certification of the process quality control shall be called for at the sole discretion of the Engineer in special cases e.g. where adequate inspection of bearings similar to those comprising the lot under inspection produced in the same plant, is not available with the Engineer or where there is any evidence of process or acceptance control being deemed unsatisfactory. The higher level certification shall comprise submittal of a complete quality control report covering tests as given in Appendix 3 of IRC:83 (Part II), supplementing the quality control certificate.

MORTH 2005.4.7 Acceptance

The manufacturer shall furnish the following to Engineer for obtaining acceptance:

Quality control certificate as laid down in Clause 2005.4.6.

Inspection certificate as laid down in Clause 2005.4.5.

The manufacturer shall furnish any supplementary information on the system of quality control and/or process and acceptance control testing as may be deemed necessary by the Engineer.

Signature of tenderer (s)

Date:



In case of any evidence of process or acceptance control testing being deemed unsatisfactory by him, Engineer at his sole discretion may call for a special acceptance testing of the lot according to specifications laid down by him, without any prejudice to his right to reject the lot. The entire cost of such supplementary inspection shall be borne by the manufacturer.

The Engineer shall be the sole authority for acceptance of a lot on scrutiny of the certificates along with any supplementary evidence as mentioned in this Clause, to his complete satisfaction therewith.

In case of rejection of a lot, the Engineer shall reserve the right to call for special acceptance inspection for the succeeding lots offered for inspection, according to the specifications laid down by him. The entire cost of such tightened inspection shall be borne by the manufacturer.

MORTH 2005.5 Certification and Marking

Bearings shall be transported to bridge site after final acceptance by Engineer and along with an authenticated copy of the certificate to that effect.

Each bearing shall be uniquely and individually numbered on its external faces for identification. The identification number shall be unique and such as to enable other bearings manufactured at the same time, to be traced through the production control records, should the need arise. The manufacturer's name and unique identification number of the bearing should be vulcanized on the top or bottom of the bearing.

An information card giving the following details for the bearings, duly certified by the manufacturer, shall also be appended :

Name of manufacturer

Date of manufacture

Elastomer grade used

Bearing dimensions

Production batch no.

Acceptance lot no.

Date of testing

Name and specific location of bridge

Explanation of markings used on the bearing

All bearings shall have suitable index markings identifying the information. The markings shall be made in indelible ink or flexible paint and if practicable, should be visible after installation. The top of the bearing and direction of installation shall be indicated.

MORTH 2005.6 Storage and Handling

Each elastomeric bearing shall be clearly labelled or marked. The bearing shall be wrapped in a cover and packed in timber crates with suitable arrangement to prevent movement and to protect corners and edges.

Signature of tenderer (s)

Date:



Care shall be taken to avoid mechanical damage, contamination with oil, grease and dirt, undue exposure to sunlight and weather of the bearings during transport and handling prior to and during installation.

MORTH 2005.7 Installation

- i) Bearings shall be installed in the structure as specified or approved by the Engineer to ensure that right bearing is being installed at the right location.
- ii) Bearings must be placed between true horizontal surfaces (maximum tolerance 0.2 percent perpendicular to the load) and at true plan position of their control lines marked on receiving surfaces (maximum tolerance ± 3 mm).
- iii) Concrete surfaces shall be free from local irregularities (maximum tolerance ± 1 mm in height).
- iv) Departures from common planarity of twin or multiple bearings shall be within such tolerance as may be specified or approved by the engineer.
- v) Design shall be got checked for the actual inclination in seating if larger inaccuracies than those specified are permitted.
- vi) For cast in-situ concrete superstructure, where bearings are installed prior to concreting, the forms around the bearings shall be capable of easy removal. Forms shall also fit the bearings snugly and prevent any leakage of mortar/grout. Any mortar contaminating the bearings during concreting shall be completely removed before setting.
- vii) Fixing of bearing to precast concrete or steel superstructure elements, shall be done by application of epoxy resin adhesive to interface, after specified surface preparation. The specifications for adhesive material, workmanship and control shall be approved by the Engineer. Care shall be taken to guard against faulty application and consequent possibility of behavior of the adhesive layer as a lubricant. The bonding by the adhesive shall be deemed effective only as a device for installation and shall not be deemed to secure bearings against displacement for the purpose of design.
- viii) Lifting of a cast in-situ post-tensioned bridge deck for relieving time dependent deformation shortly after installation of bearings, should be avoided. In case such lifting is unavoidable, the lifting arrangement, proper seating of the girder on the bearing, etc. shall be rigidly controlled to avoid any risk of misalignment.
- ix) Bulging of the rubber layer between the reinforcing steel laminates on free exposed perimeter under load, which is a normal phenomenon, shall be examined carefully for detecting any evidence of crack or bond failure.
- x) In case seating of bearings on a non-horizontal plane is required, it shall be carried out in accordance with acceptable practice and particular specifications as may be laid out and directed by the Engineer.
- xi) As a measure of ample precaution against accidental displacement, the bearings shall be placed in a recess as shown in Fig. 9 of I RC:83 (Part II).

- xii) After installation, bearings and their surrounding areas shall be left clean.

MORTH 2005.8 Maintenance

- i) The maintenance of bearings shall be carried out according to a planned schedule.
- ii) The structure should be designed and detailed in such a way that the bearings are easily accessible after installation for inspection and maintenance. Arrangements for insertion of jacks to lift the bridge deck shall be made in detailing of structure.
- iii) The exposed bearing surface shall be maintained clean and free from contamination with grease, oil or other deleterious matter.
- iv) Annual routine maintenance inspection or special maintenance inspection of all bearings shall be made to check the following aspects and results reported:
 - The top and bottom load bearing surfaces shall be in full contact with the plinth (bottom supporting surface) and the soffit (top supporting surface). If there is imperfect contact between the bearing surfaces and the soffit and plinth, the angle between the soffit and plinth shall be checked against the design specifications.
 - The magnitude of the shear deflection of each bearing shall be checked to ensure that it is within the design specifications.
 - A visual inspection shall be made of all the accessible edges. A note shall be made of the size and position of any cracks, splits or uneven bulges.
 - The plinth and soffit shall be examined for signs of displacement from original position of bearing which may be indicated by black marks left on the plinth and soffit.
 - Where applicable, the sliding surfaces shall be examined for cleanliness and for any movements beyond the design range.
 - Where applicable, protective coating and/or dust protection shall be examined for signs of deterioration.
- v) Damaged bearings shall be replaced immediately. To avoid differences in stiffness, all adjacent bearings on the same line of support shall also be replaced.

MORTH 2006.6 Maintenance

- i) Bearings shall be designed and manufactured to make them maintenance free so as to withstand undesirable effects caused by extreme atmosphere or aggressive environmental conditions/ unforeseen events.

- ii) Suitable easy access to the bearings shall be provided for inspection and maintenance. Provision shall also be available for jacking up the superstructure so as to allow repair/replacement of bearings.
- iii) The area surrounding the bearings shall be kept clean and dry to avoid damage to the bearings. The bearings shall also be periodically cleaned to remove deposits of salts, debris, dust or other foreign material.
- iv) Periodic inspection and nominal maintenance of bearings shall be carried out in order to ensure their better performance and longer life. The bearings are required to be inspected at intervals of one year for the first five years after installation and at intervals of two years thereafter.
- v) The bearings shall also be examined carefully after unusual occurrences such as passage of heavy traffic/oversized loads, earthquakes and battering by floating debris in high floods.

MORTH 2007 INSPECTION AND TESTING

Where any patented items are used, the manufacturer's certificate for the same with test proofs shall be submitted along with the design and got approved by the Engineer before their use in work.

MORTH 2008 TEST AND STANDARDS OF ACCEPTANCE

The materials shall be tested in accordance with these Specifications and shall meet the prescribed criteria.

The work shall conform to these Specifications and shall meet the prescribed standards of acceptance.

MORTH 2009 MEASUREMENTS FOR PAYMENT

Bearings shall be measured in numbers, according to their capacities and particular specifications given on the drawings.

The quantity of elastomeric bearings shall be measured in cubic centimetres of finished dimensions.

MORTH 2010 RATE

The contract unit rate of each type of bearing shall include the cost of manufacturing, supplying and fixing the bearings in position complete as specified on the drawings or as directed by the Engineer.

The rate shall also include the cost of samples and their testing as required under the specifications or as directed by the Engineer.

In case of steel bearings the rate shall include the cost of all nuts, bolts and all tests prescribed in the specifications and shown on the drawings.

Item SR No. 8

Providing and laying chequered precast cement concrete tiles 22mm thick with aggregate of sizes up to 6mm in floors, treads of steps and landings on 20mm thick bed of C.M. 1:6 (1-cement : 6-sand) or L.M. 1:1.5(1-Lime putty : 1.5 coarse

Signature of tenderer (s)

Date:



sand) joint with neat cement slurry with pigments to match the shade of the tiles.

1.Chequered tiles :-

Chequered terrazzo tiles 22mm thick with marble chips of size upto 6mm in floor on 25mm thick bed or C.M 1:5 jointed with neat cement slurry mixed with pigment to match the shade of the tiles including rubbing and polishing etc. complete, light shade using white cement.

2.Fixing Tiles

2.1 The tiles before laying shall be soaked in water for at least two hours. Neat grey cement grout at 3.3 kg/cement/sq.mt. of honey like consistency shall be spread over the mortar bedding at directed. The edges of the tile be smeared with neat cement slurry. The tiles shall be well pressed and gently tapped with a wooden mallet till they are properly bedded and in level with the adjoining tiles. There shall be no hollows in bed or joints. The joint between the tiles shall be as thin as possible in straight line or as per pattern.

2.2 The tiles shall not have staggered joints. The joint shall be true to centre line both ways. The Nehni trap coming in the flooring shall be so positioned that it granting shall replace only one tile as far as possible. Where full size tiles cannot be fixed, they shall be cut(sawn) to be required size and the edges rubbed smooth to ensure straight and true joints. The joint shall be filled with gray cement grout with wire brush of trowel to a depth of 5mm and loose material removed. White cement shall be used for pointing the joints. After fixing the tile finally in an even plane the flooring shall be kept wet and allowed to nature undisturbed for 7 days.

2.3 Cleaning: The surplus cement grout that may have come out of the joint shall be cleared off before its sets. Once the floor has set, it shall be carefully washed, cleared by dilute acid and dried. Proper precaution and measure shall be taken to ensure that the tiles are not damaged in any way till the completion of the construction.

3.0 Mode of measurements and payment:

3.1 The work done shall be measured in sq.mt. for visible area of work done. The length and width of the flooring shall be measured not-between the faces of skirting or dedos or plastered face of wall as the case may be. The paving under dado or skirting shall not be measured. No deduction shall be made nor extra paid of any opening in the floor of area upto 0.1 sq.mt. Nothing extra shall be paid for lying the floors at different levels in the same rooms.

3.2 The rate shall be for a unit of one sq. metre.

Item SR No. 9

Providing PVC. 100 mm. diameter water spouts including necessary iron gratings as per drawings.

Signature of tenderer (s)

Date:



MORTH 2705.1. This work shall consist of furnishing and fixing in position of drainage spouts and drainage pipes for bridge decks.

Drainage along longitudinal direction shall be ensured by sufficient number of drainage fixtures embedded in the deck slab. The spouts shall be of not less than 100 mm in diameter and shall be corrosive resistant material such as galvanized steel with suitable cleanout fixtures. The spacing of drainage spouts shall not exceed 10 m. The discharge from drainage spout shall be kept away from the deck structure by means of suitable down pipes upto 500 mm above High Flood Level. In case of viaducts in urban areas, the drainage spouts should be connected with suitably located runners and down pipes to discharge the surface run-off to drains provided at ground level.

MORTH 2705.2. Fabrication

The drainage assembly shall be fabricated to the dimensions shown on the drawings. All materials shall be corrosion resistant; Steel components shall be seam welded for water tightness and then hot-dip galvanised.

MORTH 2705.3. Placement

The galvanised assembly shall be given two coats of bituminous paint before placement. The whole assembly shall be placed in true position, lines and levels as shown in the drawing with necessary cutouts in the shuttering for deck slab and held in place firmly. Where the reinforcements of the deck are required to be cut, equivalent reinforcements shall be placed at the corners of the cut out.

MORTH 2705.4. Finishing

After setting of the deck slab concrete, the shrinkage cracks around the assembly shall be sealed with polysulphide sealant or bituminous sealant as per IS: 1834 and the excess sealant trimmed to receive the wearing coat. After the wearing coat is completed, similar sealant shall be provided to cover at least 50 mm on the wearing coat surface all round the drainage assembly.

MEASUREMENTS FOR PAYMENT :

Drainage spouts shall be measured in numbers.

RATE:

The contract unit rate for each drainage spout shall include the cost of all labour, material, tools and plant required for completing the work as per these Specifications. It shall also include the cost of providing flow drain pipes with all fixtures up to the point of ground drains wherever shown on the drawings.

Item SR No. 10

Providing and laying of a strip seal expansion joint catering to maximum horizontal movement upto 70 mm complete as per approved drawings and standard specifications to be installed by the manufacturer/supplier or their

Signature of tenderer (s)

Date:



authorised representative ensuring compliance to the manufacturer's instructions for installation.

MORTH 2601 DESCRIPTION

The work shall consist of fabrication and installation of expansion joints. The filler joint, asphaltic plug joint, compression seal joint and reinforced elastomeric joint of slab seal, strip seal and box seal type shall conform to these Specifications.

MORTH 2602 GENERAL

MORTH 2602.1 The type of expansion joint proposed to be used shall conform to the design and got approved by the Engineer.

MORTH 2602.2 Expansion joints shall be robust, durable, water-tight and easy for inspection, maintenance and replacement. Site fabricated expansion joints shall be prohibited. Expansion joints shall be procured from approved manufacturers and shall be of proven type.

MORTH 2602.3 Alternative proprietary type deck joints proposed by the Contractor in lieu of the type specified shall comply in all respects with the manufacturer's specifications and meet the required range of movements and rotations and be fit for the purpose of ensuring satisfactory long term performance. For such proprietary type deck joints the following information shall be provided.

- i) Name and location of the proposed manufacturer.
- ii) Dimensions and general details of the joint including material specifications, holding down bolt or anchorage details and installation procedures.
- iii) Evidence of satisfactory performance under similar environmental conditions of similar joints being produced by the manufacturer.

Acceptance of any alternative type of expansion joint shall be at the sole discretion of the Engineer. Such deck joints shall be installed in accordance with the manufacturer's recommendations and to the requirements of these Specifications.

Vehicular traffic shall not be allowed over expansion joints after their installation for such period as may be determined by the Engineer.

MORTH 2602.4 The expansion joint shall be provided to cover the entire carriageway, kerb and footpath, wherever provided. It shall follow the profile of the deck including the kerb,

Signature of tenderer (s)
Date:

footway and facia. The expansion joint for kerb, footway and facia may be of different type and specification from that used for the carriageway and it shall cater to all movements and rotations for which the carriageway expansion joint is designed and shall be water tight.

MORTH 2603 PERFORMANCE REQUIREMENTS

MORTH 2603.1 The expansion joint proper and the transition zone (the zone of connection of joint assembly and the adjoining deck) shall satisfy the performance requirements specified herein. The expansion joint proper shall satisfy the performance requirements of both the bridge structure and the road users.

MORTH 2603.2 Performance Requirements with Respect to Bridge Structure

The expansion joint shall:

- i) withstand the imposed loads including the impact load from live load and other sources,
- ii) allow expansion and contraction movement due to temperature, creep, shrinkage, pre-stressing and structural deformations,
- iii) permit relative rotation in elevation and plan due to the causes mentioned above,
- iv) be waterproof,
- v) be properly sealed,
- vi) ensure long life by being resistant to corrosion,
- vii) be easy to install,
- viii) be easy to maintain.
- ix) be easy to replace. and
- x) be resistant to the materials likely to collect/spill over the deck in its normal service.

MORTH 2603.3. Performance Requirements with Respect to User

The expansion joint shall:

- i) provide smooth continuity at the top of the deck for riding comfort,
- ii) be skid resistant,
- iii) be non-damaging to rubber tyres,
- iv) make little or no noise during passage of vehicles,
- v) ensure that animal paws and hooves do not get entangled when used by animal drawn traffic,
- vi) permit passage of steel tyre of bullock carts without being damaged, and
- vii) look good aesthetically.

MORTH 2607.1. Components

Signature of tenderer (s)

Date:



Strip seal expansion joint shall comprise the following items :

- i) Edge beams - This special claw leg profiled member shall be of extruded rolled steel section combining good weld ability with notch toughness.
- ii) Strip seal - This shall be of chloroprene with high tear strength, insensitive to oil, gasoline, and ozone. It shall have high resistance to aging. This component, provided to ensure water tightness, shall have bulbous shape of the pan of the seal which is inserted into the groove, provided in the edge beam. The seal should be vulcanised in single operation for minimum full length of joint.
- iii) Rigid Anchorage - This shall be welded to the edge beam at staggered distance.
- iv) Anchor loops - This shall be made of weldable steel connecting the rigid anchorage with, deck reinforcement

MORTH 2607.2. Material

- i) Edge beams of this special section are at present being directly imported in India. The steel shall conform to steel grade Rst 37-2 of German Standard or equivalent.
- ii) Chloroprene of strip seal shall conform to clause 915.1 of RC:83 (Pan II). The properties of chloroprene shall conform to Table 2600-1
- iii) Anchorage steel shall conform to IS:2061
- iv) Anchor loop shall conform to IS:2062.

MORTH TABLE 2600-1. STRIP SEAL ELEMENT SPECIFICATION

Sealing element is made of chloroprene and must be an extruded section. The working movement range of the sealing element shall be at least 80 mm with a maximum of 100 mm at right angles to the joint and ± 40 mm parallel to the joint

PROPERTY	SPECIFIED VALUE
Hardness	63 \pm 5 Shore A
Tensile Strength	Min 11 MPa
Elongation at fracture	Min 350 per cent
Tear Propagation Strength	
Longitudinal	Min 10 N/mm
Transverse	Min 10 N/mm
Shock Elasticity	Min 25 per cent
Abrasion	Min 220 mm ³
Residual Compressive Strain (22 h/70 deg C/30 per cent strain)	Max 28 per cent
Ageing in hot air	

Signature of tenderer (s)

Date:



(14 days/70 deg C)	Max +5 Shore A
Change in hardness	Max -20 per cent
Change in tensile strength	Max -20 per cent
Change in elongation at fracture	
Ageing in ozone	
(24 h/50pphm/25 deg C/20 per cent strain)	No cracks
Swelling behaviour in Oil	
(116 h/25 per cent Q ASTM Oil no.	
Volume Change	Max 5 per cent
Change in hardness	Max 10 Shore A
ASTM Oil no.3	
Volume Change	Max 25 per cent
Change in hardness	Max 20 Shore A
Cold Hardening Point	Min -35 deg C

MORTH 2607.3. Fabrication (Pre-installation)

- Rolled steel profiles for edge beams shall be long enough to cater for a 2-lane carriageway. These shall be cut to size of actual requirements by means of a metre box saw. Alignment of the cut-to-size steel profiles shall then be made in accordance with the actual bridge cross-section on work tablet. For this purpose, the contour of bridge cross-section shall be sketched onto these tables. After the steel profiles are aligned, they will be chucked to the tables by means of screw clamps and tacked by arc welding.
- Anchor plates shall be cut to the required size by gat cutting. These shall be welded to the edge beams.
- Anchor loops shall be bent to the required shape and welded to anchor plates.
- The finally assembled joints shall then be clamped and transported to the work site.

MORTH 2607.4. Handling and Storage

- For transportation and storage, auxiliary brackets shall be provided to hold the joint assembly together.
- The manufacturer shall supply either directly to the Engineer . or to the Bridge Contractor all the materials of strip seal joints including sealants and all other accessories for the effective installation of the jointing.
- Expansion joint material shall be handled with care. It shall be stored under cover on suitable

Signature of tenderer (s)

Date:



lumber padding by the Contractor to prevent damage. Any damage occurring after delivery shall be made good at the Bridge Contractor's expense to the satisfaction of the Engineer.

MORTH 2610

INSTALLATION OF EXPANSION JOINTS

MORTH 2610.1 General Procedure

- i) Expansion Joints shall be installed under close supervision of the manufacturer's/supplier's engineer in order to ensure the quality of installation and its function as intended during the entire life span. Detailed Installation Manual shall be supplied by the manufacturer/ supplier.
- ii) The dimensions of the recess in the deck shall be established in accordance with the drawings or design data of the manufacturer, taking into account the width of gap for movement of the joint.
- iii) The pre-setting of expansion joint shall be done by means of an auxiliary construction.
- iv) The road surfacing/wearing coat shall be laid before commencing installation of joint. Before laying wearing coat, the recess portion shall be filled with sand and wearing coat shall be laid in a continuous manner over the deck slabs and recess portion. Prior to installation of the joints, portion of wearing coat over the recess shall be removed by a suitable method e.g. saw cutting and the infill sand shall also be removed.
- v) **Preparation of the Recess :** The size and form of recess shall suit the geometry of the expansion joint. However, the width shall not be less than the specified value for a particular type of joint. In order to avoid difficulties during installation, the following points must be checked and considered:
 - a) Dimension of recess
 - b) Levels
 - c) Skew and slope
 - d) Designed gap between bridge deck and abutment and/or between adjoining decks
 - e) Existing structural reinforcement according to the drawings

Reinforcing bars that would obstruct the installation of expansion joint shall be bent to accommodate the expansion joint anchorages. Cutting off or removal of interfering reinforcing bars shall only be done after consultation with the Engineer.

The recess shall be cleaned thoroughly. If necessary, the surface should be roughened. All loose dirt and debris shall be removed by wire brushing, air blowing and dried with hot compressed air.

- vi) **Shuttering :** Shuttering must be used to seal the space between the underside of the joint and the vertical face of the recess. The shuttering must be fitted in such a way that it forms an appropriate seal against the edge of the recess. The recess

- shall be shuttered in such a way that dimensions shown on the drawing are maintained. The formwork shall be rigid and firm.
- vii) **Placing in the Recess :** Level marks shall be set next to the recess. This enables a controlled leveling of the expansion joint. Lowering the expansion joint/joint construction/insert into the recess shall be done in such a way that the entire length of the joint is evenly lowered into the recess. Thereafter, the joint/joint construction/insert is precisely leveled and adjusted in the longitudinal, transverse and vertical planes. If required, the joint must also be adjusted to the gradient of the final surface level.
- viii) **Connection**
- a) The expansion joint/joint construction/insert shall be installed preferably in the early morning when the temperature is distributed almost uniformly over the whole bridge. Immediately before the installation, the actual temperature of the bridge shall be measured. If it is not within the considered tolerance, the pre Set adjustment shall be corrected. The joint/joint construction/insert shall be lowered in a predetermined position. Following placement of the joint/joint construction/insert in the prepared recess, the joint/joint construction/insert shall be leveled and finally aligned and the anchorage steel on one side of the joint welded to the exposed reinforcement bars of the structure. Upon completion, the same procedure shall be followed for the other side. With the expansion joint/joint construction/ insert finally held at both sides, the auxiliary brackets shall be released, allowing it to take up the movement of the structure. After carrying out the final fixing, the .protection against corrosion shall be completed.
- b) For fully assembled joints with one end fixed and other end movable e.g. modular strip/box seal joint, connection shall be as detailed below:

The 1st side : The fixed side of the assembled joint (either the abutment or the bridge deck side) is designated the 1st side for connecting the joint. The preliminary fixing is made by evenly placing and welding of reinforcing bars over the entire length between the anchor loops and the deck reinforcement. To facilitate concreting, the gap between recess and shuttering is sealed by a grout seam. The seam must be left to dry prior to final concreting. After this, additional reinforcing bars are welded until all anchor loops are firmly connected to the deck reinforcement. The expansion joint shall be considered sufficiently fixed when no vibration is noted when it is lightly tapped. The expansion joint shall not be subjected to any loads that could in any way displace the precise location of this fixing.

The 2nd side : Depending on the size of the expansion joint and the expected movement during installation, the most suitable time must be determined for fixing of the 2nd (moveable) side. Usually this is the early morning hours with the smallest temperature deviations. The procedure is

identical to that for the 1st side. The joint shall be provisionally fixed to the reinforcement as fast as possible.

Immediately afterwards, the fixation brackets shall be removed. Thereafter, the gap between recess and shuttering shall be sealed with grout seam and the remaining reinforcing bars welded as described previously.

ix) **Concreting**

a) Prior to final concreting, the position of the joint/joint construction/insert must be recorded. The Engineer must give written confirmation of the correct position of the joint and recess concreting. The recess shall be thoroughly watered. Before pouring the concrete the joint construction should be protected by a cover. Controlled concrete having strength not less than that in superstructure subject to a minimum of M35, shall be filled into the recess. The water cement ratio shall not be more than 0.4. If necessary, admixtures may be used to improve workability. The concrete must exhibit low shrinkage. The freshly placed concrete shall be properly vibrated. Damage to the shuttering shall be avoided during vibration. The concrete shall be finished flush with the carriageway surfacing. The concrete shall be kept damp until it has cured in order to avoid fissures caused by drying too fast. After the concrete has cured, the movable installation brackets and shuttering still in place shall be removed.

b) For modular strip seal joint the space beneath the joint boxes shall be completely filled with concrete. So that traffic loads are safely transmitted into the structure.

x) As soon as the concrete in the recess has become initially set, a sturdy ramp shall be placed over the joint to protect it from traffic at site.

Expansion joint shall not be exposed to traffic loading before completion of carriageway surfacing.

xi) The elastomeric sealing element may be field installed. For strip seal and modular strip seal joints the sealing element shall be in continuous lengths spanning the full carriageway width. Proper fit of the seal of the sealing element must be ensured. The seal shall be installed by suitable methods in such a way that it is not damaged.

Acceptance Test

- (i) All steel elements shall be finished with conform corrosion protection system.
- (ii) For neoprene seat, the acceptance test shall conform to the requirement & Stipulated in Table 2600-1. It shall also be stretch tested. If a manufacturer is to supply this type of joint, they will have to produce a test certificate accordingly conducted in a recognised laboratory, in India or

Signature of tenderer (s)

Date:



abroad.

- (iii) In view of the importance of the built up edge beam*, special investigation of fatigue strength of this section with anchorages to withstand 2×10^6 load change cycles without showing signs of damage, will be required. The supplier shall have to produce a test certificate in this regard, conducted in a recognised laboratory, in India or abroad.
- (iv) The manufacturer shall produce test certificates indicating that anchorage system had been tested in a recognised laboratory to determine optimum configuration of anchorage assembly under dynamic loading.
- (v) The manufacturer shall satisfy the Engineer that water tightness test for the type of joint has been carried out in a recognised laboratory to check the water tightness under a water pressure of 4 bars.
- (vi) As strip seal type of joint if specialised in nature generally of the proprietary type, the manufacturer shall be required to produce evidence of satisfactory performance of this type of joint.

MORTH 2613. TESTS AND STANDARDS OF ACCEPTANCE

The materials shall be tested in accordance with these specifications and shall meet the prescribed criteria.

The work shall conform to these specifications and shall meet the prescribed standards of acceptance.

MORTH 2614. MEASUREMENTS FOR PAYMENT

The expansion joint shall be measured in running metres. For filled joints, the rate per running metre shall include the cost of sealant for the depth provided in this drawing.

MORTH 2615. RATE

The contract unit rate shall include the cost of all material, labour, equipment and other incidental charges for fixing the joints complete in all respects as per these specifications in the case of Bridge Contractor supplying the expansion joint. If the manufacturer supplies the expansion joint directly to the Engineer, the cost of installation, handling and fixing shall be borne by the Bridge Contractor.

Item SR No. 11

Providing and fixing in position of standard performed sealed and slab type or Strip Seal elastomeric Type Expansion Joints (80 mm expansion) for railway bridge or Road over Bridge as per approved drawing and latest MOST/IRC 69 specification. The rate are inclusive of supplying, fixing with contractor's own materials e.g. inserts, bolts, socket tubes, neoprene sheet/cap etc. equipments, machineries, labour, all taxes, royalty, all lead and lift, transport, testing, surface preparations, complete.

The work shall be carried out as per Indian Railways Unified Standard Specifications for works and materials 2010.

Signature of tenderer (s)
Date:



Item SR No. 12

Supplying and fixing reinforced concrete heavy duty non-Pressure pipes with collars for culverts carrying heavy traffic as per IS 458-1991 specifications including setting the pipes in C.M. 1:2 watering and laying (to level or slopes) of class NP3 of following internal daimeters.(vii) 900mm dia.

1. This shall consist of furnishing and installing reinforced cement concrete pipe of the type diameter and length required at the location shown on the drawings or as ordered by the Engineer-in-charge.
2. Reinforced concrete pipe shall be of **NP3** type conforming to the requirements of IS : 458 and shall be of dia. as specified in the item. Each consignment of cement concrete pipes shall be inspected, if necessary and approved by the Engineer-in-charge either at the place of manufacture or at the site before their incorporation in the works.

NP3, NP2 and NP1 pipes are used for R.C.C. Pipes. Where the testing of pipes will not be feasible the contractors will have to produce a certificate from the' manufacturer on company's letter head in the given' hereinafter from.

Production of such certificate will not however relieve the Contractor form his responsibility of supplying pipes of required standard and will have to bear the loss or damage caused to the work on account of defects found subsequently during execution. It will also be necessary to purchase these pipes from manufacturer having standard equipments for carrying out various tests as per IS : 458 at his factory.

Form of Certificate for NP-3, NP-2, NP-1 Pipes

We_____

Manufacturer or R.C.C. Pipes produce R.C.C. pipes as per the requirement of IS : 458 and also carry out the required test at out place, We have acquired equipments for carrying out test and are prepared to carry out tests at our factory sites. We have experience of

manufacturing of pipes of years. The pipes supplied by us to M/S._____.

Satisfy the requirement of IS:458.

Date:_____

Place:_____

Manufacturer's Sign _____

3. No pipes shall be placed in position until the foundations have been approved by the Engineer-in charge. Where two or more pipes are to be laid adjacent to each other, they shall be separated by a distance equal to at least half the diameter of the pipe subject to minimum of 900 mm. The laying of pipes on the prepared foundation shall start from the outlet and proceed towards the inlet and be completed to the specified lines and grades. The pipes shall be fitted and matched so that when laid in works they form a culvert with a smooth uniform invert. Any pipe found defective or damaged during laying shall be removed at the cost of Contractor.
- 4 The pipes shall be jointed either by collar joint or by flush joint in the former case the collars shall be of R.C.C. 150 to 200 mm. wide and having the same strength as the pipes to be jointed. Caulking space shall be between 13 and 20 mm. according to the diameter of the pipes caulking material shall be slightly wet mix of cement and sand in the ratio of 1:2 rammed with caulking irons. Before caulking the collar shall be so placed that its centre coincides with that of pipes and an even annular space is left between the collar and the pipes. Flush joint may be shaped to form a self centering joint with a joining space 13 cm wide. The joining space shall be filled with cement mortar 1:2 (1 cement : 2 sand) mixed sufficiently dry to remain in position when forced with a trowel or rammer. Care shall be taken to fill all voids and excess mortar shall be removed. All joints shall be made with care so that their interior surface is smooth and consistent with the interior surface of the pipes. After finishing, the joint shall be kept covered and damp for at least four days.

5. R. C. C. pipes shall be measured along their centre between their inlet and outlet ends in **linear metres**.
6. The rate for the pipes shall include the cost of pipe including loading, unloading, handing, storing laying in position and joining complete.

MORTH 2901 SCOPE

This work shall consist of furnishing and installing reinforced cement concrete pipes, of the type, diameter and length as per design and details and at locations shown on the drawings or as ordered by the Engineer and in accordance with the requirements of these Specifications.

MORTH 2902 MATERIALS

All materials used in the construction of pipe culverts shall conform to the requirements of Section 1000.

Each consignment of cement concrete pipes shall be inspected, tested, if necessary, and approved by the Engineer either at the place of manufacture or at the site before their incorporation in the works.

MORTH 2903 EXCAVATION FOR PIPE

The foundation bed for pipe culverts shall be excavated true to the lines and grades shown on the drawings or as directed by the Engineer. The pipes shall be placed in shallow excavation of the natural- ground or in open trenches cut in existing embankments, taken down to levels as shown on the drawings. In case of high embankments where the height of fill is more than three times the external diameter of the pipe, the embankment shall first be built to an elevation above the top of the pipe equal to the external diameter of the pipe, and to width on each side of the pipe of not less than five times the diameter of pipe, after which a trench shall be excavated and the pipe shall be laid.

Where trenching is involved, its width on either side of the pipe shall be a minimum of 150 mm or one-fourth of the diameter of the pipe whichever is more and shall not be more than one-third the diameter of the pipe. The sides of the trench shall be as nearly vertical as possible.

The pipe shall be placed where the ground for the foundation is reasonably firm. Installation of pipes under existing bridges or culverts shall be avoided as far as possible. When during excavation the material encountered is soft, spongy or other unstable soil, and unless other

special construction methods are called for on the drawings or in special provisions, such unsuitable material shall be removed to such depth, width and length as directed by the Engineer. The excavation shall then be backfilled with approved granular material which shall be properly shaped and thoroughly compacted upto the specified level.

Where bed-rock or boulder strata are encountered, excavation shall be taken down to atleast 200 mm below the bottom level of the pipe with prior permission of the Engineer and all rock/ boulders in this area be removed and the space filled with approved earth, free from stone or fragmented material, shaped to the requirements and thoroughly compacted to provide adequate support for the pipe.

Trenches shall be kept free from water until the pipes are installed and the joints have hardened.

MORTH 2904 BEDDING FOR PIPE

The bedding surface shall provide a firm foundation of uniform density throughout the length of the culvert, shall conform to the specified levels and grade, and shall be of one of the following two types as specified on the drawings :

- (i) First Class Bedding: Under first class bedding, the pipe shall be evenly bedded on a continuous layer of well compacted approved granular material, shaped concentrically to fit the lower part of the pipe exterior for atleast ten percent of its overall height or as otherwise shown on the drawings. The bedding material shall be well graded sand or another granular material passing 5.6 mm sieve suitably compacted/rammed. The compacted thickness of the bedding layer shall be as shown on the drawings and in no case shall it be less than 75 mm
- (ii) Concrete Cradle Bedding : When indicated on the drawings or directed by the Engineer, the pipe shall be bedded in a cradle constructed of concrete having a mix not leaner than M 15 conforming to Section 1700. The shape and dimensions of the cradle shall be as indicated on the drawings. The pipes shall be laid on the concrete bedding before the concrete has set.

MORTH 2905 LAYING OF PIPE

Signature of tenderer (s)
Date:



No pipe shall be laid in position until the foundation has been approved by the Engineer. Where two or more pipes are to be laid adjacent to each other, they shall be separated by a distance equal to at least half the diameter of the pipe subject to a minimum of 450 mm.

The arrangement for lifting, loading and unloading concrete pipes from factory/yard and at site shall be such that the pipes do not suffer any undue structural strain, any damage due to fall or impact. The arrangement may be got approved by the Engineer.

Similarly, the arrangement for lowering the pipe in the bed shall be got approved by the Engineer. It may be with tripod-pulley arrangement or simply by manual labour in a manner that the pipe is placed in the proper position without damage.

The laying of pipes on the prepared foundation shall start from the outlet and proceed towards the inlet and be completed to the specified lines and grades. In case of use of pipes with bell-mouth, the belled end shall face upstream. The pipes shall be fitted and matched so that when laid in work, they form a culvert with a smooth uniform invert

.Any pipe found defective or damaged during laying shall be removed at the cost of the Contractor.

MORTH 2906 JOINTING

The pipes shall be jointed either by collar joint or by flush joint. In the former case, the collars shall be of RCC 150 to 200 mm wide and having the same strength as the pipes to be jointed. Caulking space shall be between 13 and 20 mm according to the diameter of the pipe. Caulking material shall be slightly wet mix of cement and sand in the ratio of 1:2 rammed with caulking irons. Before caulking, the collar shall be so placed that its center coincides with the joint and an even annular space is left between the collar and the pipe.

Flush joint may be internal flush joint or external flush joint. In either case, the ends of the pipes shall be specially shaped to form a self centering joint with a jointing space 13 mm wide. The jointing space shall be filled with cement mortar, 1 cement to 2 sand, mixed sufficiently dry to remain in position when forced with a trowel or rammer. Care shall be taken to fill all voids and excess mortar shall be removed.

For jointing pipe lines under light hydraulic pressure, the recess at the end of the pipe shall be filled with jute braiding dipped in hot bitumen or other suitable approved compound.

Pipes shall be so jointed that the bitumen ring of one pipe shall set into the recess of the next pipe. The ring shall be thoroughly compressed by jacking or by any other suitable method.

All joints shall be made with care so that their interior surface is smooth and consistent with the interior surface of the pipes. After finishing, the joint shall be kept covered and damp for at least four days.

MORTH 2907 BACKFILLING

Trenches shall be backfilled immediately after the pipes have been laid and the jointing material has hardened. The backfill soil shall be clean, free from boulders, large roots, excessive amounts of sods or other vegetable matter, and lumps and shall be approved by the Engineer. Backfilling upto 300 mm above the top of the pipe shall be carefully done and the soil thoroughly rammed, tamped or vibrated in layers not exceeding 150 mm, particular care being taken to thoroughly consolidate the materials under the haunches of the pipe. Approved pneumatic or light mechanical tamping equipment can be used.

Filling of the trench shall be carried out simultaneously on both sides of the pipe in such a manner that unequal pressures do not occur.

In case of high embankment, after filling the trench upto the top of the pipe in the above said manner, a loose fill of a depth equal to external diameter of the pipe shall be placed over the pipe before further layers are added and compacted.

MORTH 2908 HEADWALLS AND OTHER ANCILLARY WORKS

Headwalls, wing walls, aprons and other ancillary works shall be constructed in accordance with the details shown on the drawings or as directed by the Engineer. Masonry for the walls shall conform to Sections 1300, 1400 or 1700 as applicable. Aprons shall conform to Section 2500.

MORTH 2909 OPENING TO TRAFFIC

No traffic shall be permitted to cross the pipes unless height of filling above the top of the pipes is atleast 600 mm.

MORTH 2910 MEASUREMENTS FOR PAYMENT

RCC pipe culvert shall be measured as complete work in linear metres along its length between the inlet and outlet ends. Culverts with multiple rows of pipes shall be measured as one unit; irrespective of the number of rows.

MORTH 2911

RATE

The Contract unit rate for the pipe culvert shall include the cost of pipes including loading, unloading, hauling, handling, storing, laying in position and jointing and all ancillary works such as excavation, bedding for pipes, backfilling, concrete, masonry and aprons and incidental costs to complete the work as per these Specifications.

Item SR No. 13

Providing, laying and jointing in true line and level 110 diameter U.P.V.C (Type B) conforming to IS 13592-1992 with one end plain and other end socketed with rubber ring, & fittings conforming to ISI 14735-1999 of approved make for drainage system pipe line, pipe shall be jointed with each other with rubber lubricant, pipe shall be fixed on wall using of PVC clamp of the size 110 mm diameter x 149 mm length x 145 mm height at every 2000 mm centre to centre or shall be concealed in walls as directed including necessary fittings such as bends, shoes etc. including testing of pipes and joints and jointed with adhesive solvent cement including cost of all materials.

Materials

- 1.1. The pipes shall be standard I.S.I. mark U.P.V.C. SWR Type B pipe of specified dia.
- 1.2. The fittings, clamps etc. required for specified dia. bore pipes shall be of best quality and makes as approved by the Engineer-in-charge. Necessary accessories with inner/ outer brass thread shall be used as required and instruction by Engineer in charge.

2.0. Workmanship

2.1. Cutting, Laying & Jointing

- 2.1.1. When the tubes are to be cut or rethreaded, the ends shall be carefully filed out so that no obstruction to bore is offered. The ends of the tubes shall then be threaded conforming to the requirements of I.S. 554-1955 with pipe dies and taps carefully in such a manner that it will not result in slackness of joints when the two pieces are screwed together.
- 2.1.2. The taps and dies shall be used only for straightening screw threads which have become bent or damaged and shall not be used for turning of the threads so as to make them slack as

Signature of tenderer (s)

Date:



the latter procedure may not result in the water tight joint. The screw threads for tube and fitting shall be protected from edge until they are fitted.

2.1.3. In jointing the tubes, the inside of the socket and the screwed end of the tubes shall be oiled and smeared with white or red lead and wrapping around with a few turns of fine spun yarn round the screwed end of the tube. The end shall then be tightly screwed in the socket, tees, etc. with a pipe wrench. Care shall be taken that all times free from dust and dirt during fixing. But from the joints shall be removed after screwing. After laying the open ends of the pipes shall be temperately plugged to prevent access of water, soil, or any other foreign matter. Jointing shall be carried out with proper chemical adhesive material and allow to dry.

2.1.4. Any threads exposed after jointing shall be painted or in the case of underground piping thickly coated with approved anti-corrosive paint to prevent corrosion.

2.2. Fixing concealed to wall, ceiling & floors.

2.2.1. In case of fixing concealed cement point to walls or ceilings, these shall run on the surface of the wall, or ceiling (not in chase) unless otherwise specified. The fixing shall be done by means of standard pattern, holder clamps keeping the pipes about 15 mm. clear of the wall. When it is found necessary to pattern, holder clamps keeping the pipes about 15 mm. clear of the wall. When it is found necessary to conceal the pipes and when specified so, chasing may be adopted or pipe fixed in ducts or recesses etc. provided that there is sufficient space to work on the pipe with usual tools. The pipe shall not ordinarily be buried in walls or solid floors, where unavoidable, pipe may be buried for short distances provided that adequate protection is given against damage and where so required joints are not buried. Where required M.S. tube sleeve shall be fixed at a place a pipe is passed through a wall or floor for expansion and contraction and other movements. In case the pipe is embedded in walls or floors, it should be painted with anti-corrosive bitumastic paint of approved quality. The pipe should not come in contact with lime mortar or lime concrete as the pipe is affected by lime. Under the floors, the pipe shall be laid in layer of sand filling.

2.2.2. All pipes and fittings shall be fixed truly vertical and horizontal unless unavoidable. The pipes shall be fixed to walls with standard pattern clamps of required size and shape, one

end of which shall be properly plugged or cemented into walls with cement mortar 1:3 (1 cement : 3 coarse sand) and the other tightened round the pipes to hold it securely. These clamps shall be spaced at regular intervals in straight lengths at 2 MC/C interval in horizontal run and 2.5 m. interval in vertical run. For pipe of 15 mm. dia. up to 25 mm. dia the holes in the walls and floors shall be made by drilling with chisel or jumper and not by dismantling the brick work or concrete. However for bigger diameter pipes the holes shall be carefully made (1 cement : 3 coarse sand), and properly finished to match the adjacent surface.

2.3. Testing of joints :

2.3.1. After laying and jointing, the pipes and fillings shall be inspected under working conditions of pressure and flow. Any joints found liken shall be redone, and ail leaking pipes removed and replaced without extra cost.

2.3.2. The pipes and fittings after they are laid shall be tested to hydraulic pressure of 6 Kg./Sq cm. The pipe shall be slowly and carefully charged with water allowing all air to escape and avoiding all shocks and water hammer. The draw off takes and stop cock shall then be closed and specified hydraulic pressure shall be applied gradually. The pressure gauge must be accurate. The pipes and fittings shall be tested in sections as the work laying proceeds, keeping, the joints exposed for inspection during the testing.

3.0. Mode of measurements and payment

3.1. The description of the item shall, unless otherwise stated be held to include where necessary conveyance and delivery, handling, unloading, storing fabrication, hoisting, all labour for finishing to required shape and size, setting, fitting in position straight, cutting and waste return of packing etc.

3.2. The length shall be measured on running meter basis of finished work. The length shall be taken along the centre line of the pipe and fittings. The pipes fixed to wall, ceiling. floors etc shall be measured and paid under this item.

3.3. All the work shall be measured in decimal system as fixed in its place, subject to tolerance given below unless otherwise stated.

- (i) Dimension shall be measured to the nearest 0.01 meter.
- (ii) Area shall be worked out to the nearest 0.01 sq. meter.
- 3.4. All measurements of cutting shall unless otherwise stated be held to include the consequent waste.
- 3.5. In case of fitting of unequal bore, the target bore shall be measured for the test.
- 3.6. Testing of pipe line fittings, and joints include for providing all plant appliances necessary for obtaining access to the work to be tested and carrying out the tests.
- 3.7. The rate includes U.P.V.C. SWR Type B pipe with screwed socket joints to gather with all fittings (such as bends, sockets, springs, elbows, tees, crosses, short pieces, clamps and plugs, unions etc.) and fixing complete with clamping wall hooks, wooden plug etc. and also curing, screwing and waste and for making forged (or hand made) bends on piping as required. Connector shall be inserted where required or directed. The rate also includes cutting through walls, floors etc. and their making good and painting exposed threads with anti-corrosive paint as above and testing where tubes are to be fixed to wall, ceiling and flooring, the rates shall not include painting of pipes, providing sleeves and sand filling under floor for which separate payment shall be made.
- 3.8. The rate shall be for a unit of one running meter.

Item SR No. 14:-

Providing and laying Road marking with hot applied thermo plast compound reflecting glass beads on bituminous surface. Providing and laying Hot applied thermoplastic compound 2.5 cm thick including reflectorizing glass beads 250 gms/sqmt area, thickness of surface applied glass beads as per IRC 35 the finished surface to be level uniform and free from streaks & holes.

MORTH 803 ROAD MARKINGS

MORTH 803.1 Scope

The work shall consist of providing road markings of specified width, layout and design using paint of the required specifications as given in the Contract and as per guidelines contained in from IRC:35-1997.

Signature of tenderer (s)
Date:

MORTH 803.2 Materials

Road markings shall be of ordinary road marking paint hot applied thermoplastic compound, reflectorised paint or cold applied reflective paint as specified in the item and the material shall meet the requirements as specified in these Specifications.

MORTH 803.3 Ordinary Road Marking Paint

MORTH 803.3.1 Ordinary paint used for road marking shall conform to Grade I as per IS:164.

MORTH 803.3.2 The road marking shall preferably be laid with appropriate road marking machinery.

MORTH 803.4 Hot Applied Thermoplastic Road Marking**MORTH 803.4.1 Thermoplastic Material****MORTH 803.4.1.1 General**

The thermoplastic material shall be homogeneously composed of aggregate, pigment, resins and glass reflectorizing beads. The colour of the compound shall be white or yellow (IS colour No. 356) as specified in the drawings or as directed by the Engineer.

MORTH 803.4.1.2 Requirements :

- i) **Composition:** The pigment, beads, and aggregate shall be uniformly dispersed in the resin. The material shall be free from all skins, dirt and foreign objects and shall comply with requirements indicated in Table 800-9.

Table 800-9 : Proportions of Constituents of Marking Material (Percentage by Weight)

Component	White	Yellow
Binder	18.0 min.	18.0 min.
Glass Beads	30-30	30-30
Titanium Dioxide	10.0 min.	—
Calcium Carbonate and Inert Fillers	42.0 max.	See Note below
Yellow Pigments	- -	See Note below

Note : Amount of yellow pigment, calcium carbonate and inert fillers shall be at the option of the manufacturer, provided all other requirements of this Specification are met.

- ii) **Properties:** The properties of thermoplastic material, when tested in accordance with ASTM D36/BS-3262-(Part I), shall be as below:
- a) **Luminance :**
White: Daylight luminance at 45°-65 percent min. as per AASHTO M 249

Yellow: Daylight luminance at 45°-45 percent min. as per AASHTO M 249
 - b) **Drying time :** When applied at a temperature specified by the manufacturer and to the required thickness, the material shall set to bear traffic in not more than 15 minutes.
 - c) **Skid resistance:** not less than 45 as per BS:6044.
 - d) **Cracking resistance at low temperature:** The material shall show no cracks on application to concrete blocks.
 - e) **Softening point:** $102.5^{\circ}\text{C} \pm 9.5^{\circ}\text{C}$ as per ASTM D 36.
 - f) **Yellowness index (for white thermoplastic paint):** not more than 0.12 as per AASHTO M 249
- iii) **Storage life :** The material shall meet the requirements of these Specifications for a period of one year. The thermoplastic material must also melt uniformly with no evidence of skins or unmelted particles for the one year storage period. Any material not meeting the above requirements shall be replaced by the manufacturer/supplier/ Contractor.
- iv) **Reflectorisation :** Shall be achieved by incorporation of beads, the grading and other properties of the beads shall be as specified in Clause 803.4.2.
- v) **Marking :** Each container of the thermoplastic material shall be clearly and indelibly marked with the following information:
- 1) The name, trade mark or other means of identification of manufacturer
 - 2) Batch number
 - 3) Date of manufacture
 - 4) Colour (white or yellow)
 - 5) Maximum application temperature and maximum safe heating temperature.

- vi) **Sampling and Testing :** The thermoplastic material shall be sampled and tested in accordance with the appropriate ASTMIBS method. The Contractor shall furnish to the Engineer a copy of certified test reports from the manufacturers of the thermoplastic material showing results of all tests specified herein and shall certify that the material meets all requirements of this Specification.

MORTH 803.42 Reflectorizing Glass Beads

MORTH 803.42.1 General

This Specification covers two types of glass beads to be used for the production of reflectorised pavement markings.

Type 1 beads are those which are a constituent of the basic thermoplastic compound vide Table 800-9 and Type 2 beads are those which are to be sprayed on the surface vide Clause 803.6.4.

MORTH 803.4.2.2 The glass beads shall be transparent, colourless and free from milkiness, dark particles and excessive air inclusions.

These shall conform to the requirements spelt out in Clause 803.4.2.3.

MORTH 803.4.2.3 Specific Requirements

- a) **Gradation :** The glass beads shall meet the gradation requirements for the two types as given in Table 800-10.
- b)

Table 800-10 : Gradation Requirements for Glass Beads

Sieve Size	Percent Retained	
	Type '1	Type 2
1.18 mm	0 to 3	
850 micron	5 to 20	0 to 5
600 micron		5 to 20
425 micron	65 to 95	- -
300 micron	- -	30 to 75
180 micron	0-10	10 to 30
Below 180 micron	- -	0 t o 1 5

- c) **Roundness:** The glass beads shall have a minimum of 70 percent true spheres.
- d) **Refractive index:** The glass beads shall have a minimum refractive index of 1.50.

- e) **Free flowing properties:** The glass beads shall be free of hard lumps and clusters and shall dispense readily under any conditions suitable for paint striping. They shall pass the free flow-test.

MORTH 803.4.2.4 Test Methods

The specific requirements shall be tested with the following methods:

- i) Free-flow test: Spread 100 grams of beads evenly in a 100 mm diameter glass dish. Place the dish in a 250 mm inside diameter dessicator which is filled within 25 mm of the top of a dessicator plate with sulphuric acid water solution (specific gravity 1.10). Cover the dessicator and let it stand for 4 hours at 20°C to 29°C. Remove sample from dessicator, transfer beads to a pan and inspect for lumps or clusters. Then pour beads into a clean, dry glass funnel having a 100 mm stem and 6 mm orifice. If necessary, initiate flow by lightly tapping the funnel. The glass spheres shall be free of lumps and clusters and shall flow freely through the funnel.
- ii) The requirements of gradation, roundness and refractive index of glass beads and the amount of glass beads in the compound shall be tested as per BS:6088 and BS:3262 (Part I).
- iii) The Contractor shall furnish to the Engineer a copy of certified test reports from the manufacturer of glass beads obtained from a reputed laboratory showing results of all tests specified herein and shall certify that the material meets all requirements of these Specifications. However, if so required, these tests may be carried out as directed by the Engineer.

MORTH 803.4.3 Application Properties of Thermoplastic Material

MORTH 803.4.3.1 The thermoplastic material shall readily get screeded/extruded at temperatures specified by the manufacturers for respective method of application to produce a line of specified thickness which shall be continuous and uniform in shape having clear and sharp edges.

MORTH 803.4.3.2 The material upon heating to application temperatures shall not exude fumes, which are toxic, obnoxious or injurious to persons or property.

MORTH 803.4.4 Preparation

- i) The material shall be melted in accordance with the manufacturer's instructions in a heater with a mechanical stirrer to give a smooth consistency to the thermoplastic material to avoid local overheating. The temperature of the mass shall be within the range specified by the manufacturer, and shall on no account be allowed to exceed the maximum temperature stated by the manufacturer. The molten material should be used as expeditiously as possible and for thermoplastic material which has natural binders or is otherwise sensitive to prolonged heating, the material shall not be maintained in a molten condition for more than 4 hours.

Signature of tenderer (s)

Date:



- ii) After transfer to the laying equipment, the material shall be maintained within the temperature range specified by the manufacturer for achieving the desired consistency for laying.

MORTH 803.5 Reflectorised Paint

Reflectorised paint, if used, shall conform to the Specification by the manufacturers and approved by the Engineer. Reflectorising glass beads for reflectorising paints where used shall conform to the requirements of Clause 803.4.2.

MORTH 803.6 Application

MORTH 803.6.1 Marking shall be done by machine. For locations where painting cannot be done by machine, approved manual methods shall be used with prior approval of the Engineer. The Contractor shall maintain control over traffic while painting operations are in progress so as to cause minimum inconvenience to traffic compatible with protecting the workmen.

MORTH 803.6.2 Where the compound is to be applied to cement concrete pavement, a sealing primer as recommended by the manufacturer, shall be applied to the pavement in advance of placing of the stripes to ensure proper bonding of the compound. On new concrete surface any laitance and/or curing compound shall be removed before the markings are applied.

MORTH 803.6.3 The thermoplastic material shall be applied hot either by screeding or extrusion process. After transfer to the laying apparatus, the material shall be laid at a temperature within the range specified by the manufacturer for the particular method of laying being used. The paint shall be applied using a screed or extrusion machine.

MORTH 803.6.4 The pavement temperature shall not be less than 10°C during application. All surfaces to be marked shall be thoroughly cleaned of all dust, dirt, grease, oil and all other foreign matter before application of the paint.

The material, when formed into traffic stripes, must be readily renewable by placing an overlay of new material directly over an old line. Such new material shall so bond itself to the old line that no splitting or separation takes place.

Thermoplastic paint shall be applied in intermittent or continuous lines of uniform thickness of at least 2.5 mm unless specified otherwise. Where arrows or letters are to be provided,

Signature of tenderer (s)
Date:

thermoplastic compound may be hand-sprayed. In addition to the beads included in the material, a further quantity of glass beads of Type 2, conforming to the above noted Specification shall be sprayed uniformly into a mono-layer on to the hot paint line in quick succession of the paint spraying operation. The glass beads shall be applied at the rate of 250 grams per square metre area.

MORTH 803.6.5 The minimum thickness specified is exclusive of surface applied glass beads.

The method of thickness measurement shall be in accordance with Appendices B and C of BS:3262 (Part 3).

MORTH 803.6.6 The markings shall be done to accuracy within the tolerances given below:

- i) Width of lines and other markings shall not deviate from the specified width by more than 5 percent.
- ii) The position of lines, letters, figures, arrows and other markings shall not deviate from the position specified by more than 20 mm
- iii) The alignment of any edge of a longitudinal line shall not deviate from the specified alignment by more than 10 mm in 15 m.
- iv) The length of segment of broken longitudinal lines shall not deviate from the specified length by more than 150 mm.

In broken lines, the length of segment and the gap between segments shall be as indicated on the drawings; if these lengths are altered by the Engineer, the ratio of the lengths of the painted sections shall remain the same.

MORTH 803.6.7 Properties of Finished Road Markings

The finished lines shall be free from ruggedness on sides and ends and be parallel to the general alignment of the carriageway. The upper surface of the lines shall be level, uniform and free from streaks.

- a) The stripe shall not be slippery when wet.
- b) The marking shall not lift from the pavement in freezing weather.
- c) After application and proper drying, the stripe shall show no appreciable deformation or discoloration under traffic and under road temperatures upto 60°C.
- d) The marking shall not deteriorate by contact with sodium chloride, calcium chloride or oil dripping from traffic.

- e) The stripe or marking shall maintain its original dimensions and position. Cold ductility of the material shall be such as to permit normal movement with the road surface without chopping or cracking.
- f) The colour of yellow marking shall conform to IS Colour No. 356 as given in IS:164

MORTH 803.6.8 Measurements for Payment

MORTH 803.6.8.1 The painted markings shall be measured in sq. metres of actual area marked (excluding the gaps, if any).

MORTH 803.6.8.2 In respect of markings like directional arrows and lettering, etc., the measurement shall be by numbers.

MORTH 803.6.9 Rate

The Contract unit rate for road markings shall be payment in full compensation for furnishing all labour, materials, tools, equipment, including all incidental costs necessary for carrying out the work at the site conforming to these Specifications complete as per the approved drawing(s) or as directed by the Engineer and all other incidental costs necessary to complete the work to these Specifications.

Item SR No. 15

Providing & Fixing Village name boards made out of 2mm. Aluminium sheet / 4 mm ACP (aluminium composite panel), size 90 x 60 cms rectangle per the design of IRC - 67 - 2012 Pre treated with phosphating process & acid etching : coated with one coat of epoxy primer and two coats of best quality epoxy paint reflectorised with high intensity prismatic grade retro reflective sheeting of type-4 as per ASTM D-4956 and latest M.O.S.T Specification, 3.3 M long (2 no's) Stand post and frame fabricated from suitable size iron angle of 75 x 75 x 6mm/ 65 NB circular MS pipe as required and frame fabricated from suitable size iron angle of 35x35x3mm; painted with best quality epoxy coating in black and white bends the details of symbol or inscription / numerals for each board shall be as per the instruction for of Engineer-in-charge, The fixing at site shall be in 1;2;4 CC block of size 45 x 45 x 60cms. for each leg. including excavation curing etc. comp. under the supervision of engineer in charge.(B) High intensity Grade. A warranty for 7 years for the retro reflective sheeting from original manufacturer and certified copy of three years outdoor exposure test report

from third party test lab for the product offered shall be submitted by contractor.(B) Class-B type-4 retro reflective sheeting.

1.0 Traffic Signs having retro-reflective sheeting:

1.1 General Requirement:

The retro-reflective used the sign shall be consist of white or colored sheeting a smooth surface outer surface has the property of retro-reflection over its entire surface. It shall be weather resistant and show lifting or curling and shall have negligible shrinkage or expansion. A certificate of having tested the sheeting for properties in an unprotected outdoor exposure facing the sun for two years and its having passed these tests shall be obtained from a reputed laboratory by the manufacturer of the sheeting. The Type of sheeting to be used would depend upon the type, Functional hierarchy and importance of the road.

1.2 High Intensity Grade Sheeting:

1.2.1 Encapsulated Lens Type:

This sheeting be of encapsulated lens type consisting of spherical glass lens element, adhered to a resin and encapsulated by flexible, transparent proof plastic having a smooth surface. The retro reflective surface after cleaning with soap and water and in dry condition shall have the minimum co-efficient of retro-reflection (determined in accordance with ASTM Standard e: 810) as indicated in MORTH Table 800-1.

MORTH TABLE 800-1 ACCEPTABLE MINIMUM CO-EFFCINT OF RETRO REFLECTIVE FOR HIGH INTENSITY GRADE SHEETING (CANDELAS PER LUX SQURE METOD).

Observation Angle (In degrees)	Entrance Angle (In degrees)	White	Yellow	Orange	Green /Red	Blue
0.2	-4	250	170	100	45	20
0.2	+30	150	100	60	25	11
0.5	-4	95	62	30	15	7.5
0.5	+30	65	45	25	10	5.0

When totally wet, the sheeting shall not less than 90% of the values of retro reflectance indicated in Table 800-1. At the end of 7 years. The sheeting retain at least 75% of its original retro-reflectance.

1.3 Engineering Grade Sheeting:

Signature of tenderer (s)

Date:

This sheeting shall be enclosed lens type consisting of microscopic lens element embedded beneath the surface of a smooth, flexible, transparent, water-proof plastic, resulting in a non-exposed lens optical reflecting system. The retro-reflective surface after cleaning with soap and water and in dry condition shall have the minimum coefficient of retro-reflection (determine in accordance with ASTM Standard e-810) as Table 800-2.

TABLE 800-2 ACCEPTABLE MINIMUM CO-EFFICIENT OF RETRO REFLECTIVE FOR ENGINEERING GRADE SHEETING (CANDELAS PER LUX SQUARE METOD).

Observation Angle (In degrees)	Entrance Angle (In degrees)	White	Yellow	Orange	Green	Red	Blue
0.2	-4	70	50	25	9.0	14.5	4.0
0.2	+30	30	22	7.0	3.5	6.0	1.7
0.5	-4	30	25	13.5	14.5	7.5	2.0
0.5	+30	15	13	4.0	2.2	3.0	0.8

1.3.1 When totally wet, the sheeting shall not show less than 90% of the values of retro-reflectance indicated in table 800-2 At the end of 5 years, The sheeting shall retain at least 50% of its original retro-reflectance.

1.4. **Messages /Borders:** The messages (legends, letters, numerals etc.) and borders shall either be screen-printed or of cut-outs. Screen-Printing shall be processed and finished with materials and in a manner specified by the sheeting manufacturer. Cut outs shall be of material as specified by the sheeting manufacturer and shall be bonded with the sheeting in the manner specified by Manufacturer.

1.4.1 For screen-printed transparent colored areas on white sheeting, the co-efficient shall not be less than 50 % of the values corresponding color in table 800-1(a),800-1(b) as applicable.

1.4.2 Cut out message and border, wherever used, shall be made out of retro-reflective sheeting (as per Clause 1.12) except those in black which shall be of non-reflective sheeting.

1.4.3 Color: Unless otherwise specified the general color scheme shall be stipulated in IS:5 “Color for ready Mixed Paints.”

Blue IS Color No.166: French Blue

Red IS Color No.537: Signal Red

Green IS Color No.284: Indian Green

Orange IS Color No.591: Deep Orange

Signature of tenderer (s)

Date:



The color shall be durable and uniform in acceptable but when viewed in day or under normal headlight at night.

1.5. Adhesives : The sheeting shall be either have a pressure sensitive of the aggressive tack type requiring no heat, Solvent or removable liner (removable by peeling without soaking in water or other solvent) and shall be suitable for the type material of the base plate used for the sign. The adhesive shall form a durable bond to smooth, corrosion and weather resistance surface of the base plate such that it shall be possible to remove the sheeting from the sign base in one piece by sharp instrument. In case of pressure-sensitive adhesive sheeting, the sheeting shall be applied in accordance with the manufacturer specification

1.6. Refurbishment: Where existing signs are specified for the refurbishment, the sheeting shall have a semi-rigid aluminium backing pre-coated with aggressive-tack type pressure sensitive adhesive. The adhesive shall be suitable for type of material used for the sign and should thoroughly bond that material.

1.7. Fabrication:

1.7.1 Surface to be refectories shall be prepared to receive the retro-reflective sheeting. The smooth plain surface before the application of retro-reflective sheeting. If the surface is rough, approved surface primer may be used. After cleaning, metal shall not be handled, except by suitable device or clean canvas gloves between all cleaning and preparation operation and application of reflective sheeting/primer.

1.7.2 Complete sheets of the material shall be used on the signs except where it is unavoidable. At splices sheeting with pressure sensitive adhesive shall be overlapped not less be 5 mm. Sheeting with heat –activated adhesive may be spliced with an overlapped not less than 5mm or butted with gap or butted with a gap not exceeding 0.75mm. Where screen printing with transparent color is proposed, only but jointing shall be used. Cut out to produce legends and borders shall be bonded with the sheeting in the manner specified by the manufacturer.

1.7.3 Warranty Durability: For each lot of sheeting procured, the contractor shall obtain from the manufacturer a 7 Years warranty for satisfactory field performance including stipulated retro-reflectance of the sheeting of high intensity grade and 5 years warranty for the engineering grade and submit the same to the Engineer. In addition, a 7 years and a five years warranty for satisfactory in field performance of the finished sign with retro-reflective sheeting of high intensity grade and engineering grade respectively, inclusive of the screen printed or cut-out letters/legends and their bonding and their bonding to the retro-reflective to the retro-reflective sheeting shall be obtained from the contractor/supplier and passed on to the Engineer.

1.8. Installation:

1.8.1 Sign post their foundation and sign mounting shall be so constructed as to hold in a proper and permanent position against the normal storm wind loads or displacement by vandalism. Normally signs with an area 0.9 Sq.m. shall be mounted on a single post, and for greater area two or more supports shall be provided. Sign supports may be of mild steel, reinforced concrete or galvanized iron (G.I.). Post –end shall be firmly fixed to the ground by means of properly designed foundation. The work of foundation shall conform to relevant specification as specified.

Signature of tenderer (s)

Date:



1.8.2 All components of signs and supports, other than the reflective portion and G.I. Posts shall be thoroughly decaled, cleaned, primed concrete or G.I. Posts. After the must have been tightened, The tails of the bolts shall be painted with three coats of red lead paint.

1.8.3 The signs shall be fixed to the posts by welding in the case of steel post and by bolts and washers of suitable size in the case or reinforced concrete or G.I. Posts. After the nuts have been tightened, the tails of the bolts shall be furred over with a hammer to prevent removal.

1.9. Measurement for payment:

The measurement for standard cautionary, mandatory and information sign shall be In number of different types of signs supplied and fixed as per above detail and specification.

1.10. Rate:

The contract unit shall be payment in full for the cost of making the road sign. Including all material, installing it at the site and incidentals to complete the work in accordance with the specification.

Item SR No. 16

Providing & Fixing sign boards made out of 2mm. Aluminium sheet / 4 mm ACP (aluminium composite panel) size 1 Meter x 1 Meter as per the design given by engineer in charge, Pre treated with phosphating process & acid etching : coated with one coat of epoxy primer and two coats of best quality epoxy paint reflectorised with high intensity prismatic grade retro reflective sheeting of type-4 as per ASTM D-4956 and as per latest M.O.S.T Specification, , 4.0 M long (2 nos) Stand post and frame fabricated from suitable size iron angle of 75 x 75 x 6mm / 65 NB circular MS pipe as required and frame fabricated from suitable size iron angle & 50 x 50 x 5mm ; painted with best quality epoxy coating in black and white bends the details of symbol or inscription / numerals for each board shall be as per the instruction for of Engineer-in-charge, The fixing at site shall be in 1;2;4 CC block of size 45 x 45 x 60cms. for each leg. including excavation curing etc. comp. under the supervision of engineer in charge.(B) High intensity Grade. A warranty for 7 years for the retro reflective sheeting from original manufacturer and certified copy of three years outdoor exposure test report from third party test lab for the product offered shall be submitted by contractor.(B) Class-B type-4 retro reflective sheeting.

Specifications are same as item no 15 and to be followed for this item except the size of the sign board made out 2 mm aluminium sheet is size 90X60 CM equilateral rectangle.

Item No.17:-

Providing and fixing Junction Board made out of 2mm aluminium sheet / 4 mm ACP (aluminium composite panel), size 244 x 122 cms rectangle, as per the

Signature of tenderer (s)

Date:



design of IRC-67-2012. Pre treated with phosphating process and acid etching coated with one coat of epoxy primer and two coats of best quality epoxy paint, reflectorized with high intensity prismatic grade retro reflective sheeting of type-4 as per ASTM D-4956 and as per the latest M.O.S.T. specification. 4.0 Mt. long (2 nos.) stand post and frame fabricated from suitable size iron angle of 75 x 75 x 6mm / 65 NB circular MS pipe as required and frame fabricated from suitable size iron angle & 50 x 50 x 5mm; painted with best quality epoxy coating in black and white bends. The details of symbol or inscription/ numerals for each board shall be as per the instruction of engineer in charge. The fixing at site shall be in 1:2:4 CC block of size 45 x 45 x 60 cms for each leg, including excavation curing etc. complete under the supervision of Engineer-In-Charge (B) High intensity Grade. A warranty for 7 years for the retro reflective sheeting from original manufacturer and certified copy of three years outdoor exposure test report from third party test lab for the product offered shall be submitted by contractor.(B) Class-B type-4 retro reflective sheeting.

MORTH 801.1. General

MORTH 801.1.1. The colour, configuration, size and location of all traffic signs for highways other than Expressways shall be in accordance with the Code of Practice for Road Signs, IRC: 67 or as shown on the drawings. For Expressways, the size of the signs, letters and their placement shall be as specified in the Contract drawings and relevant Specifications. In the absence of any details or for any missing details, the signs shall be provided as directed by the Engineer.

MORTH 801.1.2. The signs shall be either reflectorised or non-reflectorised as shown on the drawings or as directed by the Engineer. When they are of reflectorised type, they shall be of retro-reflectorised type and made of encapsulated lens type reflective sheeting vide Clause 801.3, fixed over aluminium sheeting as per these Specifications.

MORTH 801.1.3. In general, cautionary and mandatory signs shall be fabricated through process of screen printing. In regard to informatory signs with inscriptions, either the message could be printed over the reflective sheeting, or cut letters of non-reflective black sheeting used for the purpose which must be bonded well on the base sheeting as directed by the Engineer.

MORTH 801.2. Materials

The various materials and fabrication of the traffic signs shall conform to the following requirements:

MORTH 801.2J. Concrete : Concrete shall be of the grade shown on the Contract drawings or otherwise as directed by the Engineer.

MORTH 801.2.2. Reinforcing steel: Reinforcing steel shall conform to the requirement of IS:1786 unless otherwise shown on the drawing.

MORTH 801.2.3. Bolts, nuts, washers: High strength bolts shall conform to IS : 1367 whereas precision bolts, nuts, etc., shall conform to IS: 1364.

Signature of tenderer (s)

Date:



MORTH 801.2.4. Plates and supports: Plates and support sections for the sign posts shall conform to IS: 226 and IS: 2062 or any other relevant IS Specifications.

MORTH 801.2.5. Aluminium: Aluminium sheets used for sign boards shall be of smooth, hard and corrosion resistant aluminium alloy conforming to IS : 736-Material designation 24345 or 1900. 311

MORTH 801.2.6. Signs with a maximum side dimension not exceeding 600 mm shall not be less than 1.5 mm thick. All others shall be at least 2 mm thick. The thickness of the sheet shall be related to the size of the sign and its support and shall be such that it does not bend or deform under the prevailing wind and other loads.

MORTH 801.2.7. In respect of sign sizes not covered by IRC:67, the structural details (thickness, etc.) shall be as per the approved drawings.

MORTH 801.3. Traffic Signs Having Retro-reflective Sheeting

MORTH 801.3.1. General requirements: The retro-reflective sheeting used on the sign shall consist of the white or coloured sheeting having a smooth outer surface which has the property of retro-reflection over its entire surface. It shall be weather-resistant and show colour fastness. It shall be new and unused and shall show no evidence of cracking, scaling, pitting, blistering, edge lifting or curling and shall have negligible shrinkage or expansion. A certificate of having tested the sheeting for these properties in an unprotected outdoor exposure facing the sun for two years and its having passed these tests shall be obtained from a reputed laboratory, by the manufacturer of the sheeting. The reflective sheeting shall be either of Engineering Grade material with enclosed lens or of High Intensity Grade with encapsulated lens. The type of the sheeting to be used would depend upon the type, functional hierarchy and importance of the road.

MORTH 801.3.2. High intensity grade sheeting: This sheeting shall be of encapsulated lens type consisting of spherical glass lens, elements adhered to a synthetic resin and encapsulated by a flexible, transparent water-proof plastic having a smooth surface. The retro-reflective surface after cleaning with soap and water and in dry condition shall have the minimum co-efficient of retro-reflection (determined in accordance with ASTM D: 4956-09) as indicated in Table 800-2.

MORTH TABLE 800.2. ACCEPTABLE MINIMUM COEFFICIENT OF RETRO. REFLECTION FOR HIGH INTENSITY GRADE SHEETING (CANDELAS PER LUX PER SQUARE METRE)

Observation Angle (In degrees)	Entrance Angle (In degrees)	White	Yellow	Orange	Green / Red	Blue
0.2	-4	250	170	100	45	20
0.2	+30	150	100	60	25	11
0.5	-4	95	62	30	15	7.5
0.5	+30	65	45	25	10	5.0

Signature of tenderer (s)

Date:



When totally wet, the sheeting shall not show less than 90 per cent of the values of retro reflectance indicated in Table 800-2. At the end of 7 years, the sheeting shall retain at least 75 per cent of its original retro-reflectance.

MORTH 801.3.3. Engineering grade sheeting: This sheeting shall be of enclosed lens type consisting of microscopic lens elements embedded beneath the surface of a smooth, flexible, transparent, water-proof plastic, resulting in a non-exposed lens optical reflecting system. The retroreflective surface after cleaning with soap and water and in dry condition shall have the minimum coefficient of retro- reflection (determined in accordance with ASTM Standard: E-S'IO) as indicated in Table SOO-2.

MORTH TABLE 800.2. ACCEPTABLE MINIMUM COEFFICIENT OF RETRO.REFLECTION FOR ENGINEERING GRADE SHEETING (CANDELAS PER LUX PER SQUARE METRE)

Observation Angle (In degrees)	Entrance Angle (In degrees)	White	Yellow	Orange	Green	Red	Blue
0.2	-4	70	50	25	9.0	14.5	4.0
0.2	+30	30	22	7.0	3.5	6.0	1.7
0.5	-4	30	25	13.5	4.5	7.5	2.0
0.5	+30	15	13	4.0	2.2	3.0	0.8

When totally wet, the sheeting shall not show less than 90 per cent of the values, of retro-reflection indicated in Table SOO-2. At the end of 5 years, the sheeting shall retain at least 50 per cent of its original retro-reflectance.

MORTH 801.3.4. Messages/borders: The messages (legends, letters, numerals etc.) and borders shall either be screen-printed or of cut-outs. Screen printing shall be processed and finished with materials and in a manner specified by the sheeting manufacturer. Cut-outs shall be of materials as specified by the sheeting manufacturer and shall be bonded with the sheeting in the manner specified by the manufacturer.

MORTH 801.3.5. For screen-printed transparent coloured areas on white sheeting, the co-efficient of retro-reflection shall not be less than 50 per cent of the values of corresponding colour in Tables SOO-1 and 800-2, as applicable.

MORTH 801.3.6. Cut-out messages and borders, wherever used, shall be made out of retro-reflective sheeting (as per Clause S01.3.2 or S01.3.3 as applicable), except those in black which shall be of non-reflective sheeting.

MORTH 801.3.7. Colour: Unless otherwise specified, the general colour scheme shall be as stipulated in IS : 5 "Colour for Ready Mixed Paints", viz.

Signature of tenderer (s)

Date:



Blue	-	IS	Colour	No. 166:	French Blue
Red	-	IS	Colour	No. 537:	Signal Red
Green	-	IS	Colour	No. 284:	India Green
Orange	-	IS	Colour	No. 591:	Deep Orange.

The Colours shall be durable and uniform in acceptable hue when viewed in day light or under normal headlights at night.

MORTH 801.3.8. Adhesives: The sheeting shall, either have a pressure sensitive adhesive of the aggressive-tack type requiring no heat, solvent or other preparation for adhesion to a smooth clean surface, or a tack free adhesive activated by heat, applied in a heat-vacuum applicator, in a manner recommended by the sheeting manufacturer. The adhesive shall be protected by an easily removable liner (removable by peeling without soaking in water or other solvent) and shall be suitable for the type of material of the base plate used for the sign. The adhesive shall form a durable bond to smooth, corrosion and weather resistant surface of the base plate such that it shall not be possible to remove the sheeting from the sign base in one piece by use of sharp instrument. In case of pressure-sensitive adhesive sheeting, the sheeting shall be applied in accordance with the manufacturer's Specifications. Sheeting with adhesives requiring use of solvents or other preparation for adhesive shall be applied strictly in accordance with the manufacturer's instructions.

MORTH 801.3.9. Refurbishment: Where existing signs are specified for refurbishment, the sheeting shall have a semi-rigid aluminium backing pre-coated with aggressive-tack type pressure sensitive adhesive. The adhesive shall be suitable for the type of material used for the sign and should thoroughly bond with that material.

MORTH 801.3.10. Fabrication :

MORTH 801.3.10.1. Surface to be reflectorised shall be effectively prepared to receive the retro-reflective sheeting. The aluminium sheeting shall be de-greased either by acid or hot alkaline etching and all scale/dust removed to obtain a smooth plain surface before the application of retro reflective sheeting. If the surface is rough, approved surface primer may be used. After cleaning, metal shall not be handled, except by suitable device or clean canvas gloves, between all cleaning and preparation operation and application of reflective sheeting/primer. There shall be no opportunity for metal to come in contact with grease, oil or other contaminants prior to the application of retro-reflective sheeting.

MORTH 801.3.10.2. Complete sheets of the material shall be used on the signs except where it is unavoidable; at splices, sheeting with pressure sensitive adhesives shall be overlapped not less than 5 mm. Sheeting with heat-activated adhesives may be spliced with an overlap not less than 5 mm or butted with ~ gap not exceeding 0.75 mm. Where screen printing with transparent colours is proposed, only butt jointing shall be used. The material shall cover the sign surface evenly and shall be free from twists, cracks and folds. Cut-outs to produce legends and borders shall be bonded with the sheeting in the manner specified by the manufacturer.

MORTH 801.3.11. Warranty and durability : The Contractor shall obtain from the manufacturer a seven-year warranty for satisfactory field performance including stipulated retro-reflectance of the

retro-reflective sheeting of high intensity grade and a five year warranty for the adhesive sheeting of engineering grade. and submit the same to the Engineer. In addition, a seven year and a five year warranty for satisfactory in-field performance of the finished sign with retro-reflective sheeting of high intensity grade and engineering grade respectively, inclusive of the screen printed or cut out letters/legends and their bonding to the retro-reflective sheeting shall be obtained from the Contractor/supplier and passed on to the Engineer. The Contractor/supplier shall also furnish a certification that the signs and materials supplied against the assigned work meets all the stipulated requirements and carry the stipulated warranty.

Processed and applied in accordance with recommended procedures, the reflective material shall be weather resistant and, following cleaning, shall show no appreciable discolouration, cracking, blistering or dimensional change. and shall not have less than 50 per cent of the specified minimum reflective intensity values (Tables 800-1 and 800-2) when subjected to accelerated weathering for 1000 hours, using type E or EH Weatherometer (AASHTO Designation M 268).

MORTH 801.4. Installation

MORTH 801.4.1. Sign posts, their foundations and sign mountings shall be so constructed as to hold these in a proper and permanent position against the normal storm wind loads or displacement by vandalism. Normally, signs with an area upto 0.9 sq. m. shall be mounted on a single post, and for greater area two or more supports shall be provided. Sign supports may be of mild steel, reinforced concrete or galvanised iron (G.I). Post- end(s) shall be firmly fixed to the ground by means of properly designed foundation. The work of foundation shall conform to relevant Specifications as specified.

MORTH 801.4.2. All components of signs and supports, other than the reflective portion and OJ. posts shall be thoroughly descaled, cleaned, primed and painted with two coats of epoxy paint. Any part of mild steel

(M.S.) post below ground shall be painted with three coats of red lead paint.

MORTH 801.4.3. The signs shall be fixed to the posts by welding in the case of steel posts and by bolts and washers of suitable size in the case of reinforced concrete or GI posts. After the nuts have been tightened, the tails of the bolts shall be furred over with a hammer to prevent removal.

MORTH 801.5. Measurements for Payment The measurement of standard cautionary, mandatory and information signs shall be in numbers of different types of signs supplied and fixed, while for direction and place identification signs, these shall be measured by area in square metres.

MORTH 801.6. Rate The Contract unit rate shall be payment in full for the cost of making the road sign, including all materials, installing it at the site and incidentals to complete the work in accordance with the Specifications.

Item SR No.18:-

Providing and fixing Cautionary Sign Board made out of 2mm aluminium sheet/ 4 mm ACP (aluminium composite panel), size 90 x 90 x 90 cms equilateral triangle, as per the design of IRC-67-2012. Pre treated with phosphating process and acid etching coated with one coat of epoxy primer and two coats of best

Signature of tenderer (s)

Date:



quality epoxy paint, reflectorized with high intensity prismatic grade retro reflective sheeting of type-4 as per ASTM D-4956 and as per the latest M.O.S.T. specification, 3.6 Mt. long stand post and frame fabricated from suitable size iron angle of 75 x 75 x 6mm / 65 NB circular MS pipe as required and frame fabricated from suitable size iron angle & 35 x 35 x 3mm; painted with best quality epoxy coating in black and white bends. The details of symbol for each board shall be as per the instruction of engineer in charge. The fixing at site shall be in 1:2:4 CC block of size 45 x 45 x 60 cms for each leg, including excavation curing etc. complete under the supervision of Engineer-In-Charge (B) High intensity Grade. A warranty for 7 years for the retro reflective sheeting from original manufacturer and certified copy of three years outdoor exposure test report from third party test lab for the product offered shall be submitted by contractor. (B) Class-B type-4 retro reflective sheeting.

This work shall consist of Providing and fixing Cautionary Sign Board and shall be carried out as per relevant detailed specification of Item No. 17 of this contract.

Item SR No.19 :-

Providing and fixing ordinary kilometer stone of precast R.C.C. 1:2:4 including necessary reinforcement as per I.R.C. type design in C.C. 1: 4:8 including letter and paints etc. complete. (for N.H., SH. and M.D.R.)

1. Kilometer stone shall be of approved quality and shall be either black Rajula stone or of precast 1:2:4 R.C.C. as specified in the item.
2. The size manner of fixing painting and lettering of K.M. stone specification as per I.R.C. 8 (Type design for Highway kilometer stones.) The fixing of K.M. stone shall be carried out in ordinary concrete of grade specified in the item using broken metal field metal or gravel The measurement for payment shall be made per No of K.M. stone fixed in position
3. Unit rate for kilometre stone include the cost of all materials, labour, tools, fixing, finishing curing lettering and painting as directed by the Engineer-in-charge.

Item SR No.20 :-

Providing and fixing marble slab including engraving and painting complete of Size 75 cm x 60 cm x 4 cm

1. Marble plate shall be white and of approved quality and shall be of size as mentioned in the item. Lettering shall be done by V-shape engraving and shall be filled with black paint of approved quality, lettering shall be done as directed by the Engineer-in-charge. The Marble plate shall be fixed in neat cement at a place as directed by the Engineer-in-charge. Cement shall conform to relevant IS Specification.
2. Measurement shall be per number of marble plate fixed.
3. Unit rates includes cost of all material labour and tools to complete the work

Signature of tenderer (s)
Date:

Item SR No.21:-

Supplying and fixing cat eye (Stimsonite) made out from Acrylo butyle styrene high compression injection moulding with reflector made of MMC (prismatic type of size 12cm x 6cm x 2.5cm) provided with bituminous adhesive 100g. with each unit for fixing. (High Intensity grade)

1.1 General

Reflective Pavement marker (RPM) or road stud is device which is bonded to or anchored within the road surface for lane marking and delineation for night time visibility. It reflects incident light in directions close to the direction from which it came.

1.2 Definitions**1.2.1 Description of Terms Specific to this standard**

- 1.2.1.1** Coefficient of luminous intensity (CIL) or specific intensity = the ratio of luminous intensity of the retro-reflector in the direction of observation to luminance at the retro-reflector on a plane perpendicular to the direction of the incident light expressed in terms of Milaca deal as per incident lux (med/ lx).
- 1.2.1.2** Horizontal entrance angle – the angle in the horizontal plant between the direction of incident light and the normal to the leading edge of the marker.
- 1.2.1.3** Observation angle – the angle in the reflector between the illumination axis and the observation axis.
- 1.2.1.4** Retro – reflection – reflection in which the radiation is returned in direction close to the direction from which it came, this property being maintained over were variations of the direction of incident radiation.
- 1.2.1.5** Head – that part of a road stud which is above the road surface where the road stud is fixed in position in the road.
- 1.2.1.6** Upper surface – that part of the external surface of road stud which is visible when the road stud is fixed in position in the road.
- 1.2.1.7** Anchorage – that part of a road stud which is below the road surface above the road stud is fixed position in the road.

1.3 Material

- 1.3.1** Plastic body of RPM road stud shall be moulded from ASA (Acrylic Sterner Acrylonitrile) or HIPS (Impacts polystyrene) or ABS or any other suitable material approved by the Engineer-in-charge. The marker shall support a load of 13635 kg tested in accordance with ASTM D4280.
- 1.3.2** Reflective panels shall consist if number of lenses containing single or dual prismatic cubes capable of providing total internal reflection of the light entering the lens face. Lenses shall be moulded of methyl methecrylate conforming to ASTMD 788 or equivalent.

1.4 Design

- 1.4.1** The slope or retro-reflecting surface shall preferably be 35 ± 5 degree to base.
- 1.4.2** The area of each retro-reflecting surface shall not be less than 13.0 Sq.cm.

1.5 Optical Performance**1.5.1 Unidirectional and bi-directional studs**

- 1.5.1.1** Each reflector or combination of reflectors on each face of the stud shall have a CIL not less than given in Table 1 or 2 as appropriate.

Table 1 Minimum C.I.L. Values for Category "A" studs.

Entrance angle	Observation angle	C.I.L. in med 1 x		
		White	Amber	Red
0" U 5" L & R	0.3"	220	110	44
0" U 10" L & R	0.5"	120	60	24

Table 1 Minimum C.I.L. Values for Category "B" studs.

Entrance angle	Observation angle	C.I.L. in med 1 x		
		White	Amber	Red
0" U 6" L & R	0.3"	20	10	4
0" U 10" L & R	0.5"	15	7.5	3

Note: The entrance angle of 0"U corresponds to the normal aspect of the reflectors when the reflecting road stud is installed in horizontal road surface.

- 1.5.1.2** A stud that incorporates one or more corner cube reflectors shall be considered to be included in category "A". A stud that incorporates one or more biconvex reflectors shall be considered to be included in category "B".

1.5.2 Omni – directional studs

Each Omni-directional stud shall have a minimum C.I.L. of not less than med/ lx.

1.5.3 Tests

- 1.5.3.1** Coefficient of luminance intensity can be measured by produced described in ASTM D 809 "Practice for Measuring Photometric Characteristics" or as recommended in BS 873 Part 4:1973.

- 1.5.3.2** Under test conditions a stud shall not be considered to fall the photometric requirements of the measured C.I.L. at any one position of measurement is less than the values specified in Table 1 or 2 provided that.

- (A) The value is not less than 80% of the specified minimum, and
(B) The average of the left and right measurements for the specific angle is greater than the specified minimum.

1.6 Fixing of Reflective Markers

1.6.1 Requirements

- 1.6.1.1** The enveloping profile of the head of the stud shall be smooth and the studs shall not present any sharp edges to traffic.
- 1.6.1.2** The reflecting portions of the studs shall be free from crevice or ledges where dirt might accumulate.

- 1.6.1.3** All road studs shall be legibly marked with the name, trade mark of other means of identification of the manufacture.
- 1.6.1.4** Marker height shall not exceed 20 mm.
- 1.6.1.5** Marker width shall not exceed 130 mm.
- 1.6.1.6** The base of the marker shall be flat within 1.3 mm. If the bottom of the marker is configured. The outermost faces of the configurations shall not deviate more than 1.3 mm from a flat surface.
- 1.6.2 Placement**
- 1.6.2.1** The reflective marker shall be fixed to the road surface using the adhesives and the produced recommended by the manufacturer. No nails shall be used to affix the marker as nails are hazardous for the roads.
- 1.6.2.2** Regardless of the type of adhesive used. The markers shall not be fixed if the pavement is not surface dry and on new asphalt concrete surfacing unit the surfacing has been opened to traffic for a period of not less than 14 hours.
- 1.6.2.3** The portions of the highway surface, to which the marker is to be bonded by the adhesive, shall be free of dirt, curing compound, grease, oil, moisture, loose of unsound layers, paint and any other material which would adversely affect the bond of the adhesive.
- 1.6.2.4** Use a wire brush, if necessary to loosen and remove dirt. Then brush or blow clean.
- 1.6.2.5** The adhesive shall be places uniformly on the cleaned pavement surface or on the bottom to the marker in a quantity sufficient to result in complete coverage of the area of contact of the marker with no voids present and with a slight excess after the marker has been lightly pressed in place.
- 1.6.2.6** For epoxy installations, excess adhesive around the edge of the marker, excess adhesive on the pavement and adhesive on the exposed surfaces of the markers shall be immediately removed. Soft rags moistened with mineral spirits or kerosene may be used a necessary to remove adhesive from exposed faces of pavement marker.
- 1.7 Warranty and durability**

The contractor shall obtain from the manufacturer a two year warranty for satisfactory light performance including stipulated retro-reflectance of the reflecting panel and submit the same to the Engineer. In addition, a two year warranty for satisfactory infield performance of the finished road marker shall also be given by the contractor who carried out the work of fixing of reflective road markers. In case the markers are displaced, damaged get worn out or lose their reflectivity compared to stipulated standards, the contractor would be required to replaced all such markers within 15 days of the intimation from the Engineer at his own cost and with no extra remuneration to be paid for such works.
- 1.8 Measurement for Payment**

The measurement of Cats eye (MMC) shall be in numbers of markers supplied and fixed.
- 1.9 Rate**

The contact unit rate for Cats eye (MMC) shall be payment in full compensation for furnishing all labour, material, tools, equipment including incidental costs necessary for carrying out the work at site conforming to the specifications complete as per approved drawings or as directed.

Item SR No. 22:

Providing and fixing pre-cast concrete kerb stone of gray cement based concrete block 30cm length, 30cm height and 15cm thick of M 25 grade concrete as per approved design and including excavation for fixing in proper line and level, filling the joint with C:M 1:3 (1 cement:3 fine sand) etc complete.

1. Description

The work shall consist of scarifying the existing road surface to required depth, preparing pre cast kerb with kerb laying machine of required shape and size and fixing them in place in traffic island at Junction or as directed; as per drawing and joining them in C.M.1:3 and filling the central island portion with selected soil and compacting it and painting the sides as directed.

2. Material:

2.1: M-25 Pre Cast Kerb: (1) Water shall conform to M-1 (2) Cement shall conform to M-3 (3) Sand shall conform to M-6 (4) Mortar shall conform to M-11 (5) Aggregates shall conform to M-12 (6) Shuttering shall conform to M-26.

Pre cast C.C. Block: M250 Precast block shall be sharp, smooth and in true line, level and shape as per drawing or as directed. Expansion joint shall be provided at every 10 mt. length

3. Construction:

The road surface shall be excavated to required depth on approved alignment. For the base of stone C.C. 1:5:10 base concrete shall be provided conforming to Standard Specification. The vertical C.C. stones shall be fixed as shown in drawing to line and level and expansion joint shall be provided. The outer sides of the vertical kerb stones shall be applied a coat of primer and subsequently white washed with two coats

Mode of Measurement and Payment: The measurement shall be on **running metre** basis and shall include all the work including necessary excavation, C.C. Blocks and soil filling and joining C.C. Blocks in C.M.1:3, curing, white washing, with all labour, material tools & plants etc complete. Sides exposed at right angles to each other. The surface touching the wall may not be planed unless it is required in order to straighten up the member or to obtain the overall size within the tolerances specified.

Item SR No. 23:

Conducting in situ size Plate Load Test (PLT) at selected location as per IS : 1888 including making loading arrangements & casting of RCC/cast in situ concrete footing as per codal provisions including excavation and refilling of trial pit. (b) Plate size 45cm x 45cm

The work shall be carried out as per Indian Railways Unified Standard Specifications for works and materials 2010.

Item SR No. 24:

Lateral Load Testing of single pile in accordance with " IS Code of practice IS: 2911 (Part IV) for determining safe allowable lateral load of pile" with all labour, material, tool & plants, equipment, machinery, etc complete as per drawing and specification as directed by the engineer.

The work shall be carried out as per Indian Railways Unified Standard Specifications for works and materials 2010.

Item SR No. 25 and 26:

Applying two coats of Birla (white cement based) or Asian (acrylic lapy- putty) or equivalent & two coats of primer of approved brand and manufacture on new concrete surface to give an even shade including thoroughly brushing the surface free from mortar dropping and other foreign matter and sand papered smooth.

Finishing concrete surface with weather proof exterior emulsion paint on concrete surface (two coats) to give an required shape even shade after thoroughly brushing the surface to remove all dirt, and remains of loose powdered materials.etc complete.

1.0. Materials

The acrylic emulsion paint shall conform to I.S.: 5411-1969 (Part-1).

2.0. Workmanship

The painting work shall be of Birla or Asian acrylic lapy (Putty) and two coats of primer of approved brand & manufactures on new wall surface to give an even shade.

2.1. Scaffolding : Wherever scaffolding is necessary it shall be erected in such a way that as far as possible on part of scaffolding shall rest against the surface to be white or colour washed A properly secured strong and well tied suspended platform (Zoola) may be used for white washing. Where ladders are used pieces of old gunny bags shall be tied at top and bottom to prevent scratches

Signature of tenderer (s)

Date:



to the floors and walls. For white washing of ceilings, proper stage scaffolding shall be erected where necessary.

2.2. Preparation of surface : The undecorated surface to be distempered shall be thoroughly brushed from dust, dirt, grease, mortar dropping and other foreign matter and sand papered smooth. New plaster surface shall be allowed to dry for at least 2 months before applications of distemper.

2.2.1. All unnecessary nails shall be removed. Pitting in plaster shall be made good with plaster again with a fine grade sand paper and made smooth. A coat of distemper shall be applied over the patches. The surface shall be allowed to dry thoroughly before the regular coat of distemper is allowed. The surface affected by moulds, moss, fungi, algae lichens, efflorescence etc. shall be treated in accordance with I.S; 2395 (Part 01) 1966. Before applying distempering, any unevenness shall be made good by applying putty made of plaster of paris mixed with water on entire surface including filling up the undulation and then sand papering the same after it is dry.

2.3. Preparation of Mix :

This shall be done as per manufacture's instructions. The thinning of emulsion is to be done with water and not with turpentine. The quantity of thinner to be added shall be as per manufacturer instructions.

2.4. Application :

2.4.1. Before pouring into small containers for use, the paint shall be stirred thoroughly in item container. When applying also, the paint shall be continuously stirred in the smaller container, so that its consistency is kept uniform.

2.4.2. The paint shall be laid on evenly and smoothly by means of crossing and laying off the crossing and consist of covering the area over with paint, brushing the surface hard for the first time over and then, brushing alternately in opposite direction two or three times and then finally brushing lightly in direction at right angles to the same. In this process, no brush Marks shall be left after the laying off is finished. No hair marks from the brush or clogging of paint puddles in the corners of panels, angles of moldings, etc. shall be left on the work. The full process of crossing and laying off will constitute one coat.

2.4.3. The paint shall be applied with brush or rollers. For undecorated surfaces, the surface shall be treated with minimum two coats of cement water proofing paint. The second or subsequent coat shall not be started until the proceeding coat as become sufficiently hard to resist marking by brushing being used.

2.4.4. The surface on finishing shall present a flat velvety smooth finish. It shall be even and uniform in shade without patches, brush marks, paint drops etc.

2.5. Precautions :

(a) Old brushes if they are to be used with emulsion paints shall be completely dried of turpentine or oil paint by washing in warm soap water. Brushes shall be quickly washed in water immediately after use and kept immersed in water fusing break periods to prevent the paint from hardening on the brush.

(b) In the preparation of wall for plastic emulsion painting, no oil base paints shall be used in filling cracks, holes etc.

(c) Splashes on floors etc. shall be cleaned out without delay as they will be difficult to remove after hardening.

(d) Washing of surfaces treated with emulsion paint shall not be done within 3 to 4 weeks of application.

2.6. Protective measures : The surface of doors, windows, floors, articles, of furniture etc. and such other parts of the building not to be white washed shall be protected from being splashed upon. Such surfaces shall be cleaned of white wash splashed if any.

3.0. Mode of measurements and payment

3.1. All the work shall be measured in the decimal system as under:

(a) Dimensions shall be measured to the nearest 0.01 m.

(b) Area in individual item shall be worked out to the nearest 0.01 sq.m.

All the work shall be measured in sq.mt. Deductions for jambs, soffits, sills etc. for openings not exceeding 0.5 sq.mt. each in area, for ends of joists, posts, beams, girders, steps etc. not exceeding 0.5 sq.mt. each in area and for openings exceeding 0.5 sq.mt. and not exceeding 3.0 sq.mt. each in area, deductions and additions shall be made as under.

3.2. No deductions shall be made for ends of joists, beams, posts, etc. and openings not exceeding 0.5 sq mt. each. No addition shall be made for reveals, jambs, soffits, sills etc. of these openings not for finish around ends of joints, beams, posts etc.

3.3. No deductions for openings exceeding 0.5 sq.mt. but not exceeding 3 sq.mt. each shall be made as follows and no addition will be made for reveals, jambs, soffits etc. of these openings :

(a) When both the faces of walls are provided with finish, deduction shall be made for one face only.

(b) When each face of wall is provided with different finish, deduction shall be made for that side of frame for door, windows, etc. on which width of reveals is less than that of the other side. Where width of reveals on both faces of wall are equal, deduction of .50% of area of opening on each face shall be made from total area of finish.

(c) When only one face of wall is treated and the other face is not treated, full deduction shall be made if the width of reveal on the treated side is less than that on the untreated side, but if the width of the reveal is equal or more than on the untreated side neither deductions nor additions to be made for reveals, jambs, soffits, sills etc.

3.4 In case of area of openings exceeding 3 sq.mt. each, deductions shall be made for openings but jambs, soffits, sills shall be measured.

3.5. No deductions shall be made for attachment such as casing, conducts, pipe, electric wiring and the like.

3.6. Corrugated surfaces shall be measured flat as fixed and not girth. The quantities so measured shall be increased by the following percentage and the resultant shall be included with the general areas:

(a) Corrugated steel sheets..... 14%

(b) Corrugated A.C. sheets..... 20%

(c) Semi corrugated A.C. Sheets..... 10%

Signature of tenderer (s)

Date:



(d) Naintial pattern roof (Plain sheeting sheets)..... 10%

(e) Naintial pattern roof (with corrugated sheets)..... 25%

3.7. Cornices and other wall features, when they are not picked out in a different finish/colour shall be girthed and included in the general area.

3.8 Extra payment shall be done on ceiling and sloping roofs.

3.9. The rate shall include the cost of ail materials, labour, scaffolding, protective measures etc. involved in all the operations described above.

4.0 The rate shall be for a unit of **One sq.** meter.

DETAILED SPECIFICATIONS AND SPECIAL CONDITIONS FOR SCHEDULE “B”

Item No. 1

Marking out the centre line of the bridge and various other components structures and complete lining out and levelling with Total Station, theodolite, level including construction necessary masonry pillars for lines and levels and establishing necessary benchmark etc. complete as directed.

The Centre line axis of the Rail Over Bridge with approaches shall be surveyed along their lengths. Centre line pegs for Rail Over Bridge with approaches including foundation pegs at each location and at suitable distance of 3.0 m c/c along the approach on each side shall be fixed.

All deviation angles of the central line axis for the Rail Over Bridge with approaches including tangent distances shall be demarcated with pegs fixed in to the ground.

The rate on Lump sum basis shall include all equipment/theodolite/total station survey instruments, necessary survey party, supply and fixing of pegs including, fixing of pillars for intermediate stations labour, materials required in completing the job as required, as per direction of Engineer-in-charge.

The rate shall be paid on lump sum basis for completed item as directed.

Item no: 2

Earthwork for embankment including breaking clods, dressing with all lead and lift and including watering rolling and consolidation of sub grade in layers at O.M.C. to required dry density including filling the depression which occur during the process using Vibratory roller 8T to 10T.

EMBANKMENT CONSTRUCTION

GENERAL:

Description: These Specifications shall apply to the construction of embankments including sub grades, earthen shoulders and miscellaneous backfills with approved materials obtained from contractor's own earth. No railway land / Gujarat State land to be used as source of earth, contractor shall arrange own earth. All embankments, sub grades, earthen shoulders and miscellaneous backfills shall be constructed in accordance with the requirements of these specifications and in conformity with the lines, grades, and cross-sections shown on the drawings or as directed by the Engineer.

MATERIALS AND GENERAL REQUIREMENTS

Physical requirements:

The materials used in embankments sub grades, earthen shoulders and miscellaneous back fills shall be soil, murrum, gravel a mixture of these or any other material approved by the Engineer. Such materials shall be free of logs, stumps, roots, rubbish or any other ingredient likely to deteriorate or affect the stability of the embankment sub grade.

The following types of material shall be considered unsuitable for embankment:

- (a) Materials from swamps, marshes and bogs;
- (b) Peat, log, stump and perishable material and soil that classifies as OL, 01, OH or Pt in accordance with IS: 1498
- (c) Materials susceptible to spontaneous combustion
- (d) Materials in a frozen condition
- (e) Clay having liquid limit exceeding 70 and plasticity index exceeding 45; and
- (f) Materials with salts resulting in leaching in the embankment.

Expansive clay exhibiting marked swell and shrinkage, properties ("free swelling index" exceeding 50 percent when tested as per IS:2720-Part 40) shall not be used as a fill material. Where an expansive clay with acceptable "free swelling index" value is used as a fill material, sub grade and top 500 mm portion of the embankment just below sub grade shall be non-expansive in nature.

Any fill material with a soluble sulphate content exceeding 1.9 grams of sulphate (expressed as S03) per liter when tested in accordance with BS:1377 Test 10, but using a 2: 1 water-soil ratio shall not be & deposited within 500 mm or other distance described in the Contract, of concrete, cement bound materials or other cementitious materials forming part of the Permanent Works.

Materials with a total sulphate content (expressed as S03) exceeding 0.5 per cent by mass, when tested in accordance with BS: 1377 Test 9 shall not be deposited within 500 mm, or other distances described in the contract, of metallic items forming part of the Permanent Work

The size of the coarse material in the mixture of earth shall ordinarily not exceed 75mm when being placed in the embankment and 50 mm when placed in the sub grade. However the Engineer may at his discretion permit the use of material coarser than this also. If he is Satisfied that the same will not present any difficulty as regards the placement of fill material and its compaction to the requirements of these specifications. The maximum particle size shall not be more than two third of the compacted layer thickness.

Ordinarily, only the materials satisfying the density requirements given in MORTH Table 300-1 shall be employed for the Construction of the embankment and the sub grade.

Signature of tenderer (s)

Date:



MORTH TABLE 300-1:- DENSITY REQUIREMENTS OF EMBANKMENT AND SUBGRADE MATERIALS

Sr. No.	Type of work	Maximum Laboratory dry unit weight when tested as per IS:2720(part 8)
1.	Embankments up to. 3 meters height, not subjected to extensive flooding.	Not less than 15.2 kN/cum.
2.	Embankments exiting 3 meters height of embankments of any height subject to long period of inundation	Not less than 16.0 kN/cum.
3.	Sub grade and earthen shoulders/ Verges/backfill	Not less than 17.5 kN/cu.m.

Notes:

- (1) This Table is not applicable for lightweight fill materials e.g. cinder, fly ash etc.
- (2) The Engineer may relax these requirements at his discretion taking into account the availability of materials for construction and other relevant factors.
- (3) The materials to be used in sub grade should also. Satisfy design CBR at the dry unit weight Applicable as per Table 300-2 of MORT&H.

GENERAL REQUIREMENTS:

The materials for embankment shall be obtained from approved sources with preference given to materials becoming available from nearby roadway excavation or any other excavation under the same Contract.

The work shall be so planned and executed that the best available materials are saved for the sub grade and the embankment portion just below the sub grade.

Borrow materials: Where the materials are to be obtained from designated borrow areas, the location, size and shape of these areas shall be as indicated by the Engineer and the same shall not be opened without his written permission. Where specific borrow areas are not designated by the Employer/the Engineer, arrangement for locating the source of supply of materials for embankment and sub grade as well as compliance environmental requirements in respect of excavation and borrow areas as stipulated from time to time by the Ministry of Environment and Forests, Government of India and the local bodies as applicable, shall be the sole responsibility of the Contractor.

Borrow pits along the road shall be discouraged. If permitted by the Engineer, these shall not be dug continuously. Ridges of not less than 8 m width should be left at intervals not exceeding 300m. Small drains shall be cut through the ridges to facilitate drainage.

The depth of the pits shall be so regulated that their bottom does not cut an imaginary line having a slope of 1 vertical to 4 horizontal projected from the edge of the final section of the bank, the maximum depth in any case being limited to 1.5 m. Also, no pit shall be dug within the offset

Signature of tenderer (s)

Date:



width from the toe of the embankment required as per the consideration of stability with a minimum width of 10m.

Haulage of material to embankments or other areas of fill shall proceed only when sufficient spreading and compaction plant is operating at the place of deposition.

No excavated acceptable material other than surplus to requirements of the Contract shall be removed from the site. Should the contractor be permitted to remove acceptable material from the site to suit his operational procedure, and then he shall make good any consequent deficit of material arising therefrom.

Where the excavation reveals a combination of acceptable and unacceptable materials, the Contractor shall, unless otherwise agreed by the Engineer, carry out the excavation in such a manner that the acceptable materials are excavated separately for use in the permanent works without contamination by the unacceptable materials. The acceptable materials shall be stockpiled separately.

The Contractor shall ensure that he does not adversely affect the stability of excavation or fills by the methods of stockpiling materials, use of plants or sitting of temporary buildings or structures.

The Contractor shall obtain representative samples from each of the identified borrow areas and have these tested at the site laboratory following a testing programme approved by the Engineer. It shall be ensured that the sub grade material when compacted to the density requirements as in MORTH Table 300-2 shall yield the design CBR value of the sub grade.

MORTH TABLE 300-2:- COMPACTION REQUIREMENTS FOR EMBANKMENT AND SUB GRADE

Sr. No.	Type of work/material	Relative compaction as percentage of max.laboratory dry density as per IS:2720 (part 8)
1	Sub-grade and earthen shoulders	Not less than 97%
2	Embankment	Not less than 95%
3	Expansive clay	
	a) Sub grade and 500 mm portion Just below the sub-grade	Not allowed.
	b) Remaining portion of embankment	90-95%

The Contractor shall at least 7 working days before commencement of compaction submit the following to the Engineer for approval:

- (i) The value of maximum dry density and optimum content obtained in accordance with IS: 2720 (part 8), appropriate for each of the fill materials he intends to use.
- (ii) A graph of density plotted against moisture content from which each of the values in (i) above of maximum dry density and optimum moisture content were determined.

Signature of tenderer (s)

Date:



(iii) The Dry density-moisture content-CBR relationships for light, intermediate and heavy compactive efforts (light corresponding to IS: 2720 (part 7), heavy corresponding to IS: 2720(part 8) and intermediate in-between the two) for each of the fill materials he intends to use in the Sub grade.

Once the above information has been approved by the Engineer, it shall form the basis for compaction.

CONSTRUCTION OPERATIONS:

Setting Out: After the site has been cleared to Clause 201, the work shall be set out to Clause 301.3. 1. The limits of embankment/sub grade shall be marked by fixing batter pegs on both sides at regular intervals as guides before commencing the earthwork. The embankment/sub grade shall be built sufficiently wider than the design dimension so that surplus material may be trimmed; ensuring that the remaining material is to be desired density and the position specified and conforms to the specified side slopes.

Dewatering: If the foundation of the embankment is in an area with stagnant water, and in the opinion of the Engineer it is feasible to remove it, the same shall be removed by bailing out or pumping, as directed by the Engineer and the area of the embankment foundation shall be kept dry. Care shall be taken to discharge the drained water so as not to cause damage to the works, crops or any other property. Due to any negligence on the Part of the Contractor, if any such damage is caused, it shall be the sole responsibility of the Contractor to repair restore it to original condition or compensate the damage at his own cost.

If the embankment is to be constructed under water, MORTH Clause 305.4.6 shall apply.

Stripping and Storing topsoil: In localities where most of the available embankment materials are not conducive to plant growth,-or when so directed by the Engineer, the topsoil from all areas of cutting and from all areas to be covered by embankment foundation shall be stripped to specified depths not exceeding 150 mm and stored in stockpiles of height not exceeding 2 m for covering embankment slopes, cut slopes and other disturbed areas where re-vegetation is desired. Topsoil shall not be unnecessarily trafficked either before stripping or when in a stockpile Stockpiles shall not be surcharged or otherwise loaded and multiple handling shall be kept to a minimum.

Compacting ground supporting embankment Sub grade: Where necessary, the original ground shall be levelled to facilitate placement of first layer of embankment, scarified, mixed with water and then compacted by rolling so as to achieve minimum dry density as given in MORTH Table 300-2.

In case where the difference between the sub grade level (Top of the sub grade on which pavement rests) and ground level is less than 0.5 m and the ground does not have 97 per cent relative compaction with respect to the dry density as given in MORTH Table 300-2, the ground shall be loosened up to a level 0.5 m below the sub grade level, watered and compacted in layers in accordance with MORTH Clauses 305.3.5 and 305.3.6 to not less than 97 per cent of dry density as given in Table 300-2.

Where so directed by the Engineer, any unsuitable material occurring in the embankment foundation shall be removed and replaced by approved materials laid in layers to the required degree of compaction.

Embankment or sub grade work shall not proceed until the foundations for Embankment/sub grade have been inspected by the Engineer for satisfactory condition and approved.

Any foundation treatment specified for embankments especially high embankments, resting on suspect foundations as revealed by borehole logs shall be carried out in a manner and to the depth as desired by the Engineer. Where the ground on which an embankment is to be built has any of the material types (a) to (f) in MORTH Clause 305.2.1, at least 500 mm. of such material must be removed and replaced by acceptable fill material before embankment construction commences.

Spreading material in layers and bringing to appropriate moisture content

The embankment and sub grade material shall be spread in layers of uniform thickness not exceeding 200mm. compacted thickness over the entire width of embankment by mechanical means, finished by a motor grader and compacted as per MORTH Clause 305.3.6. The motor grader blade shall have hydraulic control suitable for initial adjustment and maintain the same so, as to achieve the specific slope and grade. Successive layers shall not be placed until the layer under construction has been thoroughly compacted to the specified requirements as in MORTH Table 300-2 and got approved by the Engineer. Each compacted layer shall be finished parallel to the final cross-section of the embankment.

Moisture content of the material shall be checked at the site of placement prior to commencement of compaction; if found to be out of agreed limits, the same shall be made good. Where water is required to be added in such constructions, water shall be sprinkled from a water tanker fitted with sprinkler capable of applying water uniformly with a controllable rate of flow to variable widths of surface but without any flooding. The water shall be added uniformly and thoroughly mixed in soil by balding, dicing or harrowing until uniform moisture content is obtained throughout the depth of the layer.

If the material delivered to the roadbed is too wet, it shall be dried, by aeration and exposure to the sun, till the moisture content is acceptable for compaction. Should circumstances arise, where owing to wet weather, the moisture content cannot be reduced to the required amount by the above procedure, compaction work shall be suspended. Moisture content of each layer of soil shall be checked in accordance with IS: 2720. (part , 2), and unless otherwise mentioned, shall be so adjusted, making due allowance for evaporation losses, that at the time of compaction it is in the range of 1 per cent above to 2 per cent below the optimum moisture content determined in accordance with IS:2720 (Part 7) or IS: 2720 (part 8) as the case may be. Expansive clays shall however, be compacted at moisture content corresponding to the specified dry density, but on the wet side of the optimum moisture content obtained, from the laboratory compaction curve.

After adding the required amount of water, the soil shall be processed by means of graders, harrows, rotary mixers or as otherwise approved by the Engineer until the layer is uniformly wet clods or hard lumps of earth shall be broken to have a maximum size of 75 mm when being placed in the embankment and a maximum size of 50 mm when being placed in the sub grade.

Embankment and other areas of fill shall, unless otherwise required in the Contract or permitted by the Engineer, be constructed evenly over their full width and their fullest possible extent and the

Signature of tenderer (s)

Date:



Contractor shall control and direct construction plant and other vehicular traffic uniformly over them. Damage by construction plant and other vehicular traffic shall be made good by the Contractor with material having the same characteristics and strength as the material had before it was damaged.

Embankments and other areas of unsupported fills shall not be constructed with steeper side slopes, or to greater widths than those shown in the Contract, except to permit adequate compaction at the edges before trimming back, or to obtain the final profile following any settlement of the fill and the underlying material.

Whenever fill is to be deposited' against the face of a natural slope, or sloping earthworks face including embankments, cutting, other fills and excavations steeper than 1 vertical on 4 horizontal, such faces shall be benched as per MORTH Clause 305.4.1 immediately before placing the subsequent fill.

All permanent faces of side slopes of embankments and other areas of fill formed shall, subsequent to any trimming operations, be reworked and sealed to the satisfaction of the Engineer by tracking a tracked vehicle, considered suitable by the Engineer, on the slope or any other method approved by the Engineer.

Compaction: Only the compaction equipment approved by the Engineer shall be employed to compact the different material types encountered during construction. Vibratory rollers of suitable size and capacity as approved by the Engineer shall be used for the different types and grades of materials required to be compacted either individually or in suitable combinations.

The compaction shall be done with the help of vibratory roller of 80 to 100 kN static weight with plain or pad foot drum or heavy pneumatic tyred roller of adequate capacity capable of achieving required compaction.

The Contractor shall demonstrate the efficacy of the equipment he intends to use by carrying out compaction trials. The procedure to be adopted for this site trials shall first be submitted to the Engineer for approval.

Each layer of the material shall be thoroughly compacted to the densities specified in MORTH Table 300-2. Subsequent layers shall be placed only after the finished layer has been tested according to MORTH Clause 903.2} and accepted by the Engineer. The Engineer may permit measurement of field dry density by a nuclear moisture/density gauge used in accordance with agreed procedure and the gauge is calibrated to provide results identical to that obtained from tests in accordance with IS: 2720 (Part 28). A record of the same shall be maintained by the Contractor.

When density measurements reveal any soft areas in the embankments /sub grade /earthen shoulders, further compaction shall be carried out as directed by the Engineer. If in spite of that the specified compaction is not achieved, the material in the soft areas shall be removed and replaced by approved material, compacted to the density requirements and satisfaction of the Engineer.

Drainage: The surface of the embankment/ sub grade at all times during construction shall be maintained at such a cross fall (not flatter than that required for effective drainage of an earthen surface) as will shed water and prevent ponding.

Repairing of damages caused by rain/spillage of water

The soil in the affected portion shall be removed in such areas as directed by the Engineer before next layer is laid and refilled in layers and compacted using appropriate mechanical means

Signature of tenderer (s)

Date:



such as small vibratory roller, plate compactor or power rammer to achieve the required density in accordance with MORTH Clause 305.3.6 If the cut is not sufficiently wide for use of required mechanical means for compaction, the same shall be widened suitably to permit their use for proper compaction. Tests shall be carried out as directed by the Engineer to ascertain the density requirements of the repaired area. The work of repairing the damages including widening of the cut, if any, shall be carried out by the Contractor at his own cost, including the arranging of machinery/equipment for the purpose.

Finishing operations:

Finishing operations shall include the work of shaping and dressing the shoulders/verge/roadbed and side slopes to conform to the alignment, levels, and cross sections and dimensions shown on the drawings' or as directed by the Engineer subject to the surface tolerance described in MORTH Clause 902. Both the upper and lower ends of the side slopes shall be rounded off to improve appearance and to merge the embankment with the adjacent terrain.

The topsoil, removed and conserved earlier (MORTH Clause 301.3.2 and 305.3.3) shall be spread over the fill slopes as per directions of the Engineer to facilitate the growth of vegetation. Slopes shall be roughened and moisture slightly prior to the application of the topsoil in order to provide satisfactory bond. The depth of the top soil shall be sufficient to sustain plant growth, the usual thickness being from 75 mm to 150 mm.

Where directed, the slopes shall be turfed with sods in accordance with MORTH Clause 307. If seeding and mulching of slopes is prescribed, this shall be done to the requirement of MORTH Clause 308.

Construction of Embankment and sub grade under special conditions, Earthwork for widening existing road embankment:

When an existing embankment and/or sub grade is to be Widened and its slopes are steeper than 1 vertical on 4 horizontal, continuous horizontal benches, each at least 300 mm wide, shall be cut into the old slope for ensuring adequate bond with the fresh embankment/sub grade material to be added. The material obtained from cutting of benches could be utilized in the widening of the embankment/sub grade. However when the existing slope against which the fresh material is to be placed is flatter than 1 vertical on 4 horizontal, the slope surface may only be ploughed or scarified instead of resorting to benching.

Where the width of the widened portions is insufficient to permit the use of conventional rollers, compaction shall be carried out with the help of small vibratory rollers/plate compactors/power rammers or any other appropriate equipment approved by the Engineer. And dumping of material from trucks for widening operations shall be avoided except in difficult circumstances when the extra width is too narrow to permit the movement of any other types of hauling equipment.

Earthwork for embankment and sub grade to be placed against sloping ground:

Where an embankment /sub grade to be place against sloping ground, the latter shall be appropriately benched or ploughed/scarified as required in MORTH Clause 305.4.1 before placing the embankment /sub grade material. Extra earthwork involved in benching or due to ploughing /scarifying etc. shall be considered incidental to the work.

For wet conditions, benches with slightly inward fall and subsoil drains at the lowest point shall be provided as per the drawings, before the fill is placed against sloping ground.

Where the contract requires construction of transverse subsurface drain at the cut-fill interface, work on the same shall be carried out to MORTH Clause 309 in proper sequence with the embankment and sub grade work as approved by the Engineer.

Earthwork over existing road surface:

Where the embankment is to be placed over an existing road surface, the work shall be carried out as indicated below,

- (i) If the existing road surface is of granular or bituminous type and lies within 1 m of the new sub grade level, the same shall be scarified to a depth of 50 mm or more if specified, or as to provide ample bond between the old and new material ensuring that at least 500 mm portion below the top of new sub grade level is compacted to the desired density.
- (ii) If the existing road surface is of cement concrete type and lies within 1 m of the new sub grade level the same shall be removed completely.
- (iii) If the level difference between the existing road surface and the new formation level is more than 1 m. the existing surface shall be permitted to stay in place without any modification.

Embankment and sub grade around structures:

To avoid interference with the construction of abutments, wing walls or return walls of culvert/bridge structures, the Contractor shall, at points to be determined by the Engineer suspend work on embankment forming approaches to such structures, until such time as the construction of the latter is sufficiently advanced to permit the completion of approaches without the risk of damage to the structure.

Unless directed otherwise, the filling around culverts, bridges and other structures up to a distance of twice the height of the road from the back of the abutment shall be carried out independent of the work on the main embankment. The fill material shall not be placed against any abutment or wing wall, unless permission has been given by the Engineer but in any case not until the concrete or masonry has been in position for 14 days. The embankment and sub grade shall be brought up simultaneously in equal layers on each side of the structure to avoid displacement and unequal pressure. The sequence of work in this regard shall be got approved from the Engineer.

The material used for backfill shall not be all' organic soil or highly plastic clay having plasticity index and liquid limit more than 20 and 40 respectively when tested according to IS: 2720 (part 5). Filling behind abutments and wing walls for all structures shall conform to the general guidelines given in Appendix 6 of IRC: 78 (Standard Specifications and Code of Practice for Road Bridges- Section VII) in respect of the Just below the sub grade type of material, the extent of backfill, its laying and compaction etc. The fill material shall be deposited in horizontal layers in loose thickness and compacted thoroughly to the requirements of MORTH Table 300-2.

Where the provision of any filter medium is specified behind the abutment, the same shall be laid in layers simultaneously with the laying of fill material. The material used for filter shall conform to the requirements' for filter medium spelt out in MORTH Clause 2502/309.3.2 (B) unless otherwise specified in the Contract.

Where it may be impracticable to use conventional rollers, the compaction shall be carried out by appropriate mechanical means such as small vibratory roller, plate compactor or power rammer. Care shall be taken to see that the compaction equipment does not hit or come too close to any structural member so as to cause any damage to them or excessive pressure against the structure.

Construction of embankment over ground incapable of supporting construction equipment

Where embankment is to be constructed across ground which will not support the weight of repeated heavy loads of construction equipment, the first layer of the fill may be constructed by placing successive loads of material in a uniformly distributed layer of a minimum thickness required to support the construction equipment as permitted by the Engineer. The Contractor, if so desired by him, may also use suitable geo synthetic material to increase the bearing capacity of the foundation. This exception to normal procedure will not be permitted where, in the opinion of the Engineer, the embankments could be constructed in the approved manner over such ground by the use of lighter or modified equipment after proper ditching and drainage have been provided. Where this exception is permitted, the selection of the material and the construction procedure to obtain an acceptable layer shall be the responsibility of the Contractor. The cost of providing suitable traffic conditions for. Construction equipment over any area of the Contract will be the responsibility of the Contractor and no extra payment will be made to him. The remainder of the embankment shall be constructed as specified in MORTH Clause 305.3.

Embankment construction under water:

Where filling or backfilling is to be placed under water, only acceptable granular material or rock shall be used unless otherwise approved by the Engineer. Acceptable granular material shall consist of graded, hard durable 'particles with maximum particle size not exceeding 75mm. The material should be non-plastic having uniformity coefficient of not less than 10. The material placed in open water shall be deposited' by end tipping without compaction.

Earthwork for high Embankment:

In the case of high embankments, the Contractor shall normally use the, material from the specified borrow area. In case he desires to use different material for his own convenience, he shall have to carry out necessary soil investigations and redesign the high embankment at his own cost. The contractor shall then furnish the soil test data and design of high embankment for approval of the Engineer, who reserves the right to accept or reject it if necessary, stage construction of fills and any controlled rates of filling shall be carried out in accordance with the Contract including installation of instruments and its monitoring.

Where required, the contractor shall surcharge embankments or other areas of fill with approved material for the periods specified in the Contract. If settlement of surcharged fill results in any surcharging Material, which is unacceptable for use in the fill being surcharged, laying below formation level, the Contractor shall remove the unacceptable material and dispose it as per direction of the Engineer. He shall then bring the resultant level up to formation level with acceptable materials.

Settlement period: - Where settlement period is specified in the Contract, the embankment shall remain in place for the required settlement period before excavating for abutment, wing wall, retaining wall, footings, etc. or driving foundation piles. The duration of the required settlement period at each location shall be as provided for in the contract or as directed by the Engineer.

Rolling and watering of earth work in layers with power roller including filling in depression which occur during the process.

1. For spreading materials in layers and bringing the appropriate moisture content, the embankment materials shall be spread uniformly over the entire width of the embankment in layers not exceeding 250mm in loose thickness, Successive layers of embankment shall not be

Signature of tenderer (s)

Date:



placed until the layer under construction has been thoroughly compacted to the requirements set down here under

Moisture content of the materials shall be checked at the source of supply and if found less than that specified for compaction; the same shall be made good either at the source or after spreading the soil in loose thickness for compaction. In the latter case, water shall be sprinkled directly from a hose line or from a truck mounted water tank and flooding shall not be permitted under any circumstances.

If the materials delivered to the road bed is too wet it shall be dried, by evaporation and exposure to the sun, till the moisture content is brought down to acceptable standard for compaction should circumstances arise, where owing to wet weather, the moisture content cannot be reduced to the required level by the above procedure. Work of compaction shall be suspended.

Moisture content of each layer of soil shall be checked in accordance with IST 2720 (Part-II) and unless otherwise mentioned shall be so adjusted, making due allowance for evaporation losses, that at the time of the compaction it is in the range of 1 percent to 2 percent below the optimum Moisture content determined in accordance with ISI (Part-VII). Highly expansive clays shall however be compacted at 2 to 4 percent above the optimum moisture content.

After adding the required amount of water, the soil shall be processed by means, of harrows. Rotary mixers or as otherwise approved until the layer is uniformly wet. Clods or hard lumps of earth shall be broken to have maximum size of 150mm when being placed lower layers of the embankment and a maximum size of 60mm when being placed in the top 0.5 meter portion of the embankment below the sub grade.

Hauling equipment shall be dispersed uniformly over entire surface of the previously constructed layer to minimize cutting of uneven compaction.

Where the embankment is to be constructed on low area ground that will not support the weight of trucks or other hauling equipment the lower part of the fill should be constructed by dumping successive loads in a uniformly distributed layers of a thickness not greater than that necessary to support the hauling equipment while placing subsequent layers.

2. **COMPACTION:** Only compacting equipment approved by the Engineer-in-charge shall be employed to compact the materials. The contractor shall demonstrate the efficiency of the plants he intends to use for carrying out compaction trials.

Each layer of the materials shall be thoroughly compacted to the densities specified in Table below:

Table :-

Sr. No.	Type of Work / Materials	Field dry density/MDD as percentage of maximum laboratory dry density as per IS : 2720 (Part VII)
1	Top 0.5 meter portion of embankment below sub grade level and shoulders	Not less than 97.
2	Other portion of embankment	Not less than 95.
3	Highly expansive class	85 to 90.

Signature of tenderer (s)

Date:



Subsequent layers shall be placed only after finished layer has been tested according to M.O.S.T. specification clause 902 and accepted by the Engineer-in-charge.

When density measurements reveal any soft areas in the embankment further compaction shall be carried out as directed by the Engineer-in-charge. If insight of that the specified compaction is not achieved, the materials in the soft areas shall be removed and replaced by approved materials and compacted to the density requirement, to the satisfaction of the Engineer-in-charge.

3. The contract unit rate includes cost of mechanical roller required for consolidation including all labour equipment fuel, hire charges, tolls, and incidentals necessary.

Plying of Traffic:

Construction and other vehicular traffic shall not use the prepared surface of the embankment and/or sub grade without the prior permission of the Engineer. Any damage arising out of such use shall, however, be made good by the Contractor at his own expense as directed by the Engineer.

Surface Finish and Quality Control of Work:

The surface finish of construction of sub grade shall conform to the requirements of MORTH Clause 902. Control on the quality of materials and works shall be exercised in accordance with MORTH Clause 903.

Sub grade Strength:

It shall be ensured prior to actual execution that the borrow area material to be used in the sub grade satisfies the requirements of design CBR.

Sub grade shall be compacted and finished to the design strength consistent with other physical requirements. The actual laboratory CBR values of constructed sub grade shall be determined on undisturbed samples cut out from the compacted sub grade in CBR mould fitted with cutting shoe or on remoulded samples, compacted to the field density at the field moisture content.

MEASUREMENTS FOR PAYMENT:

Earth embankment/ sub grade construction shall be measured separately by taking cross sections at intervals in the original position before the work starts and after its completion and computing the volumes of earthwork in cubic meters by the method of average end areas.

The measurement of fill material from borrow areas shall be the difference between the net quantities of compacted fill and the net quantities of suitable material brought from roadway and drainage excavation. For this purpose, it shall be assumed that one cum. of suitable material brought to site from road and drainage excavation forms one cum. of compacted fill and all bulking or shrinkage shall be ignored.

Construction of embankment under water shall be measured in cum.

Construction of high embankment with specified material and in specified manner shall be measured in cum.

Signature of tenderer (s)

Date:



Stripping including storing and reapplication of topsoil shall be measured in Cum.

Work involving loosening and re-compacting of ground supporting embankment /sub grade shall be measured in cum.

Removal of unsuitable material at embankment/sub grade foundation and replacement with suitable material shall be measured in Cum.

Scarifying existing granular /bituminous road surface shall be measured in Square metres.

Dismantling and removal of existing cement concrete pavement shall be measured vide MORTH Clause 202.6.

Filter medium and backfill material behind abutments, wing walls and other retaining structures shall be measured as finished work in position in cum.

RATES:

The Contract unit rates for the items of embankment and sub grade construction shall be payment in full for carrying out the required operations including full compensation for:

- (i) Cost of arrangement of land as a source of supply of material of required quantity for construction, unless provided otherwise in the contract.
- (ii) Setting out.
- (iii) Compacting ground supporting embankment/sub grade except where removal and replacement of unsuitable material or loosening and re-compacting is involved;
- (iv) Scarifying or cutting continuous horizontal benches 300mm wide on slopes of existing embankment and sub grade as applicable;
- (v) Cost of watering or drying of material in borrow areas and/or embankment and sub grade during construction as required.
- (vi) Spreading in layers, bringing to appropriate moisture content and compacting to specification requirements
- (vii) Shaping and dressing top and slopes of the embankment and sub grade including rounding of corners;
- (viii) Restricted working at sites of structures
- (ix) Working on narrow width or embankment and sub grade;
- (x) Excavation in all soils from borrow pits/designated borrow areas in jungle Clearing and grubbing and transporting the material to embankment sub grade site with all lifts and leads unless otherwise provided for contractor.
- (xi) All labour, material, tools, equipment and incidentals necessary to complete the work to the Specifications;
- (xii) Dewatering and
- (xiii) Keeping the embankment/completed formation free of water as per Clause 311.

In case the Contract unit rate specified is inclusive of all leads, the unit rate for transporting material beyond the initial lead, as specified in the contract for construction of embankment and sub grade shall be inclusive of full compensation for all labour, equipment, tools and incidentals necessary on account of the additional haul or transportation involved beyond the specified initial lead.

Item No. 3

Providing & filling in foundation with ordinary cement concrete M 15 mix and providing necessary vertical pin headers including formwork vibrating ramming & curing complete.

- a) Work shall be carried out as per specification/condition as per clause No.2.1 and 2.2 of TECHNICAL SPECIFICATION of the Tender Document
- b) All necessary labour, materials, cement equipment, etc., for sampling, preparing test cubes, curing etc., shall be provided by the Contractor. Testing of the materials and concrete may be arranged by the Engineer-in-charge in an approved laboratory at the cost of the contractor.
- c) The payment shall be made on cum. basis of the finished work. The unit rate of concrete shall include the cost of all materials, cement, labour, tools and plant required for mixing, placing in position, vibrating and compacting finishing etc. complete.

Item No.4

Providing and laying controlled cement concrete M 35 for R.C.C. bored piles of 1.20M dia. including ramming, vibrating and finishing excluding cost of T.M.T reinforcement etc. complete.

- a) Work shall be carried out as per specification/condition as per clause No.2.1 and 2.2 TECHNICAL SPECIFICATION of the Tender Document.
- b) All necessary labour, materials, cement equipment, etc., for sampling, preparing test cubes, curing etc., shall be provided by the Contractor. Testing of the materials and concrete may be arranged by the Engineer-in-charge in an approved laboratory at the cost of the contractor.
- c) The payment shall be made on cum. basis of the finished work. The unit rate of concrete shall include the cost of all materials, cement, labour, tools and plant required for mixing, placing in position, vibrating and compacting finishing etc. complete.
- d) The payment for steel will be paid separately under relevant item.

Item No.5

Conducting Pile low strain integrity test as per ASTM D 5882- 96 code of American Society for Testing on cast -in situ RCC pile of 1200 mm diameter inclusive of analysis with all contractor's equipment, manpower, site preparation, lead and lifts etc. complete as per standard procedure, and as directed by the Engineer in charge. Note:- Rate is inclusive All equipment, All labour and consumable required & Mobilization of equipment.

Work shall be carried out as per specification/condition as per clause No. 2.3.32 of TECHNICAL SPECIFICATION of the Tender Document.

Item No. 6

Providing and casting in situ controlled cement concrete M-35 for R.C.C. pile cap including necessary formwork, vibrating, curing and finishing complete.

Work shall be carried out as per specification/condition as per clause No.2.1 and 2.2 of TECHNICAL SPECIFICATION of the Tender Document.

- a) All necessary labour, materials, cement equipment, etc., for sampling, preparing test cubes, curing etc., shall be provided by the Contractor. Testing of the materials and concrete may be arranged by the Engineer-in-charge in an approved laboratory at the cost of the contractor.
- b) The payment shall be made on cum. basis of the finished work. The unit rate of concrete shall include the cost of all materials, cement, labour, tools and plant required for mixing, placing in position, vibrating and compacting finishing etc. complete.
- c) The payment for steel will be paid separately under relevant item

Item No. 7

Providing and casting in situ controlled cement M-35 for R.C.C. work For Piers/Abutments as per drawing including centring shuttering scaffolding where necessary laying vibrating curing and finishing complete. exposed concrete finish and form mark as directed by Engineer-in-charge, etc. complete as per specification.

Work shall be carried out as per specification/condition as per clause No.2.1 and 2.2 of TECHNICAL SPECIFICATION of the Tender Document.

- a) All necessary labour, materials, cement equipment, etc., for sampling, preparing test cubes, curing etc., shall be provided by the Contractor. Testing of the materials and concrete may be arranged by the Engineer-in-charge in an approved laboratory at the cost of the contractor.
- b) The payment shall be made on cum. basis of the finished work. The unit rate of concrete shall include the cost of all materials, cement, labour, tools and plant required for mixing, placing in position, vibrating and compacting finishing etc. complete.
- c) The payment for steel will be paid separately under relevant item.

Item No. 8

Providing and casting in situ controlled cement concrete M-35 for R.C.C. work in pier cap, abutment cap, seismic arrester and dirt wall including controlled cement concrete M-40 bed blocks or pedestals of required size below bearings as per detailed drawings, centering, shuttering, scaffolding, wherever necessary, laying vibrating, curing and finishing complete.

Work shall be carried out as per specification/condition as per clause No.2.1 and 2.2 of TECHNICAL SPECIFICATION of the Tender Document.

- a) All necessary labour, materials, cement equipment, etc., for sampling, preparing test cubes, curing etc., shall be provided by the Contractor. Testing of the materials and concrete may be arranged by the Engineer-in-charge in an approved laboratory at the cost of the contractor.
- b) The payment shall be made on cum. basis of the finished work. The unit rate of concrete shall include the cost of all materials, cement, labour, tools and plant required for mixing, placing in position, vibrating and compacting finishing etc. complete.
- c) The payment for steel will be paid separately under relevant item.

Item No. 9

Providing and casting in situ controlled cement M 40 for R.C.C. work in superstructure including centring shuttering scaffolding, ramming, vibrating curing and finishing complete.

Running Line:-

Work shall be carried out as per specification/condition as per clause No.2.1 and 2.2 of TECHNICAL SPECIFICATION of the Tender Document.

- a) All necessary labour, materials, cement equipment, etc., for sampling, preparing test cubes, curing etc., shall be provided by the Contractor. Testing of the materials and concrete may be arranged by the Engineer-in-charge in an approved laboratory at the cost of the contractor.
- b) The payment shall be made on cum. basis of the finished work. The unit rate of concrete shall include the cost of all materials, cement, labour, tools and plant required for mixing, placing in position, vibrating and compacting finishing etc. complete.
- c) MS Fixed shuttering shall be provided as per approved design of fixed shuttering. Cost of MS fixed shuttering etc. will be paid separately under item No.NS/4 of Schedule-E. The decision of DFCCIL shall final and binding to the contractor.

The payment for steel reinforcement will be paid separately under relevant item.

Non Running Line:-

Work shall be carried out as per specification/condition as per clause No.2.1 and 2.2 of TECHNICAL SPECIFICATION of the Tender Document.

- d) All necessary labour, materials, cement equipment, etc., for sampling, preparing test cubes, curing etc., shall be provided by the Contractor. Testing of the materials and concrete may be arranged by the Engineer-in-charge in an approved laboratory at the cost of the contractor.
- e) The payment shall be made on cum. basis of the finished work. The unit rate of concrete

shall include the cost of all materials, cement, labour, tools and plant required for mixing, placing in position, vibrating and compacting finishing etc. complete.

The payment for steel reinforcement will be paid separately under relevant item.

Item No. 10

Providing and casting in situ controlled cement M 35 for R.C.C. work in superstructure including centring, shuttering scaffolding, ramming, vibrating curing and finishing complete.

- a) Work shall be carried out as per specification/condition as per clause No.2.1 and 2.2 of TECHNICAL SPECIFICATION of Tender Document.
- b) All necessary labour, materials, cement equipment, etc., for sampling, preparing test cubes, curing etc., shall be provided by the Contractor. Testing of the materials and concrete may be arranged by the Engineer-in-charge in an approved laboratory at the cost of the contractor.
- c) The payment shall be made on cum. basis of the finished work. The unit rate of concrete shall include the cost of all materials, cement, labour, tools and plant required for mixing, placing in position, vibrating and compacting finishing etc. complete.

Item No. 11

Providing and casting in situ controlled cement concrete M 40 having thickness as per drawing. wearing coat laid as directed including tamping vibrating finishing curing and filling in joints with bitumen complete.

- a) Work shall be carried out as per specification/condition as per clause No.2.1 and 2.2 of TECHNICAL SPECIFICATION of Tender Document.
- b) All necessary labour, materials, cement equipment, etc., for sampling, preparing test cubes, curing etc., shall be provided by the Contractor. Testing of the materials and concrete may be arranged by the Engineer-in-charge in an approved laboratory at the cost of the contractor.
- c) The payment shall be made on cum. basis of the finished work. The unit rate of concrete shall include the cost of all materials, cement, labour, tools and plant required for mixing, placing in position, vibrating and compacting finishing etc. complete.

Item No. 12

Provision of Reinforced cement concrete crash barrier (Min. 450mm) at the edges of the road, approaches to bridge structures and medians, constructed

Signature of tenderer (s)

Date:



with M-40 grade concrete with, 450 mm long at expansion joints filled with pre-moulded asphalt filler board, keyed to the structure on which it is built and installed as per design given in the enclosure to MOST circular No. RW/NH - 33022/1/94-DO III dated 24 June 1994 as per dimensions in the approved drawing and at locations directed by the Engineer, all as specified as per drawing attached excluding steel FE 500 D.

Only Crash Barrier

- a) Work shall be carried out as per specification/condition as per clause No.2.1 and 2.2 of TECHNICAL SPECIFICATION of Tender Document.
- b) All necessary labour, materials, cement equipment, etc., for sampling, preparing test cubes, curing etc., shall be provided by the Contractor. Testing of the materials and concrete may be arranged by the Engineer-in-charge in an approved laboratory at the cost of the contractor.
- c) The payment shall be made on Rmt basis of the finished work. The unit rate of concrete shall include the cost of all materials, cement, labour, tools and plant required for mixing, placing in position, vibrating and compacting finishing etc. complete.

All above material shall be used as per complete working drawing and sanctioned by engineer in charge.

The Surface of concrete to weather must be done with necessary embossing/ Developing design given by CGM-DFCCIL/S.E., R & B Design circle, Gandhinagar.

Crash Barrier shall be measured in running metres. Reinforcement in the Crash Barrier shall be paid separately.

Unit rate includes cost of all materials including Cement, from work, labour, tools and plants to complete the job.

Item No.13 :-

Providing and Laying only with Knitted and PVC coated Polyester Uniaxial Geogrid-Techgrid indegeniously manufactured from selected high tenacity polyester yarn with high molecular weight (> 25000 g/mol), and low carboxyl end group (<30mmol/kg) for Reinforced soil wall with granular fill of PHi-30 degree (design is to be carried out in accordance with BS-8006 / FHWA) with concrete Panel (M35) as facia, casting & erection of panels with Techgrid, providing & laying of levelling pad of M15, providing and laying coping beam (M25), providing and laying drainage composite TDC-55130 etc. completed as per the necessary drawing and instruction of Engineer In Charge. Excluding providing, laying and compacting selected backfill and retained fill behind the wall, excavation and ground improvement, if any.

1.0 SCOPE

Signature of tenderer (s)

Date:



This work comprises execution of reinforced soil wall with all necessary material supply with accessories etc. completed. Materials includes, knitted & PVC coated polyester Uniaxial Geo-grid, Galvanized connectors (minimum 86 micron zinc coating), facing with Tech-form panel of size 1.6m to 2.0 meter (T-panel), Tech-geo Nonwoven Geo-textile, EPDM pad etc. completed. Geo-grids are conforming to the material specifications stated herein, as per the bill of quantity and schedule of supplies enclosed.

2.0 GENERAL

Indigenously manufactured geogrids shall be preferred, considering advantages of shorter delivery periods, no inventory pile-up and rates being not affected by fluctuation of exchange rate of foreign currency.

A plant visit by the Engineer's representative to verify the manufacturer's quality control procedures and witness testing of products is also required prior to the dispatch of material

3.0 MATERIALS

3.1 General Requirements

- 3.1.1** The geogrid shall be manufactured from high tenacity polyester filament yarns with molecular weight $\geq 25,000$ g/mol when measured in accordance with GRI-GG8 / ASTM D4603 and carboxyl end groups ≤ 30 mmol/Kg when measured in accordance with GRI GG7 / ASTM D2455.
- 3.1.2** The yarns shall be formed into a dimensionally stable grid structure with uniform square or rectangular apertures using a weft insertion warp knitting process
- 3.1.3** The geogrid shall have a durable PVC coating to protect the yarns from mechanical damage and adverse environmental effects
- 3.1.4** The geogrid shall be resistant to the chemicals and microorganisms normally found in soils and shall be stabilized against short-term exposure to solar radiation.
- 3.1.5** Drainage composite shall be able to meet the drainage & protection requirements in structurally demanding water drainage application.

3.2 Transportation & Storage

- 3.2.1** The product shall be supplied in roll form with a protective wrapping and an identification label stating the following – product name, manufacturer's name, roll number, roll width and length
- 3.2.2** Material shall be protected from sunlight, mud, dirt, debris, any other harmful substances or mechanical damage during transportation.
- 3.2.3** Rolls shall be stored in a secured area sufficiently elevated above the ground and adequately covered to protect them from the following: site construction damage, precipitation, prolonged exposure to ultraviolet radiation including sunlight, chemicals that are strong acids or strong bases, flames including welding sparks, high temperatures, and any other environmental conditions that may damage the physical property values of the geogrid.

Signature of tenderer (s)

Date:



3.2.4 Any material, which is damaged during transportation, handling or storage and do not meet the minimum requirements of the specifications is liable for rejection by the Engineer.

3.3 Quality Control & testing

3.3.1 The quality management system of the manufacturer shall conform to the requirements of ISO 9001:2000.

3.3.2 Each shipment of geogrid shall be accompanied by a manufacturer's quality certificate stating that the geogrid shipped meets the requirements of this specification as evaluated under the manufacturer's quality control programme.

3.3.3 CE-certification (BTTG certification) shall be required for supply of knitted and PVC coated Uniaxial geogrid.

3.4 Physical and Mechanical Properties

The Mechanical properties of knitted and PVC coated Uniaxial Polyester geogrids shall conform to Table-1 below:

Table-1

Property	Test Method	Unit	Type-I	Type-II	Type-III	Type-IV	Type-V	Type-VI	Type-VII	Type-VIII
Peak tensile strength ¹										
Machine Direction	ASTM D-6637	kN/m	60	80	100	120	150	200	250	300
Cross-machine Direction			20	20	30	30	30	30	30	30
Reduction factors (RF) and Machine Direction long term design strength (LTDS)										
Creep (RF _{CR})	120 years life		1.57	1.57	1.57	1.57	1.57	1.57	1.57	1.57
Installation	Sand/silt/clay		1.05	1.05	1.05	1.05	1.05	1.05	1.05	1.05
damage (RF _{ID})	<37.5 mm gravel		1.15	1.15	1.15	1.15	1.15	1.15	1.15	1.15
Durability (RF _D)	pH = 4 to 9		1.15	1.15	1.15	1.15	1.15	1.15	1.15	1.15
LTDS – 120 years; sand/silt/clay; pH = 4 - 9		kN/m	31.5	42.1	52.7	63.2	79.1	105.4	131.8	158.2
LTDS – 120 years; Gravel < 37.5; pH = 4 - 9		kN/m	28.9	38.5	48.1	57.7	72.3	96.2	120.3	144.4
Physical Properties ²										
Aperture size (± 3 mm)		Mm	30 x 25	30 x 25	30 x 25	30 x 23	30 x 23	30 x 23	30 x 22	30 x 20

Signature of tenderer (s)

Date:

MD – Machine Direction, CD-Cross Direction, (1) – Minimum average rolls value.

Specifications for Drainage Composite

	STANDARD	UNIT	UNIT VALUE	
EXTERNAL FILTER- GEOTEXTILE				
Structure: Needle punched or thermally bonded non – woven geotextile				
Raw Material: Polypropylene				
Characteristics Opening size O90	EN ISO 12956	Micron	120 (±30)	
Perpendicular Water Flow	EN ISO 11058	L/m ² /s	50 (±15)	
DRAINAGE CORE – GEONET				
Width of Drainage core		mtr	4.5(-0.5)	
In plane flow capacity MD	EN ISO 12958	I/(m.s)	I/(m.s)	Average value
	Gradient i-	1.0	1.0	
	Type of contact	S/S	R/R	
	20 kpa	-	0.60	
	100 kpa	-	0.55	
	200 kpa	-	0.45	
TECHDRAIN GEOCOMPOSITE				
Thickness at 2 kpa	EN 9863-1	mm	5.5(-0.5)	
Static puncture resistance	EN ISO 12236	N	3000	Average value
Tensile strength MD	EN ISO 10319	KN/m	16.0	Average value
Tensile Elongation @max.	EN ISO 10319	%	40	Average

Signature of tenderer (s)

Date:



Load				value
Tensile strength CMD	EN ISO 10319	KN/m	14.0	Average value
Transmissivity	EN ISO 12958	m3/s		
	Gradient i-	0.1 @ 479Kpa	1.0×10^{-4}	Average value
PACKAGING				
Length		m	25	Typical Value
Width		M	3.8 (±0.5)	Typical Value

Note: Transmissivity (In- plane value) measured value may vary between individual labs.

4.0 APPROVED MANUFACTURERS

4.1 Approved Manufacturers

- (1) Techfab (India) Industries Ltd.

712 Embassy Centre

Nariman Point, Mumbai – 400021

Phone: 022 – 2287 6224/6225

Fax: 022 – 2287 6218

- (2) MACCAFERRI ENVIRONMENTALSOL. PVT LTD

403-409, Fourth Floor, Suncity Success Tower

Golf Course Ext. Road – Gurgaon,

India

Tel:+0124-2841400

Fax:+0124-2841444

E-mail: info-in@maccaferri.com

OR as per instruction of DFCCIL/Engineer in charge of the work.

5.0 DELIVERY

Signature of tenderer (s)

Date:



Delivery of knitted and PVC coated Uniaxial Polyester geogrids shall be done according to the delivery schedule.

Specifications of RCC Panels for Reinforced Soil Walls

PRE-CAST CONCRETE PANELS

- The concrete for the panels shall have a minimum 28 days compressive strength of 35 MPa.
- The panels shall be cured for a sufficient length of time as approved by the Engineer using clean water.
- Sufficient care shall be taken to ensure that panels are not damaged during handling, storage and transportation.
- Three test specimens (150mm cubes) shall be made, cured and tested at 28 days in accordance with IS: 516 for each sample. The test strength of the sample shall be the average strength of 3 cubes. The individual variation should not be more than $\pm 15\%$ of the average.
- If the contractor wishes to transport or erect the panels prior to 28 days, a minimum of three additional test specimens shall be made and cured in the same manner as the panels.
- The average compressive strength of these additional cubes will determine whether panels can be transported and/or erected. However, the 28 days compressive strength shall be the sole criterion for acceptance or rejection of the panels on the basis of compressive strength.
- Acceptance of panels will be on the basis of the 28 days compressive and visual inspection. Samples from fresh concrete shall be taken at the point of delivery at casting yard as per IS: 1199 with the following minimum frequency of sampling:

Quantity of Concrete in work (cum)	1-5	6-15	15-30	31-50
No. of Samples	1	2	3	4

- Based on compressive strength requirement, panels are acceptable if the following conditions are satisfied:
 - The mean strength determined from any group of four consecutive samples should exceed the specified characteristic compressive strength.
 - Strength of any individual test specimen is not less than the specified characteristic strength minus 3 MPa.

- Based on visual inspection, panels are acceptable if they are free from defects indicating imperfect moulding, honeycombed or open-textured concrete, excessive cracking or chipping.
- Panels not meeting the above requirements are liable for rejection.
- In case where the defects are assessed to be not critical with regard to structural performance or visual appeal, the Engineer may permit the use of these panels after necessary repairs have been carried out to his satisfaction.

CARE TO BE EXERCISED DURING PANEL CASTING AND CURING

1. Concreting:

- Concrete received from batching plant shall be tested for field test.
- Concrete shall be poured into moulds in 1-2 layers. Each layer shall be compacted with a needle vibrator of 40mm, additional tamping may be provided to release entrapped air.
- A mould shall never be kept part filled, insufficient residual of any batch shall be kept separately and can be poured along with the fresh batch (provided the material has sufficient slump).
- Care should be taken to see that there is no segregation of concrete, displacement of reinforcement or mould shutters during placing. Rear brush after initial setting of concrete. During hot weather rear face shall be covered with wet Hessian cloth or plastic/ canvas sheet immediately after casting.

2. De-moulding and Marking:

- De-moulding of side shutters of panel mould can be taken up after 4-5 hours of casting depending upon the ambient temperature, humidity, amount of plasticizer etc.
- Care should be taken during de-moulding to avoid any damage to corners of the panels. Panel type and date of casting shall clearly be marked in bold letters on the side of panel with a yellow paint.

3. Curing:

- After the casting, curing shall start as soon as possible. At the time when panels are in casting area it shall be covered with hessian cloth or canvas/plastic sheet.
- Panel can be lifted from the casting bed after 15-20 hours of casting. At the time of lifting concrete should have attained at least 33% of its characteristic strength.
- Panel shall be lifted from 4 corner points.
- Method of curing can be decided as per the site requirement (Dip / Sprinkling / bund or the combination).

- Panels are to be cured for a minimum period of 14 days before they can be erected at site. During the curing period, shifting of panel shall be avoided. In curing area, first panel shall not be placed directly on floor/ground if orientation of placing is horizontal, as the front/outer face of the panel could be damaged.
- First row of panel shall be supported at least at 4 point/corners, using concrete or wooden cubes of size 150mm x 150mm x 150mm. Not more than 5 panels can be placed in one stack. Rest of panels shall be supported at least at 4 points using concrete or wooden cubes of size 120mm x 120mm x 120mm.

4. Steel Reinforcement

- For steel reinforcement refer relevant IS standards and panel reinforcement details provided in the drawings.

ACCEPTABLE TOLERANCES FOR FACES OF RE WALLS:

Location of Plane of Structure	Tolerances
Bulging (Vertical) & Bowing (Horizontal)	$\pm 30\text{mm}$ in 4.5m Template (Synthetic)
Steps at Joints	$\pm 10\text{mm}$
Alignment Along Top (Horizontal)	Carriage way width tolerances
Difference Between Lengths of Two Diagonals of Panels	Max. 5mm
Thickness of Panel	+ 5mm & (- 0mm)

LEVELING PAD

The leveling pad shall consist of a plain cement concrete (PCC) strip footing of 350mm width and 150mm thickness or as per Design. The PCC shall have a minimum 28-day compressive strength of 15MPa. The leveling pad must be cast with a level tolerance of $\pm 5\text{mm}$ and the surface should be finished using a smooth wood float. The leveling pad shall be cured for a minimum period of 48 hours before erection of panels can commence.

BEARING PADS AND JOINT FILLER

- Bearing pads for horizontal bedding joints between panels shall be made of EPDM. All joints between panels on the rear side of the wall facing shall be covered with strips of geotextile meeting the minimum requirements for a Type II subsurface drainage geotextile as specified by IRC : SP : 59-2002 For details of bearing pad and its properties Refer Drawing.

INSTALLATION METHODOLOGY

EXCAVATION AND FOUNDATION PREPARATION

- Excavate the site to the width and depth as shown in the approved construction drawings. The trench for the leveling pad should be excavated to the correct depth and width. In the reinforced soil zone the ground should be excavated to a depth of 200mm (minimum) below the first layer of Geogrids.
- Any unsuitable soils if present should be removed and replaced by compacted fill as directed by the Engineer. Similarly any pits, depressions etc. should be filled by compacted fill of approved quality.

FOUNDATION LEVELLING PADS

- Mark the centerline of the leveling pad on the bottom of the trench. The Centre line shall be fixed with required offset to ensure final batter for the facing panels. (Consider Lo for the varies heights from L-Section Drawings)
- Fix side forms for the leveling pad
- Pour concrete, compact using needle vibrators screed to the correct level and finish using wooden floats to a flat and smooth finish with a tolerance of $\pm 3\text{mm}$
- Cure for a minimum period of 48 hours prior to the commencement of panel placement.

ERECTION OF FIRST COURSE OF PANELS

- Mark a chalk line on the levelling pad to coincide with front face of the bottom most panels.
- Position the first full height panel on the leveling pad with its front face aligned along the chalk line (At each position, panels with the appropriate arrangement of connector bar as per the approved drawing has to be used). Set the panel to the correct inward batter (to compensate for outward rotation of panels caused by fill placement and compaction) by inserting the hardwood wedges below the base of the panels. The required batter will depend on type of fill, type of compaction equipment, degree of compaction, length of reinforcement strips etc. Normally the initial batter of 25 to 35mm per meter may be adequate, but this could be varied based on observation of panel movements. Final Batter for the Panel Shall Be 17mm Per Meter (1°). Install bracings (use 100mm x 50mm timbers or steel props) for the panel.
- Place a half height panel, next to full height panel with its face flush with the chalk line such that width of the vertical joint is 15mm. Set the panel to the required batter, as stated in point No.2.
- Continue the sequence till all the panels in first row are placed. Fix the clamps loosely. Check alignment of the panels by sighting along the panel face and adjust the panels to obtain a true line if required. Check the horizontal level of the panels using a spirit level. If required insert shims at the base to correctly level the panels. Tighten clamps and bracings.
- Install geotextile filter strips for vertical joints. Geotextile strips should have a minimum width of 200mm and should be fixed to the panels using suitable adhesive in such a way that it will not be displaced during fill placement and compaction.

PLACEMENT AND COMPACTION OF FILL UP TO FIRST LAYER OF GEOGRIDS

- Fill material satisfying project requirements shall only be used.
- Place and compact backfill in lifts up to the first layer of Geogrid reinforcement. The deposition, spreading, leveling and compaction of the fill should be carried out generally in a direction parallel to the facing
- No plant or equipment with a weight exceeding 1000 kg should be allowed to operate within 1.5m from the facing.
- Compaction of the fill should be carried out using appropriate equipment, which will not induce excessive loads on the panels and at the same time achieves the required compaction. Towards this the following equipment are recommended for different zones:
 - Within 300mm of the facing, the fill/drainage material should be compacted by a light-weight plate compactor or by hand tamping.
 - Beyond 300mm and within 1.5m from the facing the fill should be compacted using a walk behind vibratory roller with a total weight less than 1500 Kg.
 - Beyond a distance of 1.5m from the facing, the fill should be compacted using a 8 - 10 T smooth drum vibratory roller.
 - Fill should be placed and compacted in lifts. Thickness of lift (not more than 200mm) should be consistent with the compaction equipment used and the degree of compaction to be achieved. If necessary sprinkle water to bring the water content close to the OMC.
 - The dry density of the compacted fill must be at least equal to the following minimum requirements:
 - The fill (except in the following case) shall be compacted to 95% of the maximum laboratory density measured as per IS 2720 (Part 8).
 - Fill within 0.5 m depth below the road crust should be compacted to 98% of maximum laboratory density.

INSTALLATION OF FIRST LAYER OF GEOGRID REINFORCEMENT

- Position geogrid of the required type and length, as shown on drawings with the longitudinal direction perpendicular to wall face.
- Fold the front end of the Geogrid back by full length. Align the front edge of the Geogrid with rear face of the panels. If required transverse ribs along the tie rods may be cut.

- Insert connector bar through the tie rods and between the two legs of the Geogrids. Fix the rear end of the Geogrid by placing small heaps of fill and using u pins. Pull the other (front) end of the Geogrids and fix ensuring that Geogrid is reasonably tight and free from wrinkles and folds.
- Check and ensure that the anchorage length is of full length.

PLACING AND COMPACTING FILL UP TO THE TOP OF FIRST ROW OF F - PANELS

- Place and compact fill up to the top of first row of F - Panels.

ERECTION OF SUBSEQUENT COURSES OF PANELS, FILLING AND INSTALLING GEOGRID REINFORCEMENT

- Erect third and subsequent courses of panels to the correct alignment and required batter. Fix bearing pads on horizontal bedding joints. Fix geotextile filter strips behind horizontal and vertical joints. Ensure uniform joint width of 15mm.
- Check for alignment of walls at regular intervals. Use a straight edge.
- For each course of panels, remove the wedges after three courses have been erected. At any point of time more than three levels of wooden wedges should not be allowed. Otherwise it may become difficult to remove them later on.
- Before the wall reaches half its total height or 5m (whichever is less) fill up the foundation trench in front of the wall with approved material.
- The top most row of panels may be required to be of varying height to achieve the required profile at the top.
- Place and compact fill in lifts. Compaction of each lift must be checked before subsequent lifts can be placed on it. At the end of each day slope the surface of the fill away from the facing to drain away surface runoff.
- Install Geogrid reinforcement at each level as per the drawing.
- The placement and compaction of fill should be carried out so that all layers of Geogrids are fixed at the appropriate levels (as per respective L - Section Drawings) on top of the compacted fill. The deposition spreading, leveling and compaction of the fill should be carried out generally in a direction parallel to the facing and should be executed in stages to alternate with the erection of facing panels and fixing of Geogrid reinforcement. At each reinforcement level, the fill should be placed and compacted to the level of the connection. Fill placement methods near the facing shall ensure that no voids exist directly below the Tie-rods and Geogrids reinforcement.

GEOTEXTILE SPECIFICATIONS

TESTS/PROPERTIES	UNIT	PR 20
Mass per Unit Area	g/m ²	200
Thickness	mm	1.6
Grab Tensile strength	N	720
Elongation @ Break	%	60
Trapezoidal tear	N	300
AOS(Apparent Opening Size)	µm	150

COPING BEAM

At the top of the upper most panels, provide a cast in-situ coping beam to achieve the required longitudinal profile.

PLACEMENT AND COMPACTION OF FILL UP TO THE TOP OF FIRST COURSE OF B - PANELS

- Place and compact fill up to the top of B - Panels. Care should be taken during the deposition, spreading, leveling and compaction of the fill to avoid any damage, disturbance or misalignment of facing panels and Geogrids. Fill placement methods near the facing shall ensure that no voids exist directly below the Geogrids and Tie rods.
- Construction equipment should not be allowed to move directly over the Geogrids. Always ensure that there is a minimum soil cover of 150 mm over the Geogrids. Avoid abrupt stopping, turning etc. of the equipment to minimize misalignment of Geogrids. Movement of compaction equipment should always be parallel to the facing.

ERECTION OF SECOND COURSE OF PANELS

- Clean the top surface of the B - Panels with a stiff broom or brush to remove all soil, debris etc. Remove the clamps (Remove only two clamps at one time)
- Check the reduction in batter due to outward movement of panels during placement and compaction of fill. If the batter has not reduced, use a lower batter for the next course of panels.
- Fix bearing pads as shown on the drawings on the top of B - Panels.
- Place a row of F - Panels over the first row of B - Panels and accurately align them to get a vertical joint width of 15mm. Set them to the required batter using wooden wedges.
- Check levels, alignment of the panels. 6. Fix geotextile filter strips behind vertical and horizontal joints.

PLACING AND COMPACTING FILL UP TO SECOND LAYER OF GEOGRIDS

- Place and compact fill up to the level of the second layer of Geogrids reinforcement.

INSTALLING SECOND LAYER OF GEOGRID REINFORCEMENT

- Install second layer of Geogrid reinforcement.

6.0 PAYMENT

6.1 Method of Measurement

Reinforced soil wall shall be measured in the square meter of facing of panels, from top of levelling pad to top of coping beam.

6.2 Basis of Payment

Payment for the execution of reinforced soil wall shall be made in the square meter of facing, certified by the engineer in charge, which includes, knitted and pvc coated Geogrid, accessories (EPDM pad, Geotextile and connectors), panels, and composite drainage TDC-55130, which shall be full compensation for the cost of materials, transportation, duties and taxes. Levelling pad (PCC M15), coping beam (RCC M25), excavation, and backfilling shall be paid under respective items of tender.

6.3 Stage payment for precast RCC facia panel shall be as under.

- (i) 40% of accepted rate for 1 to 4m Ht. shall be released after casting in casting yard/site of Facia Panels for all stages of Heights.
- (ii) Remaining admissible %age of accepted rate of particular/respective heights of panels shall be released after placing & erecting in position and completion of item.

ITEM NO :-14

Providing reinforced Earth fill / Sand in approach portion of RE/Retaining as per MORTH section 3100 and IRC:SP:102 or latest Revision including laying as per specifications , compaction to achieve desired field density in 250 mm thick loose layers (MORTH specification Cl. by mechanical means using motor grader including 305.3.5), dressing and watering upto required OMC including rolling with the use of vibratory roller when fill is at suitable moisture content with desired field density all as per the approved design ,drawing, specification and directed by the Engineer.

REINFORCED FILL SPECIFICATIONS

The reinforced fill shall be a select granular fill with the following properties:

- Peak drained or effective angle of friction of compacted fill (as per IS 2720: part 13) shall be minimum 28°.
- % fines (passing 75 micron sieve) shall be less than 15%. Sieve Analysis test shall performed as per IS 2720 (part 4),
Material with more than 15% passing 75 micron sieve, but less than 10% of of particle smaller than 15 microns are acceptable provided PI is less than 6 and angle of friction is not less than 28°

Signature of tenderer (s)

Date:



- The fill material shall be free from organic and any other deleterious matter and shall not react adversely (chemically, electrically or biologically) with the reinforcement material and / or facia material.
- Liquid limit & Plastic Limit test shall performed as per IS 2720 (Part 5). Plasticity index shall be less than 6.
- Co-efficient of uniformity (Cu) shall be ≥ 2 .
- Top 500 mm of fill below Sub grade shall satisfy the effective CBR criteria with Sub grade material in addition to the above requirement.
- Recommended guidelines for gradation of the reinforced soil are given below:

Sieve Size (mm)	% Finer
75	100
4.75	85-100
0.425	60-90
0.075	< 15

Plasticity Index (PI) shall not exceed 6 and $Cu > 2$

RETAINED FILL SPECIFICATIONS

- Peak drained or effective angle of friction of compacted fill (as per IS 2720: Part 13) shall be minimum of 30°.
- The fill shall be compacted to 95% of the maximum laboratory density obtained from modified protocol compaction test performed as per IS 2720 (Part 8)
- Fill within 0.5m of the bottom of pavement (sub grade) shall be compacted to a minimum of 98% of the MDD.
- The liquid limit and plasticity index (performed as per IS 2720: Part 5) of the fill shall be restricted to 40 and 20 respectively.
- The organic content shall be limited to 5% and the fill shall be free from deleterious matter.
- If Fly ash is used as retained fill then it shall be in conformity with IRC-SP 58. Top 500 mm of retained fill below Sub grade shall satisfy the effective CBR criteria with Sub grade material in addition to the above requirements.

DRAINAGE BAY

Drainage Bay shall be provided as shown in the approved drawings.

Backfill and drainage material to be separated by permeable non-oven geo textile.

TESTS FOR REINFORCED AND RETAINED FILL

The soil which is proposed to be used as reinforced fill shall be tested to ascertain the suitability for required quantity, grading, type and availability of required quantity etc. The soil to be used as retained fill behind the reinforced fill, in case it is not natural soil, shall be tested for its shear characteristics and permeability to evaluate earth pressure, drainage characteristics etc. for external stability of the wall.

Signature of tenderer (s)

Date:



The backfill is tested at two stages. The first stage is to ascertain the suitability of the fill while the second stage to ensure that the backfill envisaged in design is used during construction. To ascertain the suitability of the fill, samples should be drawn from the borrow area by drawing a grid of 25 m c/c to full depth, logging and sampling for ascertaining suitability of the borrow material as per MORTH 2013 Specifications. Following tests shall be carried out as per Indian Standards.

- i) Sieve Analysis - IS: 2720 Part - 2 tests per 3000 cum. of soil
- ii) Atterberg Limit Tests- IS: 2720 Part- 5-2 tests per 3000 cum. of soil
- iii) Compaction Tests - IS: 2720 relevant part corresponding to modified as well as Standard Proctor test - 2 tests per 3000 cum. of soil

iv) Direct Shear Tests - IS: 2720 Part 13 & 39 to ascertain the peak angle of shearing resistance. The tests should be done at 95 percent of Modified Proctor Density at -2 percent of OMC at a frequency of 1 per 3000 cum. of fill.

During construction the quality control should be exercised by conducting one set of density test of 3000 sqm. of compacted area considering the importance of compaction in reinforced soil walls. (Clause 903.2.2 of MORTH 201 3) One set shall consist of 6 tests. The density tests shall be carried out in accordance with IS-2720 Part 28. Density measurement by nuclear gauge may be carried out as an alternative. For such a test the number of tests per set shall be doubled. If the retained fill is borrowed tests mentioned above should be carried out at same frequency of reinforced fill. Frequency during construction shall be as per MORTH2013 Specifications.

6.1 Method of Measurement and Payment

The Earth fill / Sand & filling shall be measured and pay in the Cubic meter basis of finished work.

Rate:

The Contract unit rates for the items of all labour, material, tools, equipment and incidentals necessary to com etc. the work to the Specifications & payment shall be done in Cu.m.

Items :- 15

Provision of Reinforced cement concrete crash barrier with friction slab (Min. 450mm) at the edges of the road, approaches to bridge structures and medians, constructed with M-40 grade concrete, 450 mm long at expansion joints filled with pre-moulded asphalt filler board, keyed to the structure on which it is built and installed as per design given in the enclosure to MOST circular No. RW/NH - 33022/1/94-DO III dated 24 June 1994 as per dimensions in the approved drawing and at locations directed by the Engineer, all as specified with friction slab as per drawing attached excluding steel FE 500 D.

Crash barrier with friction slab

Signature of tenderer (s)

Date:



- a) Work shall be carried out as per specification/condition as per clause No.2.1 and 2.2 of TECHNICAL SPECIFICATION of Tender Document.
- b) All necessary labour, materials, cement equipment, etc., for sampling, preparing test cubes, curing etc., shall be provided by the Contractor. Testing of the materials and concrete may be arranged by the Engineer-in-charge in an approved laboratory at the cost of the contractor.
- c) The payment shall be made on Rmt basis of the finished work. The unit rate of concrete shall include the cost of all materials, cement, labour, tools and plant required for mixing, placing in position, vibrating and compacting finishing etc. complete.

1. When preformed filler is to be provided, the filler shall be placed in correct position before concrete is placed against the filler. The filler material shall form part of the joint and while concreting the slab. Care shall be taken to prevent the former form being displaced, After the work is completed, the exposed face of the joint shall be cleaned of all loose materials sticking to it.

2. The rate shall include the cost of all materials, labour, equipments 'incidental charges for fixing the joints complete in all respects as per these specifications and as shown on the drawings.

3. 150 Dia PVC PIPE for Utility services as directed by Engineer in charge

All above material shall be used as per complete working drawing and sanctioned by engineer in charge.

The item shall be measured & paid as finished work in Rmt.

The Surface of concrete to weather must be done with necessary embossing/ Developing design given by CGM-DFCCIL/S.E., R & B Design circle, Gandhinagar.

Crash Barrier shall be measured in running metres including friction slab. Reinforcement in the Crash Barrier shall be paid separately.

Unit rate includes cost of all materials including cement, from work, labour, tools and plants to complete the job.

Item No.16:-

Construction of 200 mm thick compacted coarsed granular subbase (Grade-I crushed B.T materials of 53 mm to 26.5 mm @ 35 %, 26.5 mm to 4.75 mm @ 45% ,Below 2.36 mm @ 20 %) by providing close graded material , mixing in a mechanical mix plant at OMC,carriage of a mix material to work site, spreading uniform layers with motor grader on prepared surface and compacting with vibratory power roller to achieve desire density , complete clause as per 401.

This work shall consist of laying and compacting well graded material on prepared sub grade in accordance with the requirements of these specifications. The material shall be laid in one or more

Signature of tenderer (s)

Date:



layers sub base and upper sub base (termed as sub base herein after) as necessary according to lines, grades and cross sections shown on the drawings or as directed by the Engineer.

MORTH 401.2 Materials:

MORTH 401.2.1 The materials to be used for the work shall be crushed stone of required grading. The material shall be free from organic or other deleterious constituents and confirm to the coarse graded granular sub base grading II as mentioned below.

MORTH TABLE 400-2.**GRADING FOR COARSE GRADED GRANULAR SUB-BASE****MATERIALS.**

IS sieve Designation	Percent by weight passing the IS sieve. Grading I
75.0 mm	100
53.0 mm	—
26.5 mm	55 – 75
9.5 mm	—
4.75 mm	10 – 30
2.365 mm	
0.425 mm	
0.075 mm	< 10
CBR Value (Minimum)	30

Material passing 425 micron (0.425 mm) sieve for all the three grading when tested according to IS : 2720 (Part 5) shall have liquid limit and plasticity index not more than 25 and 6 percent respectively.

MORTH 401.2.2 Physical requirements:

The materials shall have a 10 percent fines value of 50 KN or more (for sample in soaked condition) when tested in compliance with B.S.: 812 (Part 111). The water absorption value of the coarse aggregate shall be determined as per IS : 2386 (Part 3) : if this value is greater than 2 percent, the soundness test shall be carried out on the material delivered to site as per IS : 383. For

Signature of tenderer (s)

Date:



grading II and III materials, the CBR shall be determined at the density and moisture content likely to be developed in equilibrium conditions which shall be taken as being the density relating to a uniform air voids content of 5 percent.

MORTH 401.3 Strength of sub-base.

It shall be ensured prior to actual execution that the material to be used in the sub base satisfies the requirements of CBR and other physical requirements when compacted and finished.

When directed by the Engineer, this shall be verified by performing CBR tests in the laboratory as required on specimens remoulded at field dry density and moisture content and any other tests for the "Quality" of materials, as may be necessary.

MORTH 401.4 Construction Operations:

MORTH 401.4.1 Preparation of Sub grade:

Immediately prior to the laying of sub-base, the sub grade already finished to Clause 301 or 305 as applicable shall be prepared by removing all vegetation and other extraneous matter, lightly sprinkled with water, if necessary and rolled with two passes of 80-100 KN smooth wheeled roller.

MORTH 401.4.2 Spreading and compacting:

The sub-base material of grading specified in the Contract shall be spread on the prepared sub grade with the help of a motor grader of adequate capacity, its blade having hydraulic controls suitable for initial adjustment and for maintaining the required slope and grade during the operation or other means as approved by the Engineer.

When the sub-base material consists of combination of materials mentioned in MORTH Clause 401.2.1, of this item mixing shall be done mechanically by the mix in place method.

Manual mixing shall be permitted only where the width of laying is not adequate for mechanical operations, as in small-sized jobs. The equipment used for mix-in-place construction shall be a rotator or similar approved equipment capable of mixing the material to the desired degree. If so desired by the Engineer, trial runs with the equipment shall be carried out to establish its suitability for the work.

Moisture content of the loose material shall be checked in accordance with IS:2720 (Part 2) and suitably adjusted by sprinkling additional water from a truck mounted or trailer mounted water tank and suitable for applying water uniformly and at controlled quantities to variable widths of surface of other means approved by the Engineer so that, at the time of compaction, it is from 1 percent above to 2 percent below the optimum moisture content corresponding to IS:2720 (Part 8). While adding water, due allowance shall be made for evaporation losses. After water has been added, the material shall be processed by mechanical or other approved means like disc barrows, rotators until the layer is uniformly wet.

Signature of tenderer (s)

Date:



Immediately thereafter, rolling shall start. If the thickness of the compacted layer does not exceed 100 mm, a smooth wheeled roller of 80 to 100 KN weight may be used. For a compacted single layer up to 225 mm the compaction shall be done with help of a vibratory roller of minimum 80 to 100 KN static weight with plain drum or pad foot drum or heavy pneumatic tyred roller of minimum 200 to 300 KN weight having a minimum tyre pressure of 0.7 MN/ M2 or equivalent capacity roller capable of achieving the required compaction. Rolling shall commence at the lower edge and proceed towards the upper edge longitudinally for portions having unidirectional cross fall and super elevation and shall commence at the edges and progress towards the centre for portions having cross fall on both sides each pass of the roller shall uniformly overlap not less than one third of the track made in the preceding pass. During rolling, the grade and cross fall (camber) shall be checked and any high spots or depressions, which become apparent, corrected by removing or adding fresh material. The speed of the roller shall not exceed 5 Km per hour. Rolling shall be continued till the density achieved is at least 98 percent of the maximum dry density for the material determined as per IS: 2720 (Part 8). The surface of any layer of material on completion of compaction shall be well closed, free from movement under compaction equipment and from compaction planes, ridges, cracks or loose material. All loose, segregated or otherwise defective areas shall be made good to the full thickness of layer and re-compacted.

401.5 Surface Finish and Quality Control of work:

The surface finish of construction shall conform to the requirements of Clause 902 of MORT & H specifications. Control on the quality of materials and works shall be exercised by the Engineer in accordance with Section 900 of MORT & H specifications.

MORTH 401.6 Arrangements for Traffic:

During the period of construction, arrangement of traffic shall be maintained in accordance with Clause 112 of MORT & H specifications.

MORTH 401.7 Measurements for Payment: Granular sub base shall be paid as finished work in position on cross sectional measurements and computing the volume of GSB work in cubic meters by average area method.

The protection of edges of granular sub base extended over the full formation as shown in the drawing shall be considered incidental to the work of providing granular sub-base and as such no extra payment shall be made for the same.

MORTH 401.8 Rate:

The Contract unit rate for granular sub base shall be payment in full for carrying out the required operations including full compensation for:

[i] Making arrangements for traffic to Clause 112 as above except for initial treatment to verges, shoulders and construction of diversions.

Signature of tenderer (s)
Date:

- [ii] Furnishing all materials to be incorporated in the work including all royalties, fees, rents where necessary and all leads and lift.
- [iii] All labour, tools, equipment and incidentals to complete the work to the specifications.
- [iv] Carrying out the work in part widths of road where directed, and
- [v] Carrying out the required tests for quality control.

Item No.17:-

Providing and laying wet mix macadam base course 250 mm thick in two layers using machine crushed B.T. chips as per required gradation mixing with required optimum quantity of water, conveying the mix to site and spreading to grade and camber with mechanical paver and consolidation by vibratory roller including material, labour, plant and machinery and equipment etc. complete.

This work shall consist of laying and compacting clean, crushed, graded aggregate and granular material, premixed with water, to a dense mass on a prepared sub grade sub base/ base or existing pavement as the case may be in accordance with the requirements of these specifications. The material shall be laid in one or more layers as necessary to lines, grades and cross-sections shown on the approved drawings or as directed by the Engineer.

The thickness of a single compacted Wet Mix Macadam layer shall not be less than 75mm. When vibrating or other approved types of compacting equipment are used, the compacted depth of a single layer of the sub-base course may be increased to 20cm upon approval of the Engineer.

MORTH 406.2 MATERIALS**MORTH 406.2.1 AGGREGATES****MORTH 406.2.1.1 PHYSICAL REQUIREMENTS:**

Course aggregates shall be crushed stone. If crushed gravel / shingle is used, not less than 90 percent by weight of the gravel / shingle pieces retained on 4.75 mm sieve shall have at least two fractured faces. The aggregates shall conform to the physical requirements set forth in Table 400-12 below.

MORTH TABLE 400-12 PHYSICAL REQUIREMENT OF COARSE AGGREGATES FOR WET MIX MACADAM FOR SUB-BASE / BASE COURSES

Test	Test Method	Requirements
1.*Los Angeles Abrasion value	IS : 2386 (Part-4)	40 percent (Max)

Signature of tenderer (s)

Date:



Aggregate impact value	IS : 2386 (Part-4) or IS : 5640	30 percent (Max)
2. Combined Flakiness and Elongation indices (Total)**	IS : 2386(PART-1)	30 percent (Max)

* Aggregates may satisfy requirements of either of the two tests.

** To determine this combined proportion, the flaky stone from a representative sample should first be separated out. Flakiness index is weight of flaky stone metal divided by weight of stone sample only the elongated particles be separated out from the remaining (non flaky stone metal. Elongation index is weight of elongated particles divided by total non flaky particles. The value of flakiness index and elongation index so found are added up.

If the water absorption value of the coarse aggregate greater than 2 percent, the soundness test shall carried out on the material delivered to site as per 2386 (Part – 5).

MORTH 406.2.1.2 Grading requirements:

The aggregates shall conform to the grading given in Table 400-13

MORTH TABLE 400-13. GRADING REQUIREMENTS OF AGGREGATES FOR WET MIX MACADAM.

Is Sieve Designation	Percent by weight Passing the IS sieve
53.00 mm	100
45.00 mm	95-100
26.50 mm	-
22.40 mm	60-80
11.20 mm	40-60
4.75 mm	25-40
2.36 mm	15-30
600.00 micron	8-22
75.00 micron	0-5

Materials finer than 425 micron shall have plasticity index (P.I) not exceeding 6.

The final gradation approved within these limits shall be well graded from course to fine and shall not vary from the low limit on one sieve to the high limit on the adjacent sieve or vice- versa.

Signature of tenderer (s)

Date:



MORTH 406.3 Construction Operation:

MORTH 406.3.1 Preparation of base: Clause 404.3.1 as below shall apply.

MORTH 404.3.1 Preparation of base: The surface of the sub grade/sub-base/base to receive the water bound macadam course shall be prepared to the specification lines and cross fall (camber) and made free of dust and other extraneous material. Any ruts or soft yielding places shall be corrected in an approved manner and rolled unit firm surface is obtained if necessary by sprinkling water. Any sub-base/base/surface irregularities, where predominant, shall be made good by proving appropriate type of profile corrective course (levelling course) to clause 501 of these specification.

As far as possible, laying water bound macadam course over an existing thick bituminous layer may be avoided since it will cause problems of internal drainage of the pavement at the interface of two courses. It is desirable to completely pick out the existing thin bituminous wearing course where water bound macadam is proposed to be laid over it. However, where the intensity of rain is low and the interface drainage facility is efficient, water bound macadam can be laid over the existing thin bituminous surface by cutting 50 mm x 50 mm furrows at an angle of 45 degrees to the centre line of the pavement at one metre intervals in the existing road. The directions and depth of furrows shall be such that they provide adequate bondage and also serve to drain water to the existing granular base course beneath the existing thin bituminous surface.

MORTH 406.3.2 Provision of lateral confinement of aggregates:

While constructing wet mix macadam arrangement shall be made for the lateral confinement of wet mix. This shall be done by laying materials in adjoining shoulders along with that of wet mix macadam layer and following the sequence of operations described in Clause 407.4.1 as below.

MORTH 407.4 Construction Operations:

MORTH 407.4.1 Shoulder: The sequence of operations shall be such that the construction of paved shoulder is done in layers each matching the thickness of adjoining pavement layer. Only after a layer of pavement and corresponding layers in paved and earth shoulder portion have been laid and compacted, the construction of next layer of pavement and shoulder shall be taken up.

Where the materials in adjacent layers are different, these shall be laid together and the pavement layer shall be compacted first. The corresponding layer in paved shoulder portion shall be compacted thereafter, which shall be followed by compaction of earth shoulder layer. The adjacent layers having same material shall be laid and compacted together.

In all cases where paved shoulders have to be provided along side of existing carriageway, the existing shoulders shall be excavated in full width and to the required depth as per clause 301.3.7 under no circumstances; box cutting shall be done for construction of shoulders.

Compaction requirement of earthen shoulder shall be as per table 300-2 in the case of bituminous courses, work on shoulder (earthen/hard/paved), shall start only after the pavement course has been laid and compacted.

During all stages of shoulder (earth/hard/paved) construction, the required cross fall shall be maintained to drain off surface water

Regardless of the method of laying, all shoulder construction material shall be placed directly on the shoulder. Any spilled material dragged on to the pavement surface shall be immediately removed, without damage to the pavement, and the area so affected thoroughly cleaned.

MORTH 406.3.4 Preparation of mix:

Wet Mix Macadam shall be prepared in an approved mixing plant of suitable capacity having provision for controlled addition of water and forced / positive mixing arrangement like pug-mil or pan type mixer of concrete batching plant.

Optimum moisture for mixing shall be determined in accordance with IS : 2720 (Part – 8) after replacing the aggregate fraction retained on 22.4 mm sieve with material of 4.75 micron to 22.4 mm size. While adding water, due allowance should be made for evaporation losses. However, at the time of compaction, water in the wet mix should not vary from the optimum value by more than agreed limits. The mixed material should be uniformly wet and so segregation should be permitted.

MORTH 406.3.4 Spreading of mix:

Immediately after mixing, the aggregates shall be spread uniformly and evenly upon the prepared sub grade / sub-base / base in required quantities. In no case should these be dumped in heaps directly on the area where these are to be laid nor shall their hauling over a partly completed stretch be permitted.

The mix may be spread either by a paver finisher or motor grader. For portions where mechanical means cannot be used, manual means as approved by the Engineer shall be used. The motor grader shall be capable of spreading the material uniformly all over the surface. Its blade shall have hydraulic control suitable for initial adjustments and maintaining the same so as to achieve the specified slope and grade.

The paver finisher shall be self – propelled, having the following features:

- (i) Loading hoppers and suitable distribution mechanism
- (ii) The screed shall have tamping and vibrating arrangement for initial compaction to the layer as it is spread without rutting or otherwise marring the surface profile.
- (iii) The paver shall be equipped with necessary control mechanism so as to ensure that the finished surface is free from surface blemishes.

The surface of the aggregate shall be carefully checked with templates and all high or low spots remedied by removing or adding aggregate as may be tested by depth blocks during construction.

No segregation of larger and fine particles should be allowed. The aggregates as spread should be of uniform gradation with pockets of fine materials.

MORTH 406.3.5 Compaction:-

After the mix has been laid to the required thickness, grade and care full / camber the same shall be uniformly compacted, to the full depth with suitable roller. If the thickness of single compacted layer does not exceed 100mm, as smooth wheel roller of 80 to 100 KN weigh may be used. For a compacted single layer up to 200mm, the compaction shall be done with the help of vibratory roller of minimum static weight of 80 to 100 KN or equivalent capacity roller. The speed of the roller shall not exceed 5 km/h. In portions having unidirectional cross fall / super elevation rolling shall commence from the lower edge and progress gradually towards the upper edge. Thereafter, roller should progress parallel to the centre line of the road. Uniformly over-lapping each preceding track by at least one fourth width until the entire surface has been rolled. Alternate trips of the roller shall be terminated in stops at least 1 m away from any preceding stop.

In portions in camber, rolling should at the edge with the roller running forward and backward until the edges have been firmly compacted. The roller shall the progress gradually towards the centre parallel to the centre line of the road uniformly overlapping each of the preceding tracks by at least one – Fourth width until the entire surface has been rolled.

Any displacement occurring as a result of reversing of the direction of a roller or from any other caused shall be corrected at once as specified and / or removed and made good.

Along forms, Kerbs, walls or other places not accessible to the roller, the mixture shall be thoroughly compacted with mechanical tampers or a plate compactor. Skin patching of an area without scarifying the surface to permit proper bonding of the added material shall not be permitted.

Rolling should not be done when the sub grade is soft or yielding or when it caused a wave-like motion in the sub – base/ base course or sub grade. If irregularities develop during rolling which exceed 12mm when tested with a 3 meter straight edge, the surface should be loosened and premixed material added or removed as required before rolling again so as to achieve a conforming to the desired grade and cross fall. In no case should the use of unmixed material be permitted to make up the depressions.

Rolling shall be continued till the density achieved is at least 98 per cent of the maximum dry the material as determined by the method outlined in IS: 2720 (Part-8)

After completion, the surface of any finished layer shall be well-close, free from movement under compaction equipment or any compaction planes, ridges, cracks and loose material. All loose, segregated or otherwise defective areas shall be made good to the full thickness of the layer and re-compacted.

MORTH 406.3.6 Setting and drying:

After final compaction of wet mix macadam course, the road shall be allowed to dry for 24 hours.

MORTH 406.4 Opening to Traffic:

Preferably no vehicular traffic of any kind should be allowed on the finished wet mix macadam surface till it has dried and the wearing course laid.

MORTH 406.5 Surface Finish and Quality control of work

Signature of tenderer (s)

Date:



MORTH 406.5.1 Surface evenness:

The surface finish of construction shall conform to the requirements of Clause 902 of MORT & H specifications.

406.5.2 Quality Control:

Control on the quality of materials and works shall be exercised by the Engineer in accordance with section 901 of MORT & H specifications

MORTH 406.6 Rectification of Surface Irregularity:

Where the surface irregularity of the wet mix macadam course exceeds the permissible tolerances or where the course is otherwise defective due to sub grade soil getting mixed with the aggregates, the full thickness of the layer shall scarified over the affected area. Reshaped with added premixed material or removed and replaced with fresh premixed material as applicable and recomputed in accordance with Clause 406.3 of this item. The area treated in the aforesaid manner shall not be less than 5m long and 2m wide. In no case shall depressions be filled up with unmixed and ungraded material or fines.

MORTH 406.6.7 Arrangement for Traffic:

During the period of construction, arrangement of traffic shall be done as per Claus 112 of MORT & H specifications

MORTH 406.8 Measurements for Payment:

Wet mix macadam shall be paid as finished work in position on cross sectional measurements and computing the volume of WMM work in cubic meters by average area method.

MORTH 406.9 Rate: The Contract unit rate for wet mix macadam shall be payment in full for carrying out the required operations including full compensation for all components listed below.

- i) Making arrangement for traffic to Clause 112 as above Except for initial treatment to verges, shoulders and Construction of diversions:
- ii) Furnishing wet materials o be incorporated in the work including all royalties, fees, rents where necessary and all leads and lifts;
- iii) All labour, tools, equipment and incidentals to complete the work to the specifications;
- iv) Carrying out the work in part widths of road where directed; and
- v) Carrying out the required tests for quality control.

Item No.18 :-

Providing and laying wet mix base course macadam 150 mm in Two layer using machine crushed chips as per required gradation mixing with required optimum quantity of water conveying the mix to site and spreading to grade and camber

Signature of tenderer (s)

Date:



with mechanical paver consolidation by vibratory roller including material, labour, plant and machinery and equipment etc. complete.

This work shall consist of Providing and laying wet mix macadam base course 150 mm thick in two layers coat as per **Item No.17** of this contract but excluding the cost of prime coat.

MORTH 406.8 Measurements for Payment:

Wet mix macadam shall be paid as finished work in position on cross sectional measurements and computing the volume of WMM work in cubic meters by average area method.

MORTH 406.9 Rate: The Contract unit rate for wet mix macadam shall be payment in full for carrying out the required operations including full compensation for all components listed below.

- i) Making arrangement for traffic to Clause 112 as above Except for initial treatment to verges, shoulders and Construction of diversions:
- ii) Furnishing wet materials to be incorporated in the work including all royalties, fees, rents where necessary and all leads and lifts;
- iii) All labour, tools, equipment and incidentals to complete the work to the specifications;
- iv) Carrying out the work in part widths of road where directed; and
 - i) Carrying out the required tests for quality control.

Item No.19 :-

Providing and laying 90 mm DBM in single layer using crushed stone aggregate BT chips as per required gradation and using emulsion asphalt as a tack coat @ 2.5 kg / 10 sqmt and the VG-30 grade asphalt at 40 kg/MT)by total weight of mix hot laid process using hot mix plant including heating and mixing asphalt & materials by hot mix process transporting the mix and laying by paver finisher including consolidation with vibratory roller including cost of material, labour, machinery equipment and fuel , oil , lubricant for plant and machinery using contractor's own plant and machineries etc. complete

MORTH 505 DENSE BITUMINOUS MACADAM

MORTH 505.1 Scope

The specification describes the design and construction procedure for Dense Bituminous Macadam, (DBM), for use mainly, but not exclusively, in base/binder and profile corrective courses. The work

Signature of tenderer (s)
Date:

shall consist of construction in a multiple layers of DBM on a previously prepared base or sub-base. The thickness of a single layer shall be 50 mm to 100 mm.

MORTH 505.2 Materials

MORTH 505.2.1 Bitumen

The bitumen shall be viscosity grade paving bitumen complying with the Indian Standard Specification IS:73, modified bitumen complying with Clause 501.2.1 or as otherwise specified in the Contract.

The type and grade of bitumen to be used shall be specified in the Contract.

MORTH 505.2.2 Coarse Aggregates

The coarse aggregates shall consist of crushed rock, crushed gravel or other hard material retained on 2.36 mm sieve. They shall be clean, hard, durable, of cubical shape, free from dust and soft or friable matter, organic or other deleterious substances. Where the Contractor's selected source of aggregates has poor affinity for bitumen, the Contractor shall produce test results that with the use of anti-stripping agents, the stripping value is improved to satisfy the specification requirements. The Engineer may approve such a source and as a condition for the approval of that source, the bitumen shall be treated with an approved anti-stripping agent, as per the manufacturer's recommendations, at the cost of the Contractor. The aggregates shall satisfy the requirements specified in Table 500-8.

Where crushed gravel is proposed for use as aggregate, not less than 90 percent by weight of the crushed material retained on the 4.75 mm sieve shall have at least two fractured faces.

MORTH 505.2.3 Fine Aggregates

Fine aggregates shall consist of crushed or naturally occurring mineral material, or a combination of the two, passing the 2.36 mm sieve and retained on the 75 micron sieve. These shall be clean, hard, durable, dry and free from dust, and soft or friable matter, organic or other deleterious matter. Natural sand shall not be allowed in binder courses. However, natural sand upto 50 percent of the fine aggregate may be allowed in base courses. The fine aggregate shall have a sand equivalent value of not less than 50 when tested in accordance with the requirement of IS:2720 (Part 37). The plasticity index of the fraction passing the 0.425 mm sieve shall not exceed 4, when tested in accordance with IS:2720 (Part 5).

MORTH 505.2.4 Filler

Filter shall consist of finely divided mineral matter such as rock dust, hydrated lime or cement approved by the Engineer. The filler shall be graded within the limits indicated in Table 500-9.

The filler shall be free from organic impurities and have a plasticity Index not greater than 4. The Plasticity Index requirement shall not apply if filler is cement or lime. Where the aggregates fail to meet the requirements of the water sensitivity test in Table 500-8, then 2 percent by total weight of aggregate, of hydrated lime shall be used and percentage of fine aggregate reduced accordingly.

MORTH 505.2.5 Aggregate Grading and Binder Content

Signature of tenderer (s)

Date:



505.2.5.1 When tested in accordance with IS:2386 Part 1 (wet sieving method), the combined grading of the coarse and fine aggregates and filler for the particular mixture shall fall within the limits given in Table 500-10 for grading 1 or 2 as specified in the Contract. To avoid gap grading, the combined aggregate gradation shall not vary from the lower limit on one sieve to higher limit on the adjacent sieve.

Table 500-8 : Physical Requirements for Coarse Aggregate for Dense Bituminous Macadam

Property	Test	Specification	Method of Test
Cleanliness (dust)	Grain size analysis	Max 5% passing 0.075 mm sieve	IS:2386 Part I
Particle shape	Combined Flakiness and Elongation Indices*	Max 35%	IS:2386 Part I
Strength	Los Angeles Abrasion Value or Aggregate Impact Value	Max 35% Max 27%	IS:2386 Part IV
Durability	Soundness either :Sodium Sulphate or Magnesium Sulphate	Max 12% Max 18%	IS:2386 Part V
Water Absorption	Water Absorption	Max 2%	IS:2386 Part 111
Stripping	Coating and Stripping of Bitumen Aggregate Mix	Minimum retained coating 95%	IS:6241
Water Sensitivity	Retained Tensile Strength**	Min. 80%	AASHTO 283

* To determine this combined proportion, the flaky stone from a representative sample should first be separated out. Flakiness index is weight of flaky stone metal divided by weight of stone sample. Only the elongated particles be separated out from the remaining (non-flaky) stone metal. Elongation index is weight of elongated particles divided by total non-flaky particles. The values of flakiness index and elongation index so found are added up.

** If the minimum retained tensile test strength falls below 80 percent, use of anti stripping

Signature of tenderer (s)

Date:



agent is recommended to meet the requirement.

Table 500-9 : Grading Requirements for Mineral Filler

IS sieve (mm)	Cumulative Percent Passing by Weight of Total Aggregate
0.6	100
0.3	— 100
	95
0.075	85 — 100

Table 500-10: Composition of Dense Graded Bituminous Macadam

Grading	1	2
Nominal aggregate size*	37.5 mm	26.5 mm
Layer thickness	75 — 100 mm	50 — 75 mm
IS Sieve ¹ (mm)	Cumulative % by weight of total aggregate passing	
45	100	
37.5	95—100	100
26.5	63—93	90—100
19	—	71—95
13.2	55—75	56—80
9.5	—	—
4.75	38—54	38—54
2.36	28—42	28—42
1.18	—	—
0.6	—	—
0.3	7 — 21	7—21
0.15	—	—
0.075	2 — 8	2—8
Bitumen content % by mass of total mix	Min 4.0**	Min 4.5**

* The nominal maximum particle size is the largest specified sieve size upon which any of the aggregate is retained.

Signature of tenderer (s)

Date:



** Corresponds to specific gravity of aggregates being 2.7. In case aggregate have specific gravity more than 2.7, the minimum bitumen content can be reduced proportionately. Further the region where highest daily mean air temperature is 30°C or lower and lowest daily air temperature is — 10°C or lower, the bitumen content may be increased by 0.5 percent.

MORTH 505.2.5.2 Bitumen content indicated in Table 500-10 is the minimum quantity. The quantity shall be determined in accordance with Clause 505.3.

MORTH 505.3 Mix Design

The bitumen content required shall be determined following the Marshall mix design procedure contained in Asphalt Institute Manual MS-2.

The Fines to Bitumen (F/B) ratio by weight of total mix shall range from 0.6 to 1.2.

MORTH 505.3.1 Requirements for the Mix

Apart from conformity with the grading and quality requirements for individual ingredients, the mixture shall meet the requirements set out in Table 500-11.

Table 500-11 : Requirements for Dense Graded Bituminous Macadam

Properties	Viscosity Grade Paving Bitumen	Modified bitumen		Test Method
		Hot climate	Cold climate	
Compaction level	75 blows on each face of the specimen			
Minimum stability (KN at 600C)	9.0	12.0	10.0	AASHTO T245
Marshall flow (mm)	2 — 4	2.5 — 4	3.5 — 5	AASHTO T245
Marshall Quotient	2 — 5	2.5 — 5		MS-2 and ASTM D2041
Stability				
Flow				
% air voids	3 — 5			
% Voids Filled with Bitumen (VFB)	65 — 75			
Coating of aggregate particle	95% minimum			IS:6241
Tensile Strength ratio	80% Minimum			AASHTO T 283

Signature of tenderer (s)

Date:

% Voids in Mineral Aggregate (VMA)	Minimum percent voids in mineral aggregate (VMA) are set out in Table 500-13
------------------------------------	--

MORTH 505.3.2 Binder Content

The binder content shall be optimized to achieve the requirements of the mix set out in Table 500-11. The binder content shall be selected to obtain 4 percent air voids in the mix design. The Marshall method for determining the optimum binder content shall be adopted as described in the Asphalt Institute Manual MS-2.

Where maximum size of the aggregate is more than 26.5 mm, the modified Marshall method using 150 mm diameter specimen described in MS-2 and ASTM D 5581 shall be used. This method requires modified equipment and procedures. When the modified Marshall test is used, the specified minimum stability values in Table 500-12 shall be multiplied by 2.25, and the minimum flow shall be 3 mm.

Table 500-12 : Minimum Percent Voids In Mineral Aggregate (VMA)

Nominal Maximum Particle Size' (mm)	Minimum VMA Percent Related to Design Percentage Air voids		
	3.0	4.0	5.0
26.5	11.0	12.0	13.0
37.5	10.0	11.0	12.0

Note : Interpolate minimum voids in the mineral aggregate (VMA) for designed percentage air voids values between those listed.

MORTH 505.3.3 Job Mix Formula

The Contractor shall submit to the Engineer for approval at least 21 days before the start the work, the job mix formula proposed for use in the works, together with the following details:

- i) Source and location of all materials;
- ii) Proportions of all materials expressed as follows:
 - a) Binder type, and percentage by weight of total mix;
 - b) Coarse aggregate/Fine aggregate/Mineral filler as percentage by weight of total aggregate including mineral filler;
- iii) A single definite percentage passing each sieve for the mixed aggregate;

Signature of tenderer (s)

Date:



- iv) The individual gradings of the individual aggregate fraction, and the proportion of each in the combined grading;
- v) The results of mix design such as maximum specific gravity of loose mix (Gmm), compacted specimen densities, Marshall stability, flow, air voids, VMA, VFB and related graphs and test results of AASHTO T 283 Moisture susceptibility test;
- vi) Where the mixer is a batch mixer, the individual weights of each type of aggregate, and binder per batch;
- vii) Test results of physical characteristics of aggregates to be used;
- viii) Mixing temperature and compacting temperature.

While establishing the job mix formula, the Contractor shall ensure that it is based on a correct and truly representative sample of the materials that will actually be used in the work and that the mix and its different ingredients satisfy the physical and strength requirements of these Specifications.

The mix job formula shall be based on the mix design prepared by GERI or Govt. Approved laboratory & same shall be got approved from Executive Engineer.

Approval of the job mix formula shall be based on independent testing by the Engineer for which samples of all ingredients of the mix shall be furnished by the Contractor as required by the Engineer.

The approved job mix formula shall remain effective unless and until a revised Job Mix Formula is approved. Should a change in the source of materials be proposed, a new job mix formula shall be forwarded by the Contractor to the Engineer for approval before the placing of the material.

MORTH 505.3.4 Plant Trials — Permissible Variation in Job Mix Formula

Once the laboratory job mix formula is approved, the Contractor shall carry out plant trials to establish that the plant can produce a uniform mix conforming to the approved job mix formula. The permissible variations of the individual percentages of the various ingredients in the actual mix from the job mix formula to be used shall be within the limits as specified in Table 500-13 and shall remain within the gradation band. These variations are intended to apply to individual specimens taken for quality control tests in accordance with Section 900.

Table 500-13 : Permissible Variations in the Actual Mix from the Job Mix Formula

Description	Base/binder Course
Aggregate passing 19 mm sieve or larger	± 8%
Aggregate passing 13.2 mm, 9.5 mm	± 7%
Aggregate passing 4.75 mm	± 6%
Aggregate passing 2.36 mm, 1.18 mm, 0.6 mm	± 5%

Signature of tenderer (s)
Date:

Aggregate passing 0.3 mm, 0.15 mm	± 4%
Aggregate passing 0.075 mm	± 2%
Binder content	± 0.3%
Mixing temperature	± 10°C

MORTH 505.3.5 Laying Trials

Once the plant trials have been successfully completed and approved, the Contractor shall carry out laying trials, to demonstrate that the proposed mix can be successfully laid and compacted all in accordance with Clause 501. The laying trial shall be carried out on a suitable area which is not to form part of the works. The area of the laying trials shall be a minimum of 100 sq.m of construction similar to that of the project road, and it shall be in all respects, particularly compaction, the same as the project construction, on which the bituminous material is to be laid.

The Contractor shall previously inform the Engineer of the proposed method for laying and compacting the material. The plant trials shall then establish if the proposed laying plant, compaction plant, and methodology is capable of producing satisfactory results. The density of the finished paving layer shall be determined by taking cores, no sooner than 24 hours after laying, or by other approved method. The compacted layers of Dense Graded Bituminous Macadam (DBM) shall have a minimum field density equal to or more than 92% of the density based on theoretical maximum specific gravity (0mm) obtained on the day of compaction in accordance with ASTM D 2041.

Once the laying trials have been approved, the same plant and methodology shall be applied to the laying of the material on the project, and no variation of either shall be acceptable, unless approved in writing by the Engineer, who may at his discretion require further laying trials.

MORTH 505.4 Construction Operations**MORTH 505.4.1 Weather and Seasonal Limitations**

The provisions of Clause 501.5.1 shall apply.

MORTH 505.4.2 Preparation of Base

The base on which Dense Graded Bituminous Material is to be laid shall be prepared in accordance with Clauses 501 and 902 as appropriate, or as directed by the Engineer.

MORTH 505.4.5 Prime Coat

Where the material on which the dense bituminous macadam is to be laid is other than a bitumen bound layer, a prime coat shall be applied, as specified, in accordance with the provisions of Clause 502, or as directed by the Engineer.

MORTH 505.4.6 Tack Coat

Signature of tenderer (s)

Date:



Where the material on which the dense bituminous macadam is to be laid is either bitumen bound layer or primed granular layer, tack coat shall be applied, as specified, in accordance with the provisions of Clause 503, or as directed by the Engineer.

MORTH 505.4.7 Mixing and Transportation of the Mix

The provisions as specified in Clauses 501.3 and 501.4 shall apply. Table 500-2 gives the mixing, laying and rolling temperature for dense mixes using viscosity grade bitumen. In case of modified bitumen, the temperature of mixing and compaction shall be higher than the mix with viscosity grade bitumen. The exact temperature depends upon the type and amount of modifier used and shall be adopted as per the recommendations of the manufacturer. In order to have uniform quality, the plant shall be calibrated from time to time.

MORTH 505.4.8 Spreading

The provisions of Clauses 501.5.3 and 501.5.4 shall apply.

MORTH 505.4.9 Rolling

The general provisions of Clauses 501.6 and 501.7 shall apply, as modified by the approved laying trials. The compaction process shall be carried out by the same plant, and using the same method, as approved in the laying trials, which may be varied only with the express approval of the Engineer in writing.

MORTH 505.5 Opening to Traffic

It shall be ensured that the traffic is not allowed without the approval of the Engineer in writing, on the surface until the dense bituminous layer has cooled to the ambient temperature.

MORTH 505.6 Surface Finish and Quality Control of Work

The surface finish of the completed construction shall conform to the requirements of Clause 902. All materials and workmanship shall comply with the provisions set out in Section 900 of these Specifications.

MORTH 505.7 Arrangements for Traffic

During the period of construction, arrangements for traffic shall be made in accordance with the provisions of Clause 112.

MORTH 505.8 Measurement for Payment

Dense Graded Bituminous Materials shall be measured as finished work in Tonnes of specified thickness as indicated in the Contract drawings, or documents, or as otherwise directed by the Engineer.

MORTH 505.9 Rate

The contract unit rate for Dense Graded Bituminous Macadam shall be payment in full for carrying out all the required operations as specified and shall include, to all components listed in Clause

501.8.8.2. The rate shall include the provision of bitumen, at 4 percent and 4.5 percent by weight of the total mixture for grading 1 and grading 2 respectively.

No Extra payment shall be made for extra consumption of bitumen which is due to variation in proportion of bitumen in mix design & specified in the description of item above.

Item No.20 :-

Providing and laying 30 mm Bitumen concrete using crushed stone aggregate BT chips as per required gradation and the VG-30 grade asphalt at 54 kg/MT)by total weight of mix hot laid process using hot mix plant including heating and mixing asphalt & materials by hot mix process transporting the mix and laying by paver finisher including consolidation with vibratory roller including cost of material, labour, machinery equipment and fuel , oil , lubricant for plant and machinery using contractor's own plant and machineries etc. complete.

MORTH 507 BITUMINOUS CONCRETE**MORTH 507.1 Scope**

This work shall consist of construction of Bituminous Concrete, for use in wearing and profile corrective courses. This work shall consist of construction in a single layer of bituminous concrete on a previously prepared bituminous bound surface. A single layer shall be 30 mm/40 mm/50 mm thick.

MORTH 507.2 Materials**MORTH 507.2.1 Bitumen**

The bitumen shall conform to Clause 504.2.1.

MORTH 507.2.2 Coarse Aggregates

The coarse aggregates shall be generally as specified in Clause 504.2.2, except that the aggregates shall satisfy the physical requirements of Table 500-16 and where crushed gravel is proposed for use as aggregate, not less than 95 percent by weight of the crushed material retained on the 4.75 mm sieve shall have at least two fractured faces.

Table 500-16 : Physical Requirements for Coarse Aggregate for Bituminous Concrete

Property	Test	Specification	Method of Test
Cleanliness (dust)	Grain size analysis	Max 5% passing 0.075 mm sieve	IS:2386 Part I
Particle shape	Combined Flakiness and Elongation Indices	Max 35%	IS:2386 Part I
Strength	Los Angeles Abrasion Value or Aggregate Impact Value	Max 30% Max 24%	IS:2386 Part IV

Durability	Soundness either: Sodium Sulphate or Magnesium Sulphate	Max 12% Max 18%	IS:2386 Part V
Polishing	Polished Stone Value	Min 55	BS:812-114
Water Absorption	Water Absorption	Max 2%	IS:2386 Part III
Stripping	Coating and Stripping of Bitumen Aggregate Mix	Minimum retained coating 95%	IS:6241
Water Sensitivity	Retained Tensile Strength*	Min 80%	AASHTO 283

* If the minimum retained tensile test strength falls below 80 percent, use of anti stripping agent is recommended to meet the requirement.

MORTH 507.2.3 Fine Aggregates

The fine aggregates shall be all as specified in Clause 505.2.3.

MORTH 507.2.4 Filler

Filler shall be as specified in Clause 505.2.4.

MORTH 507.2.5 Aggregate Grading and Binder Content

When tested in accordance with IS:2386 Part 1 (Wet grading method), the combined grading of the coarse and fine aggregates and filler shall fall within the limits shown in Table 500-17. The grading shall be as specified in the Contract.

Table 500-17 : Composition of Bituminous Concrete Pavement Layers

Grading	1	2
Nominal aggregate size*	19 mm	13.2 mm
Layer thickness	50 mm	30-40 mm
IS Sieve' (mm)	Cumulative % by weight of total aggregate passing	
45		
37.5		
26.5	100	
19	90-100	100
13.2	59-79	90-100
9.5	52-72	70-88
4.75	35-55	53-71
2.36	28-44	42-58
1.18	20-34	34-48
0.6	15-27	26-38
0.3	10-20	18-28
0.15	5-13	12-20
0.075	2-8	4-10

Signature of tenderer (s)

Date:

Bitumen content % by mass of total mix	Min 5.2*	Min 5.4**
--	---------------------	-----------

Note:

The nominal maximum particle size is the largest specified sieve size up on which any of the aggregate is retained.

Corresponds to specific gravity of aggregate being 2.7. In case aggregate have specific gravity more than 2.7, the minimum bitumen content can be reduced proportionately. Further the region where highest daily mean air temperature is 30°C or lower and lowest daily air temperature is — 10°C or lower, the bitumen content may be increased by 0.5 percent.

MORTH 507.3 Mix Design**MORTH 507.3.1 Requirements for the Mix**

Clause 505.3.1 shall apply.

MORTH 507.3.2 ' Binder Content

Clause 505.3.2 shall apply.

MORTH 507.3.3 Job Mix Formula

Clause 505.3.3 shall apply.

MORTH 507.3.4 Plant Trials — Permissible Variation in Job Mix Formula

The requirements for plant trials shall be as specified in Clause 505.3.4, and permissible limits for variation as given in Table 500-18.

Table 500-18 : Permissible Variations in Plant Mix from the Job Mix Formula

Description	Permissible Variation
Aggregate passing 19 mm sieve or larger	± 7%
Aggregate passing 13.2 mm, 9.5 mm	± 6%
Aggregate passing 4.75 mm	± 5%
Aggregate passing 2.36 mm, 1.18 mm, 0.6 mm	± 4%
Aggregate passing 0.3 mm, 0.15 mm	± 3%
Aggregate passing 0.075 mm	± 1.5%
Binder content	± 0.3%
Mixing temperature	± 10°C

MORTH 507.3.5 Laying Trials

The requirements for laying trials shall be as specified in Clause 505.3.5. The compacted layers of bituminous concrete (BC) shall have a minimum field density equal to or more than 92 percent of

Signature of tenderer (s)

Date:



the average theoretical maximum specific gravity (G_{mm}) obtained on the day of compaction in accordance with ASTM 02041.

MORTH 507.4 Construction Operations

MORTH 507.4.1 Weather and Seasonal Limitations

The provisions of Clause 501.5.1 shall apply.

MORTH 507.4.2 Preparation of Base

The surface on which the bituminous concrete is to be laid shall be prepared in accordance with Clauses 501 and 902 as appropriate, or as directed by the Engineer. The surface shall be thoroughly swept clean by mechanical broom and dust removed by compressed air. In locations where a mechanical broom cannot get access, other approved methods shall be used as directed by the Engineer.

MORTH 507.4.5 Tack Coat

The provisions as specified in Clause 504.4.6 shall apply.

MORTH 507.4.6 Mixing and Transportation of the Mix

The provisions as specified in Clauses 501.3, 501.4 and 504.4.7 shall apply.

MORTH 507.4.7 Spreading

The general provisions of Clauses 501.6 and 501.7 shall apply, as modified by the approved laying trials.

MORTH 507.4.8 Rolling

The general provisions of Clauses 501.6 and 501.7 shall apply, as modified by the approved laying trials.

MORTH 507.5 Opening to Traffic

Provisions in Clause 504.5 shall apply.

MORTH 507.6 Surface Finish and Quality Control

The surface finish of the completed construction shall conform to the requirements of Clause 902. All materials and workmanship shall comply with the provisions set out in Section 900 of these Specifications.

MORTH 507.7 Arrangements for Traffic

During the period of construction, arrangements for traffic shall be made in accordance with the provisions of Clause 112.

MORTH 507.8 Measurement for Payment

Bituminous Concrete shall be measured as finished work in Tonnes of specified thickness as indicated in the Contract drawings, or documents, or as otherwise directed by the Engineer.

MORTH 507.9 Rate

The contract unit rate shall be all as specified in Clause 504.9, except that the rate shall include the provision of bitumen at 5.2 percent & 5.4 percent for grading 1 and grading 2 by weight of total mix respectively. The variation in actual percentage of bitumen used will be assessed and the payment adjusted plus and minus accordingly.

Item No. 21:-

Providing and applying priming coat with emulsion SS1 grade at the rate of 7.50 kg/ 10 Sq.mt. including cost of asphalt and preparing the surface heating, and applying etc. complete.

MORTH 502.1 Scope

Signature of tenderer (s)

Date:



This work shall consist of the application of a single coat of low viscosity liquid bituminous material to a porous granular surface preparatory to the superimposition of bituminous treatment or mix..

MORTH 502.2 Materials

MORTH 502.2.1 Primer : The choice of a emulsion bituminous primer shall depend upon the porosity characteristics of the surface to be primed as classified in IRC : 16 These are :

- (i) Surface of low porosity: such as wet mix macadam and water bound macadam.
- (ii) Surfaces of medium porosity; such as cement stabilized soil base,
- (iii) Surfaces of high porosity; such as a gravel base.

MORTH 502.2.2 Primer viscosity :

The type and viscosity of the primer shall comply with the requirements of IS 8887, as sampled and tested for bituminous primer in accordance with the standards. Guidance on viscosity and rate of spray is given in MORTH Table 500-1.

**MORTH TABLE 500-1. VISCOSITY REQUIREMENT AND QUANTITY OF
LIQUID BITUMINOUS PRIMER**

Type of Surface	Kinematic Viscosity of Primer at 60° C (Centistokes)	Quantity of Liquid Bituminous Material per 10 Sq.M. (kg)
Low porosity	30 – 60	6 to 9
Medium porosity	70 – 140	9 to 12
High porosity	250 – 500	12 to 15

MORTH 502.2.3 Choice of primer : The primer shall be emulsion bitumen complying with IS 8887 of a type and grade as specified in the Contact or as directed by the Engineer. The use of medium curing cutback as per IS 217 shall be restricted only for sites at sub-zero temperatures or for emergency applications as directed by the Engineer.

MORTH 502.3 Weather and Seasonal Limitations

Bituminous primer shall not be applied to a wet surface (see 502.4.2) or during a dust storm or when the weather is foggy, rainy or windy or when the temperature in the shade is less than 10° C. Surfaces which are to receive emulsion primer should be damp. But no free or standing water shall be present.

Construction:**MORTH 502.4.1.1 Equipment :**

Signature of tenderer (s)

Date:



The Primer distributor shall be a self-propelled or towed bitumen pressure sprayer equipped for spraying the material uniformly at specified rates and temperatures. Hand spraying of small areas. Inaccessible to the distributor, or as directed by the Engineer.

MORTH 502.4.2 Preparation of road surface : The surface to be primed shall be prepared in accordance with Clauses **501.8** .

MORTH 501.8 This work shall consist of preparing an existing granular surface and shall be performed on such widths and lengths as shown on the drawing or as directed by the Engineer

Immediately prior to applying the primer the surface shall be carefully swept clean of dust and loose particles, care being taken not to disturb the inter locked aggregate. This is best achieved when the surface layer is slightly moist (lightly sprayed with water and the surface allowed to dry) and the surface should be kept moist until the primer is applied.

MORTH 502.4.3 Application of emulsion bituminous primer : The viscosity and rate of application of the primer shall be at rate of 7.5 Kg / 10 Sq.m. as directed. The bituminous primer shall be sprayed uniformly in accordance with Clause 501. The method for application of the primer will depend on the type of equipment to be used, size of nozzles, pressure at the spray bar and speed of forward movement. The Contractor shall demonstrate at a spraying trial, that the equipment and method to be used is capable of producing a uniform spray, within the tolerances specified.

MORTH 502.4.4 Curing of primer and opening to traffic : A primed surface shall be allowed to cure for at least 24 hours or such other period as is found to be necessary to allow all the volatiles to evaporate before any subsequent surface treatment or mix is laid. Any unabsorbed primer shall first be blotted with an application of sand, using the minimum quantity possible. A primed surface shall not be opened to traffic other than that necessary to lay the next course. A very thin layer of clean sand may be applied to the surface of the primer, to prevent the primer picking up under the wheels of the paver and the trucks delivering bituminous material to the paver.

MORTH 502.5 Quality Control of Work :

For control of the quality of materials supplied and the works carried out, the relevant provisions of Section 901 of MORT & H specifications shall apply.

MORTH 502.6 Arrangements for Traffic

During construction operations, arrangements for traffic shall be made in accordance with the provisions of Clause 112 of MORT & H specifications.

MORTH 502.7 Measurement for Payment

Prime coat shall be measured in terms of surface area of application in square meters.

MORTH 502.8 Rate :-

The contract unit rate for prime coat with adjustments as described in Clause 502.7 of MORT&H specification shall be payment in full for carrying out the required operations including full compensation for all components listed below

- [i] Making arrangements for traffic to Clause 112 as above except for initial treatment to verges, shoulders and construction of diversions.
- [ii] Furnishing all materials to be incorporated in the work including all royalties, fees, rents where necessary and all leads and lift.
- [iii] All labour, tools, equipment and incidentals to complete the work to the specifications.
- [iv] Carrying out the work in part widths of road where directed, and
- [v] Carrying out the required tests for quality control.

Payment shall be made on the basis of the provision of prime coat at an application rate of 7.5 kg per 10 square meter, with adjustment, plus or minus, for the variation between this amount and the actual amount approved by the Engineer after the preliminary trials referred to in Clause 502.4.3. of MORT&H specification stated above.

Item No. 22

Providing and casting in situ controlled cement concrete concrete M-35 for approach slab including formwork curing and finishing complete.

Work shall be carried out as per specification/condition as per clause No.2.1 and 2.2 of TECHNICAL SPECIFICATION of the Tender Document.

- a) All necessary labour, materials, cement equipment, etc., for sampling, preparing test cubes, curing etc., shall be provided by the Contractor. Testing of the materials and concrete may be arranged by the Engineer-in-charge in an approved laboratory at the cost of the contractor.
- b) The payment shall be made on cum. basis of the finished work. The unit rate of concrete shall include the cost of all materials, cement, labour, tools and plant required for mixing, placing in position, vibrating and compacting finishing etc. complete.
- c) The payment for steel will be paid separately under relevant item.

Item No. 23

Providing parapet (200 mm thick) of controlled cement concrete M-40 as per detailed drawings with necessary reinforcement including, shuttering, laying vibrating and finishing to line and level complete.(ii) Cast in situ.

Work shall be carried out as per specification/condition as per clause No.2.1 and 2.2 of TECHNICAL SPECIFICATION of the Tender Document.

- a) All necessary labour, materials, cement equipment, etc., for sampling, preparing test cubes, curing etc., shall be provided by the Contractor. Testing of the materials and concrete may be arranged by the Engineer-in-charge in an approved laboratory at the cost of the contractor.

Signature of tenderer (s)
Date:



- b) The payment shall be made on Rmt. basis of the finished work. The unit rate of concrete shall include the cost of all materials, cement, labour, tools and plant required for mixing, placing in position, vibrating and compacting finishing etc. complete.
- c) The payment for steel will be paid separately under relevant item.

DETAILED SPECIFICATIONS AND SPECIAL CONDITIONS FOR **SCHEDULE “C”**

Item No. 01

Providing Steel Liner 6 mm thick for pile including Fabricating and Setting out as per Detailed Drawing.

Work shall be carried out as per specification/condition as per clause No.2.3.14 of TECHNICAL SPECIFICATION of the Tender Document.

- a) Mode of measurement shall be in MT basis of liner provided as directed by Engineer in Charge.

Item No. 02

Providing and fixing in position steel Fe 500 D bar reinforcement For R.C.C. bored piles, Pile Cap, pier, Abutment, Abutment cap, pier cap, Pedestal & seismic arrester, Super Structure, Approach slab, crash barrier, friction slab, wearing coat etc. any structure, of steel grade FE-500 D (TMT) including cutting, bending, hooking, tying, welding etc., complete as per detailed drawing and specification.

1.0 GENERAL

- a) This work shall consist of furnishing and placing **TMT Fe 500D Conforming to IS 1786 -2008** reinforcement, bars (intentioned) of the shape and dimensions shown on the drawings and conforming to these Specifications or as approved by the Engineer in charge.
- b) The work shall be carried out as per clause 2.4.1, 2.4.2, 2.4.3 and 2.4.4 TECHNICAL SPECIFICATION of the Tender Document.
- c) The payment shall be made for over lapping beyond the standard length of bar only.
- d) The payment for steel will be paid separately under relevant item.

2.0 Binding wire

2.1 Mild steel binding wire shall be of 1.63 mm or 1.22 mm (16 to 18 gauge diameter and shall conform IS 280-1972.

2.2 The use of black wire will be permitted for binding reinforcement bars. It shall be free from dirt, paint, grease or oil, oil scale or loose or thick rust and any other undesirable coating which may prevent adhesion of cement mortar at the time of binding.

Signature of tenderer (s)

Date:



2.3 Only new binding wire shall be delivered to the site all binding wire shall be inspected before binding to its position and defective brittle, rusted, used wire, shall be discarded.

3.0 MODE OF MEASUREMENTS & PAYMENT

3.1 For the purpose of payment the bar shall be measured correct up to 10 mm length and weight payable works out at the rate specified below,

1.	6 mm.	0.22 Kg./Rmt.	8.	20 mm	2.47 Kg./Rmt.
2.	8 mm	0.39 Kg./Rmt.	9.	22 mm	2.98 Kg./Rmt.
3.	10 mm	0.62 Kg./Rmt.	10.	25 mm	3.86 Kg./Rmt.
4.	12 mm	0.89 Kg./Rmt.	11.	28 mm	4.84 Kg./Rmt.
5.	14 mm	1.21 Kg./Rmt.	12.	32 mm	6.32 Kg./Rmt.
6.	16 mm	1.58 Kg./Rmt.	13.	36 mm	7.99 Kg./Rmt.
7.	18 mm	2.00 Kg./Rmt.	14.	40 mm	9.87 Kg./Rmt.

3.2 The rate for reinforcement includes cost of steel binding wires, with all leads and lifts, cutting, bending, binding, and placing in position as shown on the drawings and as directed.

3.3 The rate shall be for a unit of one M.T.

Signature of tenderer (s)

Date:



DETAILED SPECIFICATIONS AND SPECIAL CONDITIONS FOR
SCHEDULE “D”

The work shall be carried out as per Indian Railways Unified Standard Specifications for works and materials 2010.

Signature of tenderer (s)

Date:



DETAILED SPECIFICATIONS AND SPECIAL CONDITIONS FOR SCHEDULE “E”

Item No. NS/1 & NS/3

Supply & Fabrication and Launching of steel girder

- (A) The work of fabrication, launching etc shall be carried out as per specifications/conditions mentioned at clause no.2.4 and 2.5. of TECHNICAL SPECIFICATION of the Tender Document and as per approved structural drawing/design
- (B) Contractor should inform in writing to Engineer in charge from time to time regarding fabrication stages of the girder in work shop and should provide all facilities to the representative of engineer in charge for frequent inspections during fabrication.
- (C) **Stage of Payment:** Payment shall be made as per clause 2.4.5.2(ii) and 2.4.5.3 of TECHNICAL SPECIFICATION of the Tender Document.

Item No. NS/2

Metallising of Girder Components:

1. All the parts of the girder shall be metalised and the girder parts which are not to be metalised shall be advised by the Engineer in-charge.
2. **Metalising:** The entire surface to be metalised shall be sand blasted before metalising so that surface is thoroughly clean and free from grease, oil, rust, moisture and any other foreign matter.
3. **Clean prior to Blasting:** Grease, paint and other foreign matter should be removed from the area to be sprayed as well as the adjoining areas.
4. **Sand Blasting:** The surface shall be thoroughly cleaned and roughened by compressed air blasting or centrifugal blasting with a suitable abrasive material like sharp, coarse sand of grain size between 600 microns and 1.7 mm a minimum of 40% should be retained on a 850 micron sieve.
5. The surface shall be comparable in roughness with a reference surface produced in accordance with Appendix a of IS: 5905 and shall provide an adequate key for the subsequently sprayed metal coating. The girder components shall have one coat of primer when received at site from Manmade and shall have to be cleaned as above.
6. **Metal spraying:** The metal spraying shall be carried out as soon as possible after surface preparation but, in any case, within such period that the surface is still completely clean, dry and without visible oxidation. If deterioration in the surface to be coated is observed by comparison with a freshly prepared metal surface or similar quality which has undergone the same preparation, the preparation treatment should be repeated on the surface to be coated.
7. The wire method shall be used for the purpose of metalising, the diameter of the wire being 3mm to 5 mm. Specified thickness of coating shall be applied within 4 hours of blasting and the

Signature of tenderer (s)

Date:



surface must be completely coated to the specified thickness within 8 hours of blasting.

8. **Purity of Aluminum:** The chemical composition of aluminum to be sprayed shall be 99.5% aluminum conforming to IS: 2590-1964.
9. **Appearance of the coating:** The surface of the sprayed coating shall be of uniform texture and free from lumps, coarse areas and loosely adherent particulars.
10. **Thickness of coating:** The nominal thickness of the coating shall be 150 microns. The minimum thickness shall not less than 115 microns.
11. **Inspection:** Determination of local thickness: The minimum local thickness shall be determined by the method of described below.
Equipment for measuring thickness: Any magnetic or electromagnetic thickness meter that will measure local thickness of a known standard with an accuracy of +/- 10%.

Magnetic thickness measuring gauge : Electrometer may be used for measuring the thickness of coating as specified in IS 5203-1965.

Method of Test for Adhesion: The sprayed metal coating shall be subjected to an adhesion test using the method as described below.

Using a straight edge and hardened steel scribe which has been ground to a sharp 30 degree point, scribe two parallel lines at a distance apart equal to approximately 10 times the average coating thickness. Inscribing the two lines, apply enough pressure on each occasion to cut through the coating to the base metal in a single stroke.

If any part of the coating between the lines breaks away from the base metal, it shall be deemed to have failed the test.

12. **Re-treatment of defective areas:** Any defective area shall be cleaned of all sprayed metal by blasting or other suitable means and re-prepared to conform to the requirement of para 1 of re-spraying, where the defect has been solely due to too thin a coating, sprayed metal of the same quality may be added, provided that the surface has been kept dry and is free from visible contamination, as specified in para 6.1 of IS 5905.
 - a) 1st coat with wash primer/Etch primer of SSPCT/IS-5666 and 2nd coat of zinc chrome primer to IS: 104.
 - b) After hard drying of zinc chrome primer, one coat of aluminum paint to IS 2339 (brushing or spraying as required) shall be applied.
 - c) Corrosion pits and caps between members connected together should be filled with putty before applying final coating. The putty shall conform to IS 419-1967 or other suitable compound approved by the department.
 - d) Linseed oil, raw or boiled, used for mixing paints shall correspond to IS: 77-1976.
13. **Site painting:** After steel work is erected at site, a second cover coat of aluminum paint to IS: 2339 (brushing or spraying as required) shall be applied after touching up the primer.
14. **In case of metalising at site,** priming coat as well as both the coats of aluminum paint will be applied at the site and each coat will be applied after drying of the previous coat.
15. **Thickness of coating:** Minimum thickness of all the coatings, including metalising will be 175 microns.
16. **Safety precautions:** Safety precautions should be taken as specified in IS: 6586 which is described below.
17. **The normal precautions against fumes and dust hazards,** such as wearing of mask and proper ventilation should be observed and that no special dangers arise during the spraying of aluminum and zinc.

18. Any warning printed on the containers by the pain manufacturer should be strictly observed and the user should consult him in all cases of doubt regarding health and fire hazards arising from the use of the product.

Item No. NS/4

Supplying, fabricating and fixing of mild steel of any size such as M.S. steel angles, plates, I-beams, channels, pipes etc.

Scope of work: Fabricating, supplying and erecting in position ladder, staircase, MS fixed shuttering under running line, fabrication of height gauge etc as per instruction of Engineer in charge at site.

1. The work shall be carried out as per specifications/conditions mentioned at clause no.2.4.
2. This item includes fabricating Girders / Rail clusters, bearing plate, etc. with contractor's own mild steel of various rolled section including I beam and channels as per drawing/ details given by the Engineer in charge and assembling etc. All the mild steel sections shall be procured by the contractor and shall conform to IS 226 of 1975. The fabrication of steel work will be done strictly as per Indian Railway Unified standard specification Vol-I(2010) to the extent applicable to this work.
3. Weight of the structural member to be fabricated and erected will be worked out on the basis of the length of different structural steel members shown in the DFCCIL/Railways final fabrication drawing and book weight of the section actually used.
4. **No separate payment for nuts and bolts and other fittings/fastenings shall be made and the rate is deemed to have been included, while taking measurement weight of the same shall not be accounted for.**
5. In case the structural sections and nuts, bolts specified in the approved DFCCIL/Railway's fabrication drawings are not available, the tenderer/s will be at liberty to use alternate sections with the approval of the DFCCIL/Railway Administration in each case. However it may please be noted that no extra payment for the difference in weight on account of the use of alternate higher section will be paid. The payment will be made for the weight of the steel sections as per approved final fabrication drawings. Only difference of weight on account of use of alternative heavier sections can however be allowed, for payment, subject to certification by the main producer that the prescribed sections are not being manufactured. The rate includes making the surface good for application of one coat of approved quality red oxide and two or more coats (to achieve good and even surface) of good quality synthetic enamel paints , transportation , labour, T&P, welding, bolting and riveting , erection etc. complete.
6. The contractor has to produce the test certificate for the steel brought to site and for test check same may be sent for testing. In case the testing material does not conform to the relevant IS Specifications, it will be summarily rejected. The cost of all such tests is to be borne by the contractor. The contractor at his own cost shall do one test per 50 MT of steel or part thereof from approved Govt. Laboratory.
7. The weight shall be calculated as per the standard unit weight of the section as per the ISI Hand Book. If any extra quantity of steel over and above shown in the drawing and over the standard scale laid down has been used by the contractor or for any other reasons such as wastage or bad workmanship, the cost of this excess will not be paid by the DFCCIL. The overlap shall be paid only if the length of section exceeds the standard length available in market.
8. The rate quoted by the contractor includes all labour, T&P, machinery, taxes, electricity etc.

Signature of tenderer (s)

Date:



9. MODE OF PAYMENT/MEASUREMENT

- (i) 90 % payment will be done after erection and application of one coat of red oxide.
 - (ii) 10 % payment will be done after painting the sections with two coats of good quality synthetic enamel paint.
10. The payment shall be made on the prorata basis i.e. actual work done at site and MT shall be the basis of the measurement. No payment shall be released under this item unless the test certificate produced by the contractor and the same is got approved by the Engineer in Charge.

NS/5 : Providing and fixing in position true to line and level POT cum PTFE bearings including cost of all materials, fixtures, preparing surface for receiving bearing, grouting of sleeves with non shrink high strength groute, loads testing of bearing, transporting and fixing in position including all lead and lifts etc. complete as per approved design & drawing and as directed by Engineer-in-charge under girders as per approved drawings and special condition, specification of contract. The contractor will supply design & drawing for this item.

Pot Bearings: General

Pot type bearing shall consist of metal piston supported by a disc or unreinforced elastomer confined within a metal cylinder to take care of rotation. Horizontal movement, if required, shall with a system of sealing rings be provided by sliding surfaces of PTFE pads sliding against stainless steel mating surfaces. The pot bearings shall consist of cast steel assemblies or fabricated structural steel assemblies.

Sliding bearing covers free sliding, Longitudinal guided slide, transverse guided slide, pin, metallic guided bearing.

Provision of IRC-983 (Part I) shall be applicable for all metallic elements. Provisions of IRC: 83 (Part II) shall be applicable for all elastomer elements. When any items are not covered by IRC: 83 (Parts I and II), the same shall be as per guidelines given hereunder and BS: 5400 (Sections 9.1. and 9.2), except that no natural rubber shall be permitted. If there is any conflict between BS on the one hand and IRC on the other, the provisions of IRC will be guiding.

Combination bearings using any judicious combination and sliding element shall be permitted. As for example.

Name	Rotation element	Sliding Element	Generally for
POT	POT	None	Vertical load.
Elastomer	Elastomer	None *	Horizontal Buffer
POT PTFE	POT	PTFE-SS **	Vertical load and horizontal load.
Spherical Kunckle PTEE	Spherical Knuckle	PTFE-SS**	Vertical load and horizontal load.

Signature of tenderer (s)

Date:



Elastomer PTFE	Elastomer	PTFE-SS **	Transverse Guide.
Elastomer SS **	Elastomer	SS-SS **	Transverse Guide.

Elastomer shall permit movement by shear.

** Stainless Steel.

Fabrication.

The surface mating with the PTFE in the sliding pair shall be corrosion resistant stainless steel, Normally, the stainless steel from the upper component. The stainless steel shall overlap the PTFE after full movement on all sides. If stainless steel sheet is used, it should be bonded by continuous welding along the edges. Adhesive or any other bonding can be approved by the Engineer in charge. The surface shall be prepared by through cleaning to remove grease, dust or any other foreign substance.

PTFE modular sheets of then sliding pair shall be located by confinement assisted by bonding. Confined PTFE shall be recessed into the metal backing plate. The shoulders of the recess shall be sharp and square to restrict the flow of PTFE.

The thickness of the PTFE shall not be less than 4.5 mm with projection above the recess not exceeding 2.0 mm. When the piston is subjected to tilting, the seal must slide along the wall and alter its shape according to the angle of tilt. At the same time, it must be sufficiently rigid to bridge the gap between the piston and the wall of the pot. However, the percentage of plan area of the lubrication capacities to the gross area shall not exceed 25 per cent. The depth of the cavity shall not exceed 2.0mm.

The diameter to thickness ratio of the confined elastomer shall not exceed 15. The surface of the confined elastomer shall be smooth.

A seal shall be provided to prevent extrusion of the confined elastomer between the piston and the pot wall. The seal should stay functional under the loads and rotations acting on it. Additional seal must slide along the wall and after its shape according to the angle of tilt. At the same time, it must be sufficiently rigid to bridge the gap between the piston and the wall of the post.

The hardness of the piston and pot wall at their contact region shall be minimum 350 BHN to reduce wear. The surface finish of the post base in contact with the confined elastomer shall be very smooth.

All bearings shall be installed with anchor and anchor screws or some similar device such that while replacing, the bearings can be removed with minimum lifting of the superstructure.

The external surfaces of the assemblies shall be completely cleaned by sand blasting. After sane blasting, dust shall be removed from the surface using clean and dry compressed air or a clean brush after which suitable coating shall be applied.

Pot bearings including all parts as shown on the drawings shall be fully assembled at the manufacturer's works to ensure proper fitting of all parts.

Materials.

The pot PTFE bearings shall be purchased through the RDSO approved suppliers / manufactures only.

Steels.

Structural steel shall conform to IS : 2062, as applicable.

Cast steel shall conform to Gr.280-520 W of IS 1030. 00 to 0.5 per cent copper may be added to increase the corrosion resistance properties.

Stainless steel shall conform to AISI : 304 to X04cr1 8 Nilo of IS : 6911 for ordinary applications. For applications with adverse/corrosive environment, the stainless steel shall conform to ASISI : 316 L. Or 02Cr1 17Nil 2 MO2 of IS :6911.

PTFE

PTFE (poly tetra fluoro ethylene) shall be of unfilled pure virgin quality. It shall be free sintered. The mechanical properties of unfilled PTFE shall comply with Grade A of BS : 3784.

Elastomer.

The confined elastomer inside pot will have the following properties : (a) Hardness IRHD : IS : 3400 (Part II) 50 + 5 b) Min tensile strength Mpa IS : 3400 (Part I) 15.5 c) Min elongation at break,) shall be as per Table Max compression set and) "Properties of Elastomer".

Accelerated aging.**Properties of Elastomer.**

	Property	Unit	Test method, IS specification reference	Value of the characteristic specified
1	Maximum Compression Set CR	Per Cent	IS: 3400 (Part X) Duration Temperature (h) (deg C)+0 to 24.2 100+1	35
2	Accelerated ageing CR		IS: 3400 (Part IV) duration Temperature (h) (deg C 70 100 +1.	
2.1	Max change in Hardness	IRHD		+ 15

Signature of tenderer (s)

Date:



2.2	Max Change in Tensile strength	Per cent		- 15
2.3	Ma change in Elongation	Per cent.		- 40

Workmanship.**Welding.**

All welding shall conform to IS : 9595 with electrocuted of suitable grade as per IS: 814. Preheating and post weld stress relieving shall be done as per IS : 9595.

Cast steel assemblies.

Cast steel for pot bearing assemblies shall conform to requirements of relevant IS. Casting shall be true to the forms and dimensions shown on the drawings, and shall be free from pouring faults, sponginess, cracks, below holes and other defects affecting their appearance or their strength. Warped or distorted casting shall not be accepted . Exposed surfaces shall be smooth and dense. All irregularities, fins or risers shall be ground off flush with the adjacent surface. Castings with visible cracks, blow holes, or similar blemishes shall be rejected if the imperfections are located on bearing surface or cannot be remedied to the satisfaction of the Engineer in Charge.

Imperfections which are not located on bearings surfaces shall be cleaned out, filled with weld metal of the appropriate composition and ground flush with adjacent surfaces.

Structural Steel Assemblies.

Defects arising from the fabrication of the steel shall be inspected by the Engineer, who will decide whether the materials may be repaired by the Contractor or will be rejected. The cost of repairs or replacement shall be borne by the Contractor. All steel whether fabricated or not, shall be stored above the ground on platforms, skids, or other supports, and adequately protected against corrosion. Excessively rusted, bent or damaged steel shall be rejected. All plates shall be rejected. All plates shall be flat and rolled bars and shapes straight before marking out or being worked. Straightening shall be done by methods which shall not damage the material. Sharp kinks and bends shall be the cause for rejection.

Steel may be flame cut to shape and length so that a regular surface, free from excessive gouges and striations is obtained. Flame cutting by hand shall be done only with the approval of the Engineer in charge.

Exposed corners shall be machined or ground.

Tolerances:

I)	Plan dimensions	- 0 to + 5 mm
II)	Overall height	-0 to + 3 mm
III)	Height of elastomer	+ 5 per cent.
IV)	Height of any steel component a) Machined	0 to +1mm Class 2 of IS : 4897
V)	Stainless sliding surface a) flatness b Surface Finish	0.004L, where L=Length in direction of measurement. Ra <=0.25pm per IS:3073.

Painting:

All non-working surfaces be coated with two coats of epoxy primer and one more coat each of epoxy intermediate and finish, total thickness ≤ 0.150 mm or any other painting scheme as approved by the Engineer.

Silicon severs shall be cement coated at the manufacturer's works.

Test.

Raw Materials

Necessary test certificates for all raw materials as in above shall be furnished by manufacturers, reference may also be made to for tests on elastomers.

Test on Casting

Tests specified in IS: 1030 shall be performed. Castings shall be ultrasonically tested and certificates submitted. Quality level of castings shall be level 3 as per IS: 9565.

Testing on Welding.

All welding shall be tested by Dye Penetration method. But welding shall be tested by Ultrasonic method. Soundness of welding shall be certificate by the manufacturer .Acceptance test on bearings.

All bearings shall be checked for overall dimensions.

All bearings shall be load tested to 1.1 times maximum design capacity including seismic force. Bearing tested at higher loads cannot be used.

A pair of bearing selected at random will undergo testing in order to determine the coefficient of friction “u”. The coefficient of friction shall be ≤ 0.05 at the design load.

Two bearings selected at the design load.

Two bearings selected at random shall be tested for permissible rotation.

Installation of POT-cum-PTFE Bearings

General

In-Situ Casting of Superstructure.

Seating of Bearing.

Care shall be taken during installation of the bearings to permit their correct functioning in accordance with the design scheme.

To prevent contamination, dismantling of the bearings at site shall not be done.

The total load shall be transferred on to the bearings only when the bedding material has developed sufficient strength. The props for the form work shall only be removed after lapse of appropriate time. In special cases, this can be ensured by suitable devices like jacks, etc.

Temporary clamps and shims (introduced to maintain working clearance) shall be removed at an appropriate time, before the bearing is required to permit movement.

Cement based non-shrink grout with air releasing additive and epoxy based grouts, whichever is specified shall be first at the site. For the proprietary grout mixes, appropriate instruction from the manufacturer shall be followed specially with regards of the followings.

Preparation > concrete cleaning, roughening, pre-soaking, etc.

Forms > sturdiness, leak proofing, shape, header funnel vents, etc.

Bearings Base > cleaning, etc.

Placement –curing, consistency, time period, finishing etc.,

Protection > curing, ambient temperature, etc.

Formwork around the bearing shall be carefully sealed to prevent leakage.

Sliding plates shall be fully supported and care taken to prevent tilting, displacement or distortion of the bearings under the weight of wet concrete.

Bearing shall be protected during concreting operation. Any mortar contaminating the bearing shall be completely removed before it sets.

Using Template.

Template with required and matching holes corresponding to the base of the bearings shall be used.

All the anchors shall be fitted to the lower face of the template using the anchor screws but with steel washer replacing the elastomer washers. Separate screw may be used in case of inconvenience in the length of the original anchor screws.

The template assembly shall be located with regard to level and alignment. It shall be ensured that the tops of the anchors lie in a horizontal plane at the required elevation. The anchors shall be tied/welded to reinforcements to avoid displacement during concreting.

Concreting of the pedestal / pier cap shall be done to a level leaving a gap of 25-50 mm below the template.

The template and steel washers shall be removed prior to placement of the bearing assembly with temporary clamps. The bearing assembly shall.

The gap below the bearing assembly shall be grouted with cement based grout. Reference may be made to clause 8.17.6.1(VI).

B. Without Template with Gap.

Pockets commensurate with the sizes of the anchors shall be kept pedestals during concreting of the same. The pedestal shall be cast approximately 25 mm short of the required finished level.

Anchors shall be fitted to the bearing bottom with elastomer washers and anchor screws. The bearing assembly shall be seated in the location on steel chairs/packs. The anchors fitted below the bearing shall go into pockets in the bed block. Level and alignment of the bearing shall be checked. It shall be ensured that the bearing sits in a horizontal plane.

The gap below the bearing assembly including anchor pockets shall be grouted with cement based grout. Reference may be made to Clause 8.17.6.1. (VI).

Without Template Without Gap.

Elongated pockets commensurate with the size of the anchors shall be kept in pedestals during concreting of the same. The geometry and location of the anchor pockets (with tapered funnel extension, if required) shall be such that after placement of the bearing the pockets can be successfully grouted. The pedestal shall be cast 5mm – 15mm short of the required finished level. The required level shall be achieved by chipping before placement of the bearing. Careful control shall be exercised to cast at the exact finished level or 1 mm-3 mm down from the required finished level.

Seating of bearings shall be as per manufacturer's instructions.

Inspection and Testing.

Where any patents are used, the manufacturer's certificate with test proof shall be submitted along with the design and got approved by the Engineer In Charge before their use in work.

Measurement for Payment.

Signature of tenderer (s)

Date:



Bearings shall be measured in numbers, according to their capacities and particular specifications given on the drawings.

The rate given is AS per MT capacity of bearing.

The contract unit rate of bearing shall include the cost of all nuts, bolts, tests, prescribed in the specifications and shown on the drawings. The cost of supplying and fixing the bearings in position complete as specified on the drawings and as directed by the Engineer in charge. The rate shall also include the cost of samples and their testing when desired by the Engineer-In-Charge.

NS/6 : Load testing of one composite steel/span designing and load testing of one composite girder/span as selected by the engineer conforming to Rly. Standard's with loads to be applied and removed incrementally etc. complete as per special condition and specification of contract, as per relevant IS/IRC codes with contractors labour supervisor, T&P's all taxes, equipment, leading materials instruction of load test jacks etc., dial gauges, including all lead & lift.

Work shall be carried out as per specification / condition mention above and as per contract condition.

DETAILED SPECIFICATIONS AND SPECIAL CONDITIONS FOR
SCHEDULE “F”

Item No. NS/1

Epoxy painting.

Supplying and applying epoxy paint of approved quality on surfaces of abutment, abutment caps, returns, piers, pier caps, PSC girders/slabs, deck slab, parapet walls, crash barriers etc. confirming to the specifications laid down in the special conditions of contract.

The rate inclusive of contractor's own paint, material, equipments, machineries, labour, taxes, with all lead, lift, scaffolding staging, etc. complete. (Rates are for finished item and will be paid after application as per specification.)

1. Unless otherwise specifically stated, the detailed scope of this item shall be deemed to include the cost of the under mentioned works including cost of all epoxy paints to be supplied and used, T&P, Equipments, contractor's paints, consumables, labour, T&P, equipments, scaffolding supervisors, labours, consumables, all taxes, all lead and lift etc. complete as required for the successful completion of the work at contractor's cost.
2. The tendered will have to make his own arrangements for supply of power, water etc., required for the work at his own costs.
3. This item includes the application & mixing of approved epoxy painting formulation by method of as per Manufacture's specifications, including preparing surface, applications of paint coat, cost of materials, equipments and labour etc. and all taxes. The work shall be carried out as per the detailed specification of the product.
4. The surface over which epoxy is to be applied has to be dried and cleaned. It has to be made free from oil, grease, loose materials, laitance, dust and debris. If necessary, compressed air can be used to remove the external materials from surface.
5. The surface to be treated shall be cleaned of oil, dust, grease, chemical contamination, corrosion deposits and loose concrete. . Prior to application of epoxy painting, water should be sprayed and allowed to dry.
6. The following epoxy paint formulations or equivalent may be used.
 - i) Nitomortar S of M/s FOSROC India Ltd. or equivalent
 - ii) SAMMOR E of M/s SAMROCK Pvt. Ltd. or equivalent
7. Epoxy Paint Formulation: The epoxy paint formulation shall be a blend of silica aggregates with solvent free epoxy resin supplied in three-pack system consisting of base, filler and hardener.

Signature of tenderer (s)

Date:



Table :

PROPERTIES	At 20° C	At 35° C
Pot Life	3hr.	1 1/2hr
Cure time	4-7hrs.	2-5hr
Time between coats	5-7hrs	3-5hrs
Initial Hardness	24hrs	18hrs
Full cure	7days	5days

Note- Below 20° C these times will be increased.

8. Surface preparation: The surface to be treated shall be cleaned of all grease, oil, chemical contamination, dust laitance and loose concrete. The surface shall be washed with clean water and allowed to dry.
Paint as per manufacturer's specifications shall be mixed, adding the hardener to base and shall be applied to the concrete, and after the absorption of the resin, a second coat of paint shall be applied.
9. Mixing Epoxy Paint Formulation: Before mixing, the content of each cane should thoroughly stirred to disperse any settlement which may have taken place during storage. The entire content of the smaller hardener cane should be poured into the base container and the materials thoroughly mixed for at least 3minutes. Mechanical mixing using a slow speed (300-500rpm) flameproof drill fitted with a mixing paddle is recommended.
10. Application of Epoxy paint: Apply the mixed paint on to the dry, prepared substrate making sure a continuous film is achieved using a standard paint brush, good quality lamswool roller or spray equipment.
Test certificates: Manufacturer's test certificates for each batch shall be supplied along with the material. **Material shall not be older than 6 month from the date of manufacture.**
11. Safety Measures: All the safety measures which are essentially required to be taken shall be taken by the contractor and for any mishaps; DFCCIL/Railways shall not be responsible. The contractor shall take all safety precautions to avoid damages to life and property and shall give due regard to manufacturer's recommendations for safety. The work shall be carried out in the sequence as shown in tender drawing or as directed by the Engineer in Charge as per site requirements.
12. Mode of Measurements & Payments: The mode of measurement shall be Sq m. The rate shall be inclusive of all taxes, lead, lift, transportation and phase works if any.

Item No. NS/2: Providing & fixing Safety Screen as per RDSO Drg. No. EL / C / 0068 MOD " E " , on the Parapet with necessary fixtures etc. as per detailed drawing including contractor's own materials, labours, tools and plants, etc. complete.

Signature of tenderer (s)

Date:



Safety Screen

This item is for providing, fabricating and fixing in position safety screen conforming to IS: 800 of approved quality/make including painting.

The rate quoted shall be for safety screen with all materials, labour, tools and plants etc. including painting with one coat of red oxide and two coats of synthetic enamel paint of approved make and color as directed by Engineer in charge and approved drawing.

Item No. NS/3: Providing, fixing and maintaining MS fabricated traffic barricading of 2.50m height on either side of the carriage way / portion of the carriage way closed to the traffic including provision of all sign boards/ bollards and warning lights etc. as per the Engineer in charge

Providing MS Barricading

Providing, fixing and maintaining MS fabricated traffic barricading of 2.50 m height on either side of carriage way closed to the traffic including provision of all sign board/bollards and warning lights etc as per direction of Engineer in charge at site. Rate is inclusive of all labour, materials, tools and plants, taxes, lead & lift and transportation, erection and dismantling etc. Nothing extra shall be payable other than the rate quoted by the contractor.

The barricading shall be got erected just prior to commencement of the work and will remain erected till the work is completed in all respect or as decided by Engineer in charge at site.

The length of barricading shall be decided by Engineer in charge/Site Supervisor at site and shall be final and binding. The design of barricading shall be as approved by competent authority / Engineer in charge.

Measurement shall be for the finished item. Nothing extra shall be payable for overlapping. However, overlapping has to be provided so that GI sheets perfectly anchor to each other.

After completion of the work, all the material utilized in barricading shall be the contractor's property, however, nothing extra shall be paid for transporting including loading and unloading.

Before erection, the material utilized for barricading shall be got approved by the DFCCIL supervisor at site.

Rate is also inclusive of PCC meant for insertion of MS pipe. However, PCC shall not be done in the grade lower than 1:2:4 mix.

Quantity shown above is approximate; however, actual length of barricading may differ as per the site condition. Whatever length of barricading is decided by Engineer in charge/Site supervisor shall be provided by the contractor.

Item No. NS/4

Designing and preparation of detailed drawing of foundation, substructure, super structure, staircase, retaining wall, bearings, temporary arrangements, launching scheme etc. as per relevant IR,BIS,IRC and other codes, preparation of fabrication drawings, Proof checking of designs and drawings from IIT, Approval of design and drawing from respective authority, approval, to carry out any addition/alteration/modification/change in drawing during design approval and construction phase at work, providing guidance during construction and site visit if any.

1. On the basis of survey details and Geotechnical investigation report, prepare the preliminary design and shall be submitted to concerned authorities for their approval duly proof checked by IIT. If any need arise for site verification, it shall be conducted.
2. Approved detailed Design and drawings of Foundation, Sub-Structure, Super-Structure, RE Wall, Retaining wall, approach slab and all other items which is required for completion of work for the approaches from the, State Govt R&B - Design Circle Gandhinagar and/or any other relevant authority, who so ever is authorised for said approvals.
3. After proof checked of detailed design and Drawings for Foundation, Sub-Structure, Super-Structure (if non-RDSO span is adopted) for the DFCC+ Railway portion of ROB. The detailed drawings of DFCC+Rly portion shall be got approved by acting Chief Bridge Engineer/DFCC and/or any other relevant authority , who so ever is authorised for said approvals.
4. Updated submission of detailed design and Drawings for superstructures will be done by the Contractor. RDSO standard spans and RDSO drawings and/or similar already approved spans may also be considered if it suits the site condition. Wherever required, necessary customization to RDSO drawings as per site specific requirement will be done and drawings will be submitted accordingly and as per latest policy/guidelines.
 - i) Wherever, RDSO standard superstructure spans have been adopted no separate detailed design and proof checking of drawings will be required.
 - ii) Wherever, RDSO standard superstructure spans have been adopted with customization, separate detailed design and proof checking of drawings will be required.
 - iii) Wherever, RDSO standard superstructures are not applicable (with or without customization), Proof checking of detailed design and drawings from IIT will be got done by the Contractor. Prior consent of DCCIL for the institution to be engaged for Proof Checking is required.
5. Contractor shall carry out proof checking from IIT as advised by DFCCIL
6. Two sets of check print shall be submitted to DFCCIL for verification and four sets of design & drawing duly proof checked shall be submitted to DFCCIL along with scanned copy of the same.
7. Designer support during construction of ROB including site visit as per requirement of DFCCIL. This shall include correction/addition/modification/revision of design/drawings as and when required.
8. Rates are inclusive of any modification during the currency of contract.
9. The entire work shall be carried out as per instruction of DFCCIL and as per requirement of the work.

Signature of tenderer (s)

Date:



I. Payment Terms and Condition

Payment Terms and conditions are as under:

SR. NO.	Description	Breakup of Rate in % (Weightage for Payment)
<u>Preparation, submission and approval of structural design & detailed drawings of ROB.</u>		
A	Detailed Design and drawings of Rly + DFCC portion of ROB - for Foundation, Pier/Abutment, Super Structure (in case of Non RDSO / non-approved type super structure) having proof checked from IIT.	10%
B	Detailed Design and drawings of Approach portion of ROB- for Foundation, Pier/Abutment, Super Structure, RE wall etc. duly proof checked from IIT.	
(i)	RE wall	10%
(ii)	Foundation and sub structure. Mode of payment, at the rate of 8% for each completed 25% of scope of work = $4 \times 8 = 32\%$	32%
(iii)	Super structure Mode of payment, at the rate of 8% for each completed 25% of scope of work = $4 \times 8 = 32\%$	32%
C	Preparation & Approval of launching scheme of Girder in Rly.+DFC portion and design of staircase etc.	10%
D	Site Visit/ any Guidance during construction, any leftover design/drawing for completion of work. Same shall be released at the time of final bill.	6%

Item No. NS/5**Making and fixing of check rails of 52 kg/ 60 kg rails of various lengths for level crossing as per approval drawings.**

- i) The work of fixing of check rails of any length shall be carried out strictly as per the Railway's standard drawings, instructions laid down in Indian Railway Permanent Way Manual and the instructions of the Engineer-In-Charge whose decisions shall be final and conclusive.
- ii) The work shall be carried out only under the Supervision of the Engineer-In-Charge or his representative.
- iii) The rails and other fittings will be supplied to the contractor at the nearest SSE/Pway Depot without any cost.

Signature of tenderer (s)

Date:



- iv) The quantities shown in the Schedule are approximate and Railway reserves the right to increase/ decrease it as per Railways requirement.
- v) The contractor shall be responsible for all P. Way Material supplied to him till completion of work and properly accounted.
- vi) The surplus material shall be returned in the depot in good condition and no transportation charges either transporting it to site or returning back shall be payable. Waste material shall also be returned.

Mode of payment:

The unit for measurement is each Level Crossing consist 2 check rails.

Payment shall be made as per actual work done at site. Nothing extra shall be paid other than the rates accepted.

Item no. NS/6

Providing, arranging, managing and maintaining 500 sq.ft. well furnished AC office and well equipped Laboratory with 3 tables, 10 chairs, 2 steel almirah, one computer with printer & operator, sufficient number of display etc. to the satisfaction of the Project Manager including Electrical, Water expenses etc. For execution of this item the date of start shall be considered only when the Contractor has actually rented/constructed the required premises established the office & Laboratory as per requirement. This item shall remain valid only for original contract period; no additional payment shall be made for whatsoever reason even if time extension is provided or date of completion is extended. This office and laboratory including furniture and all other equipment shall be property of contractor after completion of Project.

SITE OFFICE FOR EMPLOYER

- A. The Contractor has to provide a reasonable office accommodation of suitable size at each ROB's site (about 500 sqft) as approved by the Engineer as far as possible close to ROB location under this contract for supervisory staff of the Employer and Consultants. The office accommodation shall be maintained by the contractor by providing all required furniture as mentioned in technical specification along with a gas connection for office pantry. The contractor will also provide round the clock watch & ward, one Messenger for communication between site & officers and one for maintaining the pantry etc. the cost is incidental & deemed inclusive in cost to complete the contract and no separate payment shall be made for the above mentioned provisions except relevant SOR item. The rentals along with electrical, water supply and other charges shall be arranged by the contractor for accommodation/s provided by the contractor during entire contract period as directed & decided by the Engineer. The Contractor

Signature of tenderer (s)

Date:



shall take away all material, furniture & equipment provided at accommodation/s after completion of contract but upon obtaining written approval from the Engineer and/ or as decided by the Engineer.

- B. The office, accommodation/s shall be arranged at strategically suitable location as decided by the Engineer at each ROB site.
- C. The Contractor shall arrange & provide reasonable furnished office, accommodation/s, good for the Employer's supervisory staff, having with required accessories and compatible UPS/ Inverter power backup. The Contractor shall provide the office accommodation within one month from the date of LOA. The rentals for accommodation/s provided, Telephone, electric & water charges etc. will be arranged by the contractor on time. The list of furniture and equipments is given below, which are to be provided and maintained for site office under this contractor package. All Cost towards provision of stationary, photocopy, printing of drawings, record maintenance etc. will be incurred by contractor as part of office maintenance.
- D. Following furniture shall be provided and maintained by the contractor at his own cost at each site of ROB to the satisfaction of the Engineer including Electrical, Water expenses etc. for execution.

Sr.No	Item reqd. at site office	Specification	Nos. reqd.
1	Office table	As approved by Engineer	3
2	Office chair	As approved by Engineer	3
3	Visitor chair	As approved by Engineer	4
4	Ordinary chair	As approved by Engineer	6
5	Stools	As approved by Engineer	2
6	Steel Almirah	Make- Godrej store well 1890x900x590 mm plain with locker or equivalent as approved by Engineer	1
7	Air Conditioner	As approved by Engineer	1
8	Telephone & Fax Machine	Telephone and Fax machine with STD and internet facility.	1
9	Laptop (Core- i7) with printer	HP/HCL/DELL/SONY or equivalent including with applicable soft wares as 1Auto CAD, MS Project etc. along with one printer four in one- type print, fac scan & photo copy	1
10	Refrigerator	Make Godrej or equivalent 185 ltr. Minimum	1
11	Fire Extinguisher	As per requirement for Office	1 Set

- E. Site office shall be furnished as per requirement of the Employer. The contractor shall supply new furniture, equipment, pantry utensils, reasonable Crockery & Cutlery etc. as decided by the Engineer. All the furniture etc. shall become the property of the contractor after the completion of the contractor the same shall be taken away by the contractor as decided by the Engineer.

The cost for providing & maintenance of office, accommodation is incidental to work & no separate payment shall be made.

Note :-

1. In the event of conflict between special condition /Technical specification /other guidelines, (available in the tender) the decision of the DFCCIL administration is final and binding to the contractor. No claim in this regard shall be entertained.
2. The Contractor and concerned staff of DFCCIL shall ensure that every 1st, 3rd, 5th etc Running bill & Final Bill shall be technically checked before making payment.
3. Earthwork register, level books, steel registers, Hrs, Test certificates where as required etc. shall be maintained carefully and shall submit along with all Running / final bill for technical checking

- : SCHEDULE FOR TESTING OF MATERIALS :-

It. No. as per schedule "B"	Brief description of materials to be tested	Qty of material	Prescription of test which shall be carried out	Frequency at which test shall be carried out	Total No of test to be taken.
1]	Coarse Aggregate		- Gradation test - Impact value - Flakiness and elongation	1 to 100 cm 1 test 100 to 500 cm 3 test 500 to 1500 cm 5 test 1500 to 5000 cm 7 test Minimum 1 test/ work	
2]	Grit		- Stripping value	As above	
3]	Granular materials		- Gradation - Atterbeg limits	As above	
4]	Murum		- P I Value	One test per 50 cum.	
5]	Sand/ quarry spall		- Silt content - Gradation - CBR test	One test per work/ season One test per 200 cmt. One test per work	
6]	Asphalt		1 Penetration test as per IS 1203 2 Ductility test as per IS 1208	1 to 10 tanker 1 test 11 to 20 tanker 2 test 21 to 50 " 3 test 51 to 100 " 4 test	

Signature of tenderer (s)

Date:



			<p>3 Specific gravity test as per IS 1202</p> <p>4 Softening point test as per IS 1204</p> <p>5 Viscosity test as per IS 1206</p>	<p>Remaining every 50" 1 test</p>	
				and 8 test for larger consignment	
7]	CC Cubes		<p>- Compressive Strength (I.S. 519 – 1959)</p>	<p>1 to 5 cms 1 No</p> <p>6 to 15 cms 2 No</p> <p>16 to 30 cms 3 No</p> <p>30 to 50 cms 4 No</p> <p>51 and above 4 + 1</p> <p>(For each additional 50 m³ or part thereof)</p>	
8]	Water		- Chemical test	Once for approval of source of supply	
9]	Steel		<p>- Tensile Strength</p> <p>- Yield Stress</p> <p>- Elongation</p> <p>- Size</p>	1 test/ 40 tonnes/ per category	
10]	Bricks		<p>- Water absorption</p> <p>- Efflorence</p> <p>- Size</p> <p>- Compressive Strength</p>	1 test per 50,000 bricks	
11]	Prime coat/ Tack coat		<p>- Quality of binder</p> <p>- Binder temperature for application</p> <p>- Rate of spread of binder</p>	<p>Number of samples per lot and test as per IS:73</p> <p>At regular close intervals</p> <p>Two test per 500 m² and not less than two test per day</p>	
12]	Carpet and Seal coat mix/ B.M/		- Quality of binder	Number of samples per lot and test as per IS:73	

Signature of tenderer (s)

Date:



	M.S.S.		<ul style="list-style-type: none"> - Grading - Temperature of binder - Binder content vide 45 IMD 2172 - Rate of spread of mix materials 	<p>1 test on individual contents and mix aggregate from the dryer for each 100 tonns of mix subject to minimum of two test per plant per day</p> <p>At regular close intervals</p> <p>One test for each 100 tonnes of mix subject to mini. of Two per day</p> <p>Regular control through checks on layer thickness</p>	
13]	Granular Sub-base	~~~~~	<ul style="list-style-type: none"> - Gradation - Atterberg limits - Moisture content prior to compaction - Density of compacted layer - Deleterious constituents - C.B.R. 	<p>As mentioned under serial number 3</p> <p>As mentioned under serial number 3</p> <p>As mentioned under serial number 3</p> <p>One test per 500 m²</p> <p>As required</p> <p>As required</p>	
14]	Wet Mix Macadam		<ul style="list-style-type: none"> - Aggregate Impact Value - Grading - Flakiness and Elongation Index - Atterberg limits of portion of aggregate passing 425 micron sieve 	<p>As mentioned under serial number 1</p> <p>As mentioned under serial number 1</p> <p>As mentioned under serial number 1</p> <p>As mentioned under serial number 3</p>	

Signature of tenderer (s)

Date:



			- Density of compacted layer	One test per 500 m ²	
15]	Water Bound Macadam		<ul style="list-style-type: none"> - Aggregate Impact Value - Grading - Flakiness Index and Elongation index - Atterberg limits of binding material - Atterberg limits of portion of aggregate passing 425 micron sieve 	<p>As mentioned under serial number 1</p> <p>As mentioned under serial No.1 As mentioned under serial number 1</p> <p>As mentioned under serial number 1</p> <p>As mentioned under serial number 1</p>	
16]	Earthwork		<ul style="list-style-type: none"> - Sand Content [IS: 2720 (Part-4)] - Plasticity Test[IS:2720 (Part-5)] - Density Test [IS:2720 (Part-8)] - Moisture Content Test [IS :2720 (Part-2)] - CBR Test 	<p>2 tests per 3000 cubic metres of soil</p> <p>2 tests per 3000 cub. metres of soil.</p> <p>2 tests per 3000 cubic metres of soil.</p> <p>One test for every 250 cubic metres of soil.</p> <p>One CBR test for every 3000 cum. at least or closer as and when required by the Engineer.</p>	

If directed by the Engineer in charge, the materials intended to be used for the work but not included in the above schedule shall also be got tested at Government recognized Laboratory or field Laboratory.

MILESTONES AND TIME SCHEDULE

Signature of tenderer (s)

Date:



PART-IV

CHAPTER - I

MILESTONES AND TIME SCHEDULE

4.1.1 Time Schedule:

4.1.1.1 Time of start and completion:

The time allowed for execution of the works is 18 (Eighteen months) from the date of issue of letter of acceptance from DFCCIL.

The contractor shall be expected to mobilize to the site of works and commence execution of the works within 10 (days) from issue of Acceptance Letter by DFCCIL.

The contractor shall be expected to complete the whole work ordered on the contractor within 18 months (Eighteen months) from the date of issue of Acceptance Letter by DFCCIL.

If the contractor commits defaults in commencing execution of the works as afore stated, DFCCIL shall without prejudice to any other right to remedy, be at liberty to forfeit fully the Earnest Money Deposit and performance guarantee of the contractor.

4.1.1.2 Progress of works:

The contractor shall submit a programme of work in the form of a Bar Chart of all the activities in consistence with milestone target envisaged below. In case this bar chart requires to be modified, the Engineer and the contractor shall agree upon a time and progress chart. The chart shall be prepared in direct relation to the time stated as 18 months for the completion of the works as the milestone targets specified below of these special conditions. It shall indicate the forecast of the dates of commencement and completion of various activities of the work and may be amended as necessary by agreements between the Engineer and the contractor within the limitation of 18 months as overall completion period.

4.1.2 Achievement of milestone progress:

In order to ensure progress during the execution of the work the contractor will be expected to achieve the following milestone targets ahead of dates mentioned against each. Failure to achieve accomplished milestone targets within allocated timeframe, save for reason accepted as laid by the Engineer shall create and constitute the ground for failure on the part of contractor for maintaining progress of the work as per agreed programme.

Milestone Targets	Time allocated within which to achieve completion in total 18 (Eighteen) months Time
(a) Physical commencement of work	D + 10 days
(b) Mobilization of equipments	D + 20 days
(c) Full mobilization of plant , machinery, men and material	D + 30 days
Construction of diversion of Road	D + 60 days
(d) Construction of foundation	D + 150 days
(e) Construction of substructure (Abutments & Piers)	D+150 to D+240 days
(f) Construction of stair cases	D + 120 to D + 270 days
(g) Fabrication and launching of steel superstructure	D + 60 to D + 330 days
(h) Construction of deck slab including foot path, crash barrier, RE wall, RCC slab/Girder, railing, etc.	D +330 to D + 390 days
Earthwork in embankment, Asphalted road,rlling etc. complete	D +390 to D + 450 days
(i) Completion of providing & fixing of protection screens, cables, testing, etc,	D +390 to D + 470 days
Providing and fixing Road sign boards, Lighting arrangements, painting etc. final Finishing and clearance / tidying up of site completely.	D +470 to D + 540 days

Note: “D” is the date of issue of Letter of Acceptance by DFCCIL to the contractor.

**TENDER FORMS
(INCLUDING SCHEDULE OF PRICES)**

Signature of tenderer (s)

Date:



PART- IV

CHAPTER II

TENDER FORMS

FORM No.	SUBJECT
Form No. 1	Offer Letter
Form No. 2	Tenderer's Credentials
Form No. 2A	Technical Eligibility Criteria Details
Form No. 2B	Financial Eligibility Criteria Details
Form No. 2C	Applicant's Party Information Form
Form No. 3	Summary of Prices
Form No. 4	Schedule of Prices and Total Prices
Form No. 5	Contract Agreement
Form No. 6	Performance Guarantee Bond
Form No. 7	Standing indemnity bond for on account payment.
Form No. 8	ECS / NEFT / RTGS
Form No. 9	Draft MOU for Joint Venture Participation
Form No.10	Draft Agreement for JV
Form No.11	Pro-forma of Participation from each partner of JV
Form No.12	Power of Attorney for authorized signatory of JV Partners
Form No.13	Power of Attorney to lead partner of JV
Form No. 14	Proforma for Time Extension
Form No. 15	Certificate of Fitness
Form No. 16	Proforma of 7 days Notice
Form No. 17	Proforma of 48 Hours Notice
Form No. 18	Proforma of Termination Notice
Form No. 19	Format of Bank Guarantee for Mobilisation Advance
Form No. 20	Pre Contract Integrity Pact
Form No. 21	Form of bid security (Bank guarantee)
Form No. 22	Form of format for affidavit to be submitted/ uploaded by tenderer

Signature of tenderer (s)

Date:



OFFER LETTER**Tender No: DFC/ADI/ENGG/ADI-PNU/ROB/LC.No.204/19**

Name of work - Construction of Road over Bridge including approaches complete in lieu of **LC No. 204 at Railway km. 700/3-4 (DFC Ch. 65.270) between Unjha and Bhandu motidau station of Ahmedabad-palanpur section of Western Railway, Ahmedabad Division.**

To,
The Managing Director,
DFCCIL,
New Delhi

We, the undersigned, declare that:

- (a) We have examined and have no reservations to the Bidding Documents, including Addendum.
- (b) We offer to execute the Works in conformity with the Bidding Documents;
- (c) Our Bid shall be valid for a period of 90 days from the date fixed for the Bid submission deadline in accordance with the Bidding Documents, and it shall remain binding upon us and may be accepted at any time before the expiration of that period;
- (d) We have not been blacklisted/banned in accordance with para.1.3.13 (ii)(v)(a) of Preamble and General Instructions to tenderers.
- (e) We are neither Bankrupt/Insolvent nor in the process of winding-up nor there is a case pending before any Court on deadline of submission of the Bid in accordance with para. 1.3.13 (ii) (v) (b) of Preamble and General Instructions to tenderers.
- (f) If our Bid is accepted, we commit to obtain a Performance Guarantee in accordance with the Bidding Documents;
- (g) If our Bid is accepted, we commit to deploy key equipment and key personnel consistent with the requirements of the work.
- (h) We understand that this Bid, together with your written acceptance thereof included in your notification of award/Letter of Acceptance (LOA), shall constitute a binding contract between us, until a formal contract is prepared and executed; and
- (i) All information, statements and description in this Bid are in all respect true, correct and complete to the best of our knowledge and belief and we have not made any tampering or changes in the Bidding documents on which the Bid is being submitted and if any tampering or changes/incorrect information are detected at any stage, we understand the Bid will invite summarily rejection and forfeiture of Bid security, the contract will be liable to be terminated along with forfeiture of performance security, even if LOA has been issued.
- (j) We understand that you are not bound to accept the lowest Bid or any other Bid that you may receive.

Signature of tenderer (s)

Date:

Page **370** of **411**



For CGM/DFCCIL/ADI

Name
In the capacity of Signed
..... Duly authorized to
sign the Bid for and on behalf of Date
.....

Signature of tenderer (s)
Date:

TENDERER'S CREDENTIALS

S. No	Description
1.	For technical experience/competence, give details of similar completed works during the last three financial years (i.e current Financial year and three previous Financial Years) in the proforma given in Form-2A
2.	For financial capacity and organizational resources, give details of contractual payments received for the last three financial years (i.e current Financial year and three previous financial years) as per audited balance sheet certified by Chartered Accountant in the proforma given in Form-2B
3.	Give constitution of your firm. Attach certified copies of legal documents in support thereof. Form-2C

Signature of tenderer (s)

Date:



TECHNICAL ELIGIBILITY CRITERIA DETAILS**Details of the similar works completed (as per Para 1.3.13 (i) of Preamble and General Instructions to Tenderers)**

Similar Contract No.		
Contract Identification		
Award date		
Completion date		
Role in Contract	Prime Contractor <input type="checkbox"/>	Member in JV <input type="checkbox"/>
Total Contract Amount (Rs.)		
If member in a JV , specify participation in total Contract amount	<i>[insert a percentage amount]</i>	<i>Total contract amount in Rs.</i>
Employer's Name: Address: Telephone/fax number E-mail:		
Description of the similarity in accordance with Criteria 1.3.13(i)(A)		

The Bidder shall attach Certified completion certificates issued by the client duly attested by Notary as per Eligibility Criteria of the tender documents.

Signature of the
Tenderer with Seal

Signature of tenderer (s)

Date:



FINANCIAL ELIGIBILITY CRITERIA DETAILS

Each Bidder or each member of JV must fill in this form separately. Name of Bidder/JV Partner

Details of contractual payments received during the last three financial years and current financial year

Contractual payments received	
Year	Value of payment received in Rs. (Contract Receipts)
Current Year(2019-2020)	
2018 - 2019	
2017 – 2018	
2016 - 2017	
Total Contractual Payment	

Note: The details should be extracted from the audited balance sheet Certified by the Chartered Accountant or form 16-A issued by the Employer as per clause 1.3.13 of Preamble and General Instructions to Tenderers.

The Bidder shall attach necessary documents in support of the above.

Signature of the
Tenderer with Seal

Signature of tenderer (s)

Date:



APPLICANT'S PARTY INFORMATION FORM

Applicant name: <i>[insert full name]</i>
Applicant's Party name: <i>[insert full name of Applicant's Party]</i>
Applicant's Party country of registration: <i>[indicate country of registration]</i>
Applicant Party's year of constitution: <i>[indicate year of constitution]</i>
Applicant Party's legal address in country of constitution: <i>[insert street/ number/ town or city/ country]</i>
Applicant Party's authorized representative information Name: <i>[insert full name]</i> Address: <i>[insert street/ number/ town or city/ country]</i> Telephone/Fax numbers: <i>[insert telephone/fax numbers, including country and city codes]</i> E-mail address: <i>[indicate e-mail address]</i>
1. Attached are copies of original documents of <input type="checkbox"/> Articles of Incorporation (or equivalent documents of constitution or association), and/or registration documents of the legal entity named above. <input type="checkbox"/> In case of a Government-owned enterprise or institution, documents establishing legal and financial autonomy, operation in accordance with commercial law, and absence of dependent status.
2. Included are the organizational chart, a list of Board of Directors, and the beneficial

Signature of the
Tenderer with Seal

Signature of tenderer (s)

Date:

Page 375 of 411



For CGM/DFCCIL/ADI

SUMMARY OF PRICES

(Summary of Prices has been separately attached in Financial Packet "B")

Signature of tenderer (s)

Date:

Page **376** of **411**



For CGM/DFCCIL/ADI

FORM No. 4

**SCHEDULE -1
SCHEDULE OF PRICES & TOTAL PRICES**

**(Schedule of Prices & Total Prices have been separately attached in Financial Packet "B").
To be filled online mode E- Tendering only**

Signature of tenderer (s)

Date:

Page **377** of **411**



For CGM/DFCCIL/ADI

FORM No. 5

SAMPLE

AGREEMENT

CONTRACT AGREEMENT

THIS AGREEMENT ("Agreement") is made at New Delhi on the _____ day of _____
BETWEEN

(1) Dedicated Freight Corridor Corporation of India Limited, incorporated under the laws of India and having its principal place of business at, Pragati Maidan Metro Station Building Complex, New Delhi, India – 110001 (hereinafter called '**the Employer**'), and _____, a company / corporation / JV incorporated under the laws of _____ -having its principal place of business at _____ (hereinafter called "**the Contractor**").

WHEREAS in reference to a call for Tender for "Construction of Road over Bridge including approaches complete in lieu of LC No. 204 at Railway km. 700/3-4 (DFC Ch. 65.270) between Unjha and Bhandu motidau station of Ahmedabad-palanpur section of Western Railway, Ahmedabad Division" as per Tender paper _____ at Annexure "A" here to, the Contractor has submitted a Tender hereto and whereas the said Tender of the contractor has been accepted _____ for Construction of 01 Nos. of Road over bridge including approaches complete in lieu of L.C. No. 204. As per copy of the Letter of Acceptance of Tender No _____ dated xx.xx.2019 complete with enclosure at the accepted rates and at an estimated contract value of Rs. _____ (Rupees _only). Now the agreement with witnesseth to that in consideration of the premises and the payment to be made by the Employer to the Contractor provided for herein below the Contractor shall supply all equipments and materials and execute and perform all works for which the said Tender of the Contractor has been accepted, strictly according to the various provisions in Annexure 'A' and 'B' hereto and upon such supply, execution and performance to the satisfaction of the Purchaser, the Purchaser shall pay to the contractor at the several rates accepted as per the said Annexure 'B' and in terms of the provisions therein.

IN WITNESS WHEREOF the parties hereto have caused their respective Common Seals to be hereunto affixed/ (or have hereunto set their respective hands and seals) the day and year first above written.

Signature of tenderer (s)

Date:

Page 378 of 411



For CGM/DFCCIL/ADI

For and on behalf of the Contractor

For and on behalf of the Employer

Signature of the authorized official
Name of the official

Signature of the authorized official
Name of the official

Stamp/seal of the Contractor

Stamp/Seal of the Employer

SIGNED, SEALED AND DELIVERED

By the said

_____ Name

By the said

_____ Name

on behalf of the Contractor in the
presence of:

Witness _____

Name _____

Address _____

on behalf of the Employer in the
presence of:

Witness _____

Name _____

Address _____

Enclosures:-

1. Annexure 'A' - Tender Papers No.
2. Annexure 'B' - Letter of Acceptance of Tender _____ Dated _____.____.2016
along with Summary of Prices

Signature of tenderer (s)

Date:



SAMPLE

Name of the Bank _____

Managing Director/ DFCCIL Bank Guarantee Bond No.____

Acting through _____(Designation Dated _ and address of contract signing authority)

PERFORMANCE GUARANTEE BOND

In consideration of the Managing Director/ DFCCIL acting through _____ (Designation & Address of Contract Signing Authority), Dedicated Freight Corridor Corporation of India Limited, New Delhi hereinafter called "DFCCIL") having agreed under the terms and conditions of agreement/Contract Acceptance letter No. _____ dated _____ made between _____ (Designation & address of contract signing Authority) and _____ (hereinafter called "the said contractor(s)" for the work _____ (hereinafter called "the said agreement") having agreed for submission of a irrevocable Bank Guarantee Bond for Rs. _____ (Rs. _____ only) as a performance security Guarantee Bond from the contractor(s) for compliance of his obligations in accordance with the terms & conditions in the said agreement.

1. We _(indicate the name of the Bank) hereinafter referred to as the Bank, undertake to pay to the Government an amount not exceeding Rs. _ (Rs. _only) on demand by the Government.
2. We _____ (indicate the name of the bank, further agree that (and promise) to pay the amounts due and payable under this guarantee without any demur merely on a demand from the Government through the GROUP GENERAL MANAGER/ FINANCE Dedicated Freight Corridor Corporation of India Limited, New Delhi or _____ (Designation & Address of contract signing authority) DFCCIL, stating that the amount claimed is due by way of loss or damage caused to or would be caused or suffered by the Government by reason of any breach by the said contractor of any of the terms or conditions contained in the said agreement or by reason of the contractor failure to perform the said agreement. Any such demand made on the Bank shall be conclusive as regards the amount due and payable by the Bank under this guarantee. However, our liability under this guarantee shall be restricted to an amount not exceeding Rs. _ (Rs. _____ only)
- 3 (a) We, _____ (indicate the name of Bank) further undertake to pay to the Government any money so demanded notwithstanding any dispute or dispute raised by the contractor (s) in any suit or proceeding pending before any court or Tribunal relating to liability under this present being absolute and unequivocal.
- (b) The payment so made by us under this bond shall be valid discharge of our liability for

Signature of tenderer (s)

Date:

Page 380 of 411



For CGM/DFCCIL/ADI

payment there under and the contractor(s) shall have no claim against us for making such payment.

4. We, _____ (indicate the name of bank) to further agree that the guarantee herein contained shall remain in full force and effect during the period that would be taken for the performance of the said agreement and that it shall continue to be enforceable till all the dues of the Government under or by virtue of the said agreement have been fully paid and its claims satisfied or discharged by _____ (Designation & Address of contract signing authority) on behalf of the Government, certify that the terms and conditions of the said agreement have been fully and properly carried out by the said contractor (s) and accordingly discharges this guarantee.
5. (a) Notwithstanding any thing to the contrary contained herein the liability of the bank under this guarantee will remain in force and effect until such time as this guarantee is discharged in writing by the Government or until (date of validity/extended validity) whichever is earlier and no claim shall be valid under this guarantee unless notice in writing thereof is given by the Government within validity / extended period of validity of guarantee from the date aforesaid.

(b) Provided always that we _____ (indicate the name of the Bank) unconditionally undertakes to renew this guarantee to extend the period of guarantee form year to year before the expiry of the period or the extended period of the guarantee, as the case may be on being called upon to do so by the Government. If the guarantee is not renewed or the period extended on demand, we _____ (indicate the name of the Bank) shall pay the Government the full amount guarantee on demand and without demur.
6. We, _ (indicate the name of Bank) further agree with the Government that the Government shall have the fullest liberty without our consent and without effecting in any manner out of obligations hereunder to vary any of the terms and conditions of the said contract from time to time or to postpone for any time or from time to time any to the powers exercisable by the Government against the said contractor (s) and to forbear or enforce any of the terms and conditions of the said agreement and we shall not be relieved from our liability by reason of any such variation, or extension being granted to the said contractor (s) or for any bearance act or omission on the part of the Government or any indulgence by the Government to the said contractor (s) or by any such matter or thing whatsoever which under the law relating to sureties for the said reservation would relive us from the liability.
7. This guarantee will not be discharged by any change in the constitution of the Bank or the Contractor (s).
8. We, _____ (indicate the name of the Bank) lastly undertake not to revoke this guarantee except with the previous consent of the Government in writing.

Signature of tenderer (s)

Date:



9. This guarantee shall be valid upto _____(Date of completion plus 60 days beyond that). Unless extended on demand by Government. Notwithstanding anything to the contrary contained herein before, our liability under this guarantee is restricted to Rs. _____ (Rs. _____only) unless a demand under this guarantee is made on us in writing on or before _____ we, shall be discharged from our liabilities under this guarantee thereafter.

Dated _____ the _____ day of _____ for
_____ (indicate the name of bank)

Signature of Bank Authorize official
(Name):
Designation: Full
Address.

Witness:

1. _____

2. _____

Signature of tenderer (s)

Date:



SAMPLE
STANDING INDEMNITY BOND FOR “ON ACCOUNT” PAYMENTS

(On paper of requisite stamp value)

We, M/s _____ hereby undertake that we hold at our stores Depot/s at _____ for and on behalf of the Managing Director/ DFCCIL acting in the premises through the Chief General Manager / DFCCIL/Ahmedabad or his successor (hereinafter referred to as “The Employer”) all materials for which “On Account” payments have been made to us against the Contract for (_____) on the section _____ DFCCIL also referred to as Group/s _____ vide letter of Acceptance of Tender _____ dated _____ and material handed over to us by the employer for the purpose of execution of the said contract, until such time the materials are duly erected or otherwise handed over to him.

We shall be entirely responsible for the safe custody and protection of the said materials against all risk till they are duly delivered as erected equipment to the employer or as he may direct otherwise and shall indemnify the employer against any loss /damage or deterioration whatsoever in respect of the said material while in our possession and against disposal of surplus materials. The said materials shall at all times be open to inspection by any officer authorized by the Chief General Manager/ DFCCIL/ Ahmedabad in charge of Dedicated Freight Corridor Corporation of India Limited (Whose address will be intimated in due course).

Should any loss, damage or deterioration of materials occur or surplus material disposed off and refund becomes due, the Employer shall be entitled to recover from us the 85% of supply portion of Part IV, Chapter – II (Form - 4) to the Contract (as applicable) and also compensation for such loss or damage if any long with the amount to be refunded without prejudice to any other remedies available to him by deduction from any sum due or any sum which at any time hereafter becomes due to us under the said or any other Contract.

Dated this day ____ day of _____ 2019

for and on behalf of

M/s _____ (Contractor)

Signature of witness

Name of witness in Block letter.

Address. _____

Signature of tenderer (s)

Date:



**ECS / NEFT / RTGS
MANDATE FORM**

Date :-

To,
GM (F) / GGM (F)
DFCCIL, New Delhi.

Sub : ECS / NEFT / RTGS payments

We refer to the ECS / NEFT / RTGS set up by DFCCIL for remittance of our payments using RBI's NEFT / RTGS scheme, our payments may be made through the above scheme to our under noted account.

Name of Bank	
Name of City	
Bank Code No	
Name of Bank Branch	
Branch Code No	
Address of Bank Branch	
Telephone Number of Bank Branch	
Fax No of Bank Branch	
Name of customer / Tenderer as per account	
Account Number of Tenderer appearing on cheque book	
Type of Account (S. B. / Current / Cash credit)	
IFSC code for NEFT	
IFSC code for RTGS	
9-Digit-code number of the bank and branch appearing on the MICR cheque issued by the bank.	
Details of Cancelled Cheque leaf	
Telephone no of tenderer	
Cell Phone Number of the tenderer to whom details with regard to the status of bill submitted to Accounts Office i.e Co6 & Co7 & Cheque Purchase Orders particulars can be intimated through SMS	
Tenderer's E - mail ID	

Confirmed by Bank signature of tenderer With stamp and address
Enclose a copy of crossed cheque

Signature of tenderer (s)

Date:



**DRAFT MEMORANDUM OF UNDERSTANDING (MOU) For
JOINT VENTURE PARTICIPATION
BETWEEN**

M/s having its registered office at (hereinafter referred to as) acting as the Lead Partner of the first part,

and

M/s having its registered office at (hereinafter referred to as `.....') in the capacity of a Joint Partner of the other part.

and

M/s having its registered office at (hereinafter referred to as `.....') in the capacity of a Joint Partner of the other part.

The expressions of and shall wherever the context admits, mean and include their respective legal representatives, successors-in-interest and assigns and shall collectively be referred to as "the Parties" and individually as " the Party"

WHEREAS:

Dedicated Freight Corridor Corporation of India Limited (DFCCIL) [hereinafter referred to as "Client"] has invited Bids for ... "[Insert name of work]....."

NOW, THEREFORE, THE PARTIES AGREE AS FOLLOWS:

1. The following documents shall be deemed to form and be read and construed as an integral part of this MOU.
 - (i) Notice for Bid, and
 - (ii) Bidding document
 - (iii) Any Addendum/Corrigendum issued by Dedicated Freight Corridor Corporation of India Limited
 - (iv) The Bid submitted on our behalf jointly by the Lead Partner.
2. The `Parties' have studied the documents and have agreed to participate in submitting a `Bid' jointly.
3. M/s shall be the lead member of the JV for all intents and purpose and shall represent the Joint Venture in its dealing with the Client. For the purpose of submission of Bid proposals, the parties agree to nominate as the leader duly authorized to sign and submit all documents and subsequent clarifications, if any, to the Client. However M/s shall not submit any such proposals, clarifications or commitments before securing the written clearance of the other partner which shall be expeditiously given by M/s.....to M/s.....
4. The `Parties' have resolved that the distribution of responsibilities and their proportionate share in the Joint Venture is as under:
 - (a) Lead Partner;
 - (i)

Signature of tenderer (s)

Date:

Page 385 of 411



For CGM/DFCCIL/ADI

(ii)

(iii)

(b) Joint Venture Partner

(i)

(ii)

(iii)

[Similar details to be given for each partner]

5. JOINT AND SEVERAL RESPONSIBILITY

The Parties undertake that they shall be jointly and severally liable to the Client in the discharge of all the obligations and liabilities as per the contract with the Client and for the performance of contract awarded to their JV.

6. ASSIGNMENT AND THIRD PARTIES

The parties shall co-operate throughout the entire period of this MOU on the basis of exclusivity and neither of the Parties shall make arrangement or enter into agreement either directly or indirectly with any other party or group of parties on matters relating to the Project except with prior written consent of the other party.

7. EXECUTIVE AUTHORITY

The said Joint Venture through its authorized representative shall receive instructions, payments from the Client. The management structure for the project shall be prepared by mutual consultations to enable completion of project to quality requirements within permitted cost and time.

8. BID SECURITIES

Till the award of the work, JV firm/Lead Partner of JV firm shall furnish Bid Security to the Client on behalf of the joint venture which shall be legally binding on all the members of the Joint Venture.

9. BID SUBMISSION

Each Party shall bear its own cost and expenses for preparation and submission of the Bid and all costs until conclusion of a contract with the Client for the Project. Common expenses shall be shared by all the parties in the ratio of their actual participation.

10. INDEMNITY

Each party hereto agrees to indemnify the other party against its respective parts in case of breach/default of the respective party of the contract works of any liabilities sustained by the Joint Venture.

11. For the execution of the respective portions of works, the parties shall make their own arrangements to bring the required finance, plants and equipment, materials, manpower and other resources.

12. DOCUMENTS & CONFIDENTIALITY

Each Party shall maintain in confidence and not use for any purpose related to the Project all commercial and technical information received or generated in the course of preparation and submission of the Bid.

13. ARBITRATION

Any dispute, controversy or claim arising out of or relating to this agreement shall be

Signature of tenderer (s)

Date:

Page 386 of 411



For CGM/DFCCIL/ADI

settled in the first instance amicably between the parties. If an amicable settlement cannot be reached as above, it will be settled by arbitration in accordance with the Indian Arbitration and Conciliation Act 1996 or any amendments thereof. The venue of the arbitration shall be Delhi.

14. VALIDITY

This Agreement shall remain in force till the occurrence of the earliest to occur of the following, unless by mutual consent, the Parties agree in writing to extend the validity for a further period.

- a. The Bid submitted by the Joint Venture is declared unsuccessful, or
- b. Cancellation/ shelving of the Project by the client for any reasons prior to award of work
- c. Execution of detailed JV agreement by the parties, setting out detailed terms after award of work by the Client.

15. This MOU is drawn in number of copies with equal legal strength and status. One copy is held by M/s and the other by M/s.....&M/s and a copy submitted with the proposal.

16. This MOU shall be construed under the laws of India.

17. NOTICES

Notices shall be given in writing by fax confirmed by registered mail or commercial courier to the following fax numbers and addresses:

Lead Partner

.....
(Name & Address)

Other Partner(s)

.....
(Name & Address)

IN WITNESS WHEREOF THE PARTIES, have executed this MOU the day, month and year first before written.

M/s.....

M/s.....

.....
(Seal)

.....
(Seal)

Witness

1.....(Name & Address)

2..... (Name & Address)

Notes: (1) In case of existing joint venture, the certified copy of JV Agreement may be furnished.

Signature of tenderer (s)

Date:



DRAFT FORMAT OF JOINT VENTURE AGREEMENT

To be executed on non-judicial stamp paper of appropriate value in accordance with relevant Stamp Act and to be registered with appropriate authority under Registration Act.

The JV agreement shall be structured generally as per contents list given below:

A. CONDITIONS AND TERMS OF JV AGREEMENT

1. Definitions and Interpretation
2. Joint Venture – Include Equity of members, transferability of shareholding of equity of a partner leaving during the subsistence of the contract.
3. Proposal Submission
4. Performance – To indicate scope of responsibility of each member
5. Language and Law
6. Exclusively
7. Executive Authority
8. Documents
9. Personnel
10. Assignment and Third Parties
11. Severability
12. Member in Default
13. Duration of the Agreement
14. Liability and sharing of risks
15. Insurance
16. Sharing of Promotion and Project Costs, Profits, Losses and Remuneration
17. Financial Administration and Accounting
18. Guarantees and Bonds
19. Arbitration
20. Notices
21. Sole Agreement and Variation

B. SCHEDULES

1. Project and Agreement Particulars
2. Financial Administration Services
3. Allocation of the obligations
4. Financial Policy and Remuneration

Signature of tenderer (s)

Date:

Page 388 of 411



For CGM/DFCCIL/ADI

PRO-FORMA LETTER OF PARTICIPATION FROM EACH PARTNER OF JOINT VENTURE (JV)

(To be executed on non-judicial stamp paper of appropriate value in accordance with relevant Stamp Act and to be registered with appropriate authority under Registration Act.)

No....

Dated

From:

.....
.....

To,
The Managing Director,
Dedicated Freight Corridor Corporation of India Limited
Pragati Maidan Metro Stn. Building Complex.,
New Delhi 110001.

Gentlemen,

Re: ...“*[Insert name of work]*.....”.

Ref: Your notice for Invitation for Bid No. _____
dated

1. We wish to confirm that our company/firm has formed a Joint Venture with(i)..... & ii)..... for the purposes associated with IFB referred to above.

(Members who are not the lead partner of the JV should add the following paragraph).*

2. ‘The JV is led by ... whom we hereby authorise to act on our behalf for the purposes of submission of Bid for and authorise to incur liabilities and receive instructions for and on behalf of any and all the partners or constituents of the Joint Venture.’

OR

*(Member(s) being the lead member of the group should add the following paragraph)**

2. ‘In this group we act as leader and, for the purposes of applying for Bid, represent the Joint Venture:

Signature of tenderer (s)

Date:



3. In the event of our JV being awarded the contract, we agree to be jointly with i) & ii) (names of other members of our JV) and severally liable to the Dedicated Freight Corridor Corporation of India Limited, its successors and assigns for all obligations, duties and responsibilities arising from or imposed by the contract subsequently entered into between Dedicated Freight Corridor Corporation of India Limited and our JV.
4. ***I/We, further agree that entire execution of the contract shall be carried out exclusively through the lead partner.**

Yours faithfully,

(Signature)

(Name of Signatory).....

(Capacity of Signatory).....

Company Seal * Delete as applicable

Note : In case of existing joint venture, the certified copy of JV Agreement may be furnished.

Signature of tenderer (s)

Date:

Page **390** of **411**



For CGM/DFCCIL/ADI

**FORMAT FOR POWER OF ATTORNEY FOR AUTHORISED SIGNATORY OF
JOINT VENTURE (JV) PARTNERS**

POWER OF ATTORNEY*

(To be executed on non-judicial stamp paper of the appropriate value in accordance with relevant stamp Act. The stamp paper to be in the name of the company who is issuing the power of Attorney)

Know all men by these presents, we ... do hereby constitute, appoint and authorise Mr/Ms. who is presently employed with us/ partner of the firm and holding the position ofas our attorney, to do in our name and on our behalf, all such acts, deeds and things necessary in connection with or incidental to our Bid for the work of ... Including signing and submission of all documents and providing information / responses to Dedicated Freight Corridor Corporation of India Limited , representing us in all matters, dealing with Dedicated Freight Corridor Corporation of India Limited in all matters in connection with our Bid for the said project.

We hereby agree to ratify all acts, deeds and things lawfully done by our said attorney pursuant to this Power of Attorney and that all acts, deeds and things done by our aforesaid attorney shall and shall always be deemed to have been done by us.

Dated this the day of 2019.

(Signature of authorised Signatory)

Signature of Lead Partner

Signature of JV Partner(s)

.....

.....

(Signature and Name in Block letters of Signatory)

Seal of Company

Witness

Witness 1:

Name:

Witness 2:

Name:

Address:

Address:

Occupation:

Occupation:

**Notes:*

- i) To be executed by all the partners jointly, in case of a Joint Venture.

Signature of tenderer (s)

Date:



**FORMAT FOR POWER OF ATTORNEY TO
LEAD PARTNER OF JOINT VENTURE (JV)**

(To be executed on non-judicial stamp paper of the appropriate value in accordance with relevant stamp Act. The stamp paper to be in the name of the company who is issuing the power of Attorney)

POWER OF ATTORNEY*

Whereas Dedicated Freight Corridor Corporation of India Limited has invited Bids for the work of "Construction of Road over Bridge including approaches complete in lieu of LC No. 204 at Railway km. 700/3-4 (DFC Ch. 65.270) between Unjha and Bhandu motidau station of Ahmedabad-palanpur section of Western Railway, Ahmedabad Division."

Whereas, the members of the Joint Venture comprising of M/s. ..., M/s. ..., M/s., and M/s. are interested in submission of Bid for the work of ...[Insert name of work]... in accordance with the terms and conditions contained in the Bidding documents.

Whereas, it is necessary for the members of the Joint Venture to designate one of them as the Lead Partner, with all necessary power and authority to do, for and on behalf of the Joint Venture, all acts, deeds and things as may be necessary in connection with the Joint Venture's Bid for the project, as may be necessary in connection the Joint Venture's Bid for the project.

NOW THIS POWER OF ATTORNEY WITNESSETH THAT:

We, M/s., hereby designate M/s., being one of the partners of the Joint Venture, as the lead partner of the Joint Venture, to do on behalf of the Joint Venture, all or any of the acts, deeds or things necessary or incidental to the Joint Venture's Bid for the contract, including submission of Bid, participating in conferences, responding to queries, submission of information/ documents and generally to represent the Joint Venture in all its dealings with the DFCCIL or any other Government Agency or any person, in connection with the Bid/contract for the said work until culmination of the process of Bidding till the contract agreement if successful, is entered into with the Dedicated Freight Corridor Corporation of India Limited and thereafter till the expiry of the contract agreement.

**To be executed by all the members of the JV except the lead member.*

The mode of execution of the Power of Attorney should be in accordance with the procedure, if any, laid down by the applicable law and the charter documents of the executant(s) and

Signature of tenderer (s)

Date:



when it is so required the same should be under common seal affixed in accordance with the required procedure.

We hereby agree to ratify all acts, deeds and things lawfully done by lead member, our said attorney, pursuant to this power of attorney and that all acts deeds and things done by our aforesaid attorney shall and shall always be deemed to have been done by us/ Joint Venture.

Dated this the Day of 2019

.....
(Signature)

..... (Name
in Block letters of Executants) Seal of
Company

Witness 1	
Name:	
Address:	
Occupation:	
Witness 2	
Name:	
Address:	
Occupation:	

PROFORMA FOR TIME EXTENSION

No. _____ Dated : _____

Sub : (i) _____ (name of work).

(ii) Acceptance letter no. _____

(iii) Understanding/Agreement no. _____

Ref: _____ (Quote specific application of Contractor for extension to the date received) _____

Dear Sir,

1. The stipulated date for completion of the work mentioned above is _____. From the progress made so far and the present rate of progress, it is unlikely that the work will be completed by the above date (or 'However, the work was not completed on this date').
2. Expecting that you may be able to complete the work, if some more time is given, the competent authority, although not bound to do so, hereby extends the time for completion from _____ to _____.
3. Please note that an amount equal to the liquidated damages for delay in the completion of the work after the expiry of _____ (give here the stipulated date for completion with/without any penalty fixed earlier) will be recovered from you as mentioned in Clause, 17-B of the Standard General Conditions of Contract for the extended period, notwithstanding the grant of this extension. You may proceed with the work accordingly.
4. The above extension of the completion date will also be subject to the further condition that no increase in rates on any account will be payable to you.
5. Please intimate within a week of the receipt of this letter your acceptance of the extension of the conditions stated above.
6. Please note that in the event of your declining to accept the extension on the above said conditions or in the event of your failure after accepting or acting upto this extension to complete the work by _____ (here mention the extended date), further action will be taken in terms of Clause 62 of the Standard General Conditions of Contract.

Yours faithfully

For and on behalf of the Employer

Name of the Official:-

Stamp/Seal of the Employer

Signature of tenderer (s)

Date:



CERTIFICATE OF FITNESS

1. (a) Serial Number _____
(b) Date _____
2. Name of person examined _____
I certify that I have personally examined (*name*) _____
3. Father's Name: son/daughter of _____ ,
residing at _____
4. Sex _____
5. Residence: _____
6. Date of birth, if available, and/or certified age _____
7. Physical fitness _____
8. Identification marks _____
9. Reasons for:

Who is desirous of being employed
in a factory or on a work requiring
manual labour and that his / her age
as nearly as can be ascertained
from my examination, is _____
years and that he/she is fit for
employment in a factory or on a
work requiring manual labour as an
adult/child.

(a) refusal to grant certificate, or _____

(b) revoking the Certificate _____

Signature or Left Hand
Thumb Impression of the
person Examined

Signature of Certifying Surgeon

Note : In case of physical disability, the exact details of the cause of the physical disability should be clearly stated

Signature of tenderer (s)
Date:

FORM No. 16
Registered Acknowledgement Due

PROFORMA OF 7 DAYS NOTICE
DFCCIL
(Without Prejudice)

To

M/s _____

Dear Sir,

Contract Agreement No. _____
In connection with _____

1. In spite of repeated instructions to you by the subordinate offices as well as by this office in various letters of even no. _____, dated _____; you have failed to start work/show adequate progress and/or submit detailed programme for completing the work.
2. Your attention is invited to this office/Chief Engineer's office letter no. _____, dated _____ in reference to your representation, dated _____.
3. As you have failed to abide by the instructions issued to commence the work/to show adequate progress of work you are hereby given 7 days' notice in accordance with Clause 62 of Standard General Conditions of Contract to commence works / to make good the progress, failing which further action as provided in Clause 62 of the Standard General Conditions of Contract viz. to terminate your Contract and complete the balance work without your participation will be taken.

Kindly acknowledge receipt.

Yours faithfully

For and on behalf of the Employer
Name of the Official:-
Stamp/Seal of the Employer

Signature of tenderer (s)
Date:

PROFORMA OF 48 HRS. NOTICE
DFCCIL
(Without Prejudice)

To

M/s _____

Dear Sir,

Contract Agreement No. _____
In connection with _____

1. Seven days' notice under Clause 62 of Standard General Conditions of Contract was given to you under this office letter of even no., dated _____; but you have taken no action to commence the work/show adequate progress of the work.
2. You are hereby given 48 hours' notice in terms of Clause 62 of Standard General Conditions of Contract to commence works / to make good the progress of works, failing which and on expiry of this period your above contract will stand rescinded and the work under this contract will be carried out independently without your participation and your Security Deposit shall be forfeited and Performance Guarantee shall also be encashed and consequences which may please be noted.

Kindly acknowledge receipt.

Yours faithfully

For and on behalf of the Employer
Name of the Official:-
Stamp/Seal of the Employer

Signature of tenderer (s)
Date:

FORM No. 18
Registered Acknowledgement Due

PROFORMA OF TERMINATION NOTICE
DFCCIL
(Without Prejudice)

No. _____ Dated _____

To
M/s _____

Dear Sir,

Contract Agreement No. _____
In connection with _____

Forty eight hours (48 hrs.) notice was given to you under this office letter of even no., dated _____; but you have taken no action to commence the work/show adequate progress of the work.

Since the period of 48 hours' notice has already expired, the above contract stands rescinded in terms of Clause 62 of Standard General Conditions of Contract and the balance work under this contract will be carried out independently without your participation. Your participation as well as participation of every member/partner in any manner as an individual or a partnership firm/JV is hereby debarred from participation in the tender for executing the balance work and your Security Deposit shall be forfeited and Performance Guarantee shall also be encashed.

Kindly acknowledge receipt.

Yours faithfully

For and on behalf of the Employer
Name of the Official:-
Stamp/Seal of the Employer

Signature of tenderer (s)
Date:

SAMPLE
FORMAT OF BANK GUARANTEE FOR MOBILISATION ADVANCE

(Clause 1.5.20, Part - I, Chapter - V)

Bank guarantee made on this Between
(hereinafter called “**the Bank**”) of the One Part and Dedicated Freight Corridor Corporation of India Limited. (hereinafter called “**the Employer**”) of the other Part.

WHEREAS Dedicated Freight Corridor Corporation of India Limited has awarded the Contract no..... for “.....” (hereinafter called “**the Contractor**”), having its registered office at

AND WHEREAS vide Clause 1.5.20 of Part - I, Chapter V , Special Conditions of Contract, Mobilization Advance up to ____% (____ percent) of the original contract value of Rs..... is payable to the contractor against Bank Guarantees, the contractor hereby applies for Mobilization Advance of ____% (____ percent) amounting to Rs...../- (Rupees.....) of the Contract Price,

Now, we the undersigned, Bank of, being fully authorized to sign and to incur obligations for and on behalf of and in the name of Bank ofhereby declare that the said Bank will guarantee the Employer the full amount of Rs.-/- (Rupees.....) as stated above.

We, Bank of, do hereby unconditionally, irrevocably and without demur guarantee and undertake to pay the Employer immediately on demand any or all money payable by the contractor to the extent of Rs.-/(Rupees.....) without any demur, reservation, context, recourse or protest and/or without any reference to the contractor. Any such demand made by the Employer on the Bank shall be conclusive and binding notwithstanding any difference between the Employer and the contractor on any dispute pending before any court, Tribunal, Arbitrator or any other authority. We agree that the guarantee herein contained shall be irrevocable and shall continue to be enforceable till the Employer discharges this guarantee.

This guarantee is valid till

At any time during the period in which this guarantee still valid of the contractor fails to fulfil its obligation under the Contract, it is understood that the Bank will extend this guarantee under the same condition for the required time on demand by the Employer at the cost of the contractor. The Guarantee hereinbefore contained shall not be affected by any change in the constitution of the Bank or of the contractor.

The neglect or forbearance of the Employer in enforcement of payment of any money, the payment whereof is intended to be hereby secured or the giving of time by the Employer for the payment hereof shall in no way relieve the Bank of their liability under this Deed.

Signature of tenderer (s)

Date:



The expressions “the Employer”, “the Bank” and “the contractor” hereinbefore used shall include their respective successors and assigns.

Notwithstanding anything contained herein:

Our liability under this Bank Guarantee shall not exceed Rs...../-
(Rupees.....)

this bank Guarantee shall be valid up to.....

We are liable to pay the guaranteed amount or any part thereof under this Bank Guarantee only and only if you serve upon us a written claim or demand on or before(date of expiry of Guarantee).

In witness whereof we of the Bank have signed and sealed this Guarantee on theday of being herewith duly authorized.

For and on behalf of the Bank of

Signature of Authorized Bank Official

Name

Designation

Stamp/Seal of the bank

Signed, sealed and delivered for and on
Behalf of the bank by the above named

..... in the presence of

Witness 1

Signature

Name

Address

Witness 2

Signature

Name

Address

PRE CONTRACT INTEGRITY PACT**General**

This pre-bid pre-contract Agreement (hereinafter called the Integrity Pact) is made on _____ day of the month of _____ 2016, between, on one hand, the DFCCIL acting through Shri..... Designation of the officer, (hereinafter called his successors in office and assigns) of the First Part and M/s_____ represented by Shri_____ Chief Executive office (hereinafter called the “BIDDER/SELLER” which expression shall mean and include, unless the context otherwise requires, his successors and permitted assigns) of the Second part.

WHEREAS the CLIENT progress to procure (Name of the Stores/Equipment/Item, Name of the Consultancy Service, Name of Works Contract, Name of Services) and the [A] is willing to offer/has offered for stores or works.

WHEREAS the [A] is a private company/public company/Government undertaking/partnership/registered export agency, constituted in accordance with the relevant law in the matter and the CLIENT is a PSU performing its functions on behalf of the President of India.

NOW, THEREFOR,

To avoid all forms of corruption by following a system that is fair, transparent and free from any influence/prejudiced dealings prior to, during and subsequent to the currency of the contract to be entered into with a view to:-

Enabling the CLIENT to obtain the desired said (name of the Stores/Equipment/Item, Name of the Consultancy Service, Name of Works Contract, Name of Services) at a competitive price in conformity with the defined specifications by avoiding the high cost and the discretionary impact of corruption on public procurement, and

Enabling BIDDERS to abstain from bribing or indulging in any corrupt practice in order to secure [B] by providing assurance to them that their competitors will also abstain from bribing and other corrupt practices and the CLIENT will commit to prevent corruption, in any form, by its officials by following transparent procedures.

The parties hereto hereby agree to enter into this Integrity Pact and agree as follows:

Commitments of the CLIENT

- 1.1 The CLIENT undertakes that no official of the CLIENT, connected directly or indirectly with the [B], will demand, take a promise for or accept, directly or through intermediaries, any bribe, consideration, gift, reward favour or any material or immaterial benefit or any other advantage from the [A] either for themselves or for any person, organization or third party related to the [B], in exchange for an advantage in the bidding process, bid evaluation, contracting or implementation process related to the [B].

Signature of tenderer (s)

Date:



- 1.2 The CLIENT will, during the pre-contract stage, treat all BIDDERS alike, and will provide to all BIDDERS the same information and will not provide any such information to any particular BIDDER which could afford an advantage to that particular [A] in comparison to other BIDDERS.
- 1.3 All the officials of the CLIENT will report to the appropriate Government office any attempted or completed breaches of the above commitments as well as any substantial suspicion of such a breach.
2. In case any such preceding misconduct on the part of such official(s) is reported by the [A] to the CLIENT with full and verifiable facts and the same is prima facie found to be correct by the CLIENT, necessary disciplinary proceedings, or any other action as deemed fit, including criminal proceedings may be initiated by the CLIENT and such a person shall be debarred from further dealings related to the [B] process. In such a case while an enquiry is being conducted by the CLIENT the proceedings under the [B] would not be stalled.

Commitments of BIDDERS

3. The [A] commits itself to take all measures necessary to prevent corrupt practices, unfair means and illegal activities during any stage of its bid or during any pre-contract or post-contract stage in order to secure the [B] contract or in furtherance to secure it and in particular commit itself to the following:-
 - 3.1 The [A] will not offer, directly or through intermediaries, any bribe, gift, consideration, reward, favour, any material or immaterial benefit or other advantage, commission, fees, brokerage or inducement to any official of the CLIENT, connected directly or indirectly with the bidding process, or to any person, organization or third party related to the [B] in exchange for any advantage in the bidding, evaluation, contracting and implementation of the [B].
 - 3.2. The [A] further undertakes that It has not give, offered or promised to give, directly or indirectly any bribe, gift, consideration, reward, favour, any material or immaterial benefit or other advantage, commission, fees, brokerage or inducement to any official of the CLIENT or otherwise in procuring the Contract or forbearing to do or having done any act in relation to the obtaining or execution of the [B] or any other [B] with the Government for showing or forbearing to show favour or disfavor to any person in relation to the [B] or any other [B] with the Government.
 - 3.3* [A] shall disclose the name and address of agents and representatives and Indian [A] shall disclose their foreign principals or associates.
 - 3.4* [A] shall disclose the payments to be made by them to agents/brokers or any other intermediary, in connection with this bid/contract.
 - 3.5 The [A] further confirms and declares to the CLIENT that the [A] is the original manufacture/Integrator/authorized government sponsored export entity of the defense stores and has not engaged any individual or firm or company whether Indian or foreign to intercede, facilitate or in any way to recommend to the CLIENT or any of its functionaries, whether officially or unofficially

Signature of tenderer (s)

Date:



to the award of the [B] to the [A] not any amount been paid, promised or intended to be paid to any such individual, firm or company in respect of any such intercession, facilitation or recommendation.

- 3.6 The [A] either while presenting the bid or during pre-contract negotiations or before signing the [B] shall disclose any payments he had made, is committed to or intends to make to officials of the CLIENT or their family members, agents, brokers or any other intermediaries in connection with the [B] and the details of services agreed upon for such payments.
- 3.7 The [A] will not collude with other parties interested in the [B] to impair the transparency, fairness and progress of the bidding process, bid evaluation, contracting and implementation of the [B].
- 3.8 The [A] will not accept any advantage in exchange for any corrupt practice, unfair means and illegal activities.
- 3.9 The [A] shall not use improperly, for purposes of competition or personal gain, or pass on to others, any information provided by the CLIENT as part of the business relationship, regarding plans, technical proposals and business details, including information contained in any electronic data carrier. The [A] also undertakes to exercise due and adequate care test any such information is divulged.
- 3.10 The [A] commits to refrain from giving any complaint directly or through any other manner without supporting it with full and verifiable facts.
- 3.11 The [A] shall not instigate or cause to instigate any third person to commit any of the actions mentioned above.
- 3.12 If the [A] or any employee of the [A] or any person acting on behalf of the [A], either directly or indirectly, is a relative of any of the officers of the CLIENT, or alternatively, if any relative of an officer of the CLIENT has financial interest /stake in the BIDDER's firm, the same shall be disclosed by the [A] at the time of filling of tender.

The term 'relative' for this purpose would be as defined in Section 6 of the Companies Act 1956.

- 3.13 The [A] shall not lend to or borrow any money from or enter into any monetary dealings or transactions, directly or indirectly, with any employee of the CLIENT.

4. **Previous Transaction**

- 4.1 The [A] declares that no previous transgression occurred in the last three years immediately before signing of this Integrity Pact, with any other company in any country in respect of any corrupt practices envisaged hereunder or with any public Sector Enterprise in India or any Government Department in India that could justify BIDDER's exclusion from the tender process.
- 4.2 The [A] agrees that if it makes incorrect statement on this subject. [A] can be disqualified from the tender process or the contract, if already awarded, can be terminated for such reason.

5. **Earnest Money (Security Deposit)**

Signature of tenderer (s)

Date:



- 5.1 While submitting commercial bid, the [A] shall deposit an amount _____ (to be specified in RFP) as Earnest Money/Security Deposit, with the CLIENT through any of the following instruments:
- (i) Bank Draft or a Pay Order in favour of _____
 - (ii) A confirmed guarantee by an Indian Nationalized Bank, promising payment of the guaranteed sum to the CLIENT on demand within three working days without any demur whatsoever and without seeking any reasons whatsoever. The demand for payment by the CLIENT shall be treated as conclusive proof or payment.
 - (iii) Any other mode or through any other instrument (to be specified in the RFP)
- 5.2 The Earnest Money/ Security Deposit shall be valid upto a period of five years or the complete conclusion of the contractual obligations to the complete satisfaction of both the BIDDER and the CLIENT, including warranty period, whichever is later.
- 5.3 In case of the successful [A] a clause would also be incorporated in the Article pertaining to performance Guarantee in the [B] that the provisions of Sanctions for Violation shall be applicable for forfeiture of performance Bond in case of a decision by the CLIENT to forfeit the same without assigning any reason for imposing sanction for violation of this pact.
- 5.4 No interest shall be payable by the CLIENT to the [A] on Earnest Money/ Security Deposit for the period of its currency.

6. **Sanctions for Violations**

- 6.1 Any breach of the aforesaid provisions by the [A] or any one employed by it or acting on its behalf (whether with or without the knowledge of the [A]) shall entitle the CLIENT to take all or any one of the following actions, wherever required:-
- (i) To immediately call off the pre-contract negotiations without assigning any reason or giving any compensation to the [A]. However, the proceedings with the other BIDDER(s) would continue.
 - (ii) The Earnest Money Deposit (in pre-contract stage) and / or Security Deposit/ performance Bond (after the [B] is signed) shall stand forfeited fully and the CLIENT shall not be required to assign any reason therefore.
 - (iii) To immediately cancel the [B], if already signed, without giving any compensation to the [A].
 - (iv) To recover all sums already paid by the CLIENT, and in case of an Indian [A] with interest thereon at 2% higher than the prevailing Prime Lending Rate of State Bank of India, while in case of a [A] from the country other than India with interest thereon at 2% higher than the LIBOR. If any outstanding payment is due to the [A] from the CLIENT in connection with any other [B], such outstanding payment could also be utilized to recover the aforesaid sum and interest.
 - (v) To encash the advance bank guarantee and performance bond/ warranty bond, if furnished by the [A], in order to recover the payments, already made by the CLIENT, along with interest.

Signature of tenderer (s)

Date:



- (vi) To cancel all or any other Contracts with the [A]. The [A] shall be liable to pay compensation for any loss or damage to the CLIENT resulting from such cancellation/ rescission and the CLIENT shall be entitled to deduct the amount so payable from the money(s) due to the [A].
 - (vii) To debar the [A] from participating in future bidding processes of the Government of India for a minimum period of five years, which may be further extended at the discretion of the CLIENT.
 - (viii) To recover all sums paid in violation of this Pact by [A]) to any middleman or agent or broker with a view to securing [B] the contract.
 - (ix) In cases where irrevocable Letters of Credit have been received in respect of any [B] signed by the CLIENT with the [A], the same shall not be opened.
 - (x) Forfeiture of Performance Bond in case of a decision by the CLIENT to forfeit the same without assigning any reason for imposing sanction for violation of this Pact.
- 6.2 The CLIENT will entitled to take all or any of the actions mentioned at para 6.1 (i) to (x) of this Pact also on the Commission by the [A] or any one employed by it or acting on its behalf (whether with or without the knowledge of the [A], of an offence as defined in Chapter IX of the Indian Panel Code, 1860 or Preservation of Corruption Act, 1988 or any other statute enacted for preservation of corruption.
- 6.3 The decision of the CLIENT to the effect that a breach of the provisions of this Pact has been committed by the [A] shall be final and conclusive on the [A] . However, the [A] can approach the Independent Monitor(s) appointed for the purposes of this Pact.

7. Fall Clause

- 7.1 The [A] undertakes that it has not supplied / is not supplying similar product/systems or subsystems at a price lower than that offered in the present bid in respect of any other Ministry / Department of the Government of India or PSU and if it is found at any stage that similar product/ systems or sub systems was supplied by the [A] to any other Ministry / Department of the Government of India or a PSU at a lower price, then that very price, with due allowance for elapsed time, will be applicable to the present case and the difference in the cost would be refunded by the [A] to the CLIENT, if the [B] has already been concluded.

8. Independent Monitors

- 8.1 The CLIENT has appointed Independent Monitors (hereinafter referred to as Monitors) for this Pact in consultant with the Central Vigilance Commission (Names and Addresses of the Monitors to be given).
- 8.2 The task of the Monitors shall be to review independently and objectively, whether and to what extent the parties comply with the obligations under this Pact.
- 8.3 The Monitors shall not be subject to instructions by the representatives of the parties and perform their functions neutrally and independently.

Signature of tenderer (s)

Date:



- 8.4 Both the parties accept that the Monitors have the right to access all the documents relating to the project /procurement, including minutes of meetings.
- 8.5 As soon as the Monitor notices, or has reason to believe, a violation of this Pact, he will so inform the Authority designated by the CLIENT.
- 8.6 The BIDDER(s) accepts that the Monitor has the right to access without restriction to all Project documentation of the CLIENT including that provided by the BIDDER. The [A] will also grant the Monitor, upon his request and demonstration of a valid interest, unrestricted and unconditional access to his project documentation. The same is applicable to Subcontractors. The Monitor shall be under contractual obligation to treat the information and documents of the [A] with confidentiality.
- 8.7 The CLIENT will provide to the Monitor sufficient information about all meetings among the parties related to the Project Provided such meetings could have an impact on the contractual relations between the parties. The parties will offer to the Monitor the option to participate in such meetings.
- 8.8 The Monitor will submit a written report to the MD/DFCCIL within 8 to 10 weeks from the date of reference or intimation to him by the CLIENT/BIDDER and, should the occasion arise, submit proposals for correcting problematic situations.

9. Facilitation of Investigation

In case of any allegation of violation of any provisions of this Pact or payment of commission, the CLIENT or its agencies shall be entitled to examine all the documents including the Books of Accounts of the [A] and the [A] shall provide necessary information and documents in English and shall extend all possible help for the purpose of such examination.

10. Law and Place of Jurisdiction

This Pact is subject to Indian Law. The place of performance and jurisdiction is the seat of the CLIENT.

11. Other Legal Actions

The actions stipulated in this integrity Pact are without prejudice to any other legal action that may follow in accordance with the provisions of the extant law in force relating to any civil or criminal proceedings.

12. Validity

- 12.1 The validity of this integrity Pact shall be from date of its signing and extend up to 5 years or the complete execution of the [B] to the satisfaction of both the CLIENT and the [A], including warranty period, whichever is late. In case [A] is unsuccessful, this integrity Pact shall expire after six months from the date of the signing of the [B].
- 12.2 Should one or several provision of this Pact turn out to be invalid; the remainder of this Pact shall remain valid. In this case, the parties will strive to come to an agreement to their original intentions.

Signature of tenderer (s)

Date:



13. The parties hereby sign this integrity Pact at _____ on ____/____/2019.

CLIENT

Name of the Officer

Designation

Deptt./Ministry/PSU

BIDDER

CHIEF EXECUTIVE OFFICER

Witness

1. _____

2. _____

Witness

1. _____

2. _____

Note:

[A] – To be replaced by BIDDER/Seller/Consultant/Consultancy firm/ Service Provider as the case may be.

[B] To be replaced by Contract / Supply Contract/ Consultancy Contract/ Works Contract as the case may be.

Signature of tenderer (s)

Date:



Form of Bid Security (Bank Guarantee)**BANK GUARANTEE**

(Insert Bank's Name, and Address of Issuing Branch or Office).....

Beneficiary..... Name and Address of Employer.....

Date.....

Bid Security No.

We have been informed that name of the Bidder (hereinafter called "the Bidder") has submitted to you its bid dated.....(hereinafter called "the bid") for the execution of[insert]..... Of.....name of work..... Under invitation for Bid No.....("the IFB").

Furthermore, we understand that, according to your conditions, bid must be supported by a bid guarantee.

At the request of the Bidder, we Name of the Bank hereby irrevocably undertake to pay you any sum or sums not exceeding in total an amount of..... amount in figures.....(.....amount in words.....) upon receipt by us of your first demand in writing accompanied by a written statement stating that the Bidder is in breach of the obligation(s) under the bid conditions, because the Bidder.

(a) has withdrawn its bid during the period of bid validity specified by the Bidder in the Form of bid OR

(b) having been notified of the acceptance of its bid by the Employer during the period of bid validity, (i) fails or refuses to execute the Contract Agreement, or (ii) fails or refuses to furnish the Performance Security, in accordance with the ITB.

This guarantee will expire (a) if the Bidder is the successful Bidder, upon our receipt of copies of the Contract Agreement signed by the Bidder and performance security issued to you upon the instruction of the Bidder, and (b) if the Bidder is not the successful Bidder, upon the earlier of (i) our receipt of a copy of your notification to the Bidder of the name of the successful Bidder, or (ii) **Ninety days (90) after the expiration of the Bidder's bid.**

Consequently, any demand for payment under this guarantee must be received by us at the office on or before that date.

This guarantee is subject to the Uniform Rules for Demand Guarantees. ICC Publication No.758.
.....**Bank's seal and authorized signature(s)**.....

Note : All italicized text is for use in preparing this form and shall be deleted from the final

Signature of tenderer (s)

Date:



FORMAT FOR AFFIDAVIT TO BE SUBMITTED / UPLOADED BY TENDERER ALONGWITH THE TENDER DOCUMENTS

**(To be executed in presence of Public notary on non-judicial stamp paper of the value of Rs. 100/-.
The stamp paper has to be in the name of the tenderer) ****

I..... (Name and designation)** appointed as the attorney/authorized signatory of the tenderer (including its constituents),

M/s..... (hereinafter called the tenderer) for the purpose of the Tender documents for the work of as per the tender No. of (----- DFCCIL), do hereby solemnly affirm and state on the behalf of the tenderer including its constituents as under:

1. I/we the tenderer (s) am/are signing this document after carefully reading the contents.
2. I/We the tenderer(s) also accept all the conditions of the tender and have signed all the pages in confirmation thereof.

3. I/we hereby declare that I/we have downloaded the tender documents from DFCCIL e-tendering website www.tenderwizard.com/DFCCIL. I/we have verified the content of the document from the website and there is no addition, no deletion or no alteration to the content of the tender document. In case of any discrepancy noticed at any stage i.e. evaluation of tenders, execution of work or final payment of the contract, the master copy available with the railway Administration shall be final and binding upon me/us.

4. I/we declare and certify that I/we have not made any misleading or false representation in the forms, statements and attachments in proof of the qualification requirements.

5. I/We also understand that my/our offer will be evaluated based on the documents/credentials submitted alongwith the offer and same shall be binding upon me/us.

6. I/We declare that the information and documents submitted along with the tender by me/us are correct and I/we are fully responsible for the correctness of the information and documents, submitted by us.

7. I/we understand that if the certificates regarding eligibility criteria submitted by us are found to be forged/false or incorrect at any time during process for evaluation of tenders, it shall lead to forfeiture of the tender EMD besides banning of business for a period of upto five year. Further, I/we (*insert name of the tenderer*) ** and all my/our constituents understand that my/our offer shall be summarily rejected.

8. I/we also understand that if the certificates submitted by us are found to be false/forged or incorrect at any time after the award of the contract, it will lead to termination of the contract, alongwith forfeiture of EMD/SD and Performance guarantee besides any other action provided in the contract including banning of business for a period of upto five year.

DEPONENT
SEAL AND SIGNATURE
OF THE TENDERER

Signature of tenderer (s)

Date:



VERIFICATION

I/We above named tenderer do hereby solemnly affirm and verify that the contents of my/our above affidavit are true and correct. Nothing has been concealed and no part of it is false.

DEPONENT
SEAL AND SIGNATURE
OF THE TENDERER

Place:

Dated:

** The contents in Italics are only for guidance purpose. Details as appropriate are to be filled in suitably by tenderer.

Signature of tenderer (s)

Date:



PART V

DRAWINGS

5.1 General Arrangement Drawings with Key Plan:

SL. No.	Level Crossing No	Chainage of ROB (km)	Appox Rly.Span configuration (m)	Approx. Approach Span configuration (m)
1.	204	IR Km. 700/3-4 DFC Ch. 65.270	2x36 + 1x18 + 1x30 (Composite Girder)	24x24 (RCC T-Beam deck slab)

Notes:

1. General Arrangement Drawings are attached as a part of tender document.
2. These GADs are indicative/ tentative and for reference only.
3. The work shall be carried out as per final approved GAD with the latest alteration if any and detailed drawings and designs.

*** ** ** ** **

END OF TENDER DOCUMENTS

Signature of tenderer (s)

Date:

