



Tender No.: JP-EN-Quarter-2024-11

Name of Work:- Construction of Type-3 Staff Quarters at REJN, AELN, DBLN, BAGN, SMPN, PMPN & FLN and providing additional floor over existing service building at FLN DFCCIL station in the jurisdiction of CGM Jaipur.

**Single Packet
OPEN E-TENDER**

**TENDER DOCUMENT
(NOT TRANSFERABLE)**

July-2024

**Employer:
DEDICATED FREIGHT CORRIDOR CORPORATION OF INDIA LIMITED
(A GOVERNMENT OF INDIA ENTERPRISE)
UNDER MINISTRY OF RAILWAYS**

Signature Not
Verified

Digitally signed by NEERAJ MEENA of tenderer (s) with seal

Date: 2024.07.12

13:29:47 +05'

Reason: IRPS-CRIS

Location: New Delhi

INDEX

PART	DESCRIPTION	PAGE NO.
PART - I	Notice Inviting Tender	03
PART – II	Instructions to bidders for Online bidding & Checklist	07
PART – III	Preamble & General Instructions To Tenderers	11
PART – IV	General Conditions of Contract	33
PART – V	Special Conditions of Contract	81
PART-VI	Milestones And Time Schedule	135
PART-VII	Tender Annexures & Forms	137
PART-VIII	Drawings	198

Note:- Information as required as per various Forms/Annexures to tender document should be submitted by the tenderers without fail strictly as per formats.

PART-I

NOTICE INVITING TENDER



NOTICE INVITING TENDER (NIT)

Chief General Manager /Jaipur for and on behalf of DFCCIL invites e-tenders on Single packet system on prescribed forms from firms/Companies having requisite experience and financial capacity for execution of the following work:-

S. N	E-Tender No.	JP-EN-Quarter-2024-11
1	Name of Work	Construction of Type-3 Staff Quarters at REJN, AELN, DBLN, BAGN, SMPN, PMPN & FLN and providing additional floor over existing service building at FLN DFCCIL station in the jurisdiction of CGM Jaipur.
2	Estimated Cost of Work	Rs. 8,79,67,160.46/- including GST
3	Completion Period	15 (Fifteen) Months
4	Tender Fee	Rs. 10,000/- (Rs. Ten Thousand only) + 18 % GST 11,800/- to be paid online through payment gateway provided at www.ireps.gov.in
5	Earnest Money	Rs. 5,89,800/- to be paid online through payment gateway provided at www.ireps.gov.in
6	Availability of Bid documents	Up to 15:00 Hrs. of 08.08.2024 on www.ireps.gov.in
7	Download bid documents up to	15:00 Hrs. of 08.08.2024 on www.ireps.gov.in
8	Last date & time of online receipt of bid	15:00 Hrs. of 08.08.2024 on www.ireps.gov.in
9	Date and time of Online opening of bid	15.30 Hrs. of 08.08.2024 on www.ireps.gov.in
10	Validity of offer	60 Days from the date of opening of tender.
11	Security Deposit	5% of Contract value
12	Performance Bank Guarantee	Performance Guarantee (PG) have to be submitted within 21 (twenty one) days from the date of issue of Letter of Acceptance (LOA), amounting to five percent (5%) of the contract value in the form as given in clause 16.4 of GCC.
13	Defect Liability Period	06 Months
14	Address of Communication	Office of the Chief General Manager, Dedicated Freight Corridor Corporation of India Ltd.C-16, Khushi Vihar, Patrakar Colony, Mansarovar, Jaipur - 302020. Tel: 0141-7196245,0141-7196241,Website: www.dfccil.com
15	Help Desk for E-Tendering	For any clarification, help and registration for E-

		Tendering & matter relating to Digital Signature, contact at Help desk of www.ireps.gov.in and phone No.-011-23761525
16	Availability of Tender Documents	The Tender documents can be downloaded from www.ireps.gov.in Tenderer who wishes to view free Notification and Tender Documents can visit www.ireps.gov.in DFCCIL may issue Addendum (s)/Corrigendum (s) to the Tender document, if any, which shall be issued at least 15 days in advance of date of opening of tender and placed on the website www.ireps.gov.in only.

Note-1. Tender documents should be downloaded from the website address <https://www.ireps.gov.in>. Payment of Tender Document fee in respect of e-tendering, should accept through net banking or payment gateway only. The Bid Security shall be deposited either through e-payment gateway or submitted as Bank Guarantee bond from a scheduled commercial bank of India or as mentioned in tender documents. Any tender received without Bid Security or cost of tender documents in the form as specified in the tender documents shall not be considered and shall be summarily rejected.

2. Eligibility shall be assessed on applicants, fulfilling the technical capability and competence as well as for financial and organizational resources as specified in clause no. 10 of part III of Preamble & General Instruction to tenders.
3. The Offer shall be valid for 60 days from the date of opening of the tender, and extended further if required from time to time. The Contractor cannot withdraw their offer within the period of validity/extended validity The Bid Security of such tenderers shall be forfeited.
4. Notice Inviting Tender (NIT), Tender Document and Corrigendum/Addendum if any, will be posted on the E Tendering website www.ireps.gov.in Tenderers are advised to complete all submission related work well before Time and Date for Submission of Tender Online. Any request for modification in the time/date of submission of tender due to tenderer's failure to submit his offer, will not be accepted. No request for extension of the Tender Due Date shall be considered.
5. The tender documents shall be submitted in online mode only through website www.ireps.gov.in. Detailed credential as per the requirement of eligibility criteria and all Schedule are to be submitted in online mode.
6. No tender document will be available offline. Downloading tender documents online and submission of tender online is mandatory for this tender.
7. Any further addendum/Corrigendum for this tender will be posted in DFCCIL tendering portal website <https://www.ireps.gov.in> only. Interested bidders are advised to check website regularly for any Addendum/ Corrigendum.

8. DFCCIL reserves right to cancel the tender before submission / opening of tender, postpone the tender submission / opening date and to accept / reject any or all tenders without assigning any reason thereof. DFCCIL's assessment of suitability as per eligibility criteria shall be final and binding.
9. DFCCIL reserves the right to pre-qualify the bidder(s) provisionally based on the documents submitted by them, subject to their final verification. In the event of any document being found false, the provisional qualification shall stand withdrawn, and the next lower bidder shall automatically come to the position of such disqualified bidder. Action against such disqualified tenderers shall be taken as per above Clause No. 8 of Notice Inviting Tender.
10. Information as required as per various Forms to tender document should be submitted by the tenderers without fail strictly as per formats.

**Chief General Manager
DFCCIL, Jaipur**

PART-II

Instructions to Bidders For Online Bidding & Check List

A. Instructions to bidders for online bidding

General:-Submission of Online Bids is mandatory for this Notice Inviting Tender. E-Tendering is new methodology for conducting Public Procurement in a transparent and secured manner. Supplier/ Vendors will be the biggest beneficiaries of this new system of procurement. For conducting electronic tendering, DFCCIL has decided to use the portal (ireps.gov.in), a Government of India Undertaking. Benefits to Suppliers/ service providers are outlined on the Home page of the portal.

E-tendering site- <https://www.ireps.gov.in> / its link at www.dfccil.com (Help desk of IREPS: 011 -23761525). The tenderer/bidders must have Class-III Digital Signature Certificate & must be register on IREPS portal. Only registered tenderer/bidders can participate on e-Tendering. All relevant documents must be uploaded at the time of participating in e-Tendering.

Instructions:-

1. **Bidding Methodology:** Online Bid System
2. **Broad outline of activities from Bidders perspective:-**
 - a. Procure a Digital Signing Certificate (DSC)
 - b. Register on Electronic Tendering System (ETS)
 - c. Create Users and assign roles on ETS
 - d. View Notice Inviting Tender (NIT) on (ETS)
 - e. Download Official copy of Tender Documents from ETS.
 - f. Clarification to Tender Documents on ETS - Query to DFCCIL (Optional) - view response to queries posted by DFCCIL through addenda.
 - g. Bid Submission on ETS: Prepare & arrange all documents/ papers for submission of bid online.
 - h. Attend Public Online Tender Opening Event (TOE) on ETS.
 - i. Post TOE clarification on ETS (Optional). Respond to DFCCIL's post – TOE queries. For participating in this tender online, the following instructions are to be read carefully. These instructions are supplemented with more detailed guidelines on the relevant screens of the ETS.
3. **Digital Certificate:**

For integrity of data and its authenticity/ non repudiation of electronic records and to be compliant with IT Act 2000, it is necessary for each user to have a Digital Certificate (DC) also referred to as Digital Signature Certificate (DSC) of class III issued by a Certifying Authority (CA) licensed by Controller of Certifying Authority (CCA) (refer <http://www.cca.gov.in>).
4. The Tender documents can be downloaded from the website: ireps.gov.in and to be submitted in the e - format, before the schedule date & time of submission of the tender otherwise the Bid will not be considered.
5. Physical copy of the tender documents would not be sold /accepted.

6. List of Contact persons & Bank Details for this tender of DFCCIL

DFCCIL Contact- 1	Sh. Neeraj Meena
Telephone/Mobile No.	9351356721
E-mail ID	nmeena@dfcc.co.in

DFCCIL Contact- 2	Sh. Vishnu Kumar Gupta
Telephone/Mobile No.	9887010150
E-mail ID	vgupta@dfcc.co.in

DFCCIL Contact- 3	Sh. Sanjay Gupta
Telephone/Mobile No.	8003899325
E-mail ID	sgupta@dfcc.co.in

Name	CPM DFCCIL Jaipur
Bank account number	369201010054636
IFSC code	UBIN0536920
Bank Name	Union Bank of India
Bank Branch	Bapu Nagar, Jaipur (Rajasthan)

7. Modification / Withdrawal of bids:

- (i) The Bidder may modify/ withdraw its e- bid after submission prior to the Bid Due Date & time. No Bid shall be modified / withdrawn by the Applicant on or after the Bid Due Date & time.
- (ii) Any alteration/ modification in the Bid or additional information supplied subsequent to the Bid Due Date, unless the same has been expressly sought for by the Authority, shall be disregarded.
- (iii) For modification of e-bid, applicant has to detach its old bid from e-tendering portal and upload / resubmit digitally signed modified bid.
- (iv) For withdrawal of bid, applicant has to click on withdrawal icon at e-tendering portal and can withdraw its e-bid.

8. DFCCIL may issue addendum(s) / corrigendum(s) to the tender documents. In such cases the addendum(s)/corrigendum(s) shall be placed on ireps.gov.in and www.dfccil.gov.in. The tenderer who have downloaded the tender documents from the website before issue of addendum(s)/ corrigendum(s) must visit the website and ensure that such addendum(s) / corrigendum (s) (if any) is also downloaded by them. Such addendum(s) / corrigendum (s) (if any) shall also be submitted duly stamped and signed along with the submission of tenders. Any tender submitted without addendum(s) / corrigendum(s) (if any) shall be summarily rejected.

9. Other instructions

- a) It is recommended that the Tenderer/vendor should visit the portal (ireps.gov.in), peruse the information provided under the relevant links and login to it and upload documents of bid.
- b) DFCCIL reserves right to cancel the tender before submission / opening of tender, postpone the tender submission / opening date and to accept / reject any or all tenders without assigning any reason thereof. DFCCIL's assessment of suitability as per eligibility criteria shall be final and binding.

B. Check list for Documents :-

CHECK LIST			
CHECK LIST OF ITEMS TO BE COMPLIED BY TENDERER(S)S BEFORE SUBMITTING THEIR TENDERS. THE TENDERER(S) SHALL ENSURE THAT THE FOLLOWING ARE COMPLIED BEFORE SUBMITTING THE TENDER DOCUMENT:-			
S. N	Clause in tender document	Documents	Done or Not
1.	Para 1.8 of Part III	Tender form (Annexure no I)	
2.	Para 2.14 of Part-III	Format for certificate to be submitted / uploaded by tenderer along with the tender documents (Annexure no V)	
3.	Para 5 of Part-III	Bid security in accordance with Para 5 with Part –III of Preamble and General Instructions to Tenderers. (Bid security) bank guarantee bond from any scheduled commercial bank of India. (Annexure –VIA)	
4.	Para 10.1 of Part III	Technical eligibility criteria details (Form no-2A)	
5.	Para 10.2 of Part III	Annual contractual turnover data for the previous 3/4 years	
6.		Applicant's party information form (Form no-2C)	
7.		ECS/ NEFT / RTGS mandate form (Form no-3)	
8.		Pre contract integrity pact (Form no-5)	
9		Anti-profiteering declaration to whomsoever it may concern (Form no-6)	
10.	Para- 4 Part-III	Certificate for provision for medium & small enterprises (MSE) (If applicable)	
11.	Para-14 of Part-III	The tenderer shall clearly specify whether the tender is submitted on his own (Proprietary Firm) or on behalf of a Partnership Firm / Company / Joint Venture (JV) / Registered Society / Registered Trust / Hindu Undivided Family (HUF) / Limited Liability Partnership (LLP) etc.	
12.	Para 11 of part III	Relevant documents as per para 11 of part III of Preamble and General Instructions to Tenderers.	
13.		All the Annexures & Forms properly filled up and relevant documents attached and indicated in Forms, (If applicable).	
14.		Rates to be quoted on rate sheet online only	

PART - III

PREAMBLE & GENERAL INSTRUCTIONS TO TENDERERS

PART-III
PREAMBLE & GENERAL INSTRUCTIONS TO TENDERERS

- 1.0** Dedicated Freight Corporation of India (DFCCIL) is a Public Sector Undertaking under the administrative control of Government of India (Ministry of Railways) for construction, maintenance and operation of the Dedicated Rail Freight Corridors. At present the company is undertaking construction of Eastern & Western corridors and has its corporate office at New Delhi and Field Units at various cities.

Ministry of Railways (MOR), Government of India has planned to construct Dedicated Freight Corridor (DFC) covering about 3338 route Kilometres on Eastern and Western Corridors. The coverage of Eastern Corridor is from Ludhiana to Dankuni and Western Corridor is planned from Jawaharlal Nehru Port, Mumbai to Rewari /Tughlakabad /Dadri near Delhi. There will be a linkage between two corridors at Dadri.

1.1 Dedicated Freight Corridor

Eastern DFC Route will be approximately 1839 Km long from Dankuni to Ludhiana via Dankuni – Asansole – Dhanbad – Gaya – Sonnagar - Mughalsarai - Allahabad - Kanpur - Tundla - Aligarh - Khurja - Bulandshahr – Meerut – Saharanpur – Ambala - Ludhiana.

Western DFC Route will be approximately 1520 Km long from Dadri to JNPT via Rewai – Iqbalgarh - Vadodara- JNPT.

Proposed alignment of DFC has been generally kept parallel to existing Indian Railway line except provision of detours at some stations where the existing yards /cities are congested .

1.2 Scope of Work

On behalf of DFCCIL, Chief General Manager, Dedicated Freight Corridor Corporation of India Limited, C-16, Khushi Vihar, Patrakar Colony, Mansarovar, Jaipur-302020, India herein after referred to as 'DFCCIL' is inviting e-tenders from Firms/ Companies/Joint Ventures having requisite experience and financial capacity for execution of the following work:

“Construction of Type-3 Staff Quarters at REJN, AELN, DBLN, BAGN, SMPN, PMPN & FLN and providing additional floor over existing service building at FLN DFCCIL station in the jurisdiction of CGM Jaipur”.

- 1.3** The tenderer shall be governed by General Conditions of Contract (GCC), Preamble and General Instructions to Tenderers (ITT) and Special Conditions of Contract (SCC). Wherever, there is a conflict in any condition between GCC and Special Conditions of Contract mentioned in the tender documents, the condition mentioned in Special Conditions of Contract will prevail. However, Engineer's decision in this connection shall be final and binding. Tender document contains General Conditions of Contract and Special Conditions of Contract specific to this work and shall be applicable in the contract.

- 1.4 Location-** Works are to be executed at DFC stations in REJN-KSGN section under the jurisdiction of Chief General Manager /DFCCIL/Jaipur Unit. However, DFCCIL reserves right to change the site of work anywhere in adjacent / adjoining area of the work, the contractor shall be bound to execute the work without any extra cost.

- 1.5 Drawings for the Work:** The Drawing for the work can be seen in the office of the Chief General Manager/ DFCCIL/Jaipur at any time in working hours during working days. The drawings are only for the guidance of Tenderer(s). Detailed working drawings (if required) based generally on the drawing mentioned above, will be given by the Engineer or his representative from time to time.

(As per Clause No. 2 of tender form 2nd sheet Annex. I Part-I of GCC APRIL-2022, with up to date correction slip.)

- 1.6 Quantum of work and materials:** The indicative schedule of quantities of various items of works is included in form no 1 of tender Annexures & Forms of the tender documents.

- 1.7 Schedule of Prices form no 1 of tender Annexures & Forms of BID DOCUMENTS lists out the Schedule of Prices for various items. Based on these, the total tender value has also been worked out.

- 1.8 Instructions to Tenderers and Conditions of Tender:** The following documents form part of Tender / Contract:

- (a) Tender Forms – First Sheet
- (b) Special Conditions (enclosed)
- (c) Bill(s) of quantities (enclosed)
- (d) Standard General Conditions of Contract and Standard Specifications (Works and Materials) of Indian Railways/DFCCIL/ CPWD Specifications as amended/corrected upto latest correction slips, copies of which can be seen in the office of Chief General Manager/ DFCCIL/Jaipur or obtained from the office of the Chief General Manager/ DFCCIL/Jaipur on payment of prescribed charges.
- (e) Standard Schedule of Rates (SSOR) as amended / corrected up to latest correction slips, copies of which can be seen in the office of Chief General Manager/ DFCCIL/Jaipur or obtained from the office of the Chief General Manager/ DFCCIL/Jaipur on payment of prescribed charges.
- (f) All general and detailed drawings pertaining to this work which will be issued by the Engineer or his representatives (from time to time) with all changes and modifications.

(As per Clause No. 1 of tender form 2nd sheet Annex. I Part-I of GCC APRIL-2022, with up to date correction slip.)

1.9 Cost of Tender documents downloaded from internet

For submitting the tender, the Tender documents and Amendment(s), if any, is/are available on www.ireps.gov.in and the same can be downloaded and used as tender documents for submitting the offer. The cost of the tender document is indicated in NIT. The cost of the tender document shall be deposited through e-payment mode at www.ireps.gov.in only. In case, the cost of the tender document as detailed above is not deposited, tender will be summarily rejected.

- 1.10 Complete tender documents must be submitted online duly completed in all respect upto the scheduled date and time mentioned in the Notice Inviting E-Tender. In case the intended date for opening of tenders is declared a holiday, the tenders will be opened on the next working day at the same time. Any modified date and time for submission of tenders shall be uploaded on DFCCIL website www.dfccil.com and www.ireps.gov.in.

- 2.1 **Form of Tender** - The Tender documents shall be in Single packets viz:- “containing All tender papers & Schedule of Prices. Detailed credentials as per the requirement of eligibility criteria and all tender papers including Summary of Prices and Schedule of Prices are to be submitted in "BID”.
- 2.2 **Tender Bid** - The Tender Bid shall be submitted through online only on website www.ireps.gov.in as Eligibility/Qualifying element of the Tender Bid along with other documents mentioned in tender document.
- 2.3 **Single Packet Tender-**: This tender based on single packet tendering system.
- 2.4 **Two Packets System of Tendering (Not Applicable for this tender)**: With a view to assess the tenders technically without being influenced by the financial bids, 'Two Packets System of tendering' shall be adopted wherein tender documents provide for the same.
(As per Clause No. 7A of Part-I of GCC APRIL-2022, with up to date correction slip)
- 2.5 **Pre Bid Conference**: Intenders having advertised value more than Rs 50 Crore or as mentioned in the tender document, DFCCIL/Railways shall conduct Pre Bid Conference(s) with the prospective bidders.
(As per Clause No. 7B of Part-I of GCC APRIL-2022 , with up to date correction slip)
- 2.6 **Permission to Bid for a bidder from a country which shares Land boundary with India**: Any bidder from the countries sharing a land border with India will be eligible to bid in any procurement of works (including turnkey projects) only if the bidder is registered with the Competent Authority. The Competent Authority for registration will be the Registration Committee constituted by the Department for Promotion of Industry and Internal Trade (DPIIT), Government of India. For interpretation of this para, Department of Expenditure, Ministry of Finance, Government of India letter F.No.6/18/2019-PPD dated 23/07/2020 shall be referred.
(As per Clause No. 7D of Part-I of GCC APRIL-2022 , with up to date correction slip)
- 2.7 Tenders containing erasures and / or alterations of tender documents are liable to be rejected. Any correction made by tender(s) in his/their entries must be attested by him / them.
(As per Clause No. 4 of tender form 2nd sheet Annex. I Part-I of GCC APRIL-2022, with up to date correction slip.)
- 2.8 All communication between the Employer and the tenderer shall be in writing. For the purposes of seeking clarification, the Employer's address is: **Chief General Manager , Dedicated Freight Corridor Corporation of India Limited, C-16, Khushi Vihar, Patrakar Colony, Mansarovar, Jaipur-302020, India** Telephone: +91-141-7196260, Fax number: +91-141-7196200. Electronic mail address: anuragsharma@dfcc.co.in
- 2.9 **Omissions & Discrepancies**: Should a tenderer find discrepancies in or omissions from the drawings or any of the Tender Forms or should he be in doubt as to their meaning, he should at once notify the authority inviting tenders. The tender inviting authority may, if deemed necessary, clarify the same to all tenderers. It shall be understood that every endeavour has been made to avoid any error which can materially affect the basis of tender and successful tenderer shall take upon himself and provide for the risk of any error which may subsequently be discovered and shall make no subsequent claim on account thereof.
(As per Clause No. 4 of Part-I of GCC APRIL-2022 , with up to date correction slip)

- 2.10 Conditional tenders are liable to be rejected straightway. DFCCIL reserves the right to reject such tenders summarily without assigning any reasons whatsoever. In case tenderer/s still decides to have conditional offer, all such conditions are required to be listed separately and shall be supplemented by the details of exact financial implications, if applicable. DFCCIL will not take cognizance of any other conditions / variations from the tender stipulations mentioned at any other place in the tender documents.
- 2.11 The bidder shall submit only one bid in the capacity of an individual or sole proprietor, partnership firm or company. Violation of this condition is liable to disqualify the tender in which bidder has participated and Bid Security of all such tenderers shall stand forfeited.
- 2.12 **Withdrawal of Tender:** No tender can be withdrawn after scheduled date and time of submission and during tender validity period.
- 2.13 Care in Submission of Tenders:**
- (a) (i) Before submitting a tender, the tenderer will be deemed to have satisfied himself by actual inspection of the site and locality of the works, that all conditions liable to be encountered during the execution of the works are taken into account and that the rates he enters in the tender forms are adequate and all inclusive to accord with the provisions in Clause-37 of the Standard General Conditions of Contract for the completion of works to the entire satisfaction of the Engineer.
- (a)(ii) Tenderers will examine the various provisions of The Central Goods and Services Tax Act, 2017(CGST)/ Integrated Goods and Services Tax Act, 2017(IGST)/ Union Territory Goods and Services Tax Act, 2017(UTGST)/ respective state's State Goods and Services Tax Act (SGST) also, as notified by Central/State Govt.& as amended from time to time and applicable taxes before bidding. Tenderers will ensure that full benefit of Input Tax Credit (ITC) likely to be availed by them is duly considered while quoting rates.
- (a)(iii) The successful tenderer who is liable to be registered under CGST/IGST/UTGST/SGST Act shall submit GSTIN along with other details required under CGST/IGST/UTGST/SGST Act to DFCCIL/Railways immediately after the award of contract, without which no payment shall be released to the Contractor. The Contractor shall be responsible for deposition of applicable GST to the concerned authority.
- (a)(iv) In case the successful tenderer is not liable to be registered under CGST/IGST/UTGST/ SGST Act, the DFCCIL/Railways shall deduct the applicable GST from his/their bills under reverse charge mechanism (RCM) and deposit the same to the concerned authority.
- (b) When work is tendered for by a firm or company, the tender shall be signed by the individual legally authorized to enter into commitments on their behalf.
- (c) The DFCCIL/Railways will not be bound by any power of attorney granted by the tenderer or by changes in the composition of the firm made subsequent to the execution of the contract. It may, however, recognize such power of attorney and changes after obtaining proper legal advice, the cost of which will be chargeable to the Contractor.
- (As per Clause No. 6 of Part-I of GCC APRIL-2022, with up to date correction slip)**
- 2.14 The tenderers shall submit a copy of certificate stating that all their statements/documents submitted along with bid are true and factual. Standard format of certificate to be submitted by the bidder is enclosed as **Annexure-V**. In addition to Annexure-V, in case of other than Company /Proprietary Firm, Annexure-V(A) shall also be submitted by the each member of

a Partnership Firm / Joint Venture (JV)/ Hindu Undivided Family (HUF)/ Limited Liability Partnership firm (LLP) etc. as the case may be. Non submission of above certificate by the bidder shall result in summarily rejection of his/their bid. It shall be mandatorily incumbent upon the tenderer to identify, state and submit the supporting documents duly self attested/digitally signed by which they/he is qualifying the Qualifying Criteria mentioned in the Tender Document.

(As per Clause No. 6.1 of Part-I of GCC APRIL-2022 , with up to date correction slip)

2.15 Right of DFCCIL/Railways to Deal with Tenders: The DFCCIL/Railways reserves the right of not to invite tenders for any of DFCCIL/Railways work or works or to invite open or limited tenders and when tenders are called to accept a tender in whole or in part or reject any tender or all tenders without assigning reasons for any such action. In case if tender is accepted in part by DFCCIL/Railways administration, Letter of Acceptance shall be issued as counter offer to the Tenderer, which shall be subject to acceptance by the Tenderer.

(As per Clause No. 7 of Part-I of GCC APRIL-2022 , with up to date correction slip)

3.0 Opening of Tender:

- (a) Tender will be opened at the scheduled date and time mentioned in the Notice Inviting E-Tender.
- (b) After the opening of tender documents of all the tenderers, these bids shall be scrutinized and analysed. If found necessary by the Employer, the tenderers shall be asked to furnish clarifications and the Employer may also hold discussions with the tenderers after giving due notice. The names of the tenderers whose bid are considered complete and meet eligibility criteria shall be short listed.
- (c) The earnest money of non-qualifying tenderers will be returned back within a reasonable period.

3.1 Preliminary examination of bids

- a) The DFCCIL shall examine the bids to determine whether they are complete, whether any computational errors have been made, whether the documents have been properly signed and whether the bids are generally in order.
- b) Arithmetical errors shall be rectified on the following basis if found. If there is a discrepancy between the unit price and the total price, which is obtained by multiplying the unit price and quantity, or between subtotals and the total price, the unit or subtotal price shall prevail, and the total price shall be corrected.
- c) The rates should be quoted in figures as well as in words. If there is variation between rates quoted in figures and in words, the rate quoted in shall be taken as correct. If more than one or improper rates are tendered for the same item, the tender is liable to be rejected.
- d) Prior to the detailed evaluation, DFCCIL shall determine whether each bid is of acceptable quality, is generally complete and is substantially responsive to the bidding documents. For purposes of this determination, a substantially responsive bid is one that conforms to all the terms, conditions and specifications of the bidding documents without material deviations, objections, conditionality or reservation. A material deviation, objections, conditionality or reservation is one:

3.2 Evaluation and comparison of tenders In case of open tenders, bids, which are determined as substantially responsive, shall be evaluated based on criteria as given in Eligibility Criteria” and as given in Notice inviting E - Tender. The tenderer must submit all necessary authentic data with necessary supporting certificates of the various items of evaluation criteria failing which his tender is liable to be rejected.

3.3 Clarification of Bids: To assist in the examination, evaluation & comparison and pre-qualification of the Tender, the DFCCIL/Railways may, at its discretion, ask any Bidder for a clarification of its Bid. Any clarification submitted by a Bidder that is not in response to a request by the DFCCIL/Railways shall not be entertained or considered. The DFCCIL/Railways request for clarification and the response of the bidder in this regard shall be in writing.

However, if a Bidder does not provide clarification of its bid by the date and time communicated in the DFCCIL/Railways request for clarification, the bid shall be evaluated as per the documents submitted along with the bid.

(As per Clause No. 7E of Part-I of GCC APRIL-2022 , with up to date correction slip)

3.4 Validity of Tender:- Tenderer shall keep his offer open for a minimum period of 60 days from the date of opening of the tender or as mentioned in the Tender Notice.

3.5 Tenderer's Address

The tenderer should state in the tender his postal address legibly and clearly. Any communication sent in time, to the tenderer by post at his said address shall be deemed to have reached the tenderer duly and in time. Important documents should be sent by registered post.

3.6 Right of DFCCIL to Deal with Tenders

(a) The DFCCIL reserves the right of not to invite tenders for any of DFCCIL work or works or to invite open or limited tenders and when tenders are called to accept a tender in whole or in part or to reject any tender or all tenders without assigning reasons for any such action.

(b) The authority for the acceptance of the tender will rest with the DFCCIL. It shall not be obligatory on the said authority to accept the lowest tender or any other tender and no tenderer(s) shall demand any explanation for the cause of rejection of his/their tender nor the DFCCIL undertake to assign reasons for declining to consider or reject any particular tender or tenders.

3.7 The entire work is required to be completed in all respects within 15 months from the date of issue of the acceptance letter. Time is the essence of contract. The contractor shall be required to maintain steady and regular progress to the satisfaction of the Engineer to ensure that the work will be completed in all respects within the stipulated time.

3.8 If the Tenderer/s deliberately gives any wrong information about credentials/documents in his/ their tenders and thereby create(s) circumstances for acceptance of his/their tender, DFCCIL reserves the right to reject such tender at any stage, besides, shall suspend business with such tenderer. The EMD of such tenderers shall also be forfeited.

3.9 Employer not bound to accept any tender: The employer shall not be bound to accept the lowest or any tender or to assign any reason for non-acceptance or rejection of a tender. The employer reserves the right to accept any tender in respect of the whole or any portion of the work specified in the tender papers or to reduce the work or to accept any tender for less than the tendered quantities without assigning any reason whatsoever.

3.10 Negotiation: Should DFCCIL decide to negotiate with a view to bring down the rates, the tenderer called for negotiations should furnish the following form of declaration before commencement of negotiations? "I. do declare that in the event of failure of contemplated negotiations relating to Tender

No..... dated my original tender shall remain open for acceptance on its original terms and conditions".

3.11 **Site Inspection:** Tenderers are requested to inspect the site and carry out careful examination to satisfy them as to the nature of work involved and facilities available at the site. They should note carefully all the existing structures and those under construction through other agencies. They should also study the suitability of utilizing the different equipment and the machinery that they intend to use for the execution of the work. The tenderers should also select suitable sites for the purpose of locating their store yard, laboratory, staff quarters etc., and satisfy themselves with regard to the feasibility of transporting the girders, etc. from the yard to the final site of placement etc.

3.12 **Canvassing**

No tenderer is permitted to canvass to DFCCIL on any matter relating to this tender. Any tenderer found doing so may be disqualified and his bid may be rejected.

3.13 **Award of Contract**

1. DFCCIL shall notify the successful tenderer in writing by a Registered Letter/Courier/Speed Post or through bearer that his tender has been accepted.
2. Letter of Acceptance after it is signed by the Contractor in token of his acceptance shall constitute a legal and binding contract between DFCCIL and the contractor till such time the contract agreement is signed.

3.14 **Security Deposit on Acceptance of Tender:**

The security deposit / rate of recovery / mode of recovery on acceptance of tender shall be as per the Para 16(1) to 16(3) Of General Conditions of Contract (GCC).

3.15 **Execution of Contract Document:** The Tenderer whose tender is accepted shall be required to appear in person at the office of Chief General Manager, Dedicated Freight Corridor Corporation of India Limited, C-16, Khushi Vihar, Patrakar Colony, Mansarovar, Jaipur-302020 , as the case may be, or if tenderer is a firm or corporation, a duly authorized representative shall appear (there would be no need for appear in person if agreement is signed digitally) and execute the contract agreement within seven days of notice from DFCCIL/Railways that the Contract Agreement is ready. Failure to do so shall constitute a breach of the agreement affected by the acceptance of the tender. The Contract Agreement shall be entered into by DFCCIL/Railways only after submission of valid Performance Guarantee by the Contractor. In such cases the DFCCIL/Railways may determine that such tenderer has abandoned the contract and there upon his tender and acceptance thereof shall be treated as cancelled and the DFCCIL/Railways shall be entitled to forfeit the full amount of the Bid Security and other dues payable to the Contractor under this contract. The failed Contractor shall be debarred from participating in the re-tender for that work.
(As per Clause No. 8 of Part-I of GCC APRIL-2022 , with up to date correction slip)

3.16 **Form of Contract Document:** Every contract shall be complete in respect of the document it shall so constitute. Not less than 2 copies of the contract document shall be signed by the competent authority and the Contractor and one copy given to the Contractor (there would be no need of signing two copies if agreement is signed digitally)

- (a) For contracts for specific works, the contract document required to be executed by the tenderer whose tender is accepted shall be an agreement as per specimen form Annexure- IV.

(As per Clause No. 9 & 9B of Part-I of GCC APRIL-2022 , with up to date correction slip)

3.17 Understanding and Amendments of Tender Documents:

1. The bidder must own all responsibilities and bear all cost for obtaining all the information including risks, contingencies & other circumstances in execution of the work. It shall also carefully read and understand all its obligations & liabilities given in tender documents.
2. The bidder is advised to visit and examine the site where the work is to be executed and its surroundings or other areas as deemed fit by the bidder and should obtain at his own cost all information that may be necessary for preparing the bid and execution of the contract. The cost It is a condition of the tender that the tenderer is deemed to have visited the site and satisfied himself with all the conditions prevailing including any difficulties for executing the work.
3. At any time prior to the deadline for submission of bids, DFCCIL may for any reason whether at its own initiative or in response to any request by any prospective bidder amend the bidding documents by issuing Amendment, which shall be part of the Tender documents.
4. DFCCIL may at its discretion extend the deadline for submission of the bids at any time before the time of submission of the bids.

4.0 Make in India Policy: Provisions of Make in India Policy 2017 issued by Govt. of India, as amended from time to time, shall be followed for consideration of tenders.

(As per Clause No. 7C of Part-I of GCC APRIL-2022 , with up to date correction slip)

4.1 Provision for medium & small enterprises (MSE): As mandated by Railway Board Letter No. 2010/RS (G)/363/1 dated 05.07.2012 (RBS No. 4/2012), in compliance to public procurement policy, following provisions are included for Medium & Small Enterprises (MSE) in the tender document:

1. Tender sets shall be provided free of cost to MSEs registered with the listed agencies for the item tendered.
2. MSEs registered with the listed agencies for the item tendered will be exempted from payment of Earnest Money.
3. (I) MSEs who are interested in availing themselves of these benefits will enclose with their offer the proof of their being MSE registered with any of the agencies mentioned in the notification of Ministry of MSME indicated below:
 - (i) District industries Centers
 - (ii) Khadi and Village Industries Commission
 - (iii) Khadi and Village Industries Board
 - (iv) Coir Board
 - (v) National Small Industries Corporation
 - (vi) Directorate of Handicraft and Handloom
 - (vii) Any other body specified by Ministry of MSME.

(II) The MSEs must also indicate the terminal validity date of their registration.

Falling (I) & (II) above, such offers will not be liable for consideration of benefits detailed in MSE notification of Government of India dated 23.03.2012.

4. Definition of MSEs owned by SC/ST is as give below:

- (i) In case of proprietary MSE, proprietors (s) shall be SC/ST.
- (ii) In case of partnership MSE, the SC/ST partners shall be holding at least 51% shares in the unit.
- (iii) In case of Private Limited Companies at least 51% share shall be held by SC/ST promoters.

5. All bidders registered under Micro, Small and Medium Enterprises (MSMEs) shall have to satisfy the eligibility criteria at par with other bidders. There shall not be any relaxation in eligibility criteria/tender process or other tender requirements and L-1 price.
6. The above facilities shall not be applicable for the items for which they are not registered.
7. The tenderer (s) shall submit copy of current and valid MSMEs registration certificate inclusive of all the pages showing the category of entrepreneur whether the registered firm is owned by General or SC/ST entrepreneurs, monetary limit of their registration for the items tendered to avail the benefits under the Policy. The MSMEs shall also submit a copy “Entrepreneur’s Memorandum (Part-II)” of the concerned district centre where the unit is established.
8. Registration of Udyog Aadhar Memorandum (UAM): All Micro, Small and Medium Enterprises (MSMEs) bidders are required to declare UAM Number on CPPP / <https://www.ireps.gov.in> failing which such bidders will not be able to enjoy the benefits as per Public Procurement Policy for tenders invited electronically through CPPP / <https://www.ireps.gov.in>.
9. **The entitlement under the clause will be in accordance of Railway Board Letter No. 2010/RS (G)/363//1 dated 12.10.2017.**

5. Bid Security:

- (1) (a) The tenderer shall be required to submit the Bid Security with the tender for the due performance with the stipulation to keep the offer open till such date as specified in the tender, under the conditions of tender. The Bid Security shall be as under:

Value of the Work	Bid Security
For works estimated to cost up to ₹ 1 crore	2% of the estimated cost of the work
For works estimated to cost more than ₹ 1 crore	₹ 2 lakh plus ½% (half percent) of the excess of the estimated cost of work beyond ₹ 1 crore subject to a maximum of ₹ 1 crore

Note:

- (i) The Bid Security shall be rounded off to the nearest ₹100. This Bid Security shall be applicable for all modes of tendering.
 - (ii) Any firm recognized by Department of Industrial Policy and Promotion (DIPP) as ‘Startups’ shall be exempted from payment of Bid Security detailed above.
 - (iii) Labour Cooperative Societies shall submit only 50% of above Bid Security detailed above.
- (b) It shall be understood that the tender documents have been issued to the tenderer and the tenderer is permitted to tender in consideration of stipulation on his part, that after submitting his tender he will not resile from his offer or modify the terms and conditions thereof in a manner not acceptable to the Engineer. Should the tenderer fail to observe or comply with the said stipulation, the aforesaid amount shall be liable to be forfeited to the DFCCIL/Railways.
 - (c) If his tender is accepted, this Bid Security mentioned in sub para (a) above will be

retained as part security for the due and faithful fulfillment of the contract in terms of Clause 16 of the Standard General Conditions of Contract. The Bid Security of other Tenderers shall, save as herein before provided, be returned to them, but the DFCCIL/Railways shall not be responsible for any loss or depreciation that may happen thereto while in their possession, nor be liable to pay interest thereon.

- (2) The Bid Security shall be deposited either in cash through e-payment gateway or submitted as Bank Guarantee bond from a scheduled commercial bank of India or as mentioned in tender documents. The Bank Guarantee bond shall be as per **Annexure-VIA** and shall be valid for a period of 90days beyond the bid validity period.
- (3) **In case, submission of Bid Security in the form of Bank Guarantee, following shall be ensured:**

- i. A scanned copy of the Bank Guarantee shall be uploaded on e-Procurement Portal (IREPS) while applying to the tender.
- ii. The original Bank Guarantee should be delivered in person to the official nominated as indicated in the tender document within 5 working days before closing date for submission of bids.
- iii. Non submission of scanned copy of Bank Guarantee with the bid on e-tendering portal (IREPS) and/or non-submission of original Bank Guarantee within the specified period shall lead to summary rejection of bid.
- iv. The Tender Security shall remain valid for a period of 90 days beyond the validity period for the Tender.
- v. The details of the BG, physically submitted should match with the details available in the scanned copy and the data entered during bid submission time, failing which the bid will be rejected
- vi. The Bank Guarantee shall be placed in an envelope, which shall be sealed. The envelope shall clearly bear the identification “**Bid for the ***** Project**” and shall clearly indicate the name and address of the Bidder. In addition, the Bid Due Date should be indicated on the right hand top corner of the envelope.
- vii. The envelope shall be addressed to the officer and address as mentioned in the tender document.
- viii. If the envelope is not sealed and marked as instructed above, the Authority assumes no responsibility for the misplacement or premature opening of the contents of the Bid submitted and consequent losses, if any, suffered by the Bidder.

(As per Clause No. 5 of Part-I of GCC APRIL-2022 , with up to date correction slip)

6. (a) Subject to exemptions provided under para 5(1) (a) of Part-III (ITT) of this document, the tender must be accompanied by a Bid Security as mentioned in tender documents, failing which the tender shall be summarily rejected.
- (b) The Tenderer(s) shall keep the offer open for a minimum period of 60 days (in case of two packet system of tendering 90days) from the date of closing of the Tender. It is understood that the tender documents have been issued to the Tenderer(s) and the Tenderer(s), is / are permitted to tender in consideration of the stipulation on his / their part that after submitting his / their tender subject to the period being extended further, if required by mutual agreement from time to time, he will not

resile from his offer or modify the terms and conditions thereof in a manner not acceptable to Railway/DFCCIL. Should the tenderer fail to observe or comply with the foregoing stipulation, the amount deposited or Bank guarantee bond submitted as Bid Security for the due performance of the above stipulation, shall be forfeited to the DFCCIL.

- (c) If his tender is accepted,
- (i) the Bid Security mentioned in sub para(a) above deposited in cash through e-payment gateway will be retained as part security for the due and faithful fulfillment of the contract in terms of Clause 16 of the Standard General Conditions of Contract;
- (ii) the Bid Security mentioned in sub para(a) above submitted as Bank guarantee bond, will be encashed as part security for the due and faithful fulfillment of the contract in terms of Clause 16 of the Standard General Conditions of Contract.
- (iii) The Bid Security of other Tenderers shall, save as herein before provided, be returned to them, but the DFCCIL shall not be responsible for any loss or depreciation to the Bid Security that may happen thereto while in their possession, nor be liable to pay interest thereon.
- (d) In case Contractor submits the Term Deposit Receipt/Bank Guarantee Bond towards either the Full Security Depositor the Part Security Deposit equal to or more than Bid Security, the DFCCIL shall return the Bid Security so retained as per sub para(c) above, to the Contractor.

(As per Clause No. 6 of tender form 2nd sheet Annex. I Part-I of GCC APRIL-2022, with up to date correction slip.)

- 7. Rights of the DFCCIL to deal with Tender:** The authority for the acceptance of the tender will rest with the DFCCIL. It shall not be obligatory on the said authority to accept the lowest tender or any other tender, and tenderer(s) shall neither demand any explanation for the cause of rejection of his/ their tender nor the DFCCIL to assign reasons for declining to consider or reject any particular tender or tenders.

(As per Clause No. 7 of tender form 2nd sheet Annex. I Part-I of GCC APRIL-2022, with up to date correction slip.)

- 8.** If the tenderer(s) deliberately gives / give wrong information in his / their tender or creates / create circumstances for the acceptance of his / their tender, the DFCCIL reserves the right to reject such tender at any stage.

(As per Clause No. 8 of tender form 2nd sheet Annex. I Part-I of GCC APRIL-2022, with up to date correction slip.)

- 9.** If any partner(s) of a partnership firm expires after the submission of its tender or after the acceptance of its tender, the DFCCIL shall deem such tender as cancelled/contract as terminated under clause 61 of the Standard General Conditions of Contract, unless the firm retains its character as per partnership agreement. If a sole proprietor expires after the submission of tender or after the acceptance of tender, the DFCCIL shall deem such tender as cancelled / contract as terminated under clause 61 of the Standard General Conditions of Contract.

(As per Clause No. 9 of tender form 2nd sheet Annex. I Part-I of GCC APRIL-2022, with up to date correction slip.)

10. Eligibility Criteria:

10.1 Technical Eligibility Criteria:

- (a) The tenderer must have successfully completed or substantially completed any one of the following categories of work(s) during last 07 (seven) years, ending last day of month previous to the one in which tender is invited:

- (i) Three similar works each costing not less than the amount equal to 30% of advertised value of the tender, or
- (ii) Two similar works each costing not less than the amount equal to 40% of advertised value of the tender, or
- (iii) One similar work costing not less than the amount equal to 60% of advertised value of the tender.

Definition of Similar nature of work:-

“Construction of building on framed RCC structure of minimum G+2 storey.”

- (b) (1) The Bidder shall attach certified work completions certificates / certified copy of final bill/last bill paid issued by clients for Construction of building on framed RCC structure of minimum G+2 storey. In case main contract is not exclusively for Construction of building on framed RCC structure of minimum G+2 storey, the client’s certificate indicating the amount of executed work for Construction of building on framed RCC structure of minimum G+2 storey shall be attached by the bidder.

In case above documents clearly showing the amount of work done for similar nature of work i.e. “Construction of building on framed RCC structure of minimum G+2 storey” are not submitted by the bidder at the time of submission of his bid, his bid will be treated as invalid and shall not be considered for evaluation

Note: for subletting of work costing up to Rs 50 lakh, no previous work experience of subcontractor shall be asked for by the DFCCIL.

In case after award of contract or during execution of work it becomes necessary for contractor to change subcontractor, the same shall be done with subcontractor(s) fulfilling the requirements as per clause 7 of the Standard General Conditions of Contract, with prior approval of Chief Engineer in writing.

Note for Item 10.1:

Work experience certificate from private individual shall not be considered. However, in addition to work experience certificates issued by any Govt. Organisation, work experience certificate issued by Public listed company having average annual turnover of Rs 500 crore and above in last 3 financial years excluding the current financial year, listed on National Stock Exchange or Bombay Stock Exchange, incorporated/registered at least 5 years prior to the date of closing of tender, shall also be considered provided the work experience certificate has been issued by a person authorized by the Public listed company to issue such certificates.

In case tenderer submits work experience certificate issued by public listed company, the tenderer shall also submit along with work experience certificate, the relevant copy of work order, bill of quantities, bill wise details of payment received duly certified by Chartered Accountant, TDS certificates for all payments received and copy of final/last bill paid by company in support of above work experience certificate.

(As per Clause No. 10 of tender form 2nd sheet Annex. I Part-I of GCC APRIL-2022, with up to date correction slip.)

10.2. Financial Eligibility Criteria: The tenderer must have minimum average annual contractual turnover of V/N or ‘V’ whichever is less; where

V= Advertised value of the tender in crores of Rupees

N= Number of years prescribed for completion of work for which bids have been invited.

The average annual contractual turnover shall be calculated as an average of “total contractual payments” in the previous three financial years, as per the audited balance sheet. However, in case balance sheet of the previous year is yet to be prepared/ audited, the audited balance sheet of the fourth previous year shall be considered for calculating average annual contractual turnover.

The tenderers shall submit requisite information as per **Annexure-VIB**, along with copies of Audited Balance Sheets duly certified by the Chartered Accountant/ Certificate from Chartered Accountant duly supported by Audited Balance Sheet.

(As per Clause No. 10.2 of tender form 2nd sheet Annex. I Part-I of GCC APRIL-2022, with up to date correction slip.)

10.2 Bid Capacity: The tender/technical bid will be evaluated based on bid capacity formula detailed as Annexure-VI. **(Not applicable For this Tender)**

(As per Clause No. 10.3 of tender form 2nd sheet Annex. I Part-I of GCC APRIL-2022, with up to date correction slip.)

10.3 No Technical and Financial credentials are required for tenders having advertised value up to Rs 50 lakh.

(As per Clause No. 10.4 of tender form 2nd sheet Annex. I Part-I of GCC APRIL-2022, with up to date correction slip.)

10.5 Credentials if submitted in foreign currency shall be converted into Indian currency i.e., Indian Rupee as under:

The conversion rate of US Dollars into Rupees shall be the daily representative exchange rates published by the Reserve Bank of India or entity authorized by RBI to do so for the relevant date or immediately previous date for which rates have been published. Where, relevant date shall be as on the last day of month previous to the one in which tender is invited. In case of any other currency, the same shall first be converted to US Dollars as on the last day of month previous to the one in which tender is invited, and the amount so derived in US Dollars shall be converted into Rupees at the aforesaid rate. The conversion rate of such currencies shall be the daily representative exchange rates published by the International Monetary Fund for the relevant date or immediately previous date for which rates have been published.

[Explanation for Para 10 of the Tender Form (Second Sheet) including Para 10.1 to 10.5 - Eligibility Criteria:

- 1. Substantially Completed Work means an ongoing work in which payment equal to or more than 90% of the present contract value (excluding the payment made for adjustment of Price variation (PVC), if any) has been made to the contractor in that ongoing contract and no proceedings of termination of contract on Contractor's default has been initiated. The credential certificate in this regard should have been issued not prior to 60 days of date of invitation of present tender.*
- 2. In case a work is started prior to 07 (seven) years, ending last day of month previous to the one in which tender is invited, but completed in last 07 (seven) years, ending last day of month previous to the one in which tender is invited, the completed work shall be considered for fulfillment of credentials.*
- 3. If a work is physically completed and completion certificate to this extent is issued by the concerned organization but final bill is pending, such work shall be considered for fulfillment of credentials*
- 4. In case of completed work, the value of final bill (gross amount) including the PVC amount (if paid) shall be considered as the completion cost of work. In case final bill is pending, only*

the total gross amount already paid including the PVC amount (if paid) shall be considered as the completion cost of work.

In case of substantially completed work, the total gross amount already paid including the PVC amount (if paid), as mentioned in the certificate, shall be considered as the cost of substantially completed work.

- 5. If a bidder has successfully completed a work as subcontractor and the work experience certificate has been issued for such work to the subcontractor by a Govt. Organization or public listed company as defined in Note for Item 10.1 Para 10 of the Tender Form (above)), the same shall be considered for the purpose of fulfillment of credentials.*
- 6. In case a work is considered similar in nature for fulfillment of technical credentials, the overall cost including the PVC amount (if paid) of that completed work or substantially completed work, shall be considered and no separate evaluation for each component of that work shall be made to decide eligibility.*
- 7. In case of newly formed partnership firm, the credentials of individual partners from previous propriety firm(s) or dissolved previous partnership firm(s) or split previous partnership firm(s), shall be considered only to the extent of their share in previous entity on the date of dissolution / split and their share in newly formed partnership firm. For example, a partner A had 30% share in previous entity and his share in present partnership firm is 20%. In the present tender under consideration, the credentials of partner A will be considered to the extent of 0.3×0.2 *value of the work done in the previous entity. For this purpose, the tenderer shall submit along with his bid all the relevant documents which include copy of previous partnership deed(s), dissolution deed(s) and proof of surrender of PAN No.(s) in case of dissolution of partnership firm(s) etc.*
- 8. In case of existing partnership firm, if any one or more partners quit the partnership firm, the credentials of remaining partnership firm shall be re-worked out i.e., the quitting partner(s) shall take away his credentials to the extent of his share on the date of quitting the partnership firm (e.g. in a partnership firm of partners A, B & C having share 30%, 30% & 40% respectively and credentials of Rs 10 crore; in case partner C quits the firm, the credentials of this partnership firm shall remain as Rs 6 crore). For this purpose, the tenderer shall submit along with his bid all the relevant documents which include copy of previous partnership deed(s), dissolution deed(s) and proof of surrender of PAN No.(s) in case of dissolution of partnership firm(s) etc.*
- 9. In case of existing partnership firm if any new partner(s) joins the firm without any modification in the name and PAN/TAN no. of the firm, the credentials of partnership firm shall get enhanced to the extent of credentials of newly added partner(s) on the same principles as mentioned in item 6 above. For this purpose, the tenderer shall submit along with his bid all the relevant documents which include copy of previous partnership deeds, dissolution/splitting deeds and proof of surrender of PAN No.(s) in case of dissolution of partnership firm etc.*
- 10. Any partner in a partnership firm cannot use or claim his credentials in any other firm without leaving the partnership firm i.e., In a partnership firm of A&B partners, A or B partner cannot use credentials of partnership firm of A&B partners in any other partnership firm or propriety firm without leaving partnership firm of A&B partners.*
- 11. In case a partner in a partnership firm is replaced due to succession as per succession law, the proportion of credentials of the previous partner will be passed on to the successor.*

12. *If the percentage share among partners of a partnership firm is changed, but the partners remain the same, the credentials of the firm before such modification in the share will continue to be considered for the firm as it is without any change in their value. Further, in case a partner of partnership firm retires without taking away any credentials from the firm, the credentials of partnership firm shall remain the same as it is without any change in their value.*
13. *In a partnership firm "AB" of A&B partners, in case A also works as propriety firm "P" or partner in some other partnership firm "AX", credentials of A in propriety firm "P" or in other partnership firm "AX" earned after the date of becoming a partner of the firm AB shall not be added in partnership firm AB.*
14. *In case a tenderer is LLP, the credentials of tenderer shall be worked out on above lines similar to a partnership firm.*
15. *In case company A is merged with company B, then company B would get the credentials of company A also.]*

(As per Clause No. 10.5 of tender form 2nd sheet Annex. I Part-I of GCC APRIL-2022, with up to date correction slip.)

11. Tenderer Credentials:

Documents testifying tenderer previous experience and financial status should be produced along with the tender.

Tenderer(s) who is/are not borne on the approved list of the Contractors of DFCCIL/Railway shall submit along with his / their tender:

- (i) Certificates and testimonials regarding contracting experience for the type of job for which tender is invited with list of works carried out in the past.
- (ii) Audited Balance Sheet duly certified by the Chartered Accountant regarding contractual payments received in the past.
- (iii) The list of personnel / organization on hand and proposed to be engaged for the tendered work. Similarly list of Plant & Machinery available on hand and proposed to be inducted and hired for the tendered work.
- (iv) A copy of certificate stating that they are not liable to be disqualified and all their statements/documents submitted along with bid are true and factual. Standard format of the certificate to be submitted by the bidder is enclosed as Annexure-V. In addition to Annexure-V, in case of other than Company /Proprietary Firm, Annexure-V(A) shall also be submitted by the each member of a Partnership Firm / Joint Venture (JV)/ Hindu Undivided Family (HUF)/ Limited Liability Partnership firm (LLP) etc. as the case may be. Non submission of a copy of certificate by the bidder shall result in summarily rejection of his/their bid. It shall be mandatorily incumbent upon the tenderer to identify, state and submit the supporting documents duly self-attested / digitally signed by which they/he are/is qualifying the Qualifying Criteria mentioned in the Tender Document.
- (v) The DFCCIL reserves the right to verify all statements, information and documents submitted by the bidder in his tender offer, and the bidder shall, when so required by the DFCCIL, make available all such information, evidence and documents as may be necessary for such verification. Any such verification or lack of such verification, by the DFCCIL shall not

relieve the bidder of its obligations or liabilities hereunder nor will it affect any rights of the DFCCIL there under.

- (vi) (a) In case of any information submitted by tenderer is found to be false, forged or incorrect at any time during process for evaluation of tenders, it shall lead to forfeiture of the tender Bid Security besides banning of business for a period of upto five years.
- (b) In case of any information submitted by tenderer is found to be false, forged or incorrect after the award of contract, the contract shall be terminated. Bid Security, Performance Guarantee and Security Deposit available with the DFCCIL shall be forfeited. In addition, other dues of the contractor, if any, under this contract shall be forfeited and agency shall be banned for doing business for a period of up to five years.

(As per Clause No. 11 of tender form 2nd sheet Annex. I Part-I of GCC APRIL-2022, with up to date correction slip.)

12. Non-compliance with any of the conditions set forth therein above is liable to result in the tender being rejected.

(As per Clause No. 12 of tender form 2nd sheet Annex. I Part-I of GCC APRIL-2022, with up to date correction slip.)

13. **Execution of Contract Documents:** The successful Tenderer(s) shall be required to execute an agreement with the DFCCIL acting through the Chief General Manager/DFCCIL/Jaipur for carrying out the work according to the Standard General Conditions of Contract, Special Conditions / Specifications annexed to the tender and Standard Specifications (Works and Materials) of DFCCIL as amended/corrected upto latest correction slips, mentioned in tender form (First Sheet).

(As per Clause No. 13 of tender form 2nd sheet Annex. I Part-I of GCC APRIL-2022, with up to date correction slip.)

14. **Documents to be Submitted Along with Tender**

- (i) The tenderer shall clearly specify whether the tender is submitted on his own (Proprietary Firm) or on behalf of a Partnership Firm / Company / Joint Venture (JV) / Registered Society / Registered Trust / Hindu Undivided Family (HUF) / Limited Liability Partnership (LLP) etc. The tenderer(s) shall enclose the attested copies of the constitution of their concern, and copy of PAN Card along with their tender. Tender Documents in such cases are to be signed by such persons as may be legally competent to sign them on behalf of the firm, company, association, trust or society, as the case may be.

- (ii) Following documents shall be submitted by the tenderer:

(a) **Sole Proprietorship Firm:**

- (i) All documents in terms of Para 10 of part III above.

(b) **HUF:**

- (i) A copy of notarized affidavit on Stamp Paper declaring that he who is submitting the tender on behalf of HUF is in the position of 'Karta' of Hindu Undivided Family (HUF) and he has the authority, power and consent given by other members to act on behalf of HUF.
- (ii) All other documents in terms of Para 10 of the part III above.

(c) **Partnership Firm:**

- (i) All documents as mentioned in para 18 of the part III.

- (d) **Joint Venture (JV):** All documents as mentioned in para 17 of the part III.
- (e) **Company registered under Companies Act 2013:**
- (i) The copies of **MOA (Memorandum of Association) / AOA (Articles of Association)** of the company
 - (ii) A copy of Certificate of Incorporation
 - (iii) A copy of Authorization/Power of Attorney issued by the Company (backed by the resolution of Board of Directors) in favour of the individual to sign the tender on behalf of the company and create liability against the company.
 - (iv) All other documents in terms Para 10 of the part III above.
- (f) **LLP (Limited Liability Partnership):**
- (i) A copy of LLP Agreement
 - (ii) A copy of Certificate of Incorporation
 - (iii) A copy of Power of Attorney/Authorization issued by the LLP in favour of the individual to sign the tender on behalf of the LLP and create liability against the LLP.
 - (iv) An undertaking by all partners of the LLP that they are not blacklisted or debarred by DFCCIL/Railways or any other Ministry / Department of the Govt. of India from participation in tenders / contracts as on the date of submission of bids, either in their individual capacity or in any firm/LLP or JV in which they were / are partners/members. Concealment / wrong information in regard to above shall make the contract liable for determination under Clause 62 of the Standard General Conditions of Contract.
 - (v) All other documents in terms of Para 10 of the part III.
- (g) **Registered Society & Registered Trust:**
- (i) A copy of Certificate of Registration
 - (ii) A copy of Memorandum of Association of Society/Trust Deed
 - (iii) A copy of Power of Attorney in favour of the individual to sign the tender documents and create liability against the Society/Trust.
 - (iv) A copy of Rules & Regulations of the Society
 - (v) All other documents in terms of Para 10 of the part III above.
- (iii) If it is NOT mentioned in the submitted tender that tender is being submitted on behalf of a Sole Proprietorship firm / Partnership firm / Joint Venture / Registered Company etc., then the tender shall be treated as having been submitted by the individual who has signed the tender.
- (iv) After opening of the tender, any document pertaining to the constitution of Sole Proprietorship Firm / Partnership Firm / Registered Company/ Registered Trust / Registered Society / HUF/LLP etc. shall be neither asked nor considered, if submitted. Further, no suo moto cognizance of any document available in public domain (i.e., on internet etc.) or in DFCCIL's record/office files etc. will be taken for consideration of the tender, if no such mention is available in tender offer submitted.
- (v) A tender from JV shall be considered only where permissible as per the tender conditions.
- (vi) The DFCCIL will not be bound by any change of power of attorney or in the composition of the firm made subsequent to the submission of tender. DFCCIL may, however, recognize such power of attorney and changes after obtaining proper legal advice, the cost of which will be chargeable to the Contractor.
- (As per Clause No. 14 of tender form 2nd sheet Annex. I Part-I of GCC APRIL-2022, with up to date correction slip.)**

15. The tenderer whether sole proprietor / a company or a partnership firm / joint venture (JV) / registered society / registered trust / HUF / LLP etc if they want to act through agent or individual partner(s), should submit along with the tender, a copy of power of attorney duly stamped and authenticated by a Notary Public or by Magistrate in favour of the specific person whether he/they be partner(s) of the firm or any other person, specifically authorizing him/them to sign the tender, submit the tender and further to deal with the Tender/ Contract up to the stage of signing the agreement except in case where such specific person is authorized for above purposes through a provision made in the partnership deed / Memorandum of Understanding / Article of Association /Board resolution, failing which tender shall be summarily rejected.

A separate power of attorney duly stamped and authenticated by a Notary Public or by Magistrate in favour of the specific person whether he/they be partner(s) of the firm or any other person, shall be submitted after award of work, specifically authorizing him/them to deal with all other contractual activities subsequent to signing of agreement, if required.

Note: A Power of Attorney executed and issued overseas, the document will also have to be legalized by the Indian Embassy and notarized in the jurisdiction where the Power of Attorney is being issued. However, the Power of Attorney provided by Bidders from countries that have signed the Hague Legislation Convention 1961 are not required to be legalized by the Indian Embassy if it carries a conforming Apostille certificate.

(As per Clause No. 15 of tender form 2nd sheet Annex. I Part-I of GCC APRIL-2022, with up to date correction slip.)

16. Employment/Partnership etc. of Retired DFCCIL Employees:

(a) Should a tenderer

- i) be a retired Engineer of the gazetted rank or any other gazetted officer working before his retirement, whether in the executive or administrative capacity or whether holding a pensionable post or not, in the Engineering or any other department of any of the DFCCIL/Railways owned and administered by the DFCCIL for the time being, OR
- ii) being partnership firm / joint venture (JV) / registered society / registered trust etc have as one of its partners/members a retired Engineer of the gazetted rank or any other gazetted officer working before his retirement, OR
- iii) being an incorporated company have any such retired Engineer of the gazetted rank or any other gazetted officer working before his retirement as one of its directors

AND

in case where such Engineer or officer had not retired from government service at least 1 year prior to the date of submission of the tender

THEN

the tenderer will give full information as to the date of retirement of such Engineer or gazetted officer from the said service and as to whether permission for taking such contract, or if the Contractor be a partnership firm or an incorporated company, to become a partner or director as the case may be, has been obtained by the tenderer or the Engineer or officer, as the case may be from the DFCCIL or any officer, duly authorized by him in this behalf, shall be clearly stated in writing at the time of submitting the tender.

b) In case, upon successful award of contract, should a tenderer depute for execution of the works under or to deal matters related with this contract, any retired Engineer of gazette rank or retired

gazetted officer working before his retirement in the Engineering or any other department of any of the DFCCIL/Railways owned and administered by the DFCCIL for the time being, and now in his employment, then the tenderer will ensure that retired Engineer or retired gazetted officer had retired from government service at least 1 year prior to the date of his employment with tenderer and in case he had retired from service within a year then he possesses the requisite permission from the DFCCIL or any officer, duly authorized by him in this behalf, to get associated with the tenderer.

- c) Should a tenderer or Contractor being an individual, have member(s) of his family or in the case of partnership firm/ company / joint venture (JV) / registered society / registered trust etc. one or more of his partner(s)/shareholder(s) or member(s) of the family of partner(s)/shareholder(s) having share of more than 1% in the tendering entity employed in gazetted capacity in the Engineering or any other department of the DFCCIL, then the tenderer at the time of submission of tender, will inform the authority inviting tenders the details of such persons.

Note: -If information as required as per 16.a), b), c) above has not been furnished, contract is liable to be dealt in accordance with provision of clause 62 of the Standard General Condition of contract.

(As per Clause No. 16 of tender form 2nd sheet Annex. I Part-I of GCC APRIL-2022, with up to date correction slip.)

JOINT VENTURE (JV) IN WORKS TENDERS (Not applicable for this tender)

17.0 Participation of Joint Venture (JV) in Works Tender: Not applicable for this tender..

18. Participation of Partnership Firms in works tenders:

- 18.1 The Partnership Firms participating in the tender should be legally valid under the provisions of the Indian Partnership Act.
- 18.2 The partnership firm should have been in existence or should have been formed prior to submission of tender. Partnership firm should have either been registered with the Registrar or the partnership deed should have been notarized as per the Indian Partnership Act, prior to submission of tender.
- 18.3 Separate identity / name should be given to the partnership firm. The partnership firm should have PAN / TAN number in its own name and PAN / TAN number in the name of any of the constituent partners shall not be considered. The valid constituents of the firm shall be called partners.
- 18.4 Once the tender has been submitted, the constitution of the firm shall not normally be allowed to be modified / altered / terminated during the validity of the tender as well as the currency of the contract except when modification becomes inevitable due to succession laws etc., in which case prior permission should be taken from DFCCIL and in any case the minimum eligibility criteria should not get vitiated. The re-constitution of firm in such cases should be followed by a notary certified Supplementary Deed. The approval for change of constitution of the firm, in any case, shall be at the sole discretion of the DFCCIL/Railways and the tenderer shall have no claims what-so-ever. Any change in the constitution of Partnership firm after submission of tender shall be with the consent of all partners and with the signatures of all partners as that in the Partnership Deed. Failure to observe this requirement shall render the offer invalid and full Bid Security shall be forfeited.
- If any Partner/s withdraws from the firm after submission of the tender and before the award

of the contract, the offer shall be rejected and Bid Security of the tenderer will be forfeited. If any new partner joins the firm after submission of tender but prior to award of contract, his / her credentials shall not qualify for consideration towards eligibility criteria either individually or in proportion to his share in the previous firm. In case the tenderer fails to inform DFCCIL beforehand about any such changes / modification in the constitution which is inevitable due to succession laws etc. and the contract is awarded to such firm, then it will be considered a breach of the contract conditions liable for determination of the contract under Clause 62 of the Standard General Conditions of Contract.

- 18.5 A partner of the firm shall not be permitted to participate either in his individual capacity or as a partner of any other firm in the same tender.
- 18.6 The tender form shall be submitted only in the name of partnership firm. The Bid Security shall be submitted by partnership firm. The Bid Security submitted in the name of any individual partner or in the name of authorized partner (s) shall not be considered.
- 18.7 On issue of Letter of Acceptance (LOA) to the partnership firm, all the guarantees like Performance Guarantee, Guarantee for various Advances to the Contractor shall be submitted only in the name of the partnership firm and no splitting of guarantees among the partners shall be acceptable.
- 18.8 On issue of Letter of Acceptance (LOA), contract agreement with partnership firm shall be executed in the name of the firm only and not in the name of any individual partner.
- 18.9 In case the Letter of Acceptance (LOA) is issued to a partnership firm, the following shall be furnished by all the partners through a notarized affidavit, before signing of contract agreement.
- (a) Joint and several liabilities:
The partners of the firm to which the Letter of Acceptance (LOA) is issued, shall be jointly and severally liable to the DFCCIL for execution of the contract in accordance with General and Special Conditions of the Contract. The partners shall also be liable jointly and severally for the loss, damages caused to the DFCCIL during the course of execution of the contract or due to non-execution of the contract or part thereof.
- (b) Duration of the partnership deed and partnership firm agreement:
The partnership deed/partnership firm agreement shall normally not be modified/alterd/terminated during the currency of contract and the maintenance period after the work is completed as contemplated in the conditions of the contract. Any change carried out by partners in the constitution of the firm without permission of DFCCIL, shall constitute a breach of the contract, liable for determination of the contract under Clause 62 of the Standard General Conditions of Contract.
- (c) Governing laws: The partnership firm agreement shall in all respect be governed by and interpreted in accordance with the Indian laws.
- (d) No partner of the firm shall have the right to assign or transfer the interest right or liability in the contract without the written consent of the other partner/s and that of the DFCCIL.
- 18.10 The tenderer shall clearly specify that the tender is submitted on behalf of a partnership firm. The following documents shall be submitted by the partnership firm, with the tender:
- (i) A notarized copy of the Partnership Deed or a copy of the Partnership deed registered with the Registrar.
- (ii) A notarized or registered copy of Power of Attorney in favour of the individual to tender for the work, sign the agreement etc. and create liability against the firm.
- (iii) An undertaking by all partners of the partnership firm that they are not blacklisted or debarred by DFCCIL/Railways or any other Ministry / Department of the Govt. of India from participation in tenders / contracts as on the date of submission of bids, either in their

individual capacity or in any firm/LLP in which they were / are partners/members. Any Concealment / wrong information in regard to above shall make the bid ineligible or the contract shall be determined under Clause 62 of the Standard General Conditions of Contract.

(iv) All other documents in terms of Para 10 above.

18.11 Evaluation of eligibility of a partnership firm:

Technical and financial eligibility of the firm shall be adjudged based on satisfactory fulfillment of the eligibility criteria laid down in Para 10 above.

(As per Clause No. 17.0 to 18.11 of tender form 2nd sheet Annex. I Part-I of GCC APRIL-2022, with up to date correction slip.)

19.0 Advances to Contractor –(Not applicable for this Tender)

If specifically provided in Tender Documents of tender having advertised value more than Rs 50 Crores, DFCCIL shall make payment, as an Interest bearing advances, as per Contractor's request. These advances shall carry a simple interest _____ as indicated in the Tender documents. The payment and recovery of such advances shall be made as per manners prescribed in Clause 46.4 of the Standard General Conditions of Contract.

(Signature)
(Designation)

Signature of Tenderer(s) _____ DFCCIL Date _____
Date _____

(As per Clause No. 19 of tender form 2nd sheet Annex. I Part-I of GCC APRIL-2022, with up to date correction slip.)

Part IV
GENERAL CONDITIONS OF CONTRACT

GENERAL CONDITIONS OF CONTRACT

- 1. (1) Definitions:** In these Standard General Conditions of Contract, the following terms shall have the meaning assigned hereunder except where the context otherwise requires:
- (a) "Railway" shall mean the DFCCIL or the Administrative Officers of the DFCCIL/Railways or of the Successor DFCCIL/Railways authorized to deal with any matters which these presents are concerned on his behalf.
 - (b) "General Manager" shall mean the Officer in-charge of the General Superintendence and Control of the DFCCIL/Railways and shall also include Addl. General Manager, the General Manager (Construction) and shall mean and include their successors, of the successor DFCCIL/Railways.
 - (c) "Chief Engineer" shall mean the Officer in-charge of the Engineering Department of DFCCIL/Railways and shall also include Chief Engineer (Construction), Chief Signal & Telecommunication Engineer, Chief Signal & Telecommunication Engineer (Construction), Chief Electrical Engineer, Chief Electrical Engineer (Construction), Chief Mechanical Engineer and shall also include GGM/GM of DFCCIL.
 - (d) "Divisional Railway Manager" shall mean the Officer in-charge of a Division of the Railway and shall also mean any officer nominated by Managing Director / DFCCIL and shall mean and include their successors of the successor DFCCIL/Railways.
 - (e) "Engineer" and Employer's Engineer shall mean the Chief General Manager of DFCCIL / Representative appointed by DFCCIL.
 - (f) "Engineer's Representative" shall mean the Assistant Engineer, Assistant Signal and Telecommunication Engineer and Assistant Electrical Engineer, APM / PM / Dy .CPM / Add. CPM of DFCCIL in direct charge of the work and shall include any Sr. Sec. / Sec / Jr. Engineer / Executive / Sr. Executive, APM/PM / Dy.CPM of DFCCIL of Civil Engineering / Signal & Telecommunication Engineering / Electrical Engineering Department appointed by the DFCCIL/Railways and shall mean and include the Engineer's Representative of the successor DFCCIL/Railways.
 - (g) "Contractor" shall mean the Person/Firm/LLP/Trust/Co-operative Society or Company whether incorporated or not who enters into the contract with the DFCCIL/Railways and shall include their executors, administrators, successors and permitted assigns.
 - (h) "Contract" shall mean and include the Agreement, the Work Order, the accepted Bill(s) of Quantities or Chapter(s) of Standard Schedule of Rates (SSOR) of the DFCCIL/Railways modified by the tender percentage for items of works quantified, or not quantified, the Standard General Conditions of Contract, the Special Conditions of Contracts, if any; the Drawing, the Specifications, the Special Specifications, if any and Tender Forms, if any.
 - (i) "Works" shall mean the works to be executed in accordance with the contract.
 - (j) "Specifications" shall mean the Standard Specifications for Materials & Works of DFCCIL/Railways as specified by DFCCIL under the authority of the Chief Engineer or as amplified, added to or superseded by Special Specifications, if any.

(k) Standard Schedule of Rates (SSOR) shall mean the schedule of Rates adopted by the Railway/DFCCIL, which includes-

1. "Unified Standard Schedule of Rates of the Railway (USSOR)" i.e. the Standard Schedule of Rates of the Railway issued under the authority of the Chief Engineer from time to time, updated with correction slips issued up to date of inviting tender or as otherwise specified in the tender documents;
2. "Delhi Schedule Of Rates (DSR)" i.e. the Standard Schedule of Rates published by Director General/ Central Public Works Department, Government of India, New Delhi, as adopted and modified by the DFCCIL under the authority of the Chief Engineer from time to time, updated with correction slips issued up to date of inviting tender or as otherwise specified in the tender documents.

- (l) "Drawing" shall mean the maps, drawings, plans and tracings or prints there of annexed to the contract and shall include any modifications of such drawings and further drawings as may be issued by the Engineer from time to time.
- (m) "Constructional Plant" shall mean all appliances or things of whatsoever nature required for the execution, completion or maintenance of the works or temporary works (as hereinafter defined) but does not include materials or other things intended to form or forming part of the permanent work.
- (n) "Temporary Works" shall mean all temporary works of every kind required for the execution completion and/or maintenance of the works.
- (o) "Site" shall mean the lands and other places on, under, in or through which the works are to be carried out and any other lands or places provided by the Railway/DFCCIL for the purpose of the contract.
- (p) "Period of Maintenance" shall mean the specified period of maintenance from the date of completion of the works, as certified by the Engineer.
- (q) 'Contractor's authorized Engineer' shall mean a graduate Engineer or equivalent, having more than 3 years experience in the relevant field of construction work involved in the contract, duly approved by Engineer.
- (r) Date of inviting tender shall be the date of publishing tender notice on IREPS website if tender is published on website or the date of publication in newspaper in case tender is not published on website.
- (s) "Bill of Quantities" shall mean Schedule of Item(s) included in the tender document along with respective quantities and rates, accepted by the DFCCIL.

1. (2) Singular and Plural: Words importing the singular number shall also include the plural and vice versa where the context requires.

1.(3) Headings and Marginal Headings: The headings and marginal headings in these Standard General Conditions are solely for the purpose of facilitating reference and shall not be deemed to be part thereof or be taken into consideration in the interpretation or construction thereof the contract.

GENERAL OBLIGATIONS

2. (1) Execution Co-Relation and Intent of Contract Documents: The contract documents shall be signed in triplicate by the DFCCIL/Railways and the Contractor. The contract documents are complementary and what is called for by anyone shall be as binding as if called for by all, the intention of the documents is to include all labour and materials, equipments and transportation necessary for proper execution of work. Materials or works not covered by or properly inferable from any heading or class of the specifications shall not be supplied by the

DFCCIL to the Contractors unless distinctly specified in the contract documents. Materials or works described in words which so applied have a well-known technical or trade meaning, shall be held to refer to such recognized standards.

- 2.(2) If a work is transferred from the jurisdiction of one DFCCIL/Railways to another DFCCIL/Railways or to a Project authority or vice versa while contract is in subsistence, the contract shall be binding on the Contractor and the Successor DFCCIL/Railways/Project in the same manner & take effect in all respects as if the Contractor and the Successor DFCCIL/Project were parties thereto from the inception and the corresponding officer or the Competent Authority in the Successor Railway/DFCCIL/Project will exercise the same powers and enjoy the same authority as conferred to the Predecessor Railway/DFCCIL/Project under the original contract/agreement entered into.
- 2.(3) If for administrative or other reasons the contract is transferred to the Successor DFCCIL/Railways, the contract shall, notwithstanding any things contained herein contrary there to, be binding on the Contractor and the Successor DFCCIL/Railways in the same manner and take effect in all respects as if the Contractor and the Successor DFCCIL/Railways had been parties thereto from the date of this contract.
- 3.(1) **Law Governing the Contract:** The contract shall be governed by the law for the time being in force in the Republic of India.
- 3.(2) **Compliance to Regulations and Bye-Laws:** The Contractor shall conform to the provision of any statute relating to the works and regulations and bye-laws of any local authority and of any water and lighting companies or undertakings, with whose system the work is proposed to be connected and shall before making any variation from the drawings or the specifications that may be necessitated by so confirming give to the Engineer notice specifying the variation proposed to be made and the reason for making the variation and shall not carry out such variation until he has received instructions from the Engineer in respect thereof. The Contractor shall be bound to give all notices required by statute, regulations or bye-laws as aforesaid and to pay all fees and taxes payable to any authority in respect thereof.

3.(3) Environmental and Forest clearances:

The DFCCIL/Railways represents and warrants that the environmental and forest clearances pertaining to the work commensurate with the progress of work/agreed programme, will be obtained by Engineer. In the event of any delay in securing respective clearances leading to delay in execution of work, the Contractor shall be entitled to Extension of Time for the period of such delay in accordance with the provisions of Clause-17A(ii).

4. **Communications to be in Writing:** All notices, communications, reference and complaints made by the DFCCIL or the Engineer or the Engineer's Representative or the Contractor inter-se concerning the works shall be in writing or e-mail on registered e-mail IDs i.e. the e mail id provided for correspondence in the contract agreement, otherwise email id registered with IREPS and no notice, communication, reference or complaint not in writing or through e-mail, shall be recognized.
5. **Service of Notices on Contractors:** The Contractor shall furnish to the Engineer the name, designation and address of his authorized agent and all complaints, notices, communications and references shall be deemed to have been duly given to the Contractor, if delivered to the

Contractor or his authorized agent or left at or posted to the address so given and shall be deemed to have been so given in the case of posting on day on which they would have reached such address in the ordinary course of post/ e-mail or on the day on which they were so delivered or left. In the case of contract by partners, any change in the constitution of the firm shall be forthwith notified by the Contractor to the Engineer.

6. Occupation and Use of Land: No land belonging to or in the possession of the DFCCIL/Railways shall be occupied by the Contractor without the permission of the DFCCIL/Railways. The Contractor shall not use, or allow to be used the site for any purposes other than that of executing the works. Whenever non-Railway bodies/DFCCIL/persons are permitted to use DFCCIL/Railway premises with competent authority's approval, conservancy charges as applicable from time to time may be levied.

7. Assignment or Subletting of Contract: The Contractor shall not assign or sublet the contract or any part thereof or allow any person to become interested therein in any manner whatsoever without the special permission in writing of the Chief Engineer, save as provided below. Any breach of this condition shall entitle the DFCCIL/Railways to rescind the contract under Clause 62 of these Conditions and also render the Contractor liable for payment to the DFCCIL/Railways in respect of any loss or damage arising or ensuing from such cancellation; provided always that execution of the details of the work by petty Contractor under the direct and personal supervision of the Contractor or his agent shall not be deemed to be sub-letting under this clause.

In case Contractor intends to subcontract part of work, he shall submit a proposal in writing seeking permission of Chief Engineer for the same. While submitting the proposal to Railway/DFCCIL, Contractor shall ensure the following:

(a) (i) Total value of work to be assigned to sub-contractor(s) shall not be more than 50% of total contract value.

(ii) The subcontractor shall have successfully completed at least one work similar to work proposed for subcontract in last 5 years, ending date of submission of proposal by Contractor to Railway/DFCCIL, costing not less than 35% value of work to be subletted, through a works contract. For fulfilment of above, Work Experience Certificate issued by a Govt. Department/Organisation shall be considered. Further, Work Experience Certificate issued by a Public listed company shall be considered provided the company is having average annual turnover of Rs 500 crore and above in last 3 financial years excluding the current financial year, listed on National Stock Exchange or Bombay Stock Exchange, registered at least 5 years back from the date of submission of proposal by Contractor to Railway/DFCCIL and work experience certificate issued by a person authorised by the Public Listed Company to issue such certificates.

Note: for subletting of work costing up to Rs 50 lakh no previous work experience shall be asked for by the Railway/DFCCIL.

In case contractor submits subcontractor's work experience certificate issued by public listed company, the contractor shall also submit along with work experience certificate, the relevant copy of work order, bill of quantities, bill wise details of payment received duly certified by Chartered Accountant, TDS certificates for all payments received and copy of final/last bill paid by company in support of above work experience certificate.

(i) There is no banning of business with the sub-contractor in force over IR.

- (b) The Contractor shall provide to the Engineer a copy of the agreement to be entered into by Contractor with subcontractor. No subcontractor shall be permitted without a formal agreement between Contractor and subcontractor. This agreement shall clearly define the scope of work to be carried out by subcontractor and the terms of payment in clear & unambiguous manner.
- (c) On receipt of approval from Chief Engineer, Contractor shall enter into a formal agreement legally enforceable in Court of Law with subcontractor and submit a copy of the same to the Engineer.
- (d) The Contractor shall intimate to the Engineer not less than 7 days in advance, the intended date of commencement of subcontractor's work.
- (e) Once having entered into above arrangement, Contractor shall discontinue such arrangement, if he intends to do so at his own or on the instructions of Railway/DFCCIL, with prior intimation to Chief Engineer.
- (f) The Contractor shall indemnify Railway/DFCCIL against any claim of subcontractor.
- (g) The Contractor shall release payment to the Sub-contractor(s) promptly and shall endeavour to resolve all issues amicably and speedily with the Sub-contractor(s), so that the execution of work is not affected in any manner whatsoever.
- (h) In addition to issuance of work experience certificate to Contractor, the Engineer, when, based on documents, is satisfied that subcontracted work has been carried out by subcontractor, shall issue work experience certificate to the subcontractor also for the portion of work subcontracted and successfully completed by the sub-contractor.
*Note: Work Experience Certificate to the subcontractor shall be issued only when the contractor's work is complete and contractor is entitled for the issuance of Work Experience Certificate. However, in the same contract, when the Chief Engineer, based on documents, is satisfied that the subcontractor has successfully carried out subletted work; without issuance of work experience certificate to subcontractor at this stage, the Chief Engineer can, **only once**, consider the successfully completed subletted work for the fulfilment of eligibility for further subletting of work to the subcontractor in the same contract. When the contractor's work is complete and contractor is entitled for the issuance of work experience certificate, the subcontractor shall be issued one Work Experience Certificate for the total scope of work executed by the subcontractor in the contract.*
- (i) The responsibility of successful completion of work by subcontractor shall lie with Contractor. Subcontracting will in no way relieve the Contractor to execute the work as per terms of the Contract.
- (j) Further, in case Engineer is of the view that subcontractor's performance is not satisfactory, he may instruct the Contractor to remove the subcontractor from the work and Contractor has to comply with the above instructions with due promptness. Contractor shall intimate the actual date of discontinuation of subcontract to Engineer. No claim of Contractor whatsoever on this account shall be entertained by the DFCCIL/Railways and this shall be deemed as 'excepted matter' (matter not arbitrable).
- (k) The permitted subcontracting of work by the Contractor shall not establish any contractual relationship between the sub-contractor and the DFCCIL/Railways and shall not relieve the Contractor of any responsibility under the Contract.

- 8. Assistance by DFCCIL for the Stores to be obtained by the Contractor:** Owing to difficulty in obtaining certain materials (including Tools & Plant) in the market, the DFCCIL may have agreed without any liability therefore to endeavour to obtain or assist the Contractor in obtaining the required quantities of such materials as may be specified in the Tender. In the event of delay or failure in obtaining the required quantities of the aforesaid material, the Contractor shall not be deemed absolved of his own responsibility and shall keep in touch with the day to day position regarding their availability and accordingly adjust progress of works including employment of labour and the DFCCIL shall not in any way be liable for the supply of materials or for the non-supply thereof for any reasons whatsoever nor for any loss or damage arising in consequence of such delay or non-supply.
- 9. Railway Passes:** No free Railway passes shall be issued by the Railway to the Contractor or any of his employee/worker.
- 10. Carriage of Materials:** No forwarding orders shall be issued by the DFCCIL/Railways for the conveyance of Contractor's materials, tools and plant by train which may be required for use in the works and the Contractor shall pay full freight charges at public tariff rates therefor.
- 11. Use of Ballast Trains:** The Railway/DFCCIL may agree to allow the Contractor use of the ballast or material trains under such conditions as shall be specially prescribed, provided that the Contractor shall pay for the use thereof charges calculated at public tariff rates on the marked carrying capacity of each vehicle subject to specified minimum charge per day or part of day and provided further that the Contractor shall indemnify the Railway/DFCCIL against any claims or damages arising out of the use or misuse thereof and against any liabilities under the Workmen's Compensation Act, 1923 or any statutory amendments thereto.
- 12. Representation on Works:** The Contractor shall, when he is not personally present on the site of the works place, keep a responsible agent at the works during working hours who shall on receiving reasonable notice, present himself to the Engineer and orders given by the Engineer or the Engineer's representative to the agent shall be deemed to have the same force as if they had been given to the Contractor. Before absenting himself, the Contractor shall furnish the name and address of his agent for the purpose of this clause and failure on the part of the Contractor to comply with this provision at any time will entitle the DFCCIL/Railways to rescind the contract under Clause 62 of these Conditions.
- 13. Relics and Treasures:** All gold, silver, oil, other minerals of any description, all precious stones, coins, treasures relics antiquities and other similar things which shall be found in or upon the site shall be the property of the DFCCIL/Railways and the Contractor shall duly preserve the same to the satisfaction of the DFCCIL/Railways and shall from time to time deliver the same to such person or persons as the DFCCIL/Railways may appoint to receive the same.
- 14. Excavated Material:** The Contractor shall not sell or otherwise dispose of or remove except for the purpose of this contract, the sand, stone, clay ballast, earth, trees, rock or other substances or materials which may be obtained from any excavation made for the purpose of the works or any building or produced upon the site at the time of delivery of the possession thereof but all the substances, materials, buildings and produce shall be the property of the DFCCIL/Railways provided that the Contractor may, with the permission of the Engineer, use the same for the purpose of the works either free of cost or pay the cost of the same at such rates as may be determined by the Engineer.

15. Indemnity by Contractors: The Contractor shall indemnify and save harmless the DFCCIL/Railways from and against all actions, suit, proceedings, losses, costs, damages, charges, claims and demands of every nature and description brought or recovered against the DFCCIL/Railways by reason of any act or omission of the Contractor, his agents or employees, in the execution of the works or in his guarding of the same. All sums payable by way of compensation under any of these conditions shall be considered as reasonable compensation to be applied to the actual loss or damage sustained, and whether or not any damage shall have been sustained.

16.(1) Security Deposit: The Security Deposit shall be 5% of the contract value. The Bid Security submitted by the Contractor with his tender will be retained /encashed by the DFCCIL/Railways as part of security for the due and faithful fulfillment of the contract by the Contractor. Provided further that, if Contractor submits the Cash or Term Deposit Receipt issued from a Scheduled commercial bank of India or irrevocable Bank Guarantee Bond from a Scheduled commercial bank of India, either towards the Full Security Depositor the Part Security Deposit equal to or more than Bid Security, the DFCCIL shall return the Bid Security, to the Contractor.

Balance of Security Deposit may be deposited by the Contractor in cash or Term Deposit Receipt issued from Scheduled commercial bank of India or irrevocable Bank Guarantee bond issued from Scheduled commercial bank of India, or may be recovered at the rate of **6%** of the bill amount till the full Security Deposit is recovered. Provided also that in case of defaulting Contractor, the DFCCIL may retain any amount due for payment to the Contractor on the pending "on account bills" so that the amounts so retained (including amount guaranteed through Performance Guarantee) may not exceed 10% of the total value of the contract.

The Irrevocable Bank Guarantee submitted towards Security deposit shall be initially valid up to the stipulated date of Maintenance period plus 60 days and shall be extended from time to time, depending upon extension of contract granted in terms of Clause 17A and 17B of the Standard General Conditions of Contract.

Note: Security Deposit deposited in cash by the Contractor or recovered from the running bills of a Contractor or submitted by contractor as Term Deposit Receipt(s) can be refunded/returned to the contractor, in lieu of irrevocable Bank Guarantee bond issued from scheduled commercial bank of India, to be submitted by him, for an amount equal to or more than the already available Security Deposit, provided however that, in a contract of value less than Rs. 50 Crore, such refund/ return of the already available Security Deposit is permitted up to two times and in a contract of value equal to or more than Rs. 50 Crore, such refund / return of the already available Security Deposit is permitted up to three times.

16.(2) (i) Refund of Security Deposit: Security Deposit mentioned in sub clause (1) above shall be returned to the Contractor along with or after, the following:

- (a) Final Payment of the Contract as per clause 51.(1) **and**
- (b) Execution of Final Supplementary Agreement or Certification by Engineer that DFCCIL has No Claim on Contractor **and**
- (c) Maintenance Certificate issued, on expiry of the maintenance period as per clause 50.(1), in case applicable.

16. (2) (ii) Forfeiture of Security Deposit: Whenever the contract is rescinded as a whole under clause 62 (1) of these conditions, the Security Deposit already with DFCCIL/Railways under the

contract shall be forfeited. However, in case the contract is rescinded in part or parts under clause 62 (1) of these conditions, the Security Deposit shall not be forfeited.

16.(3) No interest shall be payable upon the Bid Security and Security Deposit or amounts payable to the Contractor under the Contract, but Government Securities deposited in terms of Sub-Clause 16.(4)(b) of this clause will be payable with interest accrued thereon.

16.(4) Performance Guarantee

The procedure for obtaining Performance Guarantee is outlined below:

(a) The successful bidder shall have to submit a Performance Guarantee (PG) within 21 (Twenty one) days from the date of issue of Letter of Acceptance (LOA). Extension of time for submission of PG beyond 21 (Twenty one) days and upto 60 days from the date of issue of LOA may be given by the Authority who is competent to sign the contract agreement. However, a penal interest of 12% per annum shall be charged for the delay beyond 21 (Twenty one) days, i.e. from 22nd day after the date of issue of LOA. Further, if the 60th day happens to be a declared holiday in the concerned office of the DFCCIL, submission of PG can be accepted on the next working day.

In all other cases, if the Contractor fails to submit the requisite PG even after 60 days from the date of issue of LOA, the contract is liable to be terminated. In case contract is terminated DFCCIL shall be entitled to forfeit Bid Security and other dues payable to the contractor against that particular contract, subject to maximum of PG amount. In case a tenderer has not submitted Bid Security on the strength of their registration as a Startup recognized by Department of Industrial Policy and Promotion (DIPP) under Ministry of Commerce and Industry, DIPP shall be informed to this effect.

The failed Contractor shall be debarred from participating in re-tender for that work.

(b) The successful bidder shall submit the Performance Guarantee (PG) in any of the following forms, amounting to 5% of the original contract value:-

- (i) A deposit of Cash;
- (ii) Irrevocable Bank Guarantee;
- (iii) Government Securities including State Loan Bonds at 5% below the market value;
- (iv) Pay Orders and Demand Drafts tendered by any Scheduled Commercial Bank of India;
- (v) Guarantee Bonds executed or Deposits Receipts tendered by any Scheduled Commercial Bank of India;
- (vi) Deposit in the Post Office Saving Bank;
- (vii) Deposit in the National Savings Certificates;
- (viii) Twelve years National Defence Certificates;
- (ix) Ten years Defence Deposits;
- (x) National Defence Bonds and
- (xi) Unit Trust Certificates at 5% below market value or at the face value whichever is less. Also, FDR in favour of FA&CAO (free from any encumbrance) may be accepted.

(c) The Performance Guarantee shall be submitted by the successful bidder after the Letter of Acceptance (LOA) has been issued, but before signing of the contract agreement. This P.G. shall be initially valid upto the stipulated date of completion plus 60 days beyond that. In case, the time for completion of work gets extended, the Contractor shall get the validity of P.G.

extended to cover such extended time for completion of work plus 60 days.

- (d) The value of PG to be submitted by the Contractor is based on original contract value and shall not change due to subsequent variation(s) in the original contract value.
- (e) The Performance Guarantee (PG) shall be released after physical completion of the work based on 'Completion Certificate' issued by the competent authority stating that the Contractor has completed the work in all respects satisfactorily.
- (f) Whenever the contract is rescinded, the Performance Guarantee already submitted for the contract shall be encashed.
- (g) The Engineer shall not make a claim under the Performance Guarantee except for amounts to which the DFCCIL is entitled under the contract (not withstanding and/or without prejudice to any other provisions in the contract agreement) in the event of:
 - (i) Failure by the Contractor to extend the validity of the Performance Guarantee as described herein above, in which event the Engineer may claim the full amount of the Performance Guarantee.
 - (ii) Failure by the Contractor to pay DFCCIL any amount due, either as agreed by the Contractor or determined under any of the Clauses/Conditions of the Agreement, within 30 days of the service of notice to this effect by Engineer.
 - (iii) The Contract being determined or rescinded under clause 62 of these conditions.

17. Force Majeure Clause: If at any time, during the continuance of this contract, the performance in whole or in part by either party of any obligation under this contract shall be prevented or delayed by reason of any war, hostility, acts of public enemy, civil commotion, sabotage, serious loss or damage by fire, explosions, epidemics/pandemics, strikes, lockouts or acts of God (hereinafter, referred to events) provided, notice of the happening of any such event is given by either party to the other within 30 days from the date of occurrence thereof, neither party shall by reason of such event, be entitled to terminate this contract nor shall either party have any claim for damages against the other in respect of such non-performance or delay in performance, and works under the contract shall be resumed as soon as practicable after such event has come to an end or ceased to exist, and the decision of the Engineer as to whether the works have been so resumed or not shall be final and conclusive, PROVIDED FURTHER that if the performance in whole or in part of any obligation under this contract is prevented or delayed by reason of any such event for a period exceeding 120 days, either party may at its option terminate the contract by giving notice to the other party.

17A Extension of Time in Contracts: Subject to any requirement in the contract as to completion of any portion or portions of the works before completion of the whole, the Contractor shall fully and finally complete the whole of the works comprised in the contract (with such modifications as may be directed under conditions of this contract) by the date entered in the contract or extended date in terms of the following clauses:

- (i) **Extension due to Modification:** If any modifications have been ordered which in the opinion of the Engineer have materially increased the magnitude of the work, then such extension of the contracted date of completion may be granted as shall appear to the Engineer to be reasonable in the circumstances, provided moreover that the Contractor shall be responsible for requesting such extension of the date as may be considered necessary as soon as the cause thereof shall arise.
- (ii) **Extension for Delay not due to DFCCIL/Railways or Contractor:** If in the opinion of the Engineer, the progress of work has any time been delayed by any act or neglect of Railway/DFCCIL's employees or by other Contractor employed by the DFCCIL under Sub-

Clause (4) of Clause 20 of these Conditions or in executing the work not forming part of the contract but on which Contractor's performance necessarily depends or by reason of proceeding taken or threatened by or dispute with adjoining or to neighbouring owners or public authority arising otherwise through the Contractor's own default etc. or by the delay authorized by the Engineer pending arbitration or in consequences of the Contractor not having received in due time necessary instructions from the DFCCIL for which he shall have specially applied in writing to the Engineer or his authorized representative then upon happening of any such event causing delay, the Contractor shall immediately give notice thereof in writing to the Engineer within 15 days of such happening, but shall nevertheless make constantly his best endeavours to bring down or make good the delay and shall do all that may be reasonably required of him to the satisfaction of the Engineer to proceed with the works. The Contractor may also indicate the period for which the work is likely to be delayed and shall be bound to ask for necessary extension of time.

- (iii) **Extension for Delay due to DFCCIL/Railways:** In the event of any failure or delay by the DFCCIL to hand over the Contractor possession of the lands necessary for the execution of the works or to give the necessary notice to commence the works or to provide the necessary drawings or instructions or any other delay caused by the DFCCIL due to any other cause whatsoever, then such failure or delay shall in no way affect or vitiate the contract or alter the character thereof or entitle the Contractor to damages or compensation therefor, but in any such case, the DFCCIL may grant such extension or extensions of the completion date as may be considered reasonable.

The Contractor shall indicate the period for which the work is likely to be delayed and shall seek extension of time as may be considered necessary under clause 17A(i) or/and 17A(ii) or/and 17A(iii) above, as soon as the cause thereof shall arise and, in any case, not less than 15 days before the expiry of the date fixed for completion of the works. The Engineer shall consider the same and shall grant and communicate such extension of time as in his opinion is reasonable having regard to the nature and period of delay and the type and quantum of work affected thereby. No other compensation shall be payable for works so carried forward to the extended period of time; the same rates, terms and conditions of contract being applicable, as if such extended period of time was originally provided in the original contract itself.

The non-submission of request for extension or submission of request within less than 15 days before the expiry of the date fixed for completion of the works, shall make him ineligible for extension under these sub clauses, subject to final decision of Engineer.

(As per Advance Correction Slip No. 1, Letter No. 2022/CE-I/CT/GCC-2022/Policy Dated-14.07.2022)

17B Extension of Time with Liquidated Damages (LD) for delay due to Contractor: The time for the execution of the work or part of the works specified in the contract documents shall be deemed to be the essence of the contract and the works must be completed not later than the date(s) as specified in the contract. If the Contractor fails to complete the works within the time as specified in the contract for the reasons other than the reasons specified in Clause 17 and 17A, the DFCCIL may, if satisfied that the works can be completed by the Contractor within reasonable short time thereafter, allow the Contractor for further extension of time (Proforma at Annexure-VII) as the Engineer may decide. On such extension the DFCCIL will be entitled without prejudice to any other right and remedy available on that behalf, to recover from the Contractor as agreed damages and not by way of penalty for each week or part of the week, a sum calculated at the rate of Liquidated Damages as decided by Engineer, between 0.05% to 0.30% of contract value of the works for each week or part of the week.

For the purpose of this Clause, the contract value of the works shall be taken as value of work as per contract agreement including any supplementary work order/contract agreement issued.

Provided also, that the total amount of liquidated damages under this condition shall not exceed 5% of the contract value or of the total value of the item or groups of items of work for which a separate distinct completion period is specified in the contract.

Provided further, that if the DFCCIL is not satisfied that the works can be completed by the Contractor and in the event of failure on the part of the contractor to complete the work within further extension of time allowed as aforesaid, the DFCCIL shall be entitled without prejudice to any other right or remedy available in that behalf, to appropriate the contractor's Security Deposit and rescind the contract under Clause 62 of these Conditions, whether or not actual damage is caused by such default.

NOTE:

In a contract, where extension(s) of time have been allowed once under clause 17B, further request(s) for extension of time under clause 17A can also be considered under exceptional circumstances. Such extension(s) of time under clause 17A shall be without any Liquidated damages, but the Liquidated damages already recovered during extension(s) of time granted previously under clause 17B shall not be waived. However, Price variation during such extension(s) shall be dealt as applicable for extension(s) of time under clause 17B.

(As per Advance Correction Slip No. 1, Letter No. 2022/CE-I/CT/GCC-2022/Policy Dated-14.07.2022)

- 17C Bonus for Early Completion of Work:** In open tenders having advertised value more than Rs.50 crore and original period of completion 12 months or more, when there is no reduction in original scope of work by more than 10%, and no extension granted on either DFCCIL or Contractor's account, Contractor shall be entitled for a bonus of 1% for each 30 days early completion of work. The period of less than 30 days shall be ignored while working out bonus. The maximum bonus shall be limited to 5% of original contract value. The completion date shall be reckoned as the date of issuance of completion certificate by Engineer.
- 18.(1) Illegal Gratification:** Any bribe, commission, gift or advantage given, promised or offered by or on behalf of the Contractor or his partner or agent or servant or anyone on his behalf, to any officer or employee of the DFCCIL or to any person on his behalf in relation to obtaining or execution of this or any other contract with the DFCCIL shall, in addition to any criminal liability which he may incur, subject Contractor to the rescission of the contract and all other contracts with the DFCCIL and to the payment of any loss or damage resulting from such decision and the DFCCIL shall be entitled to deduct the amounts so payable from the Contractor's bills/Security Deposit or any other dues of Contractor with the Government of India.
- 18.(2)** The Contractor shall not lend or borrow from or have or enter into any monetary dealings or transactions either directly or indirectly with any employee of the DFCCIL and if he shall do so, the DFCCIL shall be entitled forthwith to rescind the contract and all other contracts with the DFCCIL. Any question or dispute as to the commission of any such offence or compensation payable to the DFCCIL under this Clause shall be settled by the General Manager of the DFCCIL, in such a manner as he shall consider fit & sufficient and his decision shall be final & conclusive. In the event of rescission of the contract under this Clause, the Contractor will not be paid any compensation whatsoever except payments for the work done upto the date of rescission.

EXECUTION OF WORKS

- 19.(1) Contractor's understanding:** It is understood and agreed that the Contractor has, by careful examination, satisfied himself as to the nature and location of the work, the conformation of

the ground, the character, quality and quantity of the materials to be encountered, the character of equipment and facilities needed preliminary to and during the progress of the works, the general and local conditions, the labour conditions prevailing therein and all other matters which can in any way affect the works under the contract.

19.(2) Commencement of Works: The Contractor shall commence the works within 15 days after the receipt by him of an order in writing to this effect from the Engineer and shall proceed with the same with due expedition and without delay

19.(3) Accepted Programme of Work: The Contractor who has been awarded the work shall as soon as possible but not later than 30 days after the date of receipt of the acceptance letter in respect of contracts with initial completion period of two years or less or not later than 90 days for other contracts have to submit the detailed programme of work indicating the time schedule of various items of works in the form of Bar Chart/PERT/CPM. He shall also submit the details of organisation (in terms of labour and supervisors), plant and machinery that he intends to utilize (from time to time) for execution of the work within stipulated date of completion. The programme of work amended as necessary by discussions with the Engineer, shall be treated as the agreed programme of the work for the purpose of this contract and the Contractor shall endeavor to fulfill this programme of work. The progress of work will be watched accordingly and the liquidated damages will be with reference to the overall completion date. Nothing stated herein shall preclude the Contractor in achieving earlier completion of item or whole of the works than indicated in the programme.

In Contracts for works of New Line/Gauge Conversion/Doubling/DFCCIL Electrification, finalized through Tenders having advertised value more than Rs.100 crores, the Contractor shall submit a detailed time programme to the Engineer within 30 days after issue of LOA. The program shall include the physical and Financial Progress vis-à-vis program and forecast cash flow adopting Project Management Software such as **Primavera/Sure Track/MS Project etc.** The program must identify the milestones, interface requirements and program reporting elements. The Contractor shall supply, free of cost one set of authorized software to the Engineer and the soft copy of structured program for the project. This shall be updated every month. The Contractor shall also submit a revised programme whenever the previous programme is inconsistent with actual progress. Each programme shall include:

The order in which the Contractor intends to carry out the Works, including the anticipated timing of each stage, Contractor's Documents, procurement, manufacture of Plant, delivery to Site, construction, erection and testing, each of these stages for work by each Subcontractor, if any, the sequence and timing of inspections and tests specified in the Contract, and a supporting report which includes:

a general description of the methods which the Contractor intends to adopt, and of the major stages, in the execution of the Works,

and details showing the Contractor's reasonable estimate for the number of each class of Contractor's Personnel & Equipment, required on the Site for each major stage.

Unless the Engineer, within 21 days after receiving a programme, gives notice to the Contractor stating the extent to which it does not comply with the Contract, the Contractor shall proceed in accordance with the programme, subject to his other obligations under the Contract. The Engineer shall be entitled to rely upon the programme when planning their activities.

If, at any time, the Engineer gives notice to the Contractor that a programme fails (to the extent stated) to comply with the Contract or to be consistent with actual progress and the Contractor's stated intentions, the Contractor shall submit a revised programme to the Engineer within 15 days in accordance with this Sub-Clause.

(As per Advance Correction Slip No. 1, Letter No. 2022/CE-I/CT/GCC-2022/Policy Dated-14.07.2022)

- 19.(4) Setting out of Works:** The Contractor shall be responsible for the correct setting out of all works in relation to original points, lines and levels of reference at his cost. The Contractor shall execute the work true to alignment, grade, levels and dimensions as shown in the drawing and as directed by the Engineer's representative and check these at frequent intervals. The Contractor shall provide all facilities like labour and instruments and shall co-operate with the Engineer's representative for checking of all alignment, grades, levels and dimensions. If, at any time, during the progress of the works any error appear or arise in any part of the work, the Contractor, on being required so to do by the Engineer's representative shall, at his own cost rectify such errors, to the satisfaction of the Engineer's representative.

Such checking shall not absolve the Contractor of his own responsibility of maintaining accuracy in the work. The Contractor shall carefully protect and preserve all bench marks, sight rails, pegs and other things used in setting out the work.

- 20.(1) Compliance to Engineer's Instructions:** The Engineer shall direct the sequence in which the several parts of the works shall be executed and the Contractor shall execute without delay all orders given by the Engineer from time to time; but the Contractor shall not be relieved thereby from responsibility for the due performance of the works in all respects.
- 20.(2) Alterations to be Authorized:** No alterations in or additions to or omissions or abandonment of any part of the works shall be deemed authorised, except under written instructions from the Engineer.
- 20.(3) Extra Works:** Should works over and above those included in the contract require to be executed at the site, the Contractor shall have no right to be entrusted with the execution of such works which may be carried out by another Contractor or Contractors or by other means at the option of the DFCCIL.
- 20.(4) Separate Contracts in Connection with Works:** The DFCCIL shall have the right to let other contracts in connection with the works. The Contractor shall afford other Contractors reasonable opportunity for the storage of their materials and the execution of their works and shall properly connect and coordinate his work with theirs. If any part of the Contractor's work depends upon proper execution or result upon the work of another Contractor(s), the Contractor shall inspect and promptly report to the Engineer any defects in such works that render it unsuitable for such proper execution and results. The Contractor's failure so-to inspect and report shall constitute an acceptance of the other Contractor's work as fit and proper for the reception of his work, except as to defects which may develop in the other Contractor's work after the execution of his work.
- 21. Instruction of Engineer's Representative:** Any instructions or approval given by the Engineer's representative to Contractor in connection with the works shall bind the Contractor as though it had been given by the Engineer provided always as follows:
- (a) Failure of the Engineer's representative to disapprove any work or materials shall not prejudice the power of the Engineer thereafter to disapprove such work or material and to order the

removal or breaking up thereof.

- (b) If the Contractor shall be dissatisfied by reason of any decision of the Engineer's representative, he shall be entitled to refer the matter to the Engineer who shall there upon confirm or vary such decision.

22.(1) Adherence to Specifications and Drawings: The site and the detailed drawings shall be made available to the contractor commensurate with the accepted programme of work submitted under clause 19(3). The whole of the works shall be executed in perfect conformity with the specifications and drawings of the contract. If Contractor performs any works in a manner contrary to the specifications or drawings or any of them and without such reference to the Engineer, he shall bear all the costs arising or ensuing therefrom and shall be responsible for all loss to the DFCCIL.

22.(2) Drawings and Specifications of the Works: The Contractor shall keep one copy of Drawings and Specifications at the site, in good order, and such contract documents as may be necessary, available to the Engineer or the Engineer's Representative.

22.(3) Ownership of Drawings and Specifications: All Drawings and Specifications and copies thereof furnished by the DFCCIL to the Contractor are deemed to be the property of the DFCCIL. They shall not be used on other works and with the exception of the signed contract set, shall be returned by the Contractor to the DFCCIL on completion of the work or termination of the Contract.

22.(4) Compliance with Contractor's Request for Details: The Engineer shall furnish with reasonable promptness, after receipt by him of the Contractor's request, additional instructions by means of drawings or otherwise, necessary for the proper execution of the works or any part thereof. All such drawings and instructions shall be consistent with the Contract Documents and reasonably inferable there from.

22.(5) Meaning and Intent of Specification and Drawings: If any ambiguity arises as to the meaning and intent of any portion of the Specifications and Drawings or as to execution or quality of any work or material, or as to the measurements of the works the decision of the Engineer thereon shall be final subject to the appeal (within 7 days of such decision being intimated to the Contractor) to the Chief Engineer who shall have the power to correct any errors, omissions, or discrepancies in aforementioned items and whose decision in the matter in dispute or doubt shall be final and conclusive.

23. Working during Night: The Contractor shall not carry out any work between sun-set and sun-rise without the previous permission of the Engineer. However, if the Engineer is satisfied that the work is not likely to be completed in time except by resorting to night work, he may order the same without confirming any right on the Contractor for claiming any extra payment for the same.

24. Damage to DFCCIL Property or Private Life and Property: The Contractor shall be responsible for all risk to the work and for trespass and shall make good at his own expense all loss or damage whether to the works themselves or to any other property of the DFCCIL

or the lives, persons or property of others from whatsoever cause in connection with the works until they are taken over by the DFCCIL, although all reasonable and proper precautions may have been taken by the Contractor. In case the DFCCIL shall be called upon to make good any costs, loss or damages, or to pay any compensation, including that payable under the provisions of the Workmen's Compensation Act or any statutory amendments thereof to any person or persons sustaining damages as aforesaid by reason of any act, or any negligence or omissions on the part of the Contractor; the amount of any costs or charges including costs and charges in connection with legal proceedings, which the DFCCIL may incur in reference thereto, shall be charged to the Contractor. The DFCCIL shall have the power and right to pay or to defend or compromise any claim of threatened legal proceedings or in anticipation of legal proceedings being instituted consequent on the action or default of the Contractor, to take such steps as may be considered necessary or desirable to ward off or mitigate the effect of such proceedings, charging to Contractor, as aforesaid; any sum or sums of money which may be paid and any expenses whether for reinstatement or otherwise which may be incurred and the propriety of any such payment, defence or compromise, and the incurring of any such expenses shall not be called in question by the Contractor.

- 25. Sheds, Storehouses and Yards:** The Contractor shall at his own expense provide himself with sheds, storehouses and yards in such situations and in such numbers as in the opinion of the Engineer is requisite for carrying on the works and the Contractor shall keep at each such sheds, storehouses and yards a sufficient quantity of materials and plant in stock as not to delay the carrying out of the works with due expedition and the Engineer and the Engineer's representative shall have free access to the said sheds, store houses and yards at any time for the purpose of inspecting the stock of materials or plant so kept in hand, and any materials or plant which the Engineer may object to shall not be brought upon or used in the works, but shall be forthwith removed from the sheds, storehouses or yards by the Contractor. The Contractor shall at his own expenses provide and maintain suitable mortar mills, soaking vats or any other equipments necessary for the execution of the works.
- 26. Provision of Efficient and Competent Staff at Work Sites by the Contractor:**
- 26.1** The Contractor shall place and keep on the works at all times efficient and competent staff to give the necessary directions to his workmen and to see that they execute their work in sound & proper manner and shall employ only such supervisors, workmen & labourers in or about the execution of any of these works as are careful and skilled in the various trades.
- 26.2** The Contractor shall at once remove from the works any agents, permitted sub-contractor, supervisor, workman or labourer who shall be objected to by the Engineer and if and whenever required by the Engineer, he shall submit a correct return showing the names of all staff and workmen employed by him.
- 26.3** In the event of the Engineer being of the opinion that the Contractor is not employing on the works a sufficient number of staff and workmen as is necessary for proper completion of the works within the time prescribed, the Contractor shall forthwith on receiving intimation to this effect deploy the additional number of staff and labour as specified by the Engineer within

seven days of being so required and failure on the part of the Contractor to comply with such instructions will entitle the DFCCIL to rescind the contract under Clause 62 of these conditions.

26A. Deployment of Qualified Engineers at Work Sites by the Contractor:

26A.1 The Contractor shall also employ qualified Graduate Engineer(s) or equivalent, or qualified Diploma Engineer(s), as prescribed in the tender documents.

26A.2 In case the Contractor fails to employ the Engineer, as aforesaid in Para 26A.1, he shall be liable to pay liquidated damages at the rates, as prescribed in the tender documents.

26A.3 No. of qualified Engineers required to be deployed by the Contractor for various activities contained in the works contract shall be specified in the tender documents as 'Special Condition of Contract'.

27.(1) Workmanship and Testing: The whole of the works and/or supply of materials specified and provided in the contract or that may be necessary to be done in order to form and complete any part thereof shall be executed in the best and most substantial workman like manner with materials of the best and most approved quality of their respective kinds, agreeable to the particulars contained in or implied by the specifications and as referred to in and represented by the drawings or in such other additional particulars, instructions and drawings given during the carrying on of the works and to the entire satisfaction of the Engineer according to the instructions and directions which the Contractors may from time to time receive from the Engineer. The materials may be subjected to tests by means of such machines, instruments and appliances as the Engineer may direct and wholly at the expense of the Contractor.

27.(2) Removal of Improper Work and Materials: The Engineer or the Engineer's Representative shall be entitled to order from time to time:

- (a) The removal from the site, within the time specified in the order, of any materials which in his opinion are not in accordance with the specifications or drawings.
- (b) The substitution of proper and suitable materials, and
- (c) the removal and proper re-execution, notwithstanding any previous tests thereof or on account payments therefor, of any work which in respect of materials or workmanship is not in his opinion in accordance with the specifications and in case of default on the part of the Contractor in carrying out such order, the DFCCIL shall be entitled to rescind the contract under Clause 62 of these conditions.
- (d) The provision of Construction and Demolition Waste Management Rule 2016 issued by Ministry of Environment Forest and Climate Change dated 29.03.2016 and published in the Gazette of India, Part – II, Section -3, Sub-section (ii) are binding upon the Contractor. Contractor shall implement these provisions at worksites, for which no extra payment will be payable.

28. Facilities for Inspection: The Contractor shall afford the Engineer and the Engineer's Representative every facility for entering in and upon every portion of the work at all hours for the purpose of inspection or otherwise and shall provide all labour, materials, planks, ladders, pumps, appliances and things of every kind required for the purpose and the Engineer and the Engineer's Representative shall at all times have free access to every part of the works and to all places at which materials for the works are stored or being prepared.

- 29. Examination of Work before Covering Up:** The Contractor shall give 7 days' notice to the Engineer or the Engineer's Representative whenever any work or materials are intended to be covered up in the earth, in bodies or walls or otherwise to be placed beyond the reach of measurements in order that the work may be inspected or that correct dimensions may be taken before being so covered, placed beyond the reach of measurement in default whereof, the same shall at the option of the Engineer or the Engineer's Representative be uncovered and measured at the Contractor's expense or no allowance shall be made for such work or materials.
- 30. Temporary Works:** All temporary works necessary for the proper execution of the works shall be provided and maintained by the Contractor and subject to the consent of the Engineer shall be removed by him at his expenses when they are no longer required and in such manner as the Engineer shall direct. In the event of failure on the part of the Contractor to remove the temporary works, the Engineer will cause them to be removed and cost as increased by supervision and other incidental charges shall be recovered from the Contractor. If temporary huts are provided by the Contractor on the DFCCIL land for labour engaged by him for the execution of works, the Contractor shall arrange for handing over vacant possession of the said land after the work is completed; if the Contractor's labour refuse to vacate, and have to be evicted by the DFCCIL, necessary expenses incurred by the DFCCIL in connection therewith shall be borne by the Contractor.
- 31.(1) Contractor to Supply Water for Works:** Unless otherwise provided in the Contract, the Contractor shall be responsible for the arrangements to obtain supply of water necessary for the works.
- 31.(2) Water Supply from DFCCIL/Railways System:** The DFCCIL/Railways may supply to the Contractor part or whole of the quantity of the water required for the execution of works from the Railway/DFCCIL's existing water supply system at or near the site of works on specified terms and conditions and at such charges as shall be determined by the DFCCIL/Railways and payable by the Contractor, provided that the Contractor shall arrange, at his own expense, to effect the connections and lay additional pipelines and accessories on the site and that the Contractor shall not be entitled to any compensation for interruption or failure of the water supply.
- 31.(3) Water Supply by DFCCIL/Railways Transport:** In the event of the DFCCIL/Railways arranging supply of water to the Contractor at or near the site of works by travelling water tanks or other means, the freight and other charges incurred thereby, including demurrage charges that may be levied, shall be paid by the Contractor in addition to the charges referred to in Sub-Clause (2) of the Clause provided that the Contractor shall not be entitled to any compensation for interruption or failure of the water supply.
- 31.(4)(a) Contractor to Arrange Supply of Electric Power for Works:** Unless otherwise provided in the contract, the Contractor shall be responsible for arrangements to obtain supply of Electric Power for the works.
- (b) Electric Supply from the DFCCIL/Railways System:** The DFCCIL/Railways may supply to the Contractor part or whole of the electric power wherever available and possible, required for execution of works from the DFCCIL's existing electric supply systems at or near the site of works on specified terms and conditions and such charges as shall be determined by the DFCCIL/Railways and payable by the Contractor provided the cost of arranging necessary connections to the Railway/DFCCIL's Electric Supply systems and laying of underground/overhead conductor, circuit protection, electric power meters, transmission structure, shall be borne by the Contractor and that the Contractor shall not be entitled to any compensation for interruption or failure of the Electric supply system.
- 32. Property in Materials and Plant:** The materials and plant brought by the Contractor upon

the site or on the land occupied by the Contractor in connection with the works and intended to be used for the execution thereof shall immediately be deemed to be the property of the DFCCIL/Railways. Such of them as during the progress of the works are rejected by the Engineer under Clause 25 of these conditions or are declared by him not to be needed for the execution of the works or such as on the grant of the certificate of completion remain unused shall immediately on such rejection, declaration or grant cease to be deemed the property of the DFCCIL/Railways and the Contractor may then (but not before) remove them from the site or the said land. This clause shall not in any way diminish the liability of the Contractor nor shall the DFCCIL/Railways be in any way answerable for any loss or damage which may happen to or in respect of any such materials or plant either by the same being lost, stolen, injured or destroyed by fire, tempest or otherwise.

- 33.(1) Tools, Plant and Materials Supplied by DFCCIL/Railways:** The Contractor shall take all reasonable care of all tools, plant and materials or other property whether of a like description or not belonging to the DFCCIL/Railways and committed to his charge for the purpose of the works and shall be responsible for all damage or loss caused by him, his agents, permitted sub-contractor, or his workmen or others while they are in his charge. The Contractor shall sign accountable receipts for tools, plants and materials made over to him by the Engineer and on completion of the works shall hand over the unused balance of the same to the Engineer in good order and repair, fair wear and tear excepted, and shall be responsible for any failure to account for the same or any damage done thereto.
- 33.(2) Hire of DFCCIL's Plant:** The DFCCIL may hire to the Contractor such plant as concrete mixers, compressors and portable engines for use during execution of the works on such terms as may be specified in the special conditions or in a separate agreement for Hire of Plant.
- 34.(1) Precaution During Progress of Works:** During the execution of works, unless otherwise specified, the Contractor shall at his own cost provide the materials for and execute all shoring, timbering and strutting works as is necessary for the stability and safety of all structures, excavations and works and shall ensure that no damage, injury or loss is caused or likely to be caused to any person or property.
- 34.(2) Roads and Water Courses:** Existing roads or water courses shall not be blocked cut through, altered, diverted or obstructed in any way by the Contractor, except with the permission of the Engineer. All compensations claimed for any unauthorized closure, cutting through, alteration, diversion or obstruction to such roads or water courses by the Contractor or his agent or his staff shall be recoverable from the Contractor's bills/Security Deposit or any other dues of Contractor with the Government of India.
- 34.(3) Provision of Access to Premises:** During progress of work in any street or thoroughfare, the Contractor shall make adequate provision for the passage of traffic, for securing safe access to all premises approached from such street or thoroughfare and for any drainage, water supply or means of lighting which may be interrupted by reasons of the execution of the works and shall react and maintain at his own cost barriers, lights and other safeguards as prescribed by the Engineer, for the regulation of the traffic, and provide watchmen necessary to prevent accidents. The works shall in such cases be executed night and day, if so ordered by the Engineer and with such vigour so that the traffic way be impeded for as short a time as possible.
- 34.(4) Safety of Public:** The Contractor shall be responsible to take all precautions to ensure the safety of the public whether on public or DFCCIL/Railways property and shall post such look out men as may, in the opinion of the Engineer, be required to comply with regulations appertaining to the work. Contractor shall ensure placement of barricading / partitions at the place of work to ensure safety of habitants of adjacent area, failing which Engineer may advise stoppage of work as per his discretion.

- 34.(5) Display Board:** The Contractor shall be responsible for displaying the details of works i.e. name of work, approximate cost, expected date of completion, name and address of the Contractor and address of Engineer on a proper steel Board of size not less than 1m x 1m.
- 35. Use of Explosives:** Explosives shall not be used on the works or on the site by the Contractor without the permission of the Engineer and then also only in the manner and to the extent to which such permission is given. Where explosives are required for the works, they shall be stored in a special magazine to be provided by and at the cost of the Contractor in accordance with the Explosive Rules. The Contractor shall obtain the necessary license for the storage and the use of explosives. All operations in which or for which explosives are employed shall be at the sole risk and responsibility of the Contractor and the Contractor shall indemnify the DFCCIL/Railways in respect thereof.
- 36.(1) Suspension of Works:** The Contractor shall on the order of the Engineer, suspend the progress of the works or any part thereof for such time or times and in such manner as the Engineer may consider necessary and shall during such suspension properly protect and secure the work so far as is necessary in the opinion of the Engineer. If such suspension is:
- (a) Provided for in the contract, or
 - (b) Necessary for the proper execution of the works or by the reason of weather conditions or by some default on the part of the Contractor, and or
 - (c) Necessary for the safety of the works or any part thereof, or
 - (d) Necessary for the safety of adjoining public or other property or safety of the public or workmen or those who have to be at the site, or
 - (e) Necessary to avoid disruption of traffic and utilities, as also to permit fast repair and restoration of any damaged utilities, or
 - (f) Due to instruction of The National Green Tribunal or any other statutory authority due to high level of pollution in the city of worksite.
- 36.(2)** The Contractor shall not be entitled to the extra costs, if any, incurred by him during the period of suspension of the works, but in the event of any suspension ordered by the Engineer for reasons other than aforementioned and when each such period of suspension exceeds 14 days, the Contractor shall be entitled to such extension of time for completion of the works as the Engineer may consider proper having regard to the period or periods of such suspensions and to such compensations as the Engineer may consider reasonable in respect of salaries or wages paid by the Contractor to his employees during the periods of such suspension.
- 36.(3) Suspension Lasting More than 3 Months:** If the progress of the works or any part thereof is suspended on the order of the Engineer for more than three months at a time, the Contractor may serve a written notice on the Engineer requiring permission within 15 days from the receipt thereof to proceed with the works or that part thereof in regard to which progress is suspended and if such permission is not granted within that time the Contractor by further written notice so served may, but is not bound to, elect to treat the suspension where it affects part only of the works as an omission of such part or where it affects the whole of the works, as an abandonment of the contract by the DFCCIL.
- 37. Rates for Items of Works:**
- (i) The rates, entered in the accepted Bill(s) of Quantities of the Contract are intended to provide for works duly and properly completed in accordance with the General and Special (if any) Conditions of the Contract and the Specifications and drawings together with such enlargements, extensions, diminutions, reductions, alterations or additions as may be ordered in terms of Clause 42 of these conditions and without prejudice to the generality thereof and

shall be deemed to include and cover superintendence and labour, supply, including full freight of materials, stores, patterns, profiles, moulds, fittings, centerings, scaffolding, shoring props, timber, machinery, barracks, tackle, roads, pegs, posts, tools and all apparatus and plant required on the works, except such tools, plant or materials as may be specified in the contract to be supplied to the Contractor by the DFCCIL, the erection, maintenance and removal of all temporary works and buildings, all watching, lighting, bailing, pumping and draining, all prevention of or compensation for trespass, all barriers and arrangements for the safety of the public or of employees during the execution of works, all sanitary and medical arrangements for labour camps as may be prescribed by the DFCCIL, the setting of all work and of the construction, repair and upkeep of all center lines, bench marks and level pegs thereon, site clearance, all fees duties, royalties, rent and compensation to owners for surface damage or taxes and impositions payable to local authorities in respect of land, structures and all material supplied for the work or other duties or expenses for which the Contractor may become liable or may be put to under any provision of law for the purpose of or in connection with the execution of the contract and all such other incidental charges or contingencies as may have been specially provided for in the Specifications.

However, if rates of existing GST or cess on GST for Works Contract is increased or any new tax /cess on Works Contract is imposed by Statute after the date of opening of tender but within the original date of completion/date of completion extended under clause 17 & 17A and the Contractor thereupon properly pays such taxes/cess, the Contractor shall be reimbursed the amount so paid.

Further, if rates of existing GST or cess on GST for Works Contract is decreased or any tax/cess on Works Contract is decreased / removed by Statute after the date of opening of tender, the reduction in tax amount shall be recovered from Contractor's bills/Security Deposit or any other dues of Contractor with the Government of India.

- 38. Demurrage and Wharfage Dues:** Demurrage charges calculated in accordance with the scale in force for the time being on the DFCCIL and incurred by the Contractor failing to load or unload any goods or materials within the time allowed by the DFCCIL for loading as also wharfage charges, of materials not removed in time, as also charges due on consignments booked by or to him shall be paid by the Contractor, failing which such charges shall be debited to the Contractor's account in the hands of the DFCCIL and shall be deducted from any sums which may become due to him in terms of the contracts.

39.(1) Rates for Extra Item(s) of Works:

- (a) Standard Schedule of Rates (SSOR) Items: Any item of work carried out by the Contractor on the instructions of the Engineer which is not included in the accepted Bill(s) of Quantities but figures in the Standard Schedule of Rates (SSOR), shall be executed at the rates set forth in the "Standard Schedule of Rates (SSOR)" modified by the tender percentage as accepted in the contract for that chapter of Standard Schedule of Rates (SSOR).

For item(s) not covered in this sub clause, the rate shall be decided as agreed upon between the Engineer and the Contractor before the execution of such items of work as per sub clause

- (b) Other Items: For any item of work to be carried out by the Contractor but not included in the accepted Bill(s) of Quantities and also not covered under sub clause (a) above, the Contractor shall be bound to notify the Engineer at least seven days before the necessity arises for the execution of such items of works that the accepted Bill(s) of Quantities does not include rate or rates for such extra work involved. The rates payable for such items shall be decided at the meeting to be held between the Engineer and Contractor, in as short a period as possible after

the need for the special item has come to the notice. In case the Contractor fails to attend the meeting after being notified to do so or in the event of no settlement being arrived at, the Railway shall be entitled to execute the extra works by other means and the Contractor shall have no claim for loss or damage that may result from such procedure.

The assessment of rates for extra item(s) shall be arrived at based on the prevailing market rates of labour, machinery & materials and by taking guidance from the following documents in order of priority:

- i. Analysis of Rates for “Unified Standard Schedule of Rates of Indian Railways (USSOR)”
- ii. Analysis of Rates for “Delhi Schedule of Rates issued by CPWD (DSR)”
- iii. Market Analysis

(As per Advance Correction Slip No. 1, Letter No. 2022/CE-I/CT/GCC-2022/Policy Dated-14.07.2022)

.39.(2) Provided that if the Contractor commences work or incurs any expenditure in regard thereto before the rates as determined and agreed upon as lastly hereuntofore-mentioned, then and in such a case the Contractor shall only be entitled to be paid in respect of the work carried out or expenditure incurred by him prior to the date of determination of the rates as aforesaid according to the rates as shall be fixed by the Engineer. However, if the Contractor is not satisfied with the decision of the Engineer in this respect, he may appeal to the Chief Engineer within 30 days of getting the decision of the Engineer, supported by analysis of the rates claimed. The Chief Engineer's decision after hearing both the parties in the matter would be final and binding on the Contractor and the DFCCIL.

40.(1) Handing over of Works: The Contractor shall be bound to hand over the works executed under the contract to the DFCCIL complete in all respects to the satisfaction of the Engineer. The Engineer shall determine the date on which the work is considered to have been completed, in support of which his certificate shall be regarded as sufficient evidence for all purposes. The Engineer shall determine from time to time, the date on which any particular section of the work shall have been completed, and the Contractor shall be bound to observe any such determination of the Engineer.

40.(2) Clearance of Site on Completion: On completion of the works, the Contractor shall clear away and remove from the site all constructional plant, surplus materials, rubbish and temporary works of every kind and leave the whole of the site and works clean and in a workman like condition to the satisfaction of the Engineer. No final payment in settlement of the accounts for the works shall be paid, held to be due or shall be made to the, Contractor till, in addition to any other condition necessary for final payment, site clearance shall have been affected by him, and such clearance may be made by the Engineer at the expense of the Contractor in the event of his failure to comply with this provision within 7 days after receiving notice to that effect. Should it become necessary for the Engineer to have the site cleared at the expenses of the Contractor, the DFCCIL shall not be held liable for any loss or damage to such of the Contractor's property as may be on the site and due to such removal there from which removal may be affected by means of public sales of such materials and property or in such a way as deemed fit and convenient to the Engineer.

40A Offloading of Part(s) of Work: At the final stage of completion/ commissioning of work, in case the contractor fails to complete the final part(s) of the work and the value of such part(s) of the work is limited to 5% of the original contract value, the Engineer may allow/decide for

offloading of such part(s) of works, either after the Contractor's request in writing to do so or after serving a 14 (Fourteen) days suo-moto notice (as per annexure- VIIA), if the Engineer is of the opinion that :-

- (i) Such Offloading of works (up to 5% of original contract value) would enable successful completion of contract/work,
- (ii) Termination/ Part termination of the contract at this stage is not be in the interest of the DFCCIL/work;, and
- (iii) The anticipated additional cost for execution of such works through other mode would not be substantial and can be recovered from the pending dues of the contractor;

The Contractor shall be informed, in due course, by the Engineer of the mode and cost of execution of such offloaded work through other agency(ies) (as per annexure- VIIB). The extra expenditure so incurred in execution of the offloaded work, shall be recovered from subsequent Bill(s) or any other dues of the Contractor, but not exceeding the value of Performance Guarantee available in the contract. There shall be no other repercussion of such offloading on execution of the balance contract. The Contractor shall have no claim on account of above mentioned offloading of works.

VARIATIONS IN EXTENT OF CONTRACT

- 41. Modification to Contract to be in Writing:** In the event of any of the provisions of the contract required to be modified after the contract documents have been signed, the modifications shall be made in writing and signed by the DFCCIL and the Contractor and no work shall proceed under such modifications until this has been done. Any verbal or written arrangement abandoning, modifying, extending, reducing or supplementing the contract or any of the terms thereof shall be deemed conditional and shall not be binding on the DFCCIL unless and until the same is incorporated in a formal instrument and signed by the DFCCIL and the Contractor, and till then the DFCCIL shall have the right to repudiate such arrangements.
- 42.(1) Powers of Modification to Contract:** The Engineer on behalf of the DFCCIL/Railways shall be entitled by order in writing to enlarge or extend, diminish or reduce the works or make any alterations in their design, character position, site, quantities, dimensions or in the method of their execution or in the combination and use of materials for the execution thereof or to order any additional work to be done or any works not to be done and the Contractor will not be entitled, to any compensation for any increase/reduction in the quantities of work but will be paid only for the actual amount of work done and for approved materials supplied against a specific order.
- 42.(2)(i) Unless otherwise specified in the special conditions of the contract, the accepted variation in quantity of each individual item of the contract would be upto 25% of the quantity originally contracted, except in case of foundation work (in which no variation limit shall apply). However, the rates for the increased quantities shall be as per sub- para (iii) below.
- (ii) The Contractor shall be bound to carry out the work at the agreed rates and shall not be entitled to any claim or any compensation whatsoever upto the limit of 25% variation in quantity of individual item of works.

- (iii) In case an increase in quantity of an individual item by more than 25% of the agreement quantity is considered unavoidable, then same shall be executed at following rates
 - a. Quantities operated in excess of 125% but upto 140% of the agreement quantity of the concerned item, shall be paid at 98% of the rate awarded for that item in that particular tender;
 - b. Quantities operated in excess of 140% but upto 150% of the agreement quantity of the concerned item shall be paid at 96% of the rate awarded for that item in that particular tender;
 - c. Variation in quantities of individual items beyond 150% will be avoided and would be permitted only in exceptional unavoidable circumstances and shall be paid at 96% of the rate awarded for that item in that particular tender.
 - d. Variation to quantities of Minor Value Item:
The limit for varying quantities for minor value items shall be 100% (as against 25% prescribed for other items). A minor value item for this purpose is defined as an item whose original agreement value is less than 1 % of the total original contract value.
 - d.(i) Quantities operated upto and including 100% of the agreement quantity of the concerned minor value item, shall be paid at the rate awarded for that item in that particular tender;
 - d.(ii) Quantities operated in excess of 100% but upto 200% of the agreement quantity of the concerned minor value item, shall be paid at 98% of the rate awarded for that item in that particular tender;
 - d.(iii) Variation in quantities of individual minor value item beyond 200% will be avoided and would be permitted only in exceptional unavoidable circumstances and shall be paid at 96% of the rate awarded for that item in that particular tender.
- (iv) In case of earthwork items, the variation limit of 25% shall apply to the gross quantity of earthwork items and variation in the quantities of individual classifications of soil shall not be subject to this limit.
- (v) As far as Standard Schedule of Rates (SSOR) items are concerned, the variation limit of 25% would apply to the value of SSOR schedule(s) as a whole and not on individual SSOR items. However, in case of Non Standard Schedule of Rates (SSOR) items, the limit of 25% would apply on the individual items irrespective of the manner of quoting the rate (single percentage rate or individual item rate).

42.(3) Valuation of Variations: The enlargements, extensions, diminution, reduction, alterations or additions referred to in Sub-Clause (2) of this Clause shall in no degree affect the validity of the contract; but shall be performed by the Contractor as provided therein and be subject to the same conditions, stipulations and obligations as if they had been originally and expressively included and provided for in the Specifications and Drawings and the amounts to be paid therefor shall be calculated in accordance with the accepted Bill(s) of Quantities. Any extra item(s)/quantities of work falling outside the purview of the provisions of Sub-Clause (2) above shall be paid for at the rates determined under Clause-39 of these Conditions.

CLAIMS

43.(1) Quarterly Statement of Claims: The Contractor shall prepare and furnish to the Engineer once in every quarter commencing from the month following the month of issue of Letter of Acceptance, an account giving full and detailed particulars of all claims for any additional expenses to which the Contractor may consider himself entitled to and of all extra or additional works ordered by the Engineer which he has executed during the preceding quarter and no claim for payment for such work will be considered which has not been included in such particulars.

43.(2) Signing of "No Claim" Certificate : The Contractor shall not be entitled to make any claim whatsoever against the DFCCIL under or by virtue of or arising out of this contract, nor shall the DFCCIL entertain or consider any such claim, if made by the Contractor, after he shall have signed a "No Claim" Certificate in favour of the DFCCIL in such form as shall be required by the DFCCIL after the works are finally measured up. The Contractor shall be debarred from disputing the correctness of the items covered by "No Claim" Certificate or demanding a clearance to arbitration in respect thereof.

MEASUREMENTS, CERTIFICATES AND PAYMENTS

44. Quantities in Bill(s) of Quantities Annexed to Contract: The quantities set out in the accepted Bill(s) of Quantities with items of works quantified are the estimated quantities of the works and they shall not be taken as the actual and correct quantities of the work to be executed by the Contractor in fulfillment of his obligations under the contract.

45(i). Measurement of Works by DFCCIL: The Contractor shall be paid for the works at the rates in the accepted Bill(s) of Quantities and for extra works at rates determined under Clause 39 of these Conditions on the measurements taken by the Engineer or the Engineer's representative in accordance with the rules prescribed for the purpose by the DFCCIL. The quantities for items the unit of which in the accepted Bill(s) of Quantities is 100 or 1000 shall be calculated to the nearest whole number, any fraction below half being dropped and half and above being taken as one; for items the unit of which in the accepted Bill(s) of Quantities is single, the quantities shall be calculated to two places of decimals. Such measurements will be taken of the work in progress from time to time and at such intervals as in the opinion of the Engineer shall be proper having regard to the progress of works. The date and time on which 'on account' or 'final' measurements are to be made shall be communicated to the Contractor who shall be present at the site and shall sign the results of the measurements (which shall also be signed by the Engineer or the Engineer's representative) recorded in the official measurements book as an acknowledgement of his acceptance of the accuracy of the measurements. Failing the Contractor's attendance, the work may be measured up in his absence and such measurements shall, notwithstanding such absence, be binding upon the Contractor whether or not he shall have signed the measurement books provided always that any objection made by him to measurement shall be duly investigated and considered in the manner set out below:

- (a) It shall be open to the Contractor to take specific objection to any recorded measurements or Classification on any ground within seven days of the date of such measurements. Any re-measurement taken by the Engineer or the Engineer's representative in the presence of the Contractor or in his absence after due notice has been given to him in consequence of objection made by the Contractor shall be final and binding on the Contractor and no claim whatsoever shall thereafter be entertained regarding the accuracy and Classification of the measurements.
- (b) If an objection raised by the Contractor is found by the Engineer to be incorrect the Contractor shall be liable to pay the actual expenses incurred in measurements.

45(ii). Measurement of Works by Contractor's Authorized Representative (in case the contract provides for the same):

- (a) The Contractor shall be paid for the works at the rates in the accepted Bill(s) of Quantities and for extra works at rates determined under Clause 39 of these Conditions on the measurements taken by the Contractor's authorized Engineer in accordance with the rules prescribed for the purpose by the DFCCIL. The quantities for items the unit of which in the accepted Bill(s) of Quantities is 100 or 1000 shall be calculated to the nearest whole number,

any fraction below half being dropped and half and above being taken as one; for items the unit of which in the accepted Bill(s) of Quantities is single, the quantities shall be calculated to two places of decimals. Such measurements will be taken of the work in progress from time to time. The date and time on which 'on account' or 'final' measurements are to be made shall be communicated to the Engineer.

The date and time of test checks shall be communicated to the Contractor who shall be present at the site and shall witness the test checks, failing the Contractor's attendance the test checks may be conducted in his absence and such test checks shall notwithstanding such absence be binding upon Contractor provided always that any objection made by Contractor to test check shall be duly investigated and considered in the manner set out below:

- (i) It shall be open to the Contractor to take specific objection to test checks of any recorded measurement within 7 days of date of such test checks. Any re-test check done by the concerned DFCCIL's authority in the presence of the Contractor or in his absence after due notice given to him in consequent of objection made by the Contractor shall be final and binding on the Contractor and no claim whatsoever shall thereafter be entertained regarding the accuracy and classification of the measurements.
 - (ii) If an objection raised by the Contractor is found by the Engineer to be incorrect the Contractor shall be liable to pay the actual expenses incurred in measurements.
- (b) Incorrect measurement, actions to be taken:** If in case during test check or otherwise, it is detected by the Engineer that agency has claimed any exaggerated measurement or has claimed any false measurement for the works which have not been executed; amounting to variation of 5% or more of claimed gross bill amount, action shall be taken as following:
- (i) On first occasion of noticing exaggerated/ false measurement, Engineer shall recover liquidated damages equal to 10% of claimed gross bill value.
 - (ii) On any next occasion of noticing any exaggerated/false measurement, DFCCIL shall recover liquidated damages equal to 15% of claimed gross bill value. In addition, the facility of recording of measurements by Contractor as well as release of provisional payment shall be withdrawn. Once withdrawn, measurements shall be done by DFCCIL as per clause 45(i) above.

46.(1) "On-Account " Payments: The Contractor shall be entitled to be paid from time to time by way of "On-Account" payment only for such works as in the opinion of the Engineer he has executed in terms of the contract. All payments due on the Engineer's/Engineer's Representative's certificates of measurements or Engineer's certified "Contractor's authorized Engineer's measurements" shall be subject to any deductions which may be made under these presents and shall further be subject to, unless otherwise required by Clause 16 of these Conditions, a retention of six percent by way of Security Deposits, until the amount of Security Deposit by way of such retentions shall amount to 5% of the total value of the contract provided always that the Engineer may by any certificate make any correction or modification in any previous certificate which shall have been issued by him and that the Engineer may withhold any certificate, if the works or any part thereof are not being carried out to his satisfaction.

46.(2) Rounding off Amounts: The total amount due on each certificate shall be rounded off to the nearest rupee, i.e. sum less than 50 paise shall be omitted and sums of 50 paise and more upto ₹ 1 will be reckoned as ₹ 1.

46.(3) On Account Payments not Prejudicial to Final Settlement: "On-Account" payments made to the Contractor shall be without prejudice to the final making up of the accounts (except

where measurements are specifically noted in the Measurement Book as "Final Measurements" and as such have been signed by the Contractor and Engineer/Engineer's Representative) and shall in no respect be considered or used as evidence of any facts stated in or to be inferred from such accounts nor of any particular quantity of work having been executed nor of the manner of its execution being satisfactory.

46.(4) If payment(s) of Advances are applicable in the contract, as mentioned in the Tender Documents, DFCCIL shall make payment(s) of Interest bearing advances, on the request of contractor. The payment and recovery of such Advances shall be made as under:

(a): Mobilisation Advance – (Not applicable for this tender)

This shall be limited to 10% of the Contract value and shall be paid in 2 stages :

Stage 1– 5% of Contract Value on signing of the contract agreement.

Stage 2 – 5% on mobilization of site-establishment, setting up offices, bringing in equipment and actual commencement of work.

The stage 1 of advance shall be payable immediately after signing of contract agreement.

The stage 2 of advance shall be payable at the time of mobilisation, only after submission of an utilization certificate by the contractor that the Stage 1 advance has been properly utilized in the contract.

These Advances shall be payable against irrevocable guarantee (Bank Guarantee, FDRs) from a scheduled commercial bank of India of at least 110% of the value of the sanctioned advance amount (covering principal plus interest).

(b): Advance Against Machinery and Equipment – (Not applicable for this tender)

This advance shall be limited to a maximum of 10% of the contract value against new Machinery & Equipment, involving substantial outlay, brought to site and essentially required for the work. This advance shall not exceed 75% of the purchase price of such Equipment and shall be payable when Equipment is hypothecated to the DFCCIL by a suitable bond or alternatively covered by an irrevocable Bank Guarantee from a scheduled commercial bank of India for full cost of the Plant & Equipment in a form acceptable to Railways/DFCCIL. The Plant & Equipment shall be insured for the full value and for the entire period, they are required for the work. This Plant & Equipment shall not be removed from the site of work without prior written permission of the Engineer. No advance should be given against old Plant & Machinery.

The advances under sub clause (a) and (b) above, are subject to the following conditions

-

- (i) The full amount of Advances shall be recovered from contractor dues. The recovery shall commence when the value of contract executed reaches 15% of original contract value and shall be completed when the value of work executed reaches 85% of the original contract value. The installments on each "on account bill" will be on pro-rata basis.

Interest shall be recovered on the advance outstanding for the period commencing from the date of payment of advance till date of particular on-account bill (through which recovery of principal is effected) and adjusted fully against on-account bill along with pro-rata principal recovery. In the event of any short-fall, the same shall be carried forward to the next on-account bill and shall attract interest.

- (ii) The advances shall be used by the Contractor for the purpose of the Contract, and for the purpose for which they are paid. Under no circumstances, shall the advances be diverted for other purposes. Any such diversion shall be construed as a breach of the Contract and the Contractor shall be asked to return the advance at once and pay interest at 15% per annum till the advance is recovered back from him. The Contractor shall return the advance and pay the interest in one go without demur. The Contractor, if required by the Engineer shall provide the details of utilisation of Mobilisation advance.
- (iii) If the Contractor is found to have contravened the provision, it will constitute a breach of contract and DFCCIL shall be entitled to terminate the contract and forfeit his Performance Guarantee as well as Security Deposit.
- (iv) In cases, where the Contract is rescinded as per clause 62 of the contract or short closed under any other condition(s) of the contract, without making full recovery of advances and accrued interest thereon, by the DFCCIL, such balance of advances and accrued interest thereon shall immediately become due and payable by the Contractor to the DFCCIL. The same shall be recovered from any due of Contractor with the Government of India.

46.(5) Manner of Payment: Unless otherwise specified payments to the Contractor will be transferred electronically to his bank account.

46A. Price Variation Clause (PVC):

46A.1 Applicability: Price Variation Clause (PVC) shall be applicable only in tender having advertised value above **Rs. 2 Crores**. Provided further that, in a contract where PVC is applicable, following shall be outside the purview of price adjustments (i.e. shall be excluded from the gross value of the work for the purpose of price variation) :

- a) Materials supplied by DFCCIL to the Contractors, either free or at fixed rate;
- b) Any extra item(s) included in subsequent variation falling outside the purview of the Bill(s) of Quantities of tender, under clause 39. (1)(b) of these Standard General Conditions, unless applicability of PVC and 'Base Month' has been specially agreed, while fixing the rates of such extra item(s).

(As per Advance Correction Slip No. 1, Letter No. 2022/CE-I/CT/GCC-2022/Policy Dated-14.07.2022)

46A.2 Base Month: The Base Month for 'Price Variation Clause' shall be taken as the one month prior to closing of tender, unless otherwise stated elsewhere. The quarter for applicability of PVC shall commence from the month following the Base month. The Price Variation shall be based on the average Price Index of the quarter under consideration.

46A.3 Validity:

Rates accepted by DFCCIL Administration shall hold good till completion of work and no additional individual claim shall be admissible except:

- (a) Payment/recovery for increase/decrease in GST on works contract or imposition/removal of any tax/cess on Works Contract as per Clause 37,
- (b) Payment/recovery for overall market situation as per Price Variation Clause given hereunder.

46A.4 Components of various items in a contract on which variation in prices be admissible, shall be steel, cement, ferrous material, non-ferrous material, insulators, zinc and other materials, labour, plant & machinery, fuel, explosives, detonators etc. Adjustment for variation in prices of these items shall be determined in the manner prescribed.

46A.5 No price variation shall be admissible for fixed components.

46A.6 The percentages of various components in various type of works shall be as specified for all item (s)/ Bill(s) of Quantities in tender document and the same shall be fixed as per table & classifications given below:

(I). For Civil Engineering Works

S N	Classification		1A, 2 & 3A	4A	5A	6A	7	8A	9A	1B, 3B, 4B, 5B, 6B 8B & 9B	1C, 3C, 4C, 5C, 6C, 8C & 9C	3D, 4D, 5D, 6D, 8D & 9D	3E, 4E, 5E, 6E, 8E & 9E
	Components	*											
1	Fixed	*	15	15	15	15	15	15	15	15	15	15	15
2	Labour	L _c	20	25	30	20	50	20	20	0	0	10	25
3	Steel	S _c	0	0	0	0	0	0	0	85	0	50	0
4	Cement	C _c	0	0	15	0	0	0	0	0	85	0	0
5	Plant Machinery & Spares	PM _c	30	15	5	20	15	20	30	0	0	10	30
6	Fuel & Lubricants	F _c	25	15	5	15	15	20	15	0	0	10	20
7	Other materials	M _c	10	15	30	30	5	25	20	0	0	5	10
8	Detonators & Explosive	E _c	0	15	0	0	0	0	0	0	0	0	0
Total			100	100	100	100	100	100	100	100	100	100	100

* It shall not be considered for any price variation.

The classification mentioned in the table above represents following type of item(s) in the work(s) –

1 Earthwork in Formation

1A All Item(s) excluding 1B or/and 1C

1B Item(s) for supply of Steel

1C Item(s) for supply of Cement

2 Ballast Supply Works

3 Tunnelling Works (Without Explosives)

3A All Item(s) excluding 3B or/and 3C or/and 3D or/and 3E

3B Item(s) for supply of Steel

3C Item(s) for supply of Cement or/and Grout

3D Item(s) for Fabrication & Erection of Structures including supply of Steel

3E Item(s) for Fabrication & Erection of Structures excluding supply of Steel.

4 Tunnelling Works (With explosives)

4A All Item(s) excluding 4B or/and 4C or/and 4D or/and 4E

4B Item(s) for supply of Steel

4C Item(s) for supply of Cement or/and Grout

- 4D Item(s) for Fabrication & Erection of Structures including supply of Steel
- 4E Item(s) for Fabrication & Erection of Structures excluding supply of Steel.

5 Building Works

- 5A All Item(s) excluding 5B or/and 5C or/and 5D or/and 5E
- 5B Item(s) for supply of Steel
- 5C Item(s) for supply of Cement
- 5D Item(s) for Fabrication & Erection of Structures including supply of Steel
- 5E Item(s) for Fabrication & Erection of Structures excluding supply of Steel.

6 Bridges & Protection work

- 6A All Item(s) excluding 6B or/and 6C or/and 6D or/and 6E
- 6B Item(s) for supply of Steel
- 6C Item(s) for supply of Cement
- 6D Item(s) for Fabrication, Assembly, Erection& Launching of Girders including supply of Steel
- 6E Item(s) for Fabrication, Assembly, Erection & Launching of Girders excluding supply of Steel

7 Permanent Way linking

8 Platform, Passenger Amenities

- 8A All Item(s) excluding 8B or/and 8C or/and 8D or/and 8E
- 8B Item(s) for supply of Steel item/fittings
- 8C Item(s) for supply of Cement Item
- 8D Item(s) for Fabrication & Erection of Structures including supply of Steel
- 8E Item(s) for Fabrication & Erection of Structures excluding supply of Steel

9 Any Other Works not covered in Classification 1 to 8

- 9A All Item(s) excluding 9B or/and 9C or/and 9D or/and 9E
- 9B Item(s) for supply of Steel
- 9C Item(s) for supply of Cement or/and Grout
- 9D Item(s) for Fabrication & Erection of Structures including supply of Steel
- 9E Item(s) for Fabrication & Erection of Structures excluding supply of Steel

46A.7 Formulae: The Amount of variation in prices in various components (labour, material etc.) shall be worked out by the following formulae:

- (i)
$$L = \frac{(W \text{ or } W_{SF} \text{ or } W_F \text{ or } W_{SFL} \text{ or } W_{FL}) \times (L_Q - L_B) \times L_C}{L_B \times 100}$$
- (ii)
$$M = \frac{(W \text{ or } W_{SF} \text{ or } W_F \text{ or } W_{SFL} \text{ or } W_{FL}) \times (M_Q - M_B) \times M_C}{M_B \times 100}$$
- (iii)
$$F = \frac{(W \text{ or } W_{SF} \text{ or } W_F \text{ or } W_{SFL} \text{ or } W_{FL}) \times (F_Q - F_B) \times F_C}{F_B \times 100}$$
- (iv)
$$E = \frac{(W) \times (E_Q - E_B) \times E_C}{E_B \times 100}$$
- (v)
$$PM = \frac{(W \text{ or } W_{SE} \text{ or } W_F \text{ or } W_{SFL} \text{ or } W_{FL}) \times (PM_Q - PM_B) \times PM_C}{PM_B \times 100}$$
- (vi)
$$S = \frac{(W \text{ or } W_S \text{ or } W_{SF}) \times (S_Q - S_B) \times S_C}{S_B \times 100}$$

$$(vii) C = \frac{S_B \times 100}{C_B \times 100} \times \frac{(W \text{ or } W_C) \times (C_Q - C_B) \times C_C}{C_B \times 100}$$

(As per Advance Correction Slip No. 1, Letter No. 2022/CE-I/CT/GCC-2022/Policy Dated-14.07.2022)

(II) For DFCCIL Electrification Works: Deleted

(III) SIGNALING & TELECOMMUNICATION WORKS: Deleted

46A.10 Price Variation during Extended Period of Contract

The price adjustment as worked out above, i.e. either increase or decrease shall be applicable upto the stipulated date of completion of work including the extended period of completion where such extension has been granted under Clause 17A of the Standard General Conditions of Contract. However, where extension of time has been granted due to Contractor's failure under Clause 17B of the Standard General Conditions of Contract, price adjustment shall be done as follows:

- a. In case the indices increase above the indices applicable to the last month of original completion period or the extended period under Clause 17A, the price adjustment for the period of extension granted under Clause 17B shall be limited to the amount payable as per the Indices applicable to the last month of the original completion period or the extended period under Clause 17A of the Standard General Conditions of Contract; as the case may be.
- b. In case the indices fall below the indices applicable to the last month of original/ extended period of completion under Clause 17A, as the case may be; then the lower indices shall be adopted for the price adjustment for the period of extension under Clause 17B of the Standard General Conditions of Contract.

47. Maintenance of Works: The Contractor shall at all times during the progress and continuance of the works and also for the period of maintenance specified in the Tender Form after the date of issue of the certificate of completion by the Engineer or any other earlier date subsequent to the completion of the works that may be fixed by the Engineer, be responsible for and effectively maintain and uphold in good substantial, sound and perfect condition all and every part of the works and shall make good from time to time and at all times as often as the Engineer shall require, any damage or defect that may during the above period arise in or be discovered or be in any way connected with the works, provided that such damage or defect is not directly caused by errors in the contract documents, act of providence or insurrection or civil riot, and the Contractor shall be liable for and shall pay and make good to the DFCCIL or other persons legally entitled thereto whenever required by the Engineer so to do, all losses, damages, costs and expenses they or any of them may incur or be put or be liable to by reasons or in consequence of the operations of the Contractor or of his failure in any respect.

48.(1) Certificate of Completion of Works: As soon as in the opinion of the Engineer, the work has been completed and has satisfactorily passed any final test or tests that may be prescribed, the Engineer shall issue a certificate of completion duly indicating the date of completion in respect of the work and the period of maintenance of the work shall commence from the date of completion mentioned in such certificate. The certificate, inter alia, should mention that the work has been completed in all respects and that all the contractual obligations have been fulfilled by the Contractor and that there is no due from the Contractor to DFCCIL/Railways against the contract concerned.

The Engineer may also issue such a certificate indicating date of completion with respect to

any part of the work (before the completion of the whole of work), which has been both completed to the satisfaction of the Engineer and occupied or used by the Railways /DFCCIL. When any such certificate is given in respect of part of a work, such part shall be considered as completed and the period of maintenance of such part shall commence from the date of completion mentioned in the completion certificate issued for that part of the work.

- 48.(2) Contractor not Absolved by Completion Certificate:** The Certificate of Completion in respect of the works referred to in Sub-Clause (1) of this Clause shall not absolve the Contractor from his liability to make good any defects imperfections, shrinkages or faults which may appear during the period of maintenance specified in the tender arising in the opinion of the Engineer from materials or workmanship not in accordance with the drawings or specifications or instruction of the Engineer, which defects, imperfections, shrinkages or faults shall upon the direction in writing of the Engineer be amended and made good by the Contractor at his own cost; and in case of default on the part of Contractor, the Engineer may employ labour and materials or appoint another Contractor to amend and make good such defects, imperfections, shrinkages and faults and all expenses consequent thereon and incidental thereto shall be borne by the Contractor and shall be recoverable from any moneys due to him under the contract.
- 48(3) Final Supplementary Agreement:** After the work is completed or otherwise concluded by the parties with mutual consent, and taken over by the DFCCIL as per terms and conditions of the contract agreement, and there is unequivocal no claim on either side under the Contract other than as mentioned in item 4 of Annexure XIV, the parties shall execute the Final Supplementary Agreement as per Annexure XIV.
- 49. Approval only by Maintenance Certificate:** No certificate other than Maintenance Certificate, if applicable, referred to in Clause 50 of the Conditions shall be deemed to constitute approval of any work or other matter in respect of which it is issued or shall be taken as an admission of the due performance of the contract or any part thereof.
- 50.(1) Maintenance Certificate:** The Contract shall not be considered as completed until a Maintenance Certificate, if applicable, shall have been signed by the Engineer stating that the works have been completed and maintained to his satisfaction. The Maintenance Certificate shall be given by the Engineer upon the expiration of the period of maintenance or as soon thereafter as any works ordered during such period pursuant to Sub Clause (2) to Clause 48 of these Conditions shall have been completed to the satisfaction of the Engineer, and full effect shall be given to this Clause notwithstanding the taking possession of or using the works or any part thereof by the DFCCIL.
- The Competent Authority to issue above Maintenance Certificate shall normally be the authority who is competent to sign the contract. If this Competent Authority is of the rank lower than JA Grade, then a JA Grade Officer (concerned with the work) should issue the Certificate. The Certificate, inter alia, should mention that the work has been completed in all respects and that all the contractual obligations have been fulfilled by the Contractor and that there is no due from the Contractor to DFCCIL/Railways against the contract concerned
- 50.(2) Cessation of DFCCIL's Liability:** The DFCCIL shall not be liable to the Contractor for any matter arising out of or in connection with the contract for execution of the works unless the Contractor has made a claim in writing in respect thereof before the issue of the Maintenance Certificate under this clause.
- 50.(3) Unfulfilled Obligations:** Notwithstanding the issue of the Maintenance Certificate the Contractor and (subject to Sub-Clause (2) of this Clause) the DFCCIL shall remain liable for the fulfillment of any obligation incurred under the provision of the contract prior to the issue of the Maintenance Certificate which remains unperformed at the time such Certificate is

issued and for the purposes of determining the nature and extent of any such obligations, the contract shall be deemed to remain in force between the parties thereto.

51.(1) Final Payment: On the Engineer's certificate of completion in respect of the works, adjustment shall be made and the balance of account based on the Engineer or the Engineer's representative's certified measurements or Engineer's certified "contractor's authorized engineer's measurements" of the total quantity of work executed by the Contractor upto the date of completion and on the rates accepted in Bill(s) of Quantities and for extra works on rates determined under Clause 39 of these Conditions shall be paid to the Contractor subject always to any deduction which may be made under these presents and further subject to the Contractor having signed delivered to the Engineer enclosing either a full account in detail of all claims he may have on the DFCCIL in respect of the works or having delivered No Claim Certificate and the Engineer having after the receipt of such account given a certificate in writing that such claims are not covered under excepted matter i.e. Clauses 7(j), 8, 18, 22(5), 39.1, 39.2, 40A, 43(2), 45(i)(a), 55, 55-A(5), 57, 57A, 61(1), 61(2) and 62(1), 63(iv) and 63.2.11 of the Standard General Conditions of Contract or in any Clause (stated as excepted matter) of the Special Conditions of the Contract, that the whole of the works to be done under the provisions of the Contracts have been completed, that they have been inspected by him since their completion and found to be in good and substantial order, that all properties, works and things, removed, disturbed or injured in consequence of the works have been properly replaced and made good and all expenses and demands incurred by or made upon the DFCCIL for or in the respect of damage or loss by from or in consequence of the works, have been satisfied agreeably and in conformity with the contract.

51.(2) Post Payment Audit: It is an agreed term of contract that the DFCCIL reserves to itself the right to carry out a post-payment audit and/ or technical examination of the works and the Final Bill including all supporting vouchers, abstracts etc. and to make a claim on the Contractor for the refund of any excess amount paid to him till the release of security deposit or settlement of claims, whichever is later, if as a result of such examination any over-payment to him is discovered to have been made in respect of any works done or alleged to have been done by him under the contract.

51-A. Production of Vouchers etc. by the Contractor:

- (i) For a contract of more than one crore of rupees, the Contractor shall, whenever required, produce or cause to be produced for examination by the Engineer any quotation, invoice, cost or other account, book of accounts, voucher, receipt, letter, memorandum, paper of writing or any copy of or extract from any such document and also furnish information and returns verified in such manner as may be required in any way relating to the execution of this contract or relevant for verifying or ascertaining cost of execution of this contract (the decision of the Engineer on the question of relevancy of any documents, information or return being final and binding in the parties). The Contractor shall similarly produce vouchers etc., if required to prove to the Engineer, that materials supplied by him, are in accordance with the specifications laid down in the contract.
- (ii) If any portion of the work in a contract of value more than one crore of rupees be carried out by a sub-contractor or any subsidiary or allied firm or company (as per Clause 7 of the Standard General Conditions of Contract), the Engineer shall have power to secure the books of such sub-contract or any subsidiary or allied firm or company, through the Contractor, and such books shall be open to his inspection.
- (iii) The obligations imposed by Sub Clause (i) & (ii) above is without prejudice to the obligations of the Contractor under any statute rules or orders binding on the Contractor.

52. Withholding and Lien in Respect of Sums Claimed: Whenever any claim or claims for payment of a sum of money arises out of or under the contract against the Contractor, the DFCCIL shall be entitled to withhold and also have a lien to retain such sum or sums in whole or in part from the security, if any, deposited by the Contractor and for the purpose aforesaid, the DFCCIL shall be entitled to withhold the said cash Security Deposit or the Security if any, furnished as the case may be and also have a lien over the same pending finalization or adjudication of any such claim. In the event of the security being insufficient to cover the claimed amount or amounts or if no security has been taken from the Contractor, the DFCCIL shall be entitled to withhold and have a lien to the extent of the such claimed amount or amounts referred to supra, from any sum or sums found payable or which at any time thereafter may become payable to the Contractor under the same contract or any other contract with this or any other DFCCIL or any Department of the Central Government pending finalization or adjudication of any such claim.

It is an agreed term of the contract that the sum of money or moneys so withheld or retained under the lien referred to above, by the DFCCIL will be kept withheld or retained as such by the DFCCIL/Railways till the claim arising out of or under the contract is determined by the arbitrator (if the contract governed by the Arbitration Clause) or by the competent court as the case may be and that the Contractor will have no claim for interest or damages whatsoever on any account in respect of such withholding or retention under the lien referred to supra and duly notified as such to the Contractor. For the purpose of this clause, where the Contractor is a partnership firm or a company, the DFCCIL shall be entitled to withhold and also have a lien to retain towards such claimed amount or amounts in whole or in part from any sum found payable to any partner / company, as the case may be whether in his individual capacity or otherwise.

52-A Lien in Respect of Claims in other Contracts:

- (i) Any sum of money due and payable to the Contractor (including the Security Deposit returnable to him) under the contract may be withheld or retained by way of lien by the DFCCIL, against any claim of this or any other DFCCIL or any other Department of the Central Government in respect of payment of a sum of money arising out of or under any other contract made by the Contractor with this or any other Department of the Central Government.
- (ii) However, recovery of claims of DFCCIL in regard to terminated contracts may be made from the Final Bill, Security Deposits and Performance Guarantees of other contract or contracts, executed by the Contractor. The Performance Guarantees submitted by the Contractor against other contracts, if required, may be withheld and encashed. In addition, 10% of each subsequent 'on-account bill' may be withheld, if required, for recovery of DFCCIL's dues against the terminated contract.
- (iii) It is an agreed term of the contract that the sum of money so withheld or retained under this Clause by the DFCCIL will be kept withheld or retained as such by the DFCCIL till the claim arising out of or under any other contract is either mutually settled or determined by arbitration, if the other contract is governed by Arbitration Clause or by the competent court as the case may be and Contractor shall have no claim for interest or damages whatsoever on this account or on any other ground in respect of any sum of money withheld or retained under this Clause and duly notified as such to the Contractor.

53. Signature on Receipts for Amounts: Every receipt for money which may become payable or for any security which may become transferable to the Contractors under these presents, shall, if signed in the partnership name by anyone of the partners of a Contractor's firm be a good and

sufficient discharge to the DFCCIL in respect of the moneys or security purported to be acknowledged thereby and in the event of death of any of the Contractor, partners during the pendency of the contract, it is hereby expressly agreed that every receipt by anyone of the surviving Contractor partners shall if so signed as aforesaid be good and sufficient discharge as aforesaid provided that nothing in this Clause contained shall be deemed to prejudice or effect any claim which the DFCCIL may hereafter have against the legal representative of any Contractor partner so dying for or in respect to any breach of any of the conditions of the contract, provided also that nothing in this clause contained shall be deemed to prejudice or effect the respective rights or obligations of the Contractor partners and of the legal representatives of any deceased Contractor partners interse.

LABOUR

54. Wages to Labour: The Contractor shall be responsible to ensure compliance with the provision of the Minimum Wages Act, 1948 (hereinafter referred to as the “said Act”) and the Rules made thereunder in respect of any employees directly or through petty Contractors or sub-contractors employed by him for the purpose of carrying out this contract.

If, in compliance with the terms of the contract, the Contractor supplied any labour to be used wholly or partly under the direct orders and control of the DFCCIL/Railways whether in connection with any work being executed by the Contractor or otherwise for the purpose of the DFCCIL such labour shall, for the purpose of this Clause, still be deemed to be persons employed by the Contractor.

If any moneys shall, as a result of any claim or application made under the said Act be directed to be paid by the DFCCIL, such money shall be deemed to be moneys payable to the DFCCIL by the Contractor and on failure by the Contractor to repay the DFCCIL any moneys paid by it as aforesaid within seven days after the same shall have been demanded, the DFCCIL/Railways shall be entitled to recover the same from Contractor’s bills/Security Deposit or any other dues of Contractor with the Government of India.

54-A. Apprentices Act: The Contractor shall be responsible to ensure compliance with the provisions of the Apprentices Act, 1961 and the Rules and Orders issued thereunder from time to time in respect of apprentices directly or through petty Contractors or sub-contractors employed by him for the purpose of carrying out the Contract.

If the Contractor directly or through petty Contractors or sub-contractors fails to do so, his failure will be a breach of the contract and the DFCCIL may, in its discretion, rescind the contract. The Contractor shall also be liable for any pecuniary liability arising on account of any violation of the provisions of the Act.

55. Provisions of Payments of Wages Act: The Contractor shall comply with the provisions of the Payment of Wages Act, 1936 and the rules made thereunder in respect of all employees employed by him either directly or through petty Contractors or sub-contractors in the works. If in compliance with the terms of the contract, the Contractor directly or through petty Contractors or sub-contractors shall supply any labour to be used wholly or partly under the direct orders and control of the Engineer whether in connection with the works to be executed hereunder or otherwise for the purpose of the Engineer, such labour shall nevertheless be deemed to comprise persons employed by the Contractor and any moneys which may be ordered to be paid by the Engineer shall be deemed to be moneys payable by the Engineer on behalf of the Contractor and the Engineer may on failure of the Contractor to repay such money to the DFCCIL/Railways deduct the same from any moneys due to the Contractor in terms of the contract. The DFCCIL shall be entitled to recover the same from Contractor’s bills/Security Deposit or any other dues of Contractor with the Government of India all moneys paid or payable by the DFCCIL by way of compensation of aforesaid or for costs of expenses in connection with any claim thereto and

the decision of the Engineer upon any question arising out of the effect or force of this Clause shall be final and binding upon the Contractor.

55-A. Provisions of Contract Labour (Regulation and Abolition) Act, 1970:

55-A.(1) The Contractor shall comply with the provision of the contract labour (Regulation and Abolition) Act, 1970 and the Contract labour (Regulation and Abolition) Central Rules 1971 as modified from time to time, wherever applicable and shall also indemnify the DFCCIL from and against any claims under the aforesaid Act and the Rules.

55-A.(2) The Contractor shall obtain a valid license under the aforesaid Act as modified from time to time before the commencement of the work and continue to have a valid license until the completion of the work. Any failure to fulfill the requirement shall attract the penal provision of the Act.

55-A.(3) The Contractor shall pay to the labour employed by him directly or through sub-contractors the wages as per provision of the aforesaid Act and the Rules wherever applicable. The Contractor shall notwithstanding the provisions of the contract to the contrary, cause to be paid the wages to labour, indirectly engaged on the works including any engaged by sub-contractors in connection with the said work, as if the labour had been immediately employed by him.

55-A.(4) In respect of all labour directly or indirectly employed in the work for performance of the Contractor's part of the contract, the Contractor shall comply with or cause to be complied with the provisions of the aforesaid Act and Rules wherever applicable.

55-A.(5) In every case in which, by virtue of the provisions of the aforesaid Act or the rules, the DFCCIL is obliged to pay any amount of wages to a workman employed by the Contractor or his sub-contractor in execution of the work or to incur any expenditure on account of the contingent, liability of the DFCCIL due to the Contractor's failure to fulfill his statutory obligations under the aforesaid Act or the rules, the DFCCIL will recover from the Contractor, the amount of wages so paid or the amount of expenditure so incurred and without prejudice to the rights of the DFCCIL under the Section 20, Sub-Section (2) and Section 2, Sub-Section (4) of the aforesaid Act, the DFCCIL shall be at liberty to recover such amount or part thereof from Contractor's bills/Security Deposit or any other dues of Contractor with the Government of India. The DFCCIL shall not be bound to contest any claim made against it under Sub-Section (1) of Section 20 and Sub-Section (4) of Section 21 of the aforesaid Act except on the written request of the Contractor and upon his giving to the DFCCIL full security for all costs for which the DFCCIL might become liable in contesting such claim. The decision of the Chief Engineer regarding the amount actually recoverable from the Contractor as stated above shall be final and binding on the Contractor.

55-B. Provisions of Employees Provident Fund and Miscellaneous Provisions Act, 1952: The Contractor shall comply with the provisions of Para 30 & 36-B of the Employees Provident Fund Scheme, 1952; Para 3 & 4 of Employees' Pension Scheme, 1995; and Para 7 & 8 of Employees Deposit Linked Insurance Scheme, 1976; as modified from time to time through enactment of "Employees Provident Fund & Miscellaneous Provisions Act, 1952", wherever applicable and shall also indemnify the DFCCIL from and against any claims under the aforesaid Act and the Rules.

55-C (i) Contractor is to abide by the provisions of various labour laws in terms of above clause 54, 55, 55-A and 55-B of the Standard General Conditions of Contract. In order to ensure the same, an application has been developed and hosted on website 'www.shramikkalyan.indianrailwayss.gov.in'. Contractor shall register his firm/company etc. and upload requisite details of labour and their payment in this portal. These details shall be available in public domain. The registration/ updation in Portal shall be done as under:

- (a) Contractor shall apply for onetime registration of his company/firm etc. in the Shramikkalyan portal with requisite details subsequent to issue of Letter of Acceptance. Engineer shall approve the contractor's registration in the portal within 7 days of receipt of such request.
 - (b) Contractor once approved by any Engineer, can create password with login ID (PAN No.) for subsequent use of portal for all Letter of Acceptances (LoAs) issued in his favour.
 - (c) The contractor once registered on the portal, shall provide details of his Letter of Acceptances (LoAs) / Contract Agreements on shramikkalyan portal within 15 days of issue of any LoA for approval of concerned Engineer. Engineer shall update (if required) and approve the details of LoA filled by contractor within 7 days of receipt of such request.
 - (d) After approval of LoA by Engineer, contractor shall fill the salient details of contract labours engaged in the contract and ensure updating of each wage payment to them on shramikkalyan portal on monthly basis.
 - (e) It shall be mandatory upon the contractor to ensure correct and prompt uploading of all salient details of engaged contractual labour & payments made thereof after each wage period.
- (ii) While processing payment of any 'On Account Bill' or 'Final Bill' or release of 'Advances' or 'Performance Guarantee / Security Deposit', contractor shall submit a certificate to the Engineer or Engineer's representatives that "I have uploaded the correct details of contract labours engaged in connection with this contract and payments made to them during the wage period in DFCCIL's Shramikkalyan portal at 'www.shramikkalyan.indianrailways.gov.in' till ____Month, ____Year."

55-D. Provisions of "The Building and Other Construction Workers (Regulation of Employment and Conditions of Service) Act, 1996" and "The Building and Other Construction Workers' Welfare Cess Act, 1996":

The tenderers, for carrying out any construction work, shall get themselves registered with the Registering Officer under Section-7 of the Building and Other Construction Workers Act, 1996 and Rules made thereto by the concerned State Govt., and submit Certificate of Registration issued by Registering Officer of the concerned State Govt. (Labour Dept.). The Cess shall be deducted from contractor's bills as per provisions of the Act.

56. Reporting of Accidents: The Contractor shall be responsible for the safety of all employees directly or through petty Contractors or sub-contractor employed by him on the works and shall report serious accidents to any of them however and wherever occurring on the works to the Engineer or the Engineers Representative and shall make every arrangement to render all possible assistance.

57. Provision of Workmen's Compensation Act: In every case in which by virtue of the provisions of Section 12 Sub-Section (1) of the Workmen's Compensation Act 1923, Railways /DFCCIL is obliged to pay compensation to a workman directly or through petty Contractor or sub-contractor employed by the Contractor in executing the work, Railways /DFCCIL will recover from the Contractor the amount of the compensation so paid, and, without prejudice to the rights of DFCCIL under Section 12 Sub-section (2) of the said Act, Railways shall be at liberty to recover such amount or any part thereof from Contractor's bills/Security Deposit or any other dues of Contractor with the Government of India. Railways shall not be bound to contest any claim made against it under Section 12 Sub-Section (1) of the said Act except on the written request of the

Contractor and upon his giving to Railways full security for all costs for which DFCCIL/Railways might become liable in consequence of contesting such claim.

57-A. Provision of Mines Act: The Contractor shall observe and perform all the provisions of the Mines Act, 1952 or any statutory modifications or re-enactment thereof for the time being in force and any rules and regulations made thereunder in respect of all the persons directly or through the petty Contractors or sub-contractors employed by him under this contract and shall indemnify the DFCCIL from and against any claims under the Mines Act, or the rules and regulations framed thereunder, by or on behalf of any persons employed by him or otherwise.

58. DFCCIL not to Provide Quarters for Contractors: No quarters shall normally be provided by the DFCCIL for the accommodation of the Contractor or any of his staff employed on the work. In exceptional cases where accommodation is provided to the Contractor at the DFCCIL's discretion, recoveries shall be made at such rates as may be fixed by the DFCCIL for the full rent of the buildings and equipments therein as well as charges for electric current, water supply and conservancy.

59.(1) Labour Camps: The Contractor shall at his own expense make adequate arrangements for the housing, supply of drinking water and provision of latrines and urinals for his staff and workmen, directly or through the petty Contractors or sub-contractors and for temporary creche (Bal-Mandir) where 50 or more women are employed at a time. Suitable sites on DFCCIL land, if available, may be allotted to the Contractor for the erection of labour camps, either free of charge or on such terms and conditions that may be prescribed by the DFCCIL. All camp sites shall be maintained in clean and sanitary conditions by the Contractor at his own cost.

59.(2) Compliance to Rules for Employment of Labour: The Contractor(s) shall conform to all laws, bye-laws rules and regulations for the time being in force pertaining to the employment of local or imported labour and shall take all necessary precautions to ensure and preserve the health and safety of all staff employed directly or through petty contractors or sub-contractors on the works.

59.(3) Preservation of Peace: The Contractor shall take requisite precautions and use his best endeavours to

- (i) Prevent any riotous or unlawful behaviour by or amongst his workmen and other employed directly or through the petty Contractors or sub-contractors on the works and for the preservation of peace and protection of the inhabitants and
- (ii) Security of property in the neighbourhood of the works. In the event of the DFCCIL requiring the maintenance of a Special Police Force at or in the vicinity of the site during the tenure of works, the expenses thereof shall be borne by the Contractor and if paid by the DFCCIL shall be recoverable from the Contractor.

59.(4) Sanitary Arrangements: The Contractor shall obey all sanitary rules and carry out all sanitary measures that may from time to time be prescribed by the DFCCIL Medical Authority and permit inspection of all sanitary arrangements at all times by the Engineer, the Engineer's Representative or the Medical Staff of the DFCCIL. Should the Contractor fail to make the adequate sanitary arrangements, these will be provided by the DFCCIL and the cost thereof recovered from the Contractor.

59.(5) Outbreak of Infectious Disease: The Contractor shall remove from his camp such labour and their families as refuse protective inoculation and vaccination when called upon to do so by the Engineer or the Engineer's Representative on the advice of the DFCCIL/Railways Medical Authority. Should cholera, plague, or other infectious disease break out, the Contractor shall burn the huts, beddings, clothes and other belongings of or used by the infected parties and promptly erect new huts on healthy sites as required by the Engineer, failing which within the time specified in the Engineer's requisition, the work may be done by

the DFCCIL/Railways and the cost thereof recovered from the Contractor.

- 59.(6) Treatment of Contractor's Staff in Railways Hospitals:** The Contractor and his staff, other than labourers and their families requiring medical aid from the Railways hospital and dispensaries will be treated as private patients and charged accordingly. The Contractors' labourers and their Families will be granted free treatment in Railways hospitals and dispensaries where no other hospitals or dispensaries are available provided the Contractor pays the cost of medicines, dressing and diet money according to the normal scale and additional charges for special examinations such as pathological and bacteriological examination, X-Ray, etc. and for surgical operation.
- 59. (7) Medical Facilities at Site:** The Contractor shall provide medical facilities at the site as may be prescribed by the Engineer on the advice of the Railways Medical Authority in relation to the strength of the Contractor's resident staff and workmen.
- 59. (8) Use of Intoxicants:** The sale of ardent spirits or other intoxicating beverages upon the work or in any of the buildings, encampments or tenements owned, occupied by or within the control of the Contractor or any of his employees shall be forbidden and the Contractor shall exercise his influence and authority to the utmost extent to secure strict compliance with this condition.
- 59.(9) Restrictions on the Employment of Retired Engineers of DFCCIL/Railways Services Within One Year of their Retirement:** The Contractor shall not, if he is a retired Government Engineer of Gazetted rank, himself engage in or employ or associate a retired Government Engineer of Gazetted rank, who has not completed one year from the date of retirement, in connection with this contract in any manner whatsoever without obtaining prior permission of the DFCCIL and if the Contractor is found to have contravened this provision it will constitute a breach of contract and administration will be entitled to terminate the contract and forfeit his Performance Guarantee as well as Security Deposit.
- 60.(1) Non-Employment of Labourers below the age of 15:** The Contractor shall not employ children below the age of 15 as labourers directly or through petty Contractors or sub-contractors for the execution of work.
- 60.(2) Medical Certificate of Fitness for Labour:** It is agreed that the Contractor shall not employ a person above 15 and below 19 years of age for the purpose of execution of work under the contract unless a medical certificate of fitness in the prescribed form (Proforma at Annexure-VIII) granted to him by a certifying surgeon certifying that he is fit to work as an adult, is obtained and kept in the custody of the Contractor or a person nominated by him in this behalf and the person carries with him, while at work; a token giving a reference to such certificate. It is further agreed that the responsibility for having the adolescent examined medically at the time of appointment or periodically till he attains the age of 19 years shall devolve entirely on the Contractor and all the expenses to be incurred on this account shall be borne by him and no fee shall be charged from the adolescent or his parent for such medical examination.
- 60.(3) Period of Validity of Medical Fitness Certificate:** A certificate of fitness granted or renewed for the above said purposes shall be valid only for a period of one year at a time. The certifying surgeon shall revoke a certificate granted or renewed if in his opinion the holder of it, is no longer fit for work in the capacity stated therein. Where a certifying surgeon refuses to grant or renew a certificate or revoke a certificate, he shall, if so required by the person concerned, state his reasons in writing for doing so.
- 60.(4) Medical Re-Examination of Labourer:** Where any official appointed in this behalf by the Ministry of Labour is of the opinion that any person employed in connection with the execution of any work under this contract in the age group 15 to 19 years is without a certificate of fitness or is having a certificate of fitness but no longer fit to work in the capacity stated in the certificate, he may serve on the Contractor, or on the person nominated by him

in this regard, a notice requiring that such persons shall be examined by a certifying surgeon and such person shall not if the concerned official so directs, be employed or permitted to do any work under this contract unless he has been medically examined and certified that he is fit to work in the capacity stated in the certificate.

EXPLANATIONS:

- (1) Only Qualified Medical Practitioners can be appointed as "Certifying Surgeons" and the term "Qualified Medical Practitioners" means a person holding a qualification granted by an authority specified in the Schedule to the Indian Medical Degrees Act, 1916 (VII to 1916) or in the Schedule to the Indian Medical Council Act, 1933 (XXVII) of 1933.
- (2) The Certifying surgeon may be a medical officer in the service of State or Municipal Corporation.

DETERMINATION OF CONTRACT

- 61.(1) Right of DFCCIL to Determine the Contract:** The DFCCIL shall be entitled to determine and terminate the contract at any time should, in the DFCCIL's opinion, the cessation of work becomes necessary owing to paucity of funds or from any other cause whatever, in which case the value of approved materials at site and of work done to date by the Contractor will be paid for in full at the rate specified in the contract. Notice in writing from the DFCCIL of such determination and the reasons therefor shall be conclusive evidence thereof.
- 61.(2) Payment on Determination of Contract:** Should the contract be determined under sub clause (1) of this clause and the Contractor claims payment for expenditure incurred by him in the expectation of completing the whole of the work, the DFCCIL/Railways shall admit and consider such claims as are deemed reasonable and are supported by vouchers to the satisfaction of the Engineer. The DFCCIL's decision on the necessity and propriety of such expenditure shall be final and conclusive.
- 61.(3)** The Contractor shall have no claim to any payment of compensation or otherwise, howsoever on account of any profit or advantage which he might have derived from the execution of the work in full but which he did not derive in consequence of determination of contract.

62.(1) Determination of Contract owing to Default of Contractor:

If the Contractor should:

- (i) Becomes bankrupt or insolvent, or
- (ii) Make an arrangement for assignment in favour of his creditors, or agree to carry out the contract under a Committee of Inspection of his creditors, or
- (iii) Being a Company or Corporation, go into liquidation (other than a voluntary liquidation for the purposes of amalgamation or reconstruction), or
- (iv) Have an execution levied on his goods or property on the works, or
- (v) Assign the contract or any part thereof otherwise than as provided in Clause 7 of these Conditions, or
- (vi) Abandon the contract, or
- (vii) Persistently disregard the instructions of the Engineer, or contravene any provision of the contract, or
- (viii) Fail to adhere to the agreed programme of work by a margin of 10% of the stipulated period, or
- (ix) Fail to Execute the contract documents in terms of Para 8 of the Instructions to Tenderers.
- (x) Fail to submit the documents pertaining to identity of JV and PAN in terms of Para 17.11 of Part III available in the Tender document.
- (xi) Fail to remove materials from the site or to pull down and replace work after receiving from

the Engineer notice to the effect that the said materials or works have been condemned or rejected under Clause 25 and 27 of these Conditions, or

- (xii) Fail to take steps to employ competent or additional staff and labour as required under Clause 26 of these Conditions, or
- (xiii) Fail to afford the Engineer or Engineer's representative proper facilities for inspecting the works or any part thereof as required under Clause 28 of these Conditions, or
- (xiv) Promise, offer or give any bribe, commission, gift or advantage either himself or through his partner, agent or servant to any officer or employee of the DFCCIL or to any person on his or on their behalf in relation to the execution of this or any other contract with this DFCCIL.
- (xv) Fail to adhere to the provisions of Para 16 of Part III of Tender Document of the Instructions to Tenderers, or provision Clause 59(9) of these Conditions.
- (xvi) Submits copy of fake documents / certificates in support of credentials, submitted by the tenderer

Then and in any of the **said Clause**, the Engineer on behalf of the DFCCIL may serve the Contractor with a notice (Proforma at Annexure-IX) in writing to that effect and if the Contractor does not within seven days after the delivery to him of such notice proceed to make good his default in so far as the same is capable of being made good and carry on the work or comply with such directions as aforesaid of the entire satisfaction of the Engineer, the DFCCIL shall be entitled after giving 48 hours' notice (Proforma at Annexure-X or XII, as the case may be) in writing under the hand of the Engineer to rescind the contract as a whole or in part or parts (as may be specified in such notice) and after expiry of 48 hours' notice, a final termination notice (Proforma at Annexure-XI or XIII, as the case may be) should be issued.

Note: Engineer at his discretion may resort to the part termination of contract with notices (Proforma at Annexure- IX, XII and XIII), only in cases where progress of work is more than or equal to 80% of the original scope of work.

62.(2) Right of DFCCIL after Rescission of Contract owing to Default of Contractor: In the event of any or several of the courses, referred to in Sub-Clause (1) of this Clause, being adopted:

- (a) The Contractor shall have no claim to compensation for any loss sustained by him by reason of his having purchased or procured any materials or entered into any commitments or made any advances on account of or with a view to the execution of the works or the performance of the contract and Contractor shall not be entitled to recover or be paid any sum for any work thereto for actually performed under the contract unless and until the Engineer shall have certified the performance of such work and the value payable in respect thereof and the Contractor shall only be entitled to be paid the value so certified.
- (b) In the contract which has been rescinded as a whole, the Security Deposit already with DFCCIL/Railways under the contract shall be encashed/ forfeited and the Performance Guarantee already submitted for the contract shall be encashed. The balance work shall be got done independently without risk & cost of the failed Contractor. The failed Contractor shall be debarred from participating in the tender for executing the balance work. If the failed Contractor is a JV or a Partnership firm, then every member/partner of such a firm shall be debarred from participating in the tender for the balance work in his/her individual capacity or as a partner of any other JV /partnership firm.
Further the authorized representative of failed Contractor cannot be accepted as authorized representative in new contract.
- (c) In the contract rescinded in part or parts,
 - (i) The full Performance Guarantee available for the contract shall be recovered. No additional Performance Guarantee shall be required for balance of work being executed through the part

terminated contract. The contract value of part terminated contract stands reduced to the balance value of work under the contract.

- (ii) The Security Deposit of part terminated contract shall be dealt as per clause 16(2) of these Conditions.
- (iv) The defaulting Contractor shall not be issued any completion certificate for the contract.
- (iv) The balance work shall be got done independently without risk & cost of the failed Contractor. The failed Contractor shall be debarred from participating in the tender for executing the balance work. If the failed Contractor is a JV or a Partnership firm, then every member/partner of such a firm shall be debarred from participating in the tender for the balance work in his/her individual capacity or as a partner of any other JV /partnership firm.
- (v) Further the authorized representative of failed Contractor will not be accepted as authorized representative in new contract.
- (d) The Engineer or the Engineer's Representative shall be entitled to take possession of any materials, tools, implements, machinery and buildings on the works or on the property on which these are being or ought to have been executed, and to retain and employ the same in the further execution of the works or any part thereof until the completion of the works without the Contractor being entitled to any compensation for the use and employment thereof or for wear and tear or destruction thereof.
- (e) The Engineer shall as soon as may be practicable after removal of the Contractor fix and determine ex-parte or by or after reference to the parties or after such investigation or enquiries as he may consider fit to make or institute and shall certify what amount (if any) had at the time of rescission of the contract been reasonably earned by or would reasonably accrue to the Contractor in respect of the work then actually done by him under the contract and what was the value of any unused, or partially used materials, any constructional plant and any temporary works upon the site. The legitimate amount due to the Contractor after making necessary deductions and certified by the Engineer should be released expeditiously.

SETTLEMENT OF DISPUTES – INDIAN DFCCIL ARBITRATION AND CONCILIATION RULES

63. Conciliation of Disputes:

- (i) This clause is applicable in the tender having advertised value less than or equal to Rs 50 Crore.
- (ii) All disputes and differences of any kind whatsoever arising out of or in connection with the contract, whether during the progress of the work or after its completion and whether before or after the determination of the contract, shall be referred by the Contractor to the "Chief Engineer" or "Divisional DFCCIL Manager" through "Notice of Dispute" provided that no such notice shall be served later than 30 days after the date of issue of Completion Certificate by the Engineer. Chief Engineer or Divisional DFCCIL Manager shall, within 30 days after receipt of the Contractor's "Notice of Dispute", notify the name of conciliator(s) to the Contractor.
- (iii) The Conciliator(s) shall assist the parties to reach an amicable settlement in an independent and impartial manner within the terms of contract.
- (iv) If the parties reach agreement on a settlement of the dispute, they shall draw up and sign a written settlement agreement duly signed by Engineer In-charge, Contractor and conciliator(s). When the parties sign the settlement agreement, it shall be final and binding on the parties.

- (v) The parties shall not initiate, during the conciliation proceedings, any arbitral or judicial proceedings in respect of a dispute that is the subject matter of the conciliation proceedings.
- (vi) The conciliation proceedings shall be terminated as per Section 76 of 'The Arbitration and Conciliation Act, 1996.

63.1 Matters Finally Determined by the DFCCIL: All disputes and differences of any kind whatsoever arising out of or in connection with the contract, whether during the progress of the work or after its completion and whether before or after the determination of the contract, shall be referred by the Contractor to the GM and the GM shall, within 120 days after receipt of the Contractor's representation, make and notify decisions on all matters referred to by the Contractor in writing provided that matters for which provision has been made in Clauses 7(j), 8, 18, 22(5), 39.1, 39.2, 40A, 43(2), 45(i)(a), 55, 55-A(5), 57, 57A, 61(1), 61(2), 62(1), 63(iv) and 63.2.11 of the Standard General Conditions of Contract or in any Clause (stated as excepted matter) of the Special Conditions of the Contract, shall be deemed as 'excepted matters' (matters not arbitrable) and decisions of the DFCCIL authority, thereon shall be final and binding on the Contractor; provided further that 'excepted matters' shall stand specifically excluded from the purview of the Dispute Adjudication Board (DAB) and Arbitration.

63.2 Dispute Adjudication Board (DAB): This clause is applicable in the tender having advertised value more than Rs 50 Crore.

63.2.1 Any dispute/s if not settled with the Engineer, shall be referred to DAB.

The DAB shall consist of a panel of three Retired DFCCIL Officers, retired not below senior administrative grade (SAG). The DAB shall be formed within 90 days of signing of Contract Agreement. For this purpose, a panel of DAB members shall be maintained in the General Manager's office. The complete panel, which shall not be less than five members, shall be sent by Chief Engineer to the Contractor to nominate one member of the DAB from the panel as Contractor's nominee within two weeks of receipt of the panel. On receipt of Contractor's nominee, the Chief Engineer shall nominate one member from the same panel as DFCCIL nominee for the DAB. Both above nominees shall jointly select presiding member of the DAB from the same panel.

63.2.2 The appointment of DAB shall be effectuated by way of a tri-partite agreement among the DFCCIL, Contractor and the respective DAB members. The terms of the remuneration of each member shall be as fixed by Ministry of DFCCIL/Railways from time to time. Each party shall be responsible for paying one-half of this remuneration.

63.2.3 If one or more of the members appointed refuses to act as DAB member, or is unable or unwilling to perform his functions as DAB member for any reason whatsoever or dies or in the opinion of the Chief Engineer fails to act without undue delay, the parties shall terminate the mandate of such DAB member and thereupon new DAB member shall be appointed in the same manner, as the outgoing DAB member had been appointed.

63.2.4 The appointment of any member may be terminated by mutual agreement of both Parties, but not by the DFCCIL or the Contractor acting alone. Unless otherwise agreed by both the

Parties, the appointment of the DAB (including each member) shall expire upon expiry of this Contract Agreement.

63.2.5 Before start of DAB proceedings, each DAB member shall give the following certificate to the DFCCIL and the Contractor:

“I have no any past or present relationship in relation to the subject matter in dispute, whether financial, business, professional or other kind. Further, I have no any past or present relationship with or interest in any of the parties whether financial, business, professional or other kind, which is likely to give rise to justifiable doubts as to my independence or impartiality.”

63.2.6 DAB proceedings shall be conducted as decided by the DAB. The DAB shall give its decision within 90 days of a Dispute referred to it by any of the Parties, duly recording the reasons before arriving at the decision. The DAB shall decide the issue within terms and conditions of the contract. This time limit shall be extendable subject to the Parties mutual agreement.

63.2.7 The DAB decision shall not be binding on both the Parties. In case any party is not satisfied by the decision of DAB, then the aggrieved party may approach Arbitral Tribunal for arbitration proceedings.

63.2.8 No dispute shall be referred to Arbitral Tribunal unless the same has been referred to DAB for adjudication. However, in case DAB is not formed due to any reason, the disputes can be directly referred to Arbitral Tribunal to adjudicate the dispute.

63.2.9 In the specific cases of any misconduct by any of the members of the DAB, the parties shall have the right to specifically bring it to the notice of the DAB such conduct, through a statement filed with necessary documents in proof of such misconduct and the DAB, after taking NOTICE of such conduct initiate the replacement of the member concerned, in the same manner the member to be replaced was appointed.

63.2.10 Once the decision is given by DAB, DAB cannot review the decision at its own or on the request of one party, unless both parties agree for review of decision by DAB.

63.2.11 In case DAB decision is not challenged by either party within 180 days of receipt of decision of DAB, the decision shall be considered as final and parties would be barred for referring the same to Arbitral Tribunal for adjudication.

63.2.12 The obligation of the DFCCIL and the Contactor shall not be altered by reasons of issue being or under reference to DAB.

63.2.13 The DAB shall conduct the proceedings at any convenient venue which shall be decided by DAB in consultations with parties.

63.2.14 It is a term of this contract that the Parties shall not approach any Court of Law for settlement of such disputes or differences unless an attempt has first been made by the parties to settle such disputes or differences through DAB and Arbitral Tribunal.

64.(1) : Demand for Arbitration:

64.(1)(i): In the event of any dispute or difference between the parties hereto as to the construction or operation of this contract, or the respective rights and liabilities of the parties on any matter in question, dispute or difference on any account or as to the withholding by the DFCCIL of any certificate to which the Contractor may claim to be entitled to, or if the DFCCIL fails to make a decision within 120 days, then and in any such case, but except in any of the “excepted matters” referred to in Clause 63.1 of these Conditions, the Contractor, after 120 days but within 180 days of his presenting his final claim on disputed matters shall demand in writing that the dispute or difference be referred to arbitration.

64.(1)(ii)(a): The demand for arbitration shall specify the matters which are in question, or subject of the dispute or difference as also the amount of claim item-wise. Only such dispute or difference, in respect of which the demand has been made, together with counter claims or set off, given by the DFCCIL, shall be referred to arbitration and other matters shall not be included in the reference.

64.(1)(ii)(b): The parties may waive off the applicability of Sub-Section 12(5) of Arbitration and Conciliation (Amendment) Act 2015, if they agree for such waiver in writing, after dispute having arisen between them, in the format given under Annexure XV of these conditions.

64.(1)(iii)(a): The Arbitration proceedings shall be assumed to have commenced from the day, a written and valid demand for arbitration is received by the DFCCIL.

64.(1)(iii)(b): The claimant shall submit his claims stating the facts supporting the claims alongwith all the relevant documents and the relief or remedy sought against each claim within a period of 30 days from the date of appointment of the Arbitral Tribunal.

64.(1)(iii)(c): The DFCCIL shall submit its defence statement and counter claim(s), if any, within a period of 60 days of receipt of copy of claims from Tribunal, unless otherwise extension has been granted by Tribunal.

64.(1)(iii)(d): Place of Arbitration: The place of arbitration would be within the geographical limits of the Division of the DFCCIL where the cause of action arose or the Headquarters of the concerned DFCCIL or any other place with the written consent of both the parties.

64.(1)(iv): No new claim shall be added during proceedings by either party. However, a party may amend or supplement the original claim or defense thereof during the course of arbitration proceedings subject to acceptance by Tribunal having due regard to the delay in making it.

64.(1)(v): If the Contractor(s) does/do not prefer his/their specific and final claims in writing, within a period of 90 days of receiving the intimation from the DFCCIL/Railways that the final bill is ready for payment, he/they will be deemed to have waived his/their claim(s) and the DFCCIL shall be discharged and released of all liabilities under the contract in respect of these claims.

64.(2): Obligation During Pendency of Arbitration: Work under the contract shall, unless otherwise directed by the Engineer, continue during the arbitration proceedings, and no payment due or payable by the DFCCIL shall be withheld on account of such proceedings, provided, however, it shall be open for Arbitral Tribunal to consider and decide whether or not such work should continue during arbitration proceedings.

64.(3) : Appointment of Arbitrator:

64.(3)(a) : Appointment of Arbitrator where applicability of section 12 (5) of Arbitration and Conciliation Act has been waived off:

64.(3)(a)(i): In cases where the total value of all claims in question added together does not exceed ₹ 1,00,00,000/- (Rupees One Crore), the Arbitral Tribunal shall consist of a Sole Arbitrator who shall be a Gazetted Officer of DFCCIL not below Junior Administrative Grade, nominated by the General Manager. The sole arbitrator shall be appointed within 60 days from the day when a written and valid demand for arbitration is received by General Manager.

64.(3)(a)(ii): In cases not covered by the Clause 64(3)(a)(i), the Arbitral Tribunal shall consist of a panel of three Gazetted DFCCIL Officers not below Junior Administrative Grade or 2 DFCCIL Gazetted Officers not below Junior Administrative Grade and a retired DFCCIL Officer, retired not below the rank of Senior Administrative Grade Officer, as the arbitrators. For this purpose, the DFCCIL will send a panel of at least four (4) names of Gazetted DFCCIL Officers of one or more departments of the DFCCIL which may also include the name(s) of retired DFCCIL Officer(s) empanelled to work as DFCCIL Arbitrator to the Contractor within 60 days from the day when a written and valid demand for arbitration is received by the General Manager.

Contractor will be asked to suggest to General Manager at least 2 names out of the panel for appointment as Contractor's nominee within 30 days from the date of dispatch of the request by DFCCIL. The General Manager shall appoint at least one out of them as the Contractor's nominee and will, also simultaneously appoint the balance number of arbitrators either from the panel or from outside the panel, duly indicating the 'presiding arbitrator' from amongst the 3 arbitrators so appointed. General Manager shall complete this exercise of appointing the Arbitral Tribunal within 30 days from the receipt of the names of Contractor's nominees. While nominating the arbitrators, it will be necessary to ensure that one of them is from the Accounts Department. An officer of Selection Grade of the Accounts Department shall be considered of equal status to the officers in Senior Administrative Grade of other departments of the DFCCIL for the purpose of appointment of arbitrator.

64.3.(a).iii: The serving DFCCIL officer working in arbitral tribunal in the ongoing arbitration cases as per clause 64.(3)(a)(i) and clause 64.(3)(a)(ii) above, can continue as arbitrator in the tribunal even after his retirement.

64.(3)(b): Appointment of Arbitrator where applicability of Section 12 (5) of Arbitration and Conciliation Act has not been waived off:

(i) In cases where the total value of all claims in question added together does not exceed ₹ 50,00,000/- (Rupees Fifty Lakh), the Arbitral Tribunal shall consist of a Retired DFCCIL Officer, retired not below the rank of Senior Administrative Grade Officer, as the arbitrator. For this purpose, the DFCCIL will send a panel of at least four (4) names of retired DFCCIL Officer(s) empanelled to work as DFCCIL Arbitrator duly indicating their retirement dates to the Contractor within 60 days from the day when a written and valid demand for arbitration is received by the General Manager.

Contractor will be asked to suggest to General Manager at least 2 names out of the panel for appointment as arbitrator within 30 days from the date of dispatch of the request by DFCCIL. The General Manager shall appoint at least one out of them as the arbitrator within 30 days from the receipt of the names of Contractor's nominees.

(ii) In cases where the total value of all claims in question added together exceed ₹ 50,00,000/- (Rupees Fifty Lakh), the Arbitral Tribunal shall consist of a Panel of three (3) retired DFCCIL Officer, retired not below the rank of Senior Administrative Grade Officer, as the arbitrators. For this purpose, the DFCCIL will send a panel of at least four (4) names of retired DFCCIL Officer(s) empanelled to work as DFCCIL Arbitrator duly indicating their retirement date to the Contractor within 60 days from the day when a written and valid demand for arbitration is received by the General Manager.

Contractor will be asked to suggest to General Manager at least 2 names out of the panel for appointment as Contractor's nominee within 30 days from the date of dispatch of the request by DFCCIL. The General Manager shall appoint at least one out of them as the Contractor's nominee and will, also simultaneously appoint the balance number of arbitrators either from the panel or from outside the panel, duly indicating the 'Presiding Arbitrator' from amongst the 3 arbitrators so appointed. General Manager shall complete this exercise of appointing the Arbitral Tribunal within 30 days from the receipt of the names of Contractor's nominees. While nominating the arbitrators, it will be necessary to ensure that one of them has served in the Accounts Department.

- 64.(3)(c)(i):** If one or more of the arbitrators appointed as above refuses to act as arbitrator, withdraws from his office as arbitrator, or vacates his/their office/offices or is/are unable or unwilling to perform his functions as arbitrator for any reason whatsoever or dies or in the opinion of the General Manager fails to act without undue delay, the General Manager shall appoint new arbitrator/arbitrators to act in his/their place in the same manner in which the earlier arbitrator/arbitrators had been appointed. Such re-constituted Tribunal may, at its discretion, proceed with the reference from the stage at which it was left by the previous arbitrator (s).
- 64.(3) (c) (ii):** (a) The Arbitral Tribunal shall have power to call for such evidence by way of affidavits or otherwise as the Arbitral Tribunal shall think proper, and it shall be the duty of the parties hereto to do or cause to be done all such things as may be necessary to enable the Arbitral Tribunal to make the award without any delay. The proceedings shall normally be conducted on the basis of documents and written statements.
- (b) Before proceeding into the merits of any dispute, the Arbitral Tribunal shall first decide and pass its orders over any plea submitted/objections raised by any party, if any, regarding appointment of Arbitral Tribunal, validity of arbitration agreement, jurisdiction and scope of the Tribunal to deal with the dispute (s) submitted to arbitration, applicability of time 'limitation' to any dispute, any violation of agreed procedure regarding conduct of the arbitral proceedings or plea for interim measures of protection and record its orders in day to day proceedings. A copy of the proceedings duly signed by all the members of tribunal should be provided to both the parties.
- 64.3(c)(iii):** (i) Qualification of Arbitrator (s):
- (a) Serving Gazetted DFCCIL Officers of not below JA Grade level.
- (b) Retired DFCCIL Officers not below SA Grade level, one year after his date of retirement.
- (c) Age of arbitrator at the time of appointment shall be below 70 years.
- (ii) An arbitrator may be appointed notwithstanding the total number of arbitration cases in which he has been appointed in the past.
- (iii) While appointing arbitrator(s) under Sub-Clause 64.(3)(a)(i), 64.(3)(a)(ii), 64.(3)(b)(i) & 64.(3)(b)(ii) above, due care shall be taken that he/they is/are not the one/those who had an opportunity to deal with the matters to which the contract relates or who in the course of his/their duties as DFCCIL servant(s) expressed views on all or any of the matters under dispute or differences. A certification to this effect as per annexure- XVI shall be taken from Arbitrators also. The proceedings of the Arbitral tribunal or the award made by such Tribunal will, however, not be invalid merely for the reason that one or more arbitrator had, in the course of his service, opportunity to deal with the matters to which the contract relates or who in the course of his/their duties expressed views on all or any of the matters under dispute.
- 64.(3)(d)(i):** The arbitral award shall state item wise, the sum and reasons upon which it is based. The analysis and reasons shall be detailed enough so that the award could be inferred therefrom.
- 64.(3)(d)(ii):** A party may apply for corrections of any computational errors, any typographical or clerical errors or any other error of similar nature occurring in the award of a Tribunal and interpretation of a specific point of award to Tribunal within 60 days of receipt of the award.

- 64.(3)(d)(iii):** A party may apply to Tribunal within 60 days of receipt of award to make an additional award as to claims presented in the arbitral proceedings but omitted from the arbitral award.
- 64.(4):** In case of the Tribunal, comprising of three members, any ruling on award shall be made by a majority of members of Tribunal. In the absence of such a majority, the views of the Presiding Arbitrator shall prevail.
- 64.(5):** Where the arbitral award is for the payment of money, no interest shall be payable on whole or any part of the money for any period till the date on which the award is made.
- 64. (6):** The cost of arbitration shall be borne by the respective parties. The cost shall inter-alia include fee of the arbitrator(s), as per the rates fixed by DFCCIL Board from time to time and the fee shall be borne equally by both the parties, provided parties sign an agreement in the format given at Annexure XV to these conditions after/ while referring these disputes to Arbitration. Further, the fee payable to the arbitrator(s) would be governed by the instructions issued on the subject by DFCCIL Board from time to time irrespective of the fact whether the arbitrator(s) is/are appointed by the DFCCIL Administration or by the court of law unless specifically directed by Hon'ble court otherwise on the matter.
- 64.(7)** Subject to the provisions of the aforesaid Arbitration and Conciliation Act 1996 and the rules thereunder and relevant para of the Standard General Conditions of Contract and any statutory modifications thereof shall apply to the appointment of arbitrators and arbitration proceedings under this Clause.
- 64.(8)** In case arbitration award is challenged by a party in the Court of Law, 75% of award amount, pending adjudication by Court of Law, shall be made by party to other party. In case payment is to be made by DFCCIL to Contractor, the terms & conditions as incorporated in the Ministry of railways letter No. 2016/CE(I)/CT/ARB/3(NITI Aayog)/Pt. dated 08th Mar,2017 as amended from time to time, shall be followed. In case Contractor has to pay to the DFCCIL, then 75% of the award amount shall be deducted by the DFCCIL from the Contractor's bills, Performance Guarantee/ Security Deposit or any other dues of Contractor with the Government of India.

Chapter V

SPECIAL CONDITIONS OF CONTRACT

A. GENERAL

1.0 This Tender shall be governed by Preamble and General instructions to tenderers, General condition of Contract, Special conditions of contract, Technical Specifications, Additional Technical specifications (if any), Drawings, Forms, Annexures, etc.

1.1 If there are varying or conflicting provisions in the documents forming part of the contract, Engineer shall be deciding authority with regard to the intentions of the provision and decision of Engineer will be final and binding on the contractor.

1.2 Scheme of work: - Within a period of 10 days beginning from the date of issue of Letter of Acceptance of Tender, the Contractor shall submit the detailed time schedule for execution of work and various documents enumerated in tender papers to the employer.

1.3 Quality Assurance Plan for Substructure and foundation

All materials used in the work shall be of the best quality as per codes. Quality Assurance Plan shall include for materials used and for workmanship of work. The contractor shall submit Quality Assurance Plan for the substructure and foundation. The contractor shall also ensure that the Employer's prescribed Quality Assurance Standards are rigidly followed in for the construction of substructure and foundation. These are to be approved from the client / DFCCIL

1.4 Quality Assurance Plan for Superstructure

- (a) All materials used in the work shall be of the best quality as per codes / Specifications
- (b) The contractor shall ensure quality at all necessary points, whether at manufacturer's works, or in his depot or at work site as well as during erection through Quality Assurance Plan.
- (c) The Contractor shall adopt a suitable Quality Assurance Programme according to approved instructions, drawings, specifications, etc.

1.5 Expenses of Employer' Representative – All the expenses of Engineer's representative shall be borne by the Employer whether the inspected material is finally utilised in work or not.

1.5.1 The decision of the Engineer shall be final in respect of acceptability or otherwise of any material, fittings, component or equipment required for the work.

1.6 This programme of the Contractor shall generally cover the followings: -

1.6.1 The organization to manage and implement the Quality Assurance programme.

1.6.2 The documentation control system:

- (i) Basic control system.
- (ii) Adopted at manufacturer's work
- (iii) Adopted at the Contractor Depot and work site.

1.6.3 Procedure adopted for:

- (i) Source Inspection.
- (ii) Incoming raw material inspection.
- (iii) Verification of material purchased.

- (iv) Fabrication Controls.
- (v) Site erection controls.

1.6.4 Inspection and Test Procedure for:

- (i) Manufacture and quality control procedure.
- (ii) Field activity.

1.6.5 System of handling and storage.

1.6.6 System of quality audit.

1.6.7 System of maintenance of records.

1.7 For the purpose of obtaining 'On Account Payment', the Contractor shall submit along with the invoice, the documents indicated in the prescribed quality Assurance standards which should inter alia cover the following as may be applicable in each case.

- (i) Material test reports on raw materials used.
- (ii) Material type and routine test report on components specification.
- (iii) Inspection Plan with reports of the inspection Plan check points.
- (iv) Routine test report.
- (v) Factory test results as required under the specification.
- (vi) Quality audit report including test check report of Employer's representative if any.

1.8 Work By Other Agencies

- (a) Any other works undertaken at the same time by the Engineer direct or through some other agency at the same time or section where the contractor is carrying out his work will not entitle the contractor to prefer any claim regarding any delays or hindrances he may have to face on this account but the Employer shall grant a reasonable extension of time to the contractor. The contractor shall comply with any instruction which may be given to him by the Employer in order to permit simultaneous execution of his own works and those undertaken by other contractors or the DFCCIL without being entitled on this account on any extra charge.
- (b) The contractor shall not be entitled to any extra payment due to hindrance resulting from normal Railway operations, such as delay on account of adequate number of and duration of blocks not being granted, operational delay in movement of work trains extension of time to the contractor.

1.9 Infringement of patents:

- (a) The Contractor is forbidden to use any patents or registered drawings, process or pattern in fulfilling his contract without the previous consent in writing of the owner of such patent, drawing, pattern or trade mark, except where these are specified by the Employer himself. Royalties where payable for the use of such patented processes, registered drawings of patterns shall be borne exclusively by the Contractor. The contractor shall advise the Employer of any proprietary right that may exist on such processed drawings or patterns which he may use of his own accord.
- (b) In the case of patent taken out by the Contractor of the drawings or patterns registered

by him, or of those patents, drawings, or patents for which he holds a licence, the signing of the Contract automatically gives the Employer the right to repair by himself the purchased articles covered by the patent or by any person or body chosen by him and to obtain from any sources he desires the component parts required by him in carrying out the repair work. In the event of infringement of any patent rights due to above action of the Employer, he shall be entitled to claim damages from the contractor on the grounds of any loss of any nature which he may suffer e.g. in the case of attachment because of counterfeiting.

- (c) **Indemnification by contractor:-** In the event of any claim or demand being made or action being brought against the Employer for infringement of later patent in respect of any equipment, machine, plant, work or thing used or supplied by the Contractor under this contract or in respect of any methods of using or working by the Employer of such equipment machine, plant work or thing, the contractor shall indemnify the employer and keep him indemnified and harmless against all claims, costs, charges and expenses arising from or incurred by reason of such claim provided that the Employer shall notify the contractor immediately any claim is made and that the contractor shall be at liberty, if he so desires with the assistance of the Employer if required but at the Contractor's expense, to conduct all negotiations for the settlement of the same or any litigation that may arise there from and provided that no such equipment, machine, plant work or thing, shall be used by the Employer for any purpose or in any manner other than that for which they have been supplied by the Contractor and specified under this contract.

1.10 Insurance (CAR Policy) -

Before commencing of works, it shall be obligatory for the contractor to obtain, at his own cost, insurance cover (CAR policy) in the joint name of the contractor and employer from reputed companies under the following requirements:

- (a) Liability for death of or injury to any person/ employer's staff / animals or things or loss of or damage to any property / things / the work of other contractor (other than the work) arising out of the performance of the Contract.
- (b) Construction Plant, Machinery and equipment brought to site by the Contractor.
- (c) Any other insurance cover as may be required by the law of the land.

The contractor shall provide evidence to the employer / Engineer before commencement of work at site that the insurances required under the contract have been effected and shall within 60 days of the commencement date, provide the insurance policies to the Employer/Engineer, the contractor shall, whenever, called upon, produce to the engineer or his representative the evidence of payment of premiums paid by him to ensure that the policies indeed continue to be in force.

The Contractor shall also obtain any additional insurance cover as per the requirements of the Contract.

The Employer/Engineer shall not be liable for or in respect of any damages or compensation payable to any workman or other person in the employment of the Contractor or his sub-contractor or petty contractor / other contractor working there. The Contractor shall indemnify and keep indemnified the employer / Engineer against all such damages and compensation for which the contractor is liable.

The Policies of the contractor shall remain in force throughout the period of execution of

the works and till the expiry of the defect liability period except for any specific insurance covers necessary for shorter period.

If the Contractor fails to effect or keep in force or provide adequate cover as acceptable to the engineer in the insurance policies mentioned above, then in such cases, the engineer may effect and keep in force any such insurance or further insurance on behalf of the Contractor. The recovery shall be made at the rate of 1.5 times the premium/premiums paid by the engineer in this regard from the payment due to the Contractor or from the contractor's Performance security. However, the Contractor shall not be absolved from his responsibility and /or liability in this regard.

1.11 Accident:-

- (a) The contractor shall, in respect of all staff engaged by him or by his sub-contractor, indemnify and keep the employer at all times indemnified and protected against all claims made and liabilities incurred under Workman's Compensation Act, the Factories Act and the Payment of Wages Act, and rules made there under from time to time or under any other labour and Industrial Legislation made from time to time.
- (b) The contractor shall indemnify and keep the employer indemnified and harmless against all actions, suits, claim demands, costs, charges or expenses arising in connection with any death or injury sustained by any person or persons sustained due to the acts or omission of the contractor, his sub-contractors, his agents or his staff during the executions of this contract irrespective of whether such liability arises under the Workman's Compensation Act, or Fatal Accident Act or any other statute in force for the time being.
- (c) The contractor's liability to meet third party claims of the type outlined above will be applicable only in cases where accidents have been caused by workmanship, material, execution or negligence on the part of the contractor and further the liability of the contractor will be limited to Rs.5 lakh for any one accident.
- (d) The contractor shall be responsible for all repairs and rectification of damages to completed works or works under execution due to DFCCIL accidents, thefts, pilferage or any other cause, without delay to minimize or to avoid traffic detentions, in a section until the installation are provisionally handed over to the employer.

1.12 Safety Measures:-

- (a) The contractor shall take all precautionary measures in order to ensure the protection of his own personnel moving about or working on the railway premises, but shall then conform to the rules and regulations of the Railway if and when, in the course of the work there is likely to be any danger to persons in the employment of the contractor due to running traffic while working in the Railway siding and premises, the contractor shall provide flagman or look out men for protection of such persons. The employer shall remain indemnified by the contractor in the event of any accident occurring in the normal course of work, arising out of the failure of contractor or his men to exercise reasonable precaution at all places of work.
- (b) Blasting of rocks for foundation work shall be done only after due notice is given to the employer and time/s and date /s for blasting operations agreed to by the employer. Blasting, if required to be done in the vicinity of the track, shall not be undertaken

until the Employer's flagmen on duty take necessary step to protect trains and the track is adequately protected by the contractor against damage by blasted rock. The contractor shall follow detailed instructions which will be issued to him regarding blasting operations in the vicinity of tracks.

- (c) The contractor shall abide by all Railway regulations in force for the time being and ensure that the same are followed by his representatives, Agents or sub-contractors or workmen. He shall give due notice to his employees and workers about provision of this para.
- (d) The works must be carried out most carefully without any infringement of the Indian Railway Act or the General and Subsidiary Rules in force on the Railway, in such a way that they do not hinder Railway operation or affect the proper functioning of or damage any DFCCIL equipment, structure or rolling stock except as agreed to by the employer, provided that all damage and disfiguration caused by the contractor at his own cost failing which cost of such repairs shall be recovered from the contractor.
- (e) If safety of track or track drainage etc. is affected as a consequence of works undertaken by the contractor, the contractor shall take immediate steps to restore normal conditions. In case of delay, the employer shall, after giving due notice to the contractor in writing, take necessary steps and recover the costs from the contractor.

1.13 Guarantee / Defect Liability Period:-

- (a) The Contractor shall guarantee that all the works executed under this contract shall be free from all defects and faults in material, workmanship and manufacture and shall be of acceptable standards for the contracted work and in full conformity with the technical specifications, drawings and other contract stipulations, **for a period of 6 months from the date of taking over by the Employer**
- (b) During the period of guarantee the Contractor shall keep available an experienced engineer / man power to attend to any defective works / installations resulting from defective erection and/or defect in the installation supplied by the Contractor. This engineer shall not attend to rectification of defects which arise out of normal wear and tear and come within the purview of routine maintenance work. The contractor shall bear the cost of modifications, additions or substitutions that may be considered necessary due to faulty materials or workmanship for the satisfactory working of the equipment. The final decision shall rest with the Engineer his successor(s)/Nominee.
- (c) During the period of Guarantee the Contractor shall be liable for the replacement at site of any parts which may be found defective in the executed work whether such parts / structural elements of his own manufacture or those of his sub-contractor / supplier whether arising from faulty materials, workmanship or negligence in any manner on the part of the Contractor provided always that such defective parts as are not repairable at site are promptly returned to the Contractor if so required by him at his (Contractor's) own expenses. In case of parts of executed work detected during guarantee period, contractor should replace all such items irrespective of the fact whether all such items have failed or not. The Contractor shall bear the cost of repairs carried out on his behalf by the Employer at site. In such a case, the contractor shall be informed in advance of the works proposed to be carried out by the Employer.

- (d) If it becomes necessary for the Contractor to replace or renew any defective portion of the structural elements until the expiration of six month from the date of such replacement or renewal or until the end of the above mentioned period whichever is later.

Such extension shall not apply in case of defects of a minor nature, the decision of the Chief General Manager or his successor/nominee being final in the matter. If any defect be not remedied within a reasonable time during the aforesaid period the Employer may proceed to do work at the Contractor's risk and expense, but without prejudice to any other rights and remedies which the Employer may have against the Contractor in respect of such defects or faults.

- (e) The repaired or renewal parts structure shall be delivered / supplied and erected / executed on site free of charge to the employer.
- (f) Any materials, fittings, components or equipment/structure supplied under items for supplying / providing and fixing in schedule shall also be covered by the provisions of this paragraph. The liability of the Contractor under the guarantee will be limited to re-supply of components / structure installation and fittings.

1.14 Final Acceptance:-

- (a) The final acceptance of the entire work executed shall take effect from the date of expiry of the period of guarantee / Defect Liability period as defined in paragraph 1.13 above of the expiry of the last of the respective periods of guarantee, provided in any case that the Contractor has complied fully with his obligations under clause 1.13, provided also that the attention has been paid by way of maintenance by the Employer.
- (b) If on the other hand the contractor has not so complied with his obligation under Para 1.13 above in respect of any work, the Employer may either extend the period of guarantee in respect of that work until the necessary works are carried out by the Contractor or carry out those works or got them carried out suo moto on behalf of the Contractor at the Contractor's expenses. After expiry of the period of guarantee for each work, a certificate of final acceptance for the section shall be issued by the Employer and the last of such certificate will be called the last and final acceptance certificate. The contract shall not be considered as completed until the issue of final acceptance certificate by the Employer.
- (c) The Employer shall not be liable to the Contractor for any matter arising out of or in connection with the contract or execution of the work unless the Contractor shall have made a claim in writing in respect thereof before the issue of final acceptance certificate under this clause.

Notwithstanding the issue of final acceptance certificate the Contractor and the Employer (subject to sub-clause as above) shall remain liable for fulfilment of any obligation incurred under the provision of the contract prior to the issue of final acceptance certificate which remains unperformed at the time such certificate is issued and for determining the nature and extent of such obligation the contract shall be deemed to remain in force between the parties hereto.

1.15 Payment:-

Payment will be governed by the terms specified in accordance with accepted schedule of prices, read with relevant para of the other parts and Chapters of the Tender Papers. The employer retains the right to withhold money due to the contractor arising out of this contract for any default of the contractor.

- (i) The Contractor shall, whenever required, produce or cause to be produced for examination by the Employer any quotation / invoice, cost of other account, book of account, voucher, receipt letter, memorandum paper or writing or any copy of or extract from any such document and also furnish information and returns verified in such manner as may be required in anyway relating to the execution of this contract or relevant for verifying or ascertaining the cost of the execution of this Contract (the decision of the employer on the question of relevancy of any documents, information or return being final and binding on the parties). The Contractor shall similarly produce vouchers etc., if required, to prove to the Employer that materials supplied by him are in accordance with the specifications laid down in the contract.
- (ii) If any portion of the work be carried out by a sub-contractor or any subsidiary or allied firm or company the Employer shall have power to secure the books of such sub-contractor or any subsidiary or allied firm or company, through the Contractor, and such books shall be open to his inspection. The Contractor should seek prior permission from the employer for subletting whole and/or part of the work to any sub-contractor.
- (iii) The obligations imposed by sub-clause (i) and (ii) above are without prejudice to the obligation of the Contractor under any statute, rules or order binding to the Contractor or other conditions of the contract.
- (iv) It is an agreed term of the contract that the employer reserves the right to carry out post-payment Audit and/or technical examination of the works and the final bill, including all supporting vouchers, abstracts etc. and to make a claim on the Contractor for the refund of any excess amount paid to him if as a result of such examination any over payment to him is discovered to have been made in respect of any work done or alleged to have been done by him under the contract.

1.16 All payments in respect of the contract during the currency of the contract shall be made through Electronic Clearing System (ECS) / National Electronic Funds Transfer (NEFT/RTGS). The successful tenderer on award of contract must submit ECS/NEFT/RTGS Mandate Form complete in all respects as detailed at Form No. 8 of the tender document. However, if the facility of ECS/NEFT/RTGS is not available at a particular location, the payments shall be made by cheque.

1.17 ANTI PROFITEERING CLAUSE.

The contractor should adhere to anti profiteering provisions as per section 171 of the CGST Act. Where due to change in the rates GST/Change in law, the contractor gets any credits/benefits, the same shall be passed on to DFCCIL by way of reduction in prices.

1.18 INTEGRITY PACT:-

As per office memorandum no F.No DPE/13(12)/11-Fin Dated 09.09.2011 issued by Ministry of Heavy Industries (DPE) all PSU should enter into Integrity pact in the required proforma in their procurement transaction/ Contracts with suitable changes specific to the situation in which the pact is to be used. The pact, entering into which would be a

preliminary qualification for any bidder, essentially envisages an agreement between the prospective vendors / bidders and the DFCCIL, committing the persons/ officials on both sides not to resort to any corrupt practices in any aspect / stage of the contract.

The Performa for Integrity Pact is placed as **Form No. 05**. The details of present DFCCIL's IEMs are as under:

- i) Shri V.Kannan, Ex-CMD, Vijaya Bank,
Address: TA-1, Krishna Regency, Third Floor, Tata Silk Farm, K R Road, Basavanagudi, Bangalore-4,
Mobile No. 08105305555, (email: Kannan.venkata@gmail.com)
- ii) Ms. Rashmi Verma, IAS (Retd.)
Address: D-87, Ground Floor, Panchsheel Enclave, New Delhi- 110017
Mobile No. 9810735544, (email: verma.rashmi@rediffmail.com)

B. SAFETY PRECAUTIONS

1.0 MEASURES TO BE ENSURED PRIOR TO START OF WORK

- 1.1 The contractor shall not start any work without the presence of DFCCIL supervisors at site.
- 1.2 The methodology in detail for execution of the work at site shall be approved by engineering in charge of the organization executing the work and copies of the same shall be available with contractor's supervisor, DFCCIL supervisor of the section in whose jurisdiction the work falls.
- 1.3 Before permitting the execution of certain works like earthwork in formation, bridge work, supply of ballast, transportation of rails, sleepers and other material, track linking, platform/any other civil work close to the running track etc. for new/existing rail lines, gauge conversion, doubling, traffic facility work, ROB/RUB, DFCCIL engineer-in-charge (APM/DPM/PM/Dy. CPM) of the section shall ensure that he received the prior intimation/confirmation of the following aspects from representative of contractor.
- 1.4 Name and address of the contract assigned to execute the work.
 - (i) Name of the Contractor's supervisor
 - (ii) Name of the supervisor/assistant engineer/assistant officer of the construction organization/other organizations who are going to be site in charge/in charge of work site.
 - (iii) List of the number(s) of individual vehicle(s)/ machineries, names and license particulars of the driver(s) proposed to be used by contractor.
 - (iv) Information regarding location, duration and timings during which the vehicles/machinery are planned to be plied/worked.
 - (v) The supervisors and operators of the contractor proposed to be deployed at work site which is close to the running track, shall be imparted training by the DFCCIL trainer at contractor own cost about the safety measures to be adopted while working in the vicinity of running track. Further competency certificate to the individual supervisors/operator shall be issued as in Annexure-A by a DFCCIL officer not below the rank of Assistant level officer who is in charge of site. No supervisor/operator of the contractor shall work or allowed to work in the vicinity of running track who is not possession of valid competent certificate.
 - (vi) Survey of site by supervisor of contractor and DFCCIL to assess the precautions to be taken at site for working of trains and materials required for protection.
 - (vii) Written advice to sectional APM/DPM about the detailed planning of work including protection of track and safety measures proposed to be adopted.
 - (viii) A copy of the approved methodology (to be approved by engineer in charge) proposed to be adapted by the contractor with a view to ensure safety of trains passengers and workers.
 - (ix) Assurance that the methods and arrangements are actually available at site before start of the work and the contractors supervisors and the workers have clearly understood the safety aspects and requirement to be adapted/followed while executing the work.
 - (x) An assurance register has been kept at site duly signed by both DFCCIL supervisor as well as by the contractor supervisor as a token of their having understood the safety precautions to be observed at site.
 - (xi) No work shall which is to be done near running track shall commence unless permitted by sectional APM/DPM/PM/Dy.CPM
 - (xii) Supplementary site specific instructions, wherever considered necessary shall be issued by the Engineer in Charge
 - (xiii) Standard Check list on Safety at Work Sites shall be used to ensure that all the requisite measures

have been taken before start of work.

2.0 **PLYING OF ROAD VEHICLES AND WORKING OF MACHINERIES CLOSE TO RUNNING TRACKS**

- (i) Normally, the road vehicles shall be run or machinery shall be worked so as not to come closer than 6.0m from center line of nearest running track.
- (ii) The land strip adjacent to running tracks, where road vehicle is to ply or machinery is to work, shall be demarcated by lime in advance in consultation with the DFCCIL's Supervisor. Wooden pegs at interval not exceeding 75mts shall be provided along the line marking as permanent marks. The road vehicles shall ply or machinery shall work so as not to infringe the line of demarcation.
- (iii) If a road vehicle or machinery is to work closer to 6.0m due to site conditions or requirement of work, following precautions shall be observed.
 - a. In no case the road vehicle shall run or machinery shall work at distance less than 3.5m from center line of track.
 - b. Demarcation of land shall be done by bright colored ribbon/nylon cord suspended on 120 cm high wooden/bamboo posts at distance of 3.5 m from center line of nearest running track.
 - c. Presence of an authorized DFCCIL's representative shall be ensured before plying of vehicle or working of machinery.
 - d. DFCCIL's Supervisor shall issue suitable caution order to Drivers of approaching train about road vehicles plying or machineries working close to running tracks. The train drivers shall be advised to whistle freely to warn about the approaching train. Whistle boards shall be provided wherever considered necessary.
 - e. Lookout men shall be posted along the track at a distance of 800m from such locations who will carry red flag and whistles to warn the road vehicle/machinery users about the approaching trains. Lookout man shall be deputed for Safety at Work Sites.
 - f. On curves where visibility is poor, additional lookout men shall be posted.
- (iv) **If vehicle/machinery is to be worked closer to 3.5m from running track.**

Under unavoidable conditions, if road vehicles is to ply or machinery is to work closer to 3.5m due to site conditions or requirement of work, following precautions shall be observed:

 - a. Plying of vehicles or working of machinery closer to 3.5m of running track shall be done only under protection of track. Traffic block shall be imposed wherever considered necessary. The site shall be protected as per provisions of Para No. 806 & 807 of P-Way Manual as case may be.
 - b. Presence of a DFCCIL's Supervisor shall be ensured at worksite.
 - c. DFCCIL's Supervisor shall issue suitable caution order to Drivers of approaching train about road vehicles plying or machineries working close to running tracks. The train drivers shall be advised to whistle freely to warn about the approaching train.
- (v) **Precaution to be taken while reversing road vehicle alongside the track.**

The location where vehicle will take a turn shall be demarcated duly approved by DFCCIL's representative. The road vehicle driver shall always face the DFCCIL track during the course of turning/reversing his vehicle. Presence of an authorized DFCCIL representative shall be ensured at such location.
- (vi) Road vehicle shall not be allowed to run along the track during night hours generally. In unavoidable situations, however, vehicles shall be allowed to work during night hours only in the

presence of an authorized DFCCIL's representative and where adequate lighting arrangements are made and where adequate precautions as mentioned earlier have been ensured.

- (vii) Road vehicles/machinery/plant etc. when stabled near running tracks shall be properly secured against any possible roll off and always be manned even during off hours.

3.0 **EXECUTION OF WORKS CLOSE TO OR ON RUNNING LINES**

Any work close to or on running tracks shall be executed under the presence of a DFCCIL's Supervisor only.

- (i) **Precaution to be taken to ensure safety of trains while execution of work close to the running line or on running lines.**
 - (a) Contractor has deputed trained supervisors in required number at worksites duly certified by APM/DPM/PM/Dy. CPM in charge of the works.
 - (b) Drivers of vehicle/operators of the machines have been briefed about the safety and precautions to be taken while moving / working close to traffic.
 - (c) **Contractor shall ply road vehicles/working of machinery only between sunrise and sunset. In case of emergency where it is necessary to work during night hours sufficient lighting shall be ensured in the complete work area for the safety of public and passengers. Also additional staff shall be posted as necessary for night working and taking safety precautions.**
 - (d) The contractor shall not change the approved vehicle/machinery and driver/operator for working at site. Contractor shall not induct any new vehicle/machinery and driver/operator without prior written approval of APM/DPM and the list of such changes with numbers of individual vehicle, name and license particulars of the driver shall be given to APM/DPM/PM/Dy. CPM of the section.
 - (e) Contractor shall ensure that road vehicle/machinery ply/work in a way so that these do not infringe the line of demonstration.
 - (f) Lookout men with required safety equipment shall be posted where necessary.
 - (g) In unusual circumstances, where operator apprehends danger to track while working truck/machinery near running track, following action shall be taken.
 - a) The contractor/supervisor/vehicle operator immediately advice the situation to DFCCIL official/officials of the organization executing the work and assist him/them in protecting the track.
 - b) Protection shall be done as done for other emergencies
 - (h) Individual vehicle/machinery shall not be left unattended at site of work. If it is unavoidable and becomes necessary to stable the road vehicle/machinery at site near the running track, these shall be properly secured against any possible roll off and always be manned even during non-working hours. In addition the road vehicle / machinery should be stabled parallel to track only so that incase of failure of any securing arrangement, it may not roll towards the track.
 - (i) All temporary arrangements required to be made during execution of work shall be made in such a manner that moving dimensions do not infringe. Necessary checks shall be exercised by site in charge from time to time.
 - (j) During the hours of night, lamps of temporary indicators which are not of reflective type should be lit at sun-set and kept burning till sun rise, where trains run at night.
 - (ii) **Precaution to be taken to ensure safety of electrical/signal/ telephone cables while excavating near tracks.**

- (a) Particular care shall be taken to mark the locations of buried electrical/signal/telephone cables on the plans jointly with S & T/Electric supervisor and also at site so that these are not damaged during excavation
- (b) Copy of the cable plan should be given to the contractor's authorized representative before handing over the site to start the work.
- (c) Due care shall be taken to ensure that any part of the equipment or machinery or temporary arrangement does not come close to cables while working.
- (iii) Precaution to be taken during execution of works requiring traffic blocks.**
 - a) Any work, which infringes the moving dimensions or causes discontinuity in the track any activity making the existing track unsafe for passage of trains etc. Shall be started only after the traffic block has been imposed, DFCCIL servant in charge of the work is present at the worksite, engineering signals are exhibited at specified distance and flagmen are posted with necessary equipment to man them etc
 - b) Before closing the work, the track shall be left with the proper track geometry so that the trains run safely and flagmen are kept in the night with safety and track protection equipment to patrol the stretch and take action to protect the track, if so warranted and inform the DFCCIL supervisors.
 - c) After completion of work the released sleeper and fittings should be properly stacked away from the track to be kept clear of moving dimensions.
 - d) Block shall be removed only when all the temporary arrangement, machineries, tools, plants etc. have been kept clear of moving dimensions.
- (iv) Precaution to be taken during execution of works during night.** The work close to running line, generally, shall be carried out only during day hours. At locations, however, where night working is unavoidable, proper lighting arrangement should be made. The engineering indicator boards shall be lighted during night hours as per the provisions of IRPWM. The staff deputed for night working should have taken adequate rest before deploying them in night shift. We can specify duration of night shift from 20.00 hrs to 04.00 hrs. All other safety precautions applicable for day time work should be strictly observed during night working.
- (v) Precautions to be taken to ensure safety of workers while working close to running lines.**
 - a) Any work close to or on running tracks shall be executed under the presence of a DFCCIL's supervisor only.
 - b) Precaution to be taken to ensure safety of trains while execution of work close to the running line or on running lines.
 - (i) Such works shall be planned and necessary drawings particularly with regard to infringement to moving dimensions shall be finalized duly approved by competent authority before execution of work. The work shall be executed only as per approved procedure and drawings.
 - (ii) All temporary arrangements required to be made during execution of work shall be made in such a manner that moving dimension do not infringe.
 - (iii) Suitable speed restriction shall be imposed or Traffic block shall be ensured as required.
 - (iv) The site shall be protected as per provisions of Para No. 806 & 807 of P.Way Manual as case may be.
 - (v) Necessary equipment for safety of trains during emergency shall be kept ready at site.
 - c) A 'first aid kit' shall always be kept ready at site.

- (vi) **Precaution shall be taken for safety of public or passengers, while executing works at locations, used by passengers and public.** The worksite shall be suitably demarcated to keep public and passengers away from work area. Necessary signage boards such as “Work in progress. Inconvenience is regretted” etc. shall be provided at appropriate locations to warn the public/ passengers. Adequate lighting arrangement of worksite wherever required shall be done to ensure safety of public/passengers during night.
- (vii) **Precaution to be taken before stacking materials alongside the track to ensure that safety of trains is not affected.** The following precautions shall be taken before stacking the materials along the track for stacking of ballast, rails, sleepers etc.
- a) The sites for material stacking should be selected in advance in such a manner as to ensure that no part of the material to be stacked is infringing the Standard Moving Dimensions. A plan of proposed stacking locations be made and signed jointly by an authorized DFCCIL’s representative and contractor’s representative.
- b) The selected locations shall be marked by lime in advance.
- c) Presence of an authorized DFCCIL’s representative while unloading and stacking shall be ensured.
- d) The material shall be stacked in such a height so as to not to infringe SOD in case of accidental roll off.
- (viii) **Precaution for handling of departmental material trains** Instructions for working of material trains are contained in Chapter XII of IRPWM which should be brought to the notice of the supervisors and other staff working on the material trains. In addition to this, following precautions should be taken:
- (a) Issue of ‘fit to run’ certificate. As per Para 1207 before a material train is allowed to work, the complete rake should be examined by the Carriage and Wagon staff and a ‘fit to run’ certificate issued to the Guard.
- (b) As per Para 1208 of IRPWM, a qualified Engineering official should be deputed on the train to ensure working of the material train as the Guard is not qualified to carry out such duties like Supervising of loading and unloading of materials.
- (c) As per Para 1204 of IRPWM, the material train should not be permitted to work during the period of poor visibility due to fog, storm or any other cause except with the permission of the APM/DPM/PM/Dy. CPM. Working of the material trains carrying labour should not be permitted between sunset and sunrise except in an emergency.
- (d) While unloading rail panels by the side of the running track, placement of the panels, clear of the maximum moving dimensions should be ensured.
- (e) Unloading of rail panels should be done by a team of trained staff under the active supervision of competent Supervisor/Officer.
- (f) Before unloading of rail panels, site should be prepared by way of leveling/removing extra ballast, if any, from the crib and shoulder with the objective to ensure requisite lateral and vertical clearances so as to prevent slippage of rail panels due to vibration during the passage of trains.
- (g) Reasonably adequate block should be asked and provided for unloading of the material and the work should be done preferably in day light to avoid shortcut in haste which may infringe the safety requirements.
- (ix) **SAFETY ASPECTS TO BE OBSERVED WHILE WORKING IN OHE AREA**
- (a) No electrical work close to running track shall be carried out without permission of DFCCIL representative.

- (b) A minimum distance of 2m has to be maintained between live OHE wire and body part of worker or tools or metallic supports etc.
- (c) No electric connection etc. can be tapped from OHE.
- (d) Authorized OHE staff should invariably be present when the relaying work or any major work is carried out.
- (e) Power block is correctly taken and 'permit to work' is issued.
- (f) The structure bonds, track bonds, cross bonds, longitudinal rail bonds are not disturbed and
- (g) If disconnected for the work, they are reconnected properly when the work is completed.
- (h) The track level is not raised beyond the permissible limit during the work.

4.0 PROTECTION OF TRACK DURING EMERGENCY

- (i) **Action to be taken when a contractor's supervisor or vehicle operator apprehends any unusual circumstances likely to infringe the track and endanger safe running of trains.** At any time if a contractor's supervisor or vehicle operator observes any unusual circumstances likely to infringe the track and apprehend danger to safe running of track, he shall take immediate steps to advise a DFCCIL official of such danger and assist him in protection of track.
The track shall be protected as under. One person shall immediately plant a red flag (red lamp during night) at the spot and proceed with all haste in the direction of approaching train with a red flag in hand (red lamp during night) and plant a detonator on rail at a distance of 600m from the place of obstruction of BG track after which he shall further proceed for not less than 1200m from the place of obstruction from BG track and plant three detonators at 10m apart on rails. After this he shall display the red flag (red lamp during night) at a distance of 45m from the detonators.
Attempts shall also be made to send an advice to nearest DFCCIL station about the incident immediately.
- (ii) **Action to be taken if train is seen approaching to site of danger and there is no time to protect the track as per guidelines mentioned above.**
In such a case the detonators shall be planted on rails immediately at distance away from place of danger as far as possible and attention of driver of approaching train shall be invited by whistling, waving the red flag vigorously, gesticulating and shouting.
- (iii) **Action to be taken if more than one track is obstructed.**
 - a) In case of single line protection as above shall be done in both the directions from place of danger.
 - b) In case of double line or multiple lines, if other tracks are also obstructed, the protection as above shall be done for other track also.
The protection shall be done in that direction and on that track first on which train is likely to arrive first.
- c) The Contractor's Supervisors, Operators and lookout men shall be properly explained about the direction of trains on running tracks.
- (iv) **Equipment required for protection of track.**
Minimum compliment of protection equipment i.e. 10 detonators, 4 red hand flags, 4 red hand lamps, 4 banner flags and whistles etc. shall always be kept ready at worksites for use in case of emergency. DFCCIL will arrange to provide detonators, whereas Contractor shall arrange other equipment at his own cost.
- (v) **Arrangement of lookout men and competency required for lookout man to warn labour about approaching train.**
 - a) Contractor will provide lookout men

- b) The lookout men shall be properly trained in warning to staff at worksite about approaching train.
- c) Only those lookout men shall be provided at site who have been issued with a competency certificate by the DFCCIL's Supervisor.
- d) In case, it is felt necessary to provide lookout men by DFCCIL, the charges for the same as fixed by DFCCIL Administration shall be recovered from Contractor.

5.0 TRAINING TO SUPERVISORS AND OPERATORS OF CONTRACTOR

The Supervisors and Operators of the contractor proposed to be deployed at work site, which is close to the running track, shall be imparted mandatory training by the DFCCIL at site free of cost about the safety measures to be adopted while working in the vicinity of running track. Engineer-in charge of the work shall decide the scale, extent & adequacy of training. In case training is imparted at a recognized DFCCIL training institute, the charges for the same, as decided by DFCCIL, shall be recovered from contractor. A competency certificate to this effect to the individual Supervisor/ Operator shall be issued as given below by a DFCCIL Officer not below the rank of Project Manager. No Supervisor/Operator of the Contractor shall work or allowed to work in the vicinity of running track that is not in possession of valid competency certificate.

All the labour, materials, tools, plants etc. except detonators, required for ensuring safe running of trains shall be provided by Contractor at his own cost. Wherever lookout men are provided by DFCCIL, charges at the rate of Rs. 500/- per man day shall be recovered from Contractor.

6.0 SPECIAL CONDITIONS FOR WORKING OF ROAD CRANES

To ensure safe working of road cranes used in works in connection with provision of ROB/RUB/Subways, following items shall invariable be ensured before putting the cranes to use:-

- (i) No machine shall be selected to do any lifting on a specific job until its size and characteristics are considered against the weights, dimensions and lift radii of the heaviest and largest loads.
- (ii) The contractor shall ensure that a valid Certificate of Fitness is available before use of Road Cranes.
- (iii) Contractors should utilize the services of any competent person as defined in Factories Act, 1948 and approved by Chief Inspector of Factories.
- (iv) The laminated photocopies of fitness certificate issued by competent persons, the operators' photo, manufacturer's load chart and competency certificate shall always be either kept in the operator cabin or pasted on the visible surface of the lifting appliances.
- (v) All lifting appliances including all parts and gears thereof, whether fixed or movable shall be thoroughly tested and examined by a competent person once at least in every six months or after it has undergone any alterations or repairs liable to affect its strength or stability.

- 7.0 Contractor shall indemnify DFCCIL** against any loss/damage to public property, travelling public, DFCCIL or his own staff due to his (contractor's) negligence. In case there is any mishap, a fact finding inquiry will be conducted by DFCCIL. A show cause notice will be issued to the contractor, in case he is prima-facie held responsible. Contractor's reply to show cause notice will be considered by the Engineer in Charge before taking final decision. In case contractor is found responsible for the mishap, recovery from him will be affected for only tangible direct losses.

Competency Certificate

Certified that Shri _____ Supervisor/Operator of M/s. _____ has been trained and examined in safety measures to be followed while working in the vicinity of running DFCCIL track for the work _____. His knowledge has been found satisfactory and he is capable of supervising the work safely.

This certificate is valid only for the work mentioned in this certificate only.

Signature and designation of the officer

C. TECHNICAL CONDITIONS

1.0 GENERAL GUIDELINES REGARDING SPECIFICATIONS AND SPECIAL CONDITIONS FOR SUPPLY OF CEMENT FOR CONSTRUCTION WORKS

- 1.1 The work is to be executed as per the direction of Engineer in charge. Item to be operated shall be as per the tender schedule & site condition. Decision of Engineering-in-charge or his representative shall be final and binding on the contractor. Tenderers are requested to visit the site of work before quoting the rates.
- 1.2 All construction materials to be used in the work shall be as per relevant specification wherever applicable.
- 1.3 In case any ambiguity between special conditions and general standard condition, special conditions shall prevail.

2.1.1 SUPPLY OF CEMENT: (Not applicable for this tender)

- 2.1.1.1 Supply of cement to various specifications as required for various items under different schedules will be paid under the items in Schedule.
- 2.1.1.2 The cement required for various items of work under Schedule shall be supplied by the Contractor at the site of work in accordance with the requirements and specifications.
- 2.1.1.3 For supply and use of cement in various works, relevant Indian Railways Unified Standard Specifications as specified in CPWD standard specification, IRS codes and IS Specifications will be applicable. Wherever, relevant specifications are not available, decision of the Engineer shall be final and binding on the contractor.

2.1.2 SPECIFICATIONS FOR CEMENT:

- 2.1.2.1 The cement used shall conform to any of the following standards.

- (i) 33 Grade Ordinary Portland Cement conforming to IS: 269
- (ii) 43 Grade Ordinary Portland Cement conforming to IS: 8112
- (iii) 53 Grade Ordinary Portland Cement conforming to IS: 12269
- (iv) Rapid Hardening Ordinary Cement conforming to IS: 8041
- (v) High Strength Portland Cement conforming to IRS: T: 40
- (vi) Hydrophobic Portland cement conforming to IS: 8043
- (vii) Low heat Portland cement conforming to IS: 12600
- (viii) Sulphate Resistance Cement conforming to IS: 12330

2.1.3 SOURCE AND PACKAGING:

- 2.1.3.1 Cement to be used on the works shall be procured from the main / reputed cement plants or from their authorized dealers. Decision of DFCCIL regarding reputed firms shall be final and binding on the contractor.
- 2.1.3.2 Cement shall be packed in jute sacking bags conforming to IS: 2580-1982, double hessian bituminised (CRI type) or woven HDPE conforming to IS:11652-1986, woven polypropylene conforming to IS: 11653:1986, Jute synthetic union conforming to IS:

12174:1987 or any other approved composite bags, bearing the following information in legible markings:

- (i) Manufacturer's name or Registered Trade Mark of manufacturer, if any.
- (ii) Grade of cement
- (iii) Type of cement
- (iv) Weight of each bag in Kg.
- (v) Date of manufacture,
- (vi) IS Code No to which the cement conforms.

2.1.3.3 All cement bags shall have company stitches intact and if any sign of tampering with company stitches is noticed, the same will be rejected without any test and no compensation shall be payable in this regard.

2.1.4 TEST CERTIFICATE REGARDING QUALITY OF CEMENT:

2.1.4.1 Necessary test certificates will have to be produced by the contractor regarding the quality of the cement conforming to the specification in addition to the manufacturer's certificates.

2.1.4.2 DFCCIL reserves the right to take samples during the course of the work and get the cement tested in reputed laboratories to ascertain the conformity to the specification. Cost of such testing shall be borne by the contractor without any extra payment.

2.1.4.3 Tests on cement shall be done as per relevant IS Codes. These tests are as follows:

- (i) Compressive strength
- (ii) Initial and final setting time
- (iii) Consistency
- (iv) Soundness.
- (v) Fineness

2.1.4.4 The Contractor shall arrange to carryout above tests for every 100 Tonnes of cement and for every change in lot/batch and the same shall be submitted to the DFCCIL and take approval of the DFCCIL before using in work. No extra payment will be made for conducting such tests.

2.1.4.5 Any temporary structure required for storage of cement, has to be provided by the tenderer at his cost and shall be removed after completion of work. The DFCCIL will only provide suitable land wherever land is available and is free for use. On completion of the work or as directed by the Engineer, the shed if put up by the Contractor, should be removed by the contractor and site cleared at his cost.

2.1.5 CONSUMPTION OF CEMENT:

2.1.5.1 The cement consumption for other than design mix concrete, shall be as per approved design mix concrete, the quantity of cement will be decided based on the approved design mix keeping in mind Minimum and Maximum cement content specified for various grades. Excess cement used will not be paid for and the decision of the

Engineer in this connection shall be final and binding on the Contractor.

2.1.6 PAYMENT FOR CEMENT:-

Cement supplied for the work and measured under the Schedule will be paid only after its use in various works under the Schedules of the contract as per conditions and no advance payment for supply will be admissible.

2.1.7 GENERAL:-

2.1.7.1 No wastage of any of the materials supplied and used in the work by the contractor including cement is payable by DFCCIL, contractor shall make his own arrangements for storing cement for use in work.

2.1.7.2 Contractor should take proper precautionary measures to store the cement in good condition against rains, etc. Storage of cement at the work site shall be at the contractor's expense and risk. Any damage occurring to cement due to faulty storage in contractor's shed or on account of negligence on his part shall be the liability of the contractor.

2.1.7.3 53 Grade/43 Grade of cement should be stacked separately in countable manner.

2.1.7.4 Admixture as per IS: 9103 of approved manufacturer by the Engineer shall be permitted to be used in concrete wherever required. However, no extra payment for the admixtures used shall be payable unless otherwise specified in the Schedule.

2.1.7.5 Cement for temporary and enabling works shall be arranged by the contractor at his own cost and no extra payment will be paid on this account.

2.1.7.6 Empty Cement bags on release from the work is the property of the Contractor and shall be disposed of by the Contractor himself.

2.1.7.7 Cement not more than 03 months old from the date of manufacture shall be used. It shall be transported and stacked by the contractor in his godown at his own cost with all safety against loss/ theft by providing necessary security/watchman. The DFCCIL shall entertain no extra cost.

2.1.7.8 Contractor has to submit original purchase invoice/ Challans for the proof of purchase

2.2 GENERAL GUIDELINES REGARDING SPECIFICATIONS AND SPECIAL CONDITIONS FOR CONCRETE WORKS

2.2.1 Specifications:-

2.2.1.1 Concrete for PCC, RCC (Including piling and RCC deck slab) shall be as per relevant CPWD DSR & IS Specifications. Some important guide lines are listed below. Along with these, all other relevant IRS, IRC and IS specifications with their up to date versions shall also govern. These govern all concrete works in bridges, etc. as applicable.

(i) RS Concrete Bridge Code.

- (ii) IS 456: Code of Practice for Plain and Reinforced Concrete.
- (iii) Relevant CPWD DSR
- (iv) Relevant IRS/IRC/IS Specifications/Codes

2.2.1.2 Specifications for cement, steel, GI binding wire, used in concrete construction shall be as per IRS/IRC/IS specifications. Any other specifications/rules/guidelines issued from time to time by Railway Board/RDSO shall also govern the works.

2.2.1.3 In all matters of execution, including testing of various components, where the above codes/specifications/guidelines are not clear or explicit or at variance, the directions given by the Engineer shall be final and binding on the contractor.

2.2.2 Cement:-

2.2.2.1 The cement used in concrete construction shall be minimum 43 Grade Ordinary Portland cement as per the design and as specified in the relevant schedules. Specifications for cement are covered under the supply schedule.

2.2.3 Reinforcement:-

2.2.3.1 All Reinforcement Steel (TMT Bars of Grade Fe 500 D/550D) shall be procured as per specification mentioned in IS: 1786. Independent tests shall be conducted, wherever required, to ensure that the materials procured conform to the Specifications.

These steel shall be procured only from those firms, which are Established, Reliable, Indigenous & Primary Producers of Steel, having Integrated Steel Plants (ISP), using iron ore as the basic raw material and having in – house iron rolling facilities, followed by production of liquid steel and crude steel, as per Ministry of Steel’s guidelines.

2.2.3.2 Bars shall be cut, bent and placed correctly and accurately to the size and shape as shown in the detailed drawing. Preferably bars of full length shall be used. The reinforcement shall be tied with annealed steel binding wire. Overlapping of bars, where necessary, shall be done as directed by Engineer. Rates quoted include the cost of annealed steel binding wire of appropriate specifications. Rate also include necessary cutting and straightening is also included.

2.2.3.3 Welding of reinforcement will not be generally permitted except in special circumstances under the written approval of the Engineer.

2.2.3.4 A register shall be maintained by the Contractor with full details of reinforcement provided for accountable and payment of steel reinforcement. The contractor should sign a similar such register maintained by DFCCIL before undertaking concreting works, as a token of acceptance of the details of reinforcement steel provided in works, failing which the details as recorded by DFCCIL shall be binding on the contractor for the purpose of payment and no dispute will be entertained by DFCCIL on this account.

2.2.3.5 Contractor shall remove from site any steel materials rejected by the Engineer within a reasonable time as specified by him.

2.2.3.6 Protective Coatings:- In order to offer adequate resistance against corrosion, reinforcement bars may be provided with suitable protective coatings depending upon the environmental conditions. In aggressive environments (severe, and extreme) application of cement slurry coating after removal of rust and other loose material from the surface of the reinforcement bar will generally be sufficient.

2.2.3.7 The steel consumption shall be as per the drawings issued by the DFCCIL. Quantity of steel reinforcement consumption shall be as per reinforcement actually utilized in the work based on approved bar bending schedule. Nothing extra will be paid for wastage or for cut rods, if any, which will be property of the contractor. The weight of the steel will be calculated from the nominal weight given in the producer's hand /CPWD DSR specification books.

2.2.4 Coarse & Fine Aggregates:-

2.2.4.1 Aggregates shall comply with the requirements of IS: 383 and shall be subjected to the tests in accordance with IS: 2386. Coarse aggregates shall be from crushed stone from approved quarries. Sand shall be from good river sources of approved quarries only.

2.2.4.2 The size of the coarse aggregates shall be as per relevant IRS / IS specifications.

2.2.4.3 The size of the fine aggregates shall be as per relevant IRS / IS specifications.

2.2.4.4 Coarse aggregate shall be crushed and roughly cubical in shape. Fine aggregate shall be naturally produced. Creek/ Marine sand shall not be used in permanent works.

2.2.4.5 The grading of the sand shall conform to relevant IS specification. The sand shall be screened on a 4.75 mm size screen to eliminate over size particles. The sand, if required, shall be washed in screw type mechanical washers in potable water to remove excess silt, clay and chlorides wherever required. The screening and washing of sand shall be completed at least one day before using it in concrete. The washed sand shall be stored on a sloping platform and in such a manner as to avoid contamination.

2.2.5 Water:-

2.2.5.1 Water used for washing of aggregates and for mixing and curing concrete shall be clean, potable and free from injurious amounts of oils, acids, alkalis, salts, sugar, organic materials or other substances that may be deleterious to concrete or steel and shall conform to clause 5.4 of IS : 456.

2.2.5.2 In case of doubt regarding development of strength, the suitability of water for making concrete shall be ascertained by the compressive strength as per IS : 4031 (Part VI) and initial setting time tests IS : 4031 (Part V).

2.2.5.3 Water found satisfactory for mixing is also suitable for curing concrete. However, water used for curing should not produce any objectionable stain or unsightly deposit on the concrete surface. The presence of tannic acid or iron compounds is objectionable.

2.2.6 Admixtures:-

2.2.6.1 In bridges, use of admixtures is governed by clause 4.4 of IRS Concrete Bridge Code.

2.2.6.2 The admixtures, when permitted, shall conform to IS: 9103. Calcium chloride or admixtures containing calcium chloride shall not be used in structural concrete containing reinforcement, pre stressing tendon or other embedded metal. The admixture containing Cl & SO₃ ions shall not be used. Admixtures containing nitrates shall also not be used. Admixtures based on thiocyanate may promote corrosion and therefore shall be prohibited.

2.2.6.3 Concrete admixtures shall be obtained only from established manufactures with proven track record or as per approved list wherever available.

2.2.6.4 The contractor shall provide the following information concerning each admixture after obtaining the same from the manufacturer before the same is put to use:

- (a) The chemical names of the main ingredients in the admixtures.
- (b) The chloride iron content, if any, expressed as a percentage by mass of the total admixture.
- (c) Values of dry material content, ash content and relative density of the liquid admixture which can be used for Uniformity Tests.
- (d) Whether or not the admixture leads to the entrainment of air when used as per the manufacturer's recommended dosage, and if so to what extent.
- (e) Where two or more admixtures are proposed to be used in any one mix, confirmation as to their compatibility.
- (f) There would be no increase in risk of corrosion of the reinforcement or other embodiments as a result of using the admixture.
- (g) Retardation achieved in initial setting time.
- (h) Normal dosage and detrimental effects, if any, of under dosage and over dosage.
- (i) Recommended dosages and expected results, including proof for the same wherever required. Independent test results shall be produced by the contractor on demand/as specified.

2.2.7 Storage of materials:-

2.2.7.1 Storage of materials shall be as per IS: 4082. All materials may be stored at proper places so as to prevent their deterioration or intrusion by foreign matter and to ensure their satisfactory quality and fitness for the work. The storage space must also permit easy inspection, removal and restoring of the materials. All such materials even though stored in approved go downs / places, must be subjected to acceptance test prior to their immediate use.

2.2.7.2 Aggregate shall be stored at site on a hard and dry level patch of ground. If such a

surface is not available, a platform of planks or of corrugated iron sheets, or a floor of dry bricks, or a thin layer of lean concrete shall be made so as to prevent the admixture of clay, dust, vegetable and other foreign matter.

Stacks of fine and coarse aggregate shall be kept in separate stack piles, sufficiently removed from each other to prevent the materials at the edge of the piles getting intermixed. On a large job it is desirable to construct dividing walls to give each type of aggregate its own compartment. Fine aggregate shall be stacked in place where loss due to the effect of wind is minimum.

Unless specified otherwise or necessitated by site conditions, stacking of aggregate should be carried out in regular sizes.

2.2.7.3 Cement shall be transported, handled and stored at the site in such a manner as to avoid deterioration or contamination. Cement shall be stored above ground level in perfectly dry and water-tight sheds and shall be stacked not more than eight bags high. Wherever bulk storage containers are used their capacity should be sufficient to cater to the requirement at site and should be cleaned at least once every 3 months. Cement older than 3 months from the date of manufacture shall not be used. Each consignment shall be stored separately so that it may be readily identified and inspected and cement shall be used in the sequence in which it is delivered at site. Any consignment or part of a consignment of cement which had deteriorated in any way, during storage, shall not be used in the works and shall be removed from the site by the Contractor without charge to DFCCIL. For more details regarding stacking and storage of cement, refer CPWD DSR-2019 Specification.

2.2.7.4 The reinforcement bars, when delivered on the job, shall be stored above the surface of the ground level by at least by 150mm and shall ordinarily be stored in such a way as to avoid distortion and to prevent deterioration and corrosion. Every bar shall be inspected before assembling on the works and any defective, brittle, excessively rusted or burnt bars shall be removed. Cracked ends of bars shall be cut out.

2.2.8 Testing of cement & others:-

Cement and other items shall be tested as per specifications. However, the contractor shall also arrange for additional tests at his own cost as required by the Engineer as and when required. The decision of the Engineer shall be final in this regard.

2.2.9.1 Concreting:

2.2.9.1 The contractor shall make his own arrangements for supply of water and electricity for all his works at his own cost. He shall arrange potable quality water for use in all concrete works and samples of water shall be got tested from approved laboratory/approved by the Engineer before being used in concreting. Apart from water, fine & coarse aggregates and all other materials shall be tested from time to time by the contractor at his cost to ensure proper quality works.

2.2.9.2 Maximum / minimum size of aggregates, standards of quality of materials, minimum cover for concrete, use of admixtures / chemicals, treatment to reinforcement / finished surfaces, etc., shall be as per relevant Codes, IS / IRS specifications and conditions of contract as specified.

2.2.9.3 All exposed concrete surfaces shall be finished smooth by the contractor at his own cost. Shuttering materials for RCC in superstructure shall be strictly of steel only to permit vigorous vibration and to ensure no deviation of finished dimensions by more than +5/-0 mm and wooden shutters are not permitted. For other works also, proper quality of shuttering materials which will permit vibrating and will not require additional finishing shall only be used. If there is any variation in the surface, alignment or lines in the products beyond permissible rejection limits indicated in these conditions, the DFCCIL reserves the right to reject the same and the contractor shall not have any claim in this regard and cost of DFCCIL materials involved will be recovered from the contractor including penalties, if any imposed.

2.2.10 Weigh batching, vibrating, curing & testing by Batching plant with computerized control:

2.2.10.1. All concrete shall be machine batched, machine mixed and machine vibrated, by using appropriate vibrators. Weigh batching plant, mixers, vibrators, etc., of appropriate capacity, as specified/directed by the Engineer, shall be arranged by the contractor at his cost. In this case, Weigh batching plants shall have computerized control for weighing, loading, mixing and delivery.

2.2.10.2. Batching plants, transit mixers, concrete pumps, etc., shall be installed by the contractor necessarily at site. In case of failure of any of the above, standby arrangements for ensuing continuous concreting has to be provided by the contractor at his cost. For piling works concreting shall be done continuously as per the volumes designed without break and accordingly standby arrangements shall be ensured by the contractor.

2.2.10.3. Curing & vibrating shall be arranged by the contractor at all locations/heights at his own cost and no extra payment on this account will be admissible. Curing of concrete shall be done as per relevant IS Codes / Specifications. If curing is not done by the contractor properly, DFCCIL may get it done through any other means at the Contractor's cost without any notice to him and recover from his bills the same including penalty if any at the discretion of the Engineer. The concrete shall be kept wet constantly by pounding or covered with a layer of sacking canvas etc.

2.2.10.4. Test cubes shall be cast at regular intervals and tested to ascertain the strength of concrete. The contractor shall establish a cube testing facility along with operator at the site or nearby area to facilitate prompt testing of concrete. Test cube moulds as required as per IS Codes shall be made available by the contractor at his cost.

2.2.10.5 IMPORTANT CONSIDERATIONS, INSPECTION / PRECAUTIONS

Such structure or parts of the structure which fail or pass the specified tests, shall be removed from the site by the tenderer/contractor at his cost and the contractors shall redo the work. Payments made on account of the rejected structure/part structure work shall be recovered from the contractor and the work will be redone by him at the same rates.

2.2.11 Design Mix Concrete:

- (a) **General:** Design Mix is mandatory for grades higher than M20. For concrete of compressive strength greater than M55, specialized literature should be consulted.

Admixtures may be used while designing. Only design mix shall be used for all items of concrete. Prior to the start of construction, the contractor shall submit details of each trial mix of each grade of concrete to the Engineer for approval. When the proportions of the mix are approved, the contractor shall not vary any of the design parameters or the source of the materials without the approval of the Engineer. Wherever there is a significant change in materials used, fresh trial mix shall be arranged by the contractor as required by the Engineer. The concrete shall be designed keeping in view the minimum cement content and maximum cement content. Minimum cement content depends upon the environmental exposure conditions but maximum Cement Content shall be limited to 500kg/m³.

- (b) **Mix Design and Proportioning:** Recommended guidelines for Concrete Mix Design are given in **IS: 10262** which may be referred to for details. As mentioned therein in order that not more than the specified proportion of test results is likely to fall below the characteristic strength, the concrete mix has to be designed for a somewhat higher target average compressive strength. In terms of clause 9.2.2 of IS: 456, the Target Mean Strength of Concrete mix should be equal to the characteristic strength plus 1.65 times the Standard Deviation. Mix proportion shall be designed to ensure that the workability of fresh concrete is suitable for conditions of handling and placing, so that after compaction it surrounds all reinforcement and completely fill the form work. When concrete is hardened, it shall have the stipulated strength, durability and im-permeability.

Determination of the proportions of by weight of cement, aggregate and water shall be based on design mix.

As a trial the manufacturer of concrete may prepare a preliminary mix according to provisions of SP : 23-1982. (Special Publications 23-1982 of Bureau of Indian Standards) Mix design shall be tried and the mix proportions checked on the basis of tests conducted at a recognized laboratory approved by the Engineer. All concrete proportions for various grades of concrete shall be designed separately and mix proportions established keeping in view the workability for various structural elements, methods of placing and compacting.

Max size of Aggregate, Target Mean Strength			
Grade of Concrete	Max size of Aggregate (mm)	Characteristic Strength (fck) at 28 days (N/mm ²)	Target Mean Strength (fck) 28 days (N/mm ²)
M20	20	20	26.60
M25	20	25	31.60
M30	20	30	38.25
M35	20	35	43.25
M40	20	40	48.25
M45	20	45	53.25

- (c) **Standard deviation:** Standard deviation calculations of test results based on tests conducted on the same mix design for particular grade designation shall be done in accordance with Clause 9.2.4 of IS 456. Table 8 of IS 456 gives the standard deviation that can be assumed for design of mix in the first instance. The final standard deviation figures may be determined based on test results for the particular grade of concrete when available.
- (d) **Approval of Design Mix:** The contractor shall submit details of each trial mix of each grade

of concrete designed for various workability conditions to the Engineer for his comments and approval. Concrete of any particular design mix and grade shall be produced / manufactured for works only on obtaining written approval of the Engineer.

2.2.12 Requirements of Consistency:- The mix shall have the consistency which will allow proper placement and consolidation in the required position. Every attempt shall be made to obtain uniform consistency. The optimum consistency for various types of structures shall be as indicated in table below or as directed by the Engineer.

Slump Required for workability		
	Type	Slump (mm)
1	(a) Structures with exposed inclined surface requiring low slump concrete to allow proper compaction	25
	(b) Plain Cement Concrete	25
2	RCC structures with widely spaced reinforcements; e.g. solid columns, piers, abutments, footings, well steining	40-50
3	RCC structures with fair degree of congestion of reinforcement; e.g. pier and abutment caps, box culverts well curb, well cap, walls with thickness greater than 300mm	50-75
4	RCC and PSC structures with highly congested reinforcements e.g. deck slab girders, box girders, walls with thickness less than 300mm	75-125
5	Underwater concreting through tremie e.g. bottom plug, cast-in-situ piling	100-200

The minimum slump of concrete in case of bored cast in situ pile shall be 150 to 200 mm.

2.2.13 Durability:- The durability of concrete depends on its resistance to deterioration & environment in which it is placed. The resistance of concrete to weathering, chemical attack, abrasion, frost and fire depends largely upon its quality and constituent materials. Susceptibility to corrosion of the steel is governed by the cover provided and the permeability of concrete. The cube crushing strength alone is not a reliable guide to the quality and durability of concrete; it must also have adequate cement content and a low water-cement ratio. The general environment to which the concrete will be exposed during its working life is classified into three levels of severity that is moderate, severe, and extreme as described below:

Environment	Exposure condition
MODERATE	Concrete surface protected against weather or aggressive conditions. Concrete surface sheltered from severe rain or freezing whilst wet. Concrete exposed to condensation. Concrete structure continuously under water. Concrete in contact with non-aggressive soil /ground water.
SEVERE	Concrete surface exposed to severe rain, alternate wetting & drying or occasional freezing or severe condensation. Concrete exposed to aggressive subsoil / ground water or coastal environment.
EXTREME	Concrete surface exposed to sea water spray, corrosive fumes or severe

	freezing conditions whilst wet. Concrete structure surfaces exposed to abrasive action, surfaces of members in tidal zone. All other exposure conditions which are adverse to exposure conditions covered above.
--	--

Maximum water-cement ratio, grade of concrete and cementitious material content for various environment conditions for achieving durability are indicated below for guidance:

2.2.13.1 Maximum Water Cement Ratio:-

The limits for maximum water cement ratio for design mix shall be based on environmental conditions as defined in durability clause. The limits for maximum water cement ratio for different environmental conditions shall be as given in Table below:

Environment	Maximum Water-Cement Ratio		
	Plain Concrete (PCC)	Reinforced Concrete (RCC)	Pre stressed Concrete (PSC)
Moderate	0.50	0.45	0.40
Severe	0.45	0.40	0.40
Extreme	0.40	0.35	0.35

2.2.13.2 Grade of Concrete:- From durability consideration, depending upon the environment to which the structure is likely to be exposed during its service life, minimum grade of concrete shall be as given in table below:

Minimum Grade of Concrete

(A) For Bridges in Pre stressed Concrete and important Bridges.

Structural member	Moderate exposure	Severe Exposure	Extreme exposure
PCC member	M-25	M-30	M-35
RCC member	M-30	M-35	M-40
PSC member	M-35	M-40	M-45

(B) For Bridges other than mentioned above and sub-structure

Structural member	Moderate exposure	Severe Exposure	Extreme exposure
PCC Member	M-15	M-20	M-25
RCC member	M-20	M-25	M-30

2.2.13.3 Cementitious Material Content:- Maximum Cementitious Material Content shall be limited to 500kg/m³. Depending upon the environment to which the structure is likely to be exposed during its service life, minimum Cementitious Material Content in concrete shall be as given in table below:

Minimum Cementitious Material Content		
Environment	Minimum Cementitious Material Content in Kg/cum	
	Plain Concrete	Reinforced Concrete
	(PCC)	(RCC)

	Grade	Content	Grade	Content
Moderate	M25	240	M30	300
Severe	M30	250	M35	350
Extreme	M35	300	M40	400

2.2.13.4 Clear cover is the least distance from outer most surface of steel or binding wire or its end to the face of concrete. It is also an dimension used in design and indicated on the drawings. From durability consideration, minimum clear cover shall be as under.

Minimum Covers			
Type of structure	Extreme Environment	Severe Environment	Moderate Environment
Slab	50	35	25
Beam/Girder	60	50	35
Column	75	75	50
Piles	75	75	50

2.2.14 Permeability of concrete: Permeability requirements are as specified in IRS Concrete Bridge Code. Permeability test shall be mandatory for all RCC bridges under severe and extreme environment. Under moderate environment, permeability test shall be mandatory for all major bridges and for other bridges and structures.

2.2.15 Mixing of concrete:

2.2.15.1 Concrete shall be mixed either in a mini mobile batching plant or in a batching and mixing plant as per the specifications. Hand mixing shall not be permitted. The mixer or the plant shall be at an approved location considering the properties of the mixes and the transportation arrangements available with the Contractor. The mixer or the plant shall be approved by the Engineer.

2.2.15.2 Mixing shall be continued till materials are uniformly distributed and a uniform colour of the entire mass is obtained, and each individual particle of the coarse aggregate shows complete coating of mortar containing its proportionate amount of cement.

2.2.15.3 Mixers which have been out of use for more than 30 minutes shall be thoroughly cleaned before putting in a new batch. The first batch of concrete from the mixer shall contain only two thirds of the normal quantity of coarse aggregate. Mixing plant shall be thoroughly cleaned before changing from one type of mix to another.

2.2.16 Transporting, Placing and Compaction of Concrete:

2.2.16.1 The method of transporting and placing concrete shall be approved by the Engineer. Concrete shall be transported and placed as near as practicable to its final position, so that no contamination, segregation or loss of its constituent materials takes place. Concrete shall not be freely dropped into place from a height exceeding 1.5 metres.

2.2.16.2 When concrete is conveyed by chute, the plant shall be of such size and design as to ensure practically continuous flow. Slope of the chute shall be so adjusted that the concrete flows without the use of excessive quantity of water and without any segregation of its ingredients. The delivery end of the chute shall be as close as possible to the point

of deposit. The chute shall be thoroughly flushed with water before and after each working period and the water used for this purpose shall be discharged outside the formwork.

- 2.2.16.3 All formwork and reinforcement contained in it shall be cleaned and made free from standing water, dust, immediately before placing of concrete.
- 2.2.16.4 No concrete shall be placed in any part of the structure until approval of the Engineer has been obtained.
- 2.2.16.5 If concreting is not started within 24 hours of the approval being given, it shall have to be obtained again from the Engineer. Concreting then shall proceed continuously over the area between the construction joints. Fresh concrete shall not be placed against concrete which has been in position for more than 30 minutes unless a proper construction joint is formed.
- 2.2.16.6 Except where otherwise agreed to by the Engineer, concrete shall be deposited in horizontal layers to a compacted depth of not more than 450 mm when internal vibrators are used and not exceeding 300 mm in all other cases.
- 2.2.17 Concrete when deposited shall have a temperature of not less than 5⁰ C and not more than 40°C. It shall be compacted in its final position within 30 minutes of its discharge from the mixer, unless carried in properly designed agitators, operating continuously. It may be necessary to add retarding admixtures to concrete if trials shows that the period indicated above are unacceptable. In all such matters, engineer's decision shall be final.
- 2.2.18 Concrete shall be thoroughly compacted by vibration or other means approved by Engineer, during placing and worked around the reinforcement, embedded fixtures and into corners of the formwork to produce a dense homogenous void-free mass having the required surface finish. When vibrators are used, vibration shall be done continuously during the placing of each batch of concrete until the expulsion of air has practically ceased and in a manner that does not promote segregation. Over vibration shall be avoided to minimize the risk of forming a weak surface layer. When external vibrators are used, the design of formwork and disposition of vibrator shall be such as to ensure efficient compaction and to avoid surface blemishes. Vibrators shall not be applied through reinforcement and where vibrators of immersion type are used, contact with reinforcement and all inserts like ducts etc., shall be avoided. The internal vibrators shall be inserted in an orderly manner and the distance between insertions should be about one and half times the radius of the area visibly affected by vibration. Additional vibrators in serviceable condition shall be kept at site so that they can be used in the event of breakdowns.
- 2.2.19 Mechanical vibrators used shall be of appropriate specifications, type and capacity and as directed by the Engineer.

2.2.20 Equipment and machinery for concreting:

- 2.2.20.1 For concrete works, the following equipments in numbers indicated are considered necessary for efficient and speedier concreting at each site. However, the actual numbers may be arranged as required by the Engineer, taking into account the site conditions.

Indicative List of Equipment and Machinery		
1.	Concrete Batching plant (10 to 20 cum/hr capacity)	1 No.
2.	Transit Mixers (4 to 7 cum capacity)	2 Nos.
3.	Concrete Vibrators (2 HP capacity)	4 Nos.
4.	Vibrators of Needles (60mm & 40mm)	4 Nos.
5.	Screed vibrator (for ROBs)	2 Nos.
6.	Form vibrator (500 watts capacity)	2 Nos.
7.	Generator (35 KV capacity)	1 No.
8.	Welding set (3 to 5 KV capacity)	1 No.
9.	Reinforcement Steel Cutting Machine	2 No.
10.	Reinforcement Steel Bending Machine	2 No.
11.	Concrete Pumps (10 to 20 HP capacity with 40m pipe length)	1 No.
12.	Hydra 12.0 T capacity crane	1 No.
13.	Concrete Funnel Bucket	1 No.
14.	Air compressor (100 to 150 cum capacity)	1 No.
15.	Concrete Dumpers	2 Nos.
16.	Any other including power lifts etc., as required to suit site	Adequate No.

2.2.20.2 All the machinery are required to be arranged by the contractor at his own cost and the agreement rates for concreting include the same. No extra payment is admissible for any machinery arranged by the contractor.

2.2.21 TRANSPORTATION OF CONCRETE & PUMPING OF CONCRETE

2.2.21.1 General

Fresh concrete can be transported to the placement area by a variety of methods. Common among them are:

- Mixer trucks
- Stationary truck bodies with or without agitators.
- Buckets hauled by trucks.
- Conveyor belts.
- Hose or pipe line by pumping.

Each type of transportation has specific advantages and limitations depending on the condition of use, mix, accessibility and location of placing.

2.2.21.2 Transportation by Mixer Trucks

2.2.21.2.1 These are essentially revolving drums mounted on truck chassis. Truck mixers used in the job shall be labelled permanently to indicate the manufacturer's specifications for mixing like:-

- Capacity of drum.
- Total number of drum revolutions for complete mixing.

- Mixing speed
- Maximum time limit before completion of discharge and after cement has entered the drum.
- Reduction in time period of discharge due to warm weather or other variables.

All above information shall only form guidelines for the manufacturer/producer of concrete.

2.2.21.2.2 Fulfilment of the stipulated number of revolutions or elapsed time shall not be the acceptable criterion. As long as the mixing water limit is not exceeded and the concrete has satisfactory plastic physical properties and is of satisfactory consistency and homogeneity for satisfactory placement and consolidation and is without initial set, the concrete shall be acceptable.

2.2.21.2.3 When the concrete is totally mixed in transporting trucks volume of concrete being transported shall not exceed 63% of the rated capacity of the drum. In case the concrete is totally mixed in the central batching plant, the transporting truck may be loaded up to 80% of the rated capacity of the drum. In this case the drum shall be rotated at charging speed during loading and reduced to agitating speed after loading is complete.

2.2.21.2.4 When transporting concrete by truck mixers, delivery time shall be restricted to 90 minutes or initial setting time whichever is less from the time cement has entered the mixer to completion of discharge.

2.2.21.3 Transporting by Agitating / Non-agitating Trucks.

2.2.21.3.1 Transporting ready mix concrete by this method shall consist of truck chassis mounted with open top bodies. The metal body shall be smooth and streamlined for easy discharge. Discharge may be from the rear when the body is mechanically titled. Body of the truck shall have a provision of discharge gate. Mechanical vibrators shall be installed at the discharge gate for control of discharge flow.

2.2.21.3.2 Agitators, if mounted, also aid in the discharging of concrete from the truck in addition to keeping the concrete alive.

2.2.21.3.3 Water shall not be added to concrete in transport through this system.

2.2.21.3.4 Bodies of trucks shall be provided with protective covers during period of inclement weather.

2.2.21.3.5 Delivery period, when adopting this system of transporting concrete shall be restricted to 30 minutes from the moment all ingredients including cement and water enter in mixer to completion of discharge.

2.2.21.4 Transporting by Buckets

This method of transportation is very common for transportation of centrally mixed concrete. Buckets of suitable capacities may be filled with concrete which is totally mixed in central plant and hauled to the job site. Buckets then may be conveyed to the actual point of placement either with the help of crane/hoist or they may be carted

As in the case of open truck transportation, extra water shall not be added to concrete transported in buckets. Concrete shall be protected from inclement weather by necessary covering arrangements. Also, maximum delivery period for this system of transportation from the time cement is introduced into the mixer to completion of discharge shall not exceed 30 minutes.

2.2.21.5 Cleaning

Before loading concrete in either truck mixer, open bodied trucks or buckets, the containers shall be thoroughly cleaned, washed and dried, so that there is no water or moisture in the container which may affect the designed water content of the concrete.

2.2.21.6 Other Methods of Transportation

Transportation of concrete either by belt conveyors or by pumping is envisaged in some works.

If, the producer/manufacturer/purchaser/contractor of ready mix concrete desires to use such methods of transportation, they may do so provided their scheme and complete specifications are submitted to the Engineer for his record and approval.

2.2.21.7 Objective

Method of transportation used shall ensure:-

Efficient delivery of concrete

No significant alteration of properties with regard to water cement ratio, slump, air content and homogeneity.

All variables in transportation, considering type and accessibility of placement locations, distance, time interval etc., shall be carefully studied before arriving at the method used.

2.2.21.8 Pumpable Concrete (Extracted from Para 8.9 of Concrete Bridge Code, 1997)

General- Pumpable concrete is the concrete which is conveyed by pressure through either rigid pipe or flexible hose and discharged directly into the desired area. It is especially used where space for construction equipment is very limited.

Pumping Rate and Range – Depending on the equipment, pumping rate should be 10 to 70 cum. per hour. Effective pumping range is upto 300m horizontally and 90m vertically.

(i) Proportioning Pumpable Concrete

a) Basic Consideration - More emphasis on quality control is essential to the proportioning and use of a dependable pump mix. Concrete mixes for pumping must be plastic. Particular attention must be given to the mortar and to the amounts and sizes of coarse aggregates.

b) The maximum size of angular coarse aggregate is limited to one-third of smallest inside diameter of the hose or pipe. Provisions should be made for elimination of oversized particles in the concrete by finish screening or by careful selection of aggregates.

(ii) Pumping Concrete

a) Proper planning of concrete supply, pump locations, line layout, placing sequences and the entire pumping operation will result in saving of cost and time. The pump should be placed as near the placing area as practicable and the entire surrounding area must have adequate bearing strength. Lines from the pump to the placing area should be laid out with a minimum of bends. The pipe line shall be rigidly supported.

b) While pumping downward 15m or more, it is desirable to provide an air release valve at

the middle of the top bend to prevent vacuum or air build up. When pumping upward, it is desirable to have a valve near the pump to prevent reverse flow.

2.2.22 Construction Joints:-

- 2.2.22.1 Construction joints shall be avoided as far as possible and in no case the locations of such joints shall be changed or increased from those shown on the drawings, except with express approval of the Engineer. The joints shall be provided in a direction perpendicular to the member axis. Sequencing of concrete placement should be organized in such a way that cold joints are totally eliminated. The sequence of concreting shall be submitted for approval of Engineer prior to concreting of the structural element. Concreting shall be carried out continuously up to the construction joints, the position and arrangement of which shall be predetermined by the designer.
- 2.2.22.2 Construction joints should be positioned to minimize the effect of the discontinuity on the durability, structural integrity and appearance of the structure. Joints should be located away from regions of maximum stress caused by loading particularly where shear and bond stresses are high.
- 2.2.22.3 Laitance, both on the horizontal and vertical surfaces of the concrete, should be removed before fresh concrete is cast. The surface should be roughened to promote good adhesion. Various methods for removal can be used but they should not dislodge the coarse aggregate particles. Concrete may be brushed with a stiff brush soon after casting while the concrete is still fresh and while it has only slightly stiffened. If the concrete has partially hardened, it may be treated by wire brushing or with a high pressure water jet, followed by drying with an air jet, immediately before the new concrete is placed. Fully hardened concrete should be treated with mechanical hand tools or grit blasting, taking care not to split or crack aggregate particles.
- 2.2.22.4 Where there is likely to be a delay before placing the next concrete lift, protruding reinforcement should be protected. Before the next lift is placed, rust loose mortar, or other contamination should be removed from the bars and where conditions are particularly aggressive and there has been a substantial delay between lifts, the concrete should be cut back to expose the bars for a length of about 50 mm to ensure that contaminated concrete is removed.
- 2.2.22.5 In all cases, when construction joints are made, it should be ensured that the joint surface is not contaminated with release agents, dust, or curing membrane and that the reinforcement is fixed firmly in position at the correct cover.
- 2.2.22.6 When the formwork is fixed for the next lift, it should be inspected to ensure that no leakage can occur from the fresh concrete. It is a good practice to fix a 6 mm thick sponge which seals the gap completely. The practice of first placing a layer of mortar or grout is not recommended. The old surface should be soaked with water without leaving puddles, immediately before starting concreting; then the new concrete should be thoroughly compacted against it. When fresh concrete is cast against existing mature concrete or masonry the older surfaces should be thoroughly cleaned and soaked to prevent the absorption of water from the new concrete. Standing water should be removed shortly before the new concrete is placed and the new concrete should be thoroughly vibrated in the region of the joint.

2.2.23 Finishing of concrete: The finished surface of concrete after removal of formwork shall be such that no touching up is required. All fins/holes caused by form joints, supports, rods etc., shall be ground/filled up effectively using appropriate machinery shutters, formwork etc., used in construction shall be as specified in the conditions and the labour used shall be skilled to suit the quality requirements of the work. Any surface, finished poorly in the opinion of the Engineer shall require repair/remedial measures at the cost of the contractor and the Engineer's decision in this regard shall be final. Any structure, which has deficiencies in finishing including product parameters beyond the rejection limits, as specified in these conditions, are liable to be rejected and the decision of the Engineer shall be final in this regard.

2.2.24 Coatings for concrete: Normally finished concrete structures do not require any surface protective coatings in non-aggressive environment (moderate) for all structures. For aggressive environment (severe and extreme conditions), Epoxy phenolic IPN coating or CECRI Integrated four coat system can be used in superstructure of bridges and coal tar epoxy coating for sub structure of bridges (in affected part only).

2.2.25 Shuttering, Formwork & False work:-

2.2.25.1 Shuttering, Formwork & False work shall be designed to meet the requirements of the permanent structure, taking into account the actual conditions of materials, environment and site conditions. Careful attention shall be paid to the detailing of connections and functions. All the materials used for shuttering, formwork & false work shall conform to the specified quality consistent with the intended purpose and actual site condition as applicable. All shuttering, form work, false work, etc., shall be got approved by the Engineer before it is put into use.

2.2.25.2 Forms shall not be struck until the concrete has reached strength at least twice the stress to which the concrete may be subjected at the time of removal of formwork or as approved by the Engineer. In normal circumstances and where Ordinary Portland Cement is used, forms may generally be removed after the expiry of the following periods:-

Stripping Time	
a) Walls, columns and vertical faces of all structural members	24 to 48 hours as may be decided by the Engineer
b) Slabs (props left under)	3 days
c) Beam soffits (props left under)	7 days
d) Removal of props under slabs 1) Spanning up to 4.5 m 2) Spanning over 4.5 m	7 days 14 days
e) Removal of props under beams 1) Spanning up to 6 m 2) Spanning over 6 m	14 days 21 days

Where the shape of the element is such that the formwork has re-entrant angles, the

formwork shall be removed as soon as possible after the concrete has set, to avoid shrinkage crack occurring due to the restraint imposed.

2.2.26 Defective Concrete and Measurement of concrete:

- 2.2.26.1 Should any concrete be found honeycombed or in any way defective which may be, at the discretion of the Engineer suspected to affect the performance of the structure, shall be rejected outright. Contractor shall have no claim in this regard and the decision of the Engineer shall be final. The member, structurally independent, in which the concrete is found to be defective, shall be replaced by the contractor at his cost fully. The damages arising on account of such defective concreting shall also be recoverable from the dues of the contractor, including penalties if any. DFCCIL reserves the right to get the member replaced by any means at the cost of the contractor at any cost if the contractor delays reproduction.
- 2.2.26.2 However, some surface defects, not affecting the structural properties shall, on the instruction of the Engineer, be repaired as per the approved procedures. The complete cost of such repairs shall be borne by the contractor and no compensation shall be payable. Records of such repairs done shall be maintained by the contractor.
- 2.2.26.3 The tolerances for finished concrete bridge structures shall be governed by IRS Concrete Bridge Code and shall be followed; deviations beyond the permissible limits shown are liable to be rejected. These tolerances apply to other structures also appropriately.

Tolerances for Finished Concrete Bridge Structure		
S No	Description of defects in any part or full member or the structure at the decision of the Engineer.	Permissible limits (unless otherwise specified in designs/drawings)
1	Shift from alignment	1) ± 25 mm in member.
2	Deviation from plumb in piers or variation from specified batter.	1 in 250 subjected to a maximum value of 0.5 times the least lateral dimension of pier.
3	Deviation from plumb in abutments or variation from specified batter.	1 in 125
4	Cross sectional dimensions of piers, abutments and girders	+20mm/-5mm
5	Thickness of deck slab of bridges	+ 6 mm / - 3 mm
6	Size and location of openings	± 12 mm
7	Plan dimensions of footings (formed excavation)	+ 50 mm / - 25 mm
8	Plan dimensions of footings (unformed excavation)	+ 75 mm / - 00 mm
9	Thickness of footings	- 5%, + No limit
10	Footing eccentricity	0.02 times the width of the footing in the direction of deviation, but not more than 50 mm
11	Reduced level of top of footing / pier / bed block	± 5 mm
12	Centre to centre distance of pier and abutments at pier top	± 30 mm
13	Centre to centre distance of bearings along span	± 5 mm
14	Centre to centre distance of pier bearings across span	± 5 mm

2.2.27 Sampling and Strength Testing of Concrete:

2.2.27.1 General: Samples from fresh concrete shall be taken as per IS: 1199 (method of sampling and analysis of concrete). Concrete for making 3 test cubes shall be taken from a batch of concrete at point of delivery into construction according to procedure laid down in IS: 1199 and 150 mm cubes shall be made, cured and tested at the age of 28 days for compressive strength in accordance with IS:516. The 28 days test strength result for each cube shall form an item of sample.

Concrete shall conform to the surface finish and tolerance as prescribed in Unified specifications. Random sampling and lot by lot of acceptance / inspection shall be made for the 28 days cube strength of concrete.

Concrete under acceptance shall be notionally divided into lots for the purpose of sampling, before commencement of work. The delimitation of lots shall be determined by the following:

- (i) No individual lot shall be more than 30 cum in volume.

- (ii) At least one cube forming an item of the sample representing the lot shall be taken from concrete of the same grade and mix proportions cast on any day.
- (iii) Different grades of mixes of concrete shall be divided into separate lots.
- (iv) Concrete of a lot shall be used in the same identifiable component of the bridge.

2.2.27.2 Sampling .

2.2.27.2.1 Frequency of Sampling

Sampling procedure: A random sampling procedure shall be adopted to ensure that each concrete batches forming the lot under acceptance / inspection shall have a reasonable chance of being tested that is, sampling should be spread over the entire period of concreting and cover all mixing units.

Frequency: The minimum frequency of sampling of concrete of each grade shall be in accordance with table below. At least one sample shall be taken from each shift of work.

Minimum Frequency of Sample	
Quantity of concrete in work, (M ³)	No. of samples
1-5	1
6-15	2
16-30	3
31-50	4
51 and above	4 plus one additional sample for each additional 50 M ³ or part thereof

2.2.27.2.2 Test Specimen: Three test specimens shall be made from each sample for testing at 28 days. Additional samples may be required for various purposes such as to determine the strength of concrete at 7 days or at the time of striking the formwork, or to determine the duration of curing, or to check the testing error. Additional samples may also be required for testing samples cured by accelerated methods as described in IS: 9013. The specimen shall be tested as described in IS: 516.

2.2.28 Test Results of Sample: The test results of the sample shall be the average of the strength of 3 specimens. The individual variation should not be more than ± 15 percent of average. If more, test results of the sample are invalid.

2.2.29 Acceptance Criteria of Concrete: Acceptance criteria shall be acceptance of concrete as per Clause No 16 of Annexure 4.2 of Indian Railway Unified Standard Specification. Also refer criteria of concrete vide clause no 20.3.11.5 of Indian Railway Unified specifications. The 28 days compressive strength shall be the criterion for acceptance or rejection of the concrete.

The followings shall also be strictly followed.

- (i) Whenever a mix is redesigned due to a change in the quality of aggregate or cement or for any other reason, it shall be considered a new mix and initially subject to the acceptability criteria above.
- (ii) If the concrete produced at site does not satisfy the above strength requirements, the Engineer shall reserve the right to require the contractor to improve the methods of batching, the quality of the ingredients and redesign the mix with increased cement content, if necessary. The Contractor shall not be entitled to claim any extra cost for the extra cement used for the modifications stipulated by the Engineer for fulfilling the strength requirement specified.
- (iii) It is the complete responsibility of the contractor to redesign the concrete mixes by approved standard methods and to produce the reinforced concrete conforming to the specification and the strength requirements approved by the Engineer. It is expected that the Contractor will have competent staff to carry out this work.

2.2.30 Setting of field laboratory by the Contractor:

- 2.2.30.1 For all works, the Contractor shall set up a field laboratory of his own for testing of cement/water/concrete at work site, which should be open for use and inspection by the DFCCIL officials at any time and carryout the tests with his own equipments, gauges, machinery, consumables and operators, at his own cost. The laboratory shall be equipped with necessary equipment to carry out various tests such as property tests, sieve analysis, setting time of cement, compression tests on cubes, slump test, workability test etc., on aggregate, cement, water and concrete required for ensuring the required quality. For steel however, test reports of reputed institutes/laboratories are acceptable.
- 2.2.30.2 The cost of setting up the laboratory, equipping the same, maintaining conducting all tests on materials and cubes shall be borne by the contractor, within his quoted rates for works and no extra payment is eligible for the same.
- 2.2.30.3 All gauges, machines, equipment and other measuring and testing equipment of the laboratory shall be got checked / calibrated regularly and the necessary certificates furnished to the Engineer by the Contractor.
- 2.2.30.4 All the equipment machinery etc., shall be kept in good working condition. Contractor shall also maintain the required qualified / experienced staff at the laboratory.
- 2.2.30.5 The following is the minimum laboratory facilities at the site which are to be provided and operated by the contractor at his cost.
 - (i) Testing of fine and coarse aggregates as per IS:383 and IS:2386.
 - (ii) Testing of cement concrete as per IS: 8142 and IS:516.

- (iii) Testing of water as per IS: 456 and IS: 3025.
- (iv) Certain non-routine testing such as (a) Testing of admixtures, (b) Chemical testing of fine and coarse aggregates (c) Permeability of concrete (permeability test on concrete shall be got done when the mix design is approved / changed of the reputed laboratories as approved by Engineer). The frequency and need for these tests shall be decided by the Engineer, based on stipulations contained in conditions of contract or on the basis of accepted Engineering practice (e.g. whenever source of admixture is changed, tests stipulated in the codes will have to be carried out afresh, etc).

- 2.2.30.6 As frequently as the Engineer may require, testing shall be carried out in the field for:
- (a) Moisture content and absorption and density of sand and aggregate.
 - (b) Silt content of sand.
 - (c) Grading of sand and aggregates.
 - (d) Slump test of concrete.
 - (e) Concrete cube test.
 - (f) Permeability test for concrete
 - (g) Density of Plasticizer.
 - (h) PH Value of water

2.2.31 Ladders for inspections: Steel ladders are to be provided at the abutments and all pier locations on both sides of girder bridges to enable inspecting officials to get down from the track level to the top of the piers / abutments.

2.2.32 Expansion joints: Expansion joints – strip seal elastomeric type expansion joint shall be for 80mm expansion gap in RCC deck slab as per drawings.

2.2.33 Seating of foundations:

As far as possible, open foundations should be located on the firm ground having stable strata. The strata shall be well compacted before levelling course and foundations are laid on the levelling.

In case foundations resting on rock, no foundation shall be laid on sloping rock. The rock shall be made level for the width of the foundation before levelling course is laid. Before seating on the rock, capacity of the rock shall be assessed properly and safe bearing capacity assessed in the designs is to be confirmed.

The seating of the rock shall be achieved by cutting into the rock atleast by 0.50m depth to ensure removal of all weak layers and for obtaining adequate anchorage in case of open foundations. After level surface is made on the rock, a rich mix layer of 150mm thick shall be laid to even the bedding surface.

If the rock is encountered while piling, pile shall be anchored into rock to the depth as per codal provision.

2.2.34 Drainage outlets: 50mm galvanized GI pipes in case of deck slab in bridges will serve as drainage spouts.

2.3 Deleted

2.4 GENERAL GUIDLINES AND SPECIFICATIONS FOR SUPPLY OF REINFORCEMENT AND STRUCTURAL STEEL

2.4.1 SUPPLY OF STEEL FOR VARIOUS WORKS:

Supply of steel to various specifications as required under various schedules in the contract are governed by the Technical specifications and Special Conditions specified hereunder. All steel shall be supplied by the Contractor at the site of work and stacked, stored, protected and maintained by him at his cost till they are put into use. Any temporary structure required for storage of steel etc., has to be provided by the Contractor at his cost and should be removed after completion of the work. The DFCCIL will only provide suitable land for construction of the above temporary shed free of cost wherever available.

For supply and use of steel in various works, relevant IRS Codes Specifications, IS Specifications and Railways specifications will be applicable.

2.4.2 SPECIFICATIONS FOR STEEL:

2.4.2.1 The steel supplied by the contractor must satisfy any of the material specifications as required for the work along with other concerned specifications.

Relevant other IS and IRS Specifications with regard to properties, testing and use of the above steel items also shall govern.

2.4.2.2 The contractor shall produce the manufacturers test certificate for each lot of supply satisfying the requirements of relevant IS specifications and at the specific frequency as laid down.

2.4.2.3 The Contractor shall arrange to carryout additional tests on physical properties of steel structural steel at his cost. No extra payment will be made for conducting such tests and the agree mental rate is inclusive of above testing charges.

2.4.3 PROCUREMENT OF STEEL:

2.4.3.1 **Steel shall be procured only from those firms, which are Established, Reliable, Indigenous & Primary Producers of Steel, having Integrated Steel Plants (ISP),** using iron ore as the basic raw material and having in-house iron rolling facilities, followed by production of liquid steel and crude steel, as per Ministry of Steel's (Government of India) guidelines.

However, only certain isolated sections of structural steel, not being rolled by ISPs, can be procured from the authorized re-rollers of ISPs or authorized licensee of BIS having

traceability system and who use billets produced by ISPs with the approval of Engineer.

- 2.4.3.2 The contractor shall have to submit the cash memo and challans along with the lot / batch of steel purchased in token of proof of purchase of steel from reputed dealers. Steel shall be approved by Engineer only after production of necessary certificates before use in works.

2.4.6 OTHERS:

- 2.4.6.1 Reinforcement steel and structural steel shall be stored in such a way so as to avoid distortion and to prevent deterioration by corrosion. All steel used should be free from loose Mill scale, loose rust, paints and oil covering / coating etc.

- 2.4.6.2 Steel material, for which stage payment has been availed by the Contractor, shall be property of DFCCIL and will be issued to contractor by Engineer whenever required for the work. Contractor will be solely responsible for guarding against theft / misuse of the consignment due to any cause what so ever. The stage payment will be made, only when the Engineer certifies that in his opinion that the materials are actually required in accordance with the contract. It is the responsibility of the agency to ensure that steel as per the requirement is brought to site as per approved drawings / requirements.

- 2.4.6.3 The contractor shall be bound to store the materials at site of work earmarked for the purpose by the Engineer and shall not remove from the site nor use for any other purposes than exclusively for execution of the work for which the materials are intended for. Safe guarding of the materials is the responsibility of the contractor even if the material is deemed to be owned by the DFCCIL and insurance etc., have been arranged by the contractor.

- 2.4.6.4 Contractor shall remove from site any steel materials rejected by the Engineer within reasonable time as specified by him.

- 2.4.6.5 Before the test pieces are selected, the Contractor shall furnish copies of the mill records of the reinforcement steel giving number of coils in each cast with sizes and identity marks to enable identification of the material with the bill produced.

2.5 Stacking Materials:

- (a) The materials, on receipt at site, shall be carefully unloaded, examined for defects, checked, sorted and stacked securely on a level bed out of danger from flood and out of contact with water or ground moisture. All materials shall be available for inspection by the Engineer.
- (b) The materials shall be verified with the marking shown on the marking plan of part list, which shall be supplied by the manufacturers or the Engineer.

- (c) Any materials found damaged during transit or while unloading should be stacked separately and damaged portions shall be indicated by paint with distinctive colour. All such materials shall be dealt with under the orders of the Engineer without delay. If any component after receipt at site, has in the opinion of the Engineer or Purchaser, been damaged in transit, such component shall be replaced or repaired to the satisfaction of the Engineer or Purchaser free of cost.
- (d) All such damaged material shall be dealt with as per the orders of the Engineer. Badly damaged portions may require replacement. Slightly distorted parts may be straightened by gradual pressure without heat or annealing. Badly distorted or broken parts must be dealt with as the case demands and as directed by the Engineer.
- (e) Where the work has been passed in the manufacturer's works as strictly interchangeable, all members bearing the same marks can be stacked together without reference to any particular span.
- (f) The tenderer shall unload the material promptly on delivery; otherwise the tenderer shall be responsible for demurrage charges.
- (g) On receipt of rolled steel at workshop or fabrication yard, they shall be carefully unloaded and stacked properly to avoid bending, twisting, corrosion etc.

2.5.1 Manufacturing – The whole work shall be representative of the highest class of workmanship. The greatest accuracy shall be observed in the design, manufacture and erection of every part of the work to ensure that all parts will fit accurately together on erection and similar parts shall be strictly interchangeable as explained interchangeability paragraph. The contractor shall state which of the following alternative methods of manufacture, he intends to adopt.

- (i) The whole of work to be erected complete and pieces marked to place.
- (ii) All spans to be made strictly interchangeable as specified below.

2.5.2 the tenderer may fabricate the steel work at his workshop or at the site of the work as is convenient to him. If the fabrication is done in his own workshop, the transportation of the fabricated materials may be done by Road or Rail transport at his own cost. The tenderer must inspect the approach roads right from the workshop and should ensure that it would be possible for him to transport the materials by Road.

2.5.3 If the tenderer propose to fabricate the steel at site, land / site would be given to the tenderer to make temporary workshop free of cost, if available, but on completion of work, the site would be restored to normal condition.

2.5.4 The responsibility of custody of the materials, in Tenderer's workshop or site will remain with tenderer till the completion of work and then handed over to the DFCCIL.

2.5.5 All welding consumables (electrodes, wire, flux etc.) shall be procured only from the standard manufacturers subject to final approval by Engineer.

2.5.6 Removal of Unused Materials etc.:

- (a) The contractor shall take steps as desired by the Engineer to ensure that rejected work is not resubmitted for inspection.
- (b) On the completion of the work, the tenderer shall remove all his unused and surplus materials, plant, staging's and refuse, or other materials produced by his operations and shall leave the site in a clean and tidy condition.

2.6 Deleted.

2.7 Deleted.

2.8 Further Drawing and Instructions:

- (i) Chief General Manager, DFCCIL shall have full power to make and issue further drawings or instructions or direction from time to time as may appear necessary and proper to the contractor for efficient construction, completion and maintenance of the works. The contractor shall be bound by the same as fully as be if they had been mentioned or referred to in the contract, and the contractor shall not be entitled to any extra payment in respect of any work or materials shown or directed to be done supplied by such further drawings or instructions required for completion of unless the Chief General Manager, DFCCIL have given an extra order for the same in writing. The contractor shall be responsible for close scrutiny of the drawings.
- (ii) If the works are required to be done in DFCCIL Yards and Tracks are to be crossed, the tenderer shall inspect the site and make himself thoroughly acquainted with site condition and quote rate considering these aspects.
- (iii) The work shall have to be done in such a manner that the normal working of the Railway within the railway yard does not get disturbed. No material/temporary structures should be kept adjacent to the running track which may infringe rail traffic. The contractor shall take necessary precaution to prevent/cause damage to the DFCCIL/Railway property & staff during the execution of the work.
- (iv) All the work to be executed as per approved drawings and no any extra payment shall be considered for protection etc. except Engineer's prior written instructions for the same approved by Chief General Manager, DFCCIL

2.9 Commencement of the construction work at site:

The contractor shall commence the construction work when and as soon as, but not until, he receives instructions from Engineer to do so. On such order being given, possession of site/authority shall be given to the contractor of such portion or portions of the site as the Engineer may determine.

2.10 Contractor to Study Drawing & Specification etc. and His Liability:

The contractor shall be responsible for close scrutiny of the approved drawings supplied by the DFCCIL, For any discrepancies, error or omission in the drawings or other particulars indicated therein, the contractor shall approach the DFCCIL immediately for rectification of indicated therein, the contractor shall approach the DFCCIL immediately for rectification of such discrepancies, errors and omission. If any dimension/figure/features etc. on approved drawings or plans differ from those drawings or plans issued to the contractors at the time of calling the tender, the dimensions as figured upon the approved drawings or plans shall be taken as correct.

2.11 Contractor to Submit his Time Table:

The contractor shall submit a monthly progress of work done during the month by the 4th day of the following month. He will also give the programme of coming month by 25th of each month. The programme will be subject to alteration at the discretion of the DFCCIL officials.

2.12 Any Doubted Points to be referred to the Chief General Manager, DFCCIL: Should there be any doubt or obscurity as to anything to be done or not to be done by the contractor or as to these instructions or as to any matter or thing, the contractor must set forth such doubt or obscurity in writing and submit the same to Chief General Manager DFCCIL. Only such reply as the said Chief General Manager, DFCCIL may be in writing given shall be taken as the authoritative interpretation of the point in doubt or obscurity.

2.13 Contractor's Liability:

Any fitting, accessory or apparatus which may not have been mentioned in this specification or the drawings, but which are usual or necessary in the execution of such work, are to be provided by the Contractor without extra payment. The whole work must be completed in all details, whether mentioned in this specification or not, with the exception of such work as has been specified in the schedule of items to be separately provided for in the Contract.

Notwithstanding the specifications and conditions stated in the contract, the contractor shall keep the Engineer/ Employer authority fully indemnified and free from all liabilities and risks consequential to any lapse on his part in respect of material quality, standard of workmanship, accuracy of fabrication and the like. He shall provide all labour and material required for execution of the work as per all standards and specifications.

2.14 DFCCIL desires that successful contractor should establish (at his own cost) the fabrication workshop near the site only for close monitoring of all the quality aspects of this contract work. Contractor's request for establishing workshop/using workshop proposed/located away from the bridge site shall require prior approval.

2.15 Contractor shall establish fully equipped laboratory for all the tests required on materials/processes/products as per provisions of the contract, Specifications and the direction/approval of the Engineer. Costs of these are deemed to be included in the quoted rates. Prior approval of the engineer shall be obtained for non-installation of such testing equipments which cannot be installed in normal course due to any reason. However, engineer's decision (for installation and non-installation) in this regard shall be final binding and conclusive.

2.16 Site Facilities by the Contractor:

Contractor shall provide office / site facilities at the approach site / other locations for ensuring smooth and efficient communication and work execution. Cost of these facilities

deemed to be included in the quoted rates and nothing extra shall be paid for this item. Contractor shall (at his own cost) depute / nominate safety officers(s) for supervising safety aspects of all works/process including enabling arrangements for execution and inspection of the work. Safety systems/arrangements should be made for each activity of fabrication/erection and its inspection and same should be certified by nominated safety officer.

- 2.17 Architectural and structural design & drawings for the Work:** The indicative Architectural drawings of Type-3 quarters and extension of FLN service building are attached. These drawings are indicative only and are not to be used for execution purpose. The successful bidder to whom the work is awarded shall do the Geotechnical investigation at every building location and get the Architectural & structural designs prepared from reputed consultant and get the structural design proof checked from IIT/NIT at his own cost. Cost of all Architectural and structural drawings, design and proof checking is deemed to be included in the quoted rates and nothing extra shall be paid for this item.

SPECIAL TECHNICAL CONDITIONS FOR ALL TYPE ELECTRICAL WORK
(FOR BOTH ELECTRICAL CONTRACT & COMPOSITE CONTRACT)

The Work shall be carried out strictly as per IE rules and wherever applicable equipment should comply with latest Indian Standards, Statutory Regulations and Labour Acts etc. The contractor shall arrange shutdown and clearance of power block also at his own cost. The contractor should have all testing equipment for testing of cable/ earthing before commissioning of line. Contractors should have all safety equipment during working at site like earthing chain, safety belts, helmet etc. First aid box must available every time at site during working.

1. **ENERGY EFFICIENT EQUIPMENT:**

Energy efficient equipment shall be used as prescribed in the energy Conservation Building Code-2007 of BEE and star ratings of BEE wherever applicable. The contractor shall arrange inspection of major electrical equipment at his own expenditure as per DFCCIL requirement.

2. **WORK WORKMANSHIP AND ESTHETICALLY LOOKING OF PROJECT SITE:**

The work shall be carried out in best workmanship in term of working manner, esthetically matching with building design and any defect in the work due to changes in the design etc. as pointed out by Railway authority shall be carried out by the contractor. Though all design parameters concern safety, esthetically looking of electrical system will not have pertains with engineering construction official at any level.

3. **DISPUTE IN LAY OUT AND TECHNICAL MATTER:**

In case of any dispute regarding the lay out wiring plan, regarding site / location / height for fitment / installation of equipment of electrical equipment, selection of size and colour of body surface of equipment and in any other technical matter, the decision of DFCCIL Supervisor of Electrical Construction / PM/EL, GM/EL Jaipur will be final and its binding on the contractor within terms and conditions of GCC. All aforesaid parameters concerning safety, esthetically looking of electrical system will not have pertained with engineering construction official at any level.

4. **DRAWING AND DIAGRAM:**

(a) Contractor shall submit design & drawing (with showing of colour of R Y B phase, neutral and earth wire as per IS : 732, code of practice of house wiring/CPWD Specifications (Electrical)) of different circuits of electrical power supply system for outdoor work / building wiring system for indoor work, in which clearly indicating the position / location of Main Distribution Board(MDB) i.e. Main LT panel, APFC panel and AMF panel, Secondary Distribution Board (SDB) i.e. Secondary LT panel or VTPN, Branches Distribution Board (SDB) i.e. TPN/SPN/ /RR plug/AC box, Switch boards, ceiling roses, fan boxes, all type of lights / fans, all type AC's, / Room heater / geyser to ensure safety and quality aspect of work. Panel suitable with the existing DFCCIL installed panels.

(b) Contractors must submit all drawings / diagram with written letter in Electrical construction office for getting approval from concern electrical construction official. Contract must get approval of aforesaid drawing / diagram before starting the work to avoid or minimize alteration or damage in masonry work of wall / floor.

(c) All approved plans and drawing contractor may submit to concern GM/EL, PM/EL office as complete set of (01 original in multi colour Jat mat paper and 06 copies in multi colour) approved drawings including soft copies. Contractor always kept one set of all above drawing/diagram / circuit plan at site for maintain technical standard of electrical work.

(d) It is responsibilities of contractor, may ensure the present of his authorized Electrical Engineer along with all approved / proposed drawing and diagram during inspection of CGM, GM/EL, PM/EL. If the contractor failed, its leading delayed in work i.e. contractor has not shown sufficient interest to speed up the work as per specification / instruction of railway representative.

5. SITE ORDER REGISTOR:

DFCCIL representative kept site order register at site for issuing written instruction to contractor and its binding on contractor to sign on site order register. If contractor deny or failed to sign site order register, its treated escaping form site and its may became cause to work not commencement or cause of slow progress.

6. INSPECTION AND LAB TESTING OF MATERIAL:

(a) For inspection of the material as desired by DFCCIL, DFCCIL's representative will visit to manufacturer's premises to conduct the tests, if necessary. The contractor shall provide all necessary assistance in carrying out tests and inspection at his own cost.

(b) Pre commissioning visual consignee inspection certificate of electrical equipment may be carried out jointly by DFCCIL site supervisor and contractor if needed. Its responsibilities contractor and Its binding on contractor to sign above certificate and kept at site office. If contractor deny or failed, its treated escaping form site and its may become cause of slow progress.

(c) The factory inspection of manufacturer site or materials will be testing by any authorized laboratory of any items of the schedule/part of any job or a in schedule can be conducted on the desire of DFCCIL and statutory fees charges bear by contractor. Its responsibilities contractor to sign above reports / certificate and kept at site office. If contractor deny or failed, its treated escaping form site and its may become cause of slow progress.

(d) The tests on any of the item /sample/equipment in the schedule/part of any job or in schedule will be performed in an NABL/Govt. Lab. or manufacturer's premises as desired by DFCCIL.

(e) The cost / fee of factory inspection / lab tests / documentation will be borne by the contractor

7. DOCUMENTATION AND WARRENTY CARD:

(a) At the time of submission of drawings/sample prior to execution work or installation /testing /commissioned the equipment, contractor has to submit relevant documents regarding the certification / self-attested copy of purchasing invoice / bills so that railway may get clarification from manufacture / authorized dealer / seller whenever if needed.

(b) The specifications and technical catalogues / user manual reflecting all the technical parameters of the item contractor may submit the warranty card prior to claim for / due for bills of equipment, otherwise payment shall not be processed.

8. GOVERNMENT STANDARD FOR ELECTRICAL WORK / EQUIPMENT:

(a) The ISI / BEE or any other relevant mark/label of Indian government or any certificate produced in support, may not be enough to approve the sample, further verifications / factory inspection/lab test may be carried out as per the discretion of Railways/DFCCIL.

(b) The work will be carried out as per latest CPWD specification (Internal & external).

9. MAKE OF EQUIPMENT AND APPROVAL OF SAMPLE:

(a) The sample of equipment will be approval by GM/EL, PM/EL , APM/EL and Electrical Supervisor is mandatory prior to execution. For this purpose contractor may submit materials / equipment on firm's letter pad with authorizer signature. In case contractor starting the work his own risk with unapproved sample.

(b) If such type equipment is failed or not as per specification, railway may instruct to firm to remove failed equipment and provide one new equipment with approval as per specification.

(c) In case of any kind of confusion/conflict/dispute in drawing/design or in approval of sample / in specification, the decision of DFCCIL GM/EL, PM/EL , APM/EL and Electrical Supervisor will be final and binding on the contractor.

(d) The reference list for make of electrical products is given in Annexure- A as below for electrical work as below:

REFERENCE LIST FOR MAKE OF ELECTRICAL PRODUCTS (ANNEXURE- A)

S. N.	Item	Relevant Standards/ specifications (Latest Ver.)	Reference Makes
1	Power Transformer	<i>IS: 2026/1977 -2011 (Part- 1 to 10) and IS: 1180/1989 & IS: 2026/1977 for upto 100 KVA, 11 kV outdoor type transformer.</i>	Crompton Greaves, NGEF, Kirloskar, BHEL, , Alsthom (Areva), ABB, Siemens, GEC or Similar.

2	11 kV/HT Vacuum Circuit Breaker, SF-6/11kV gas filled Circuit Breaker	<i>IS: 3427/1997</i>	GEC, Siemens, Crompton Greave, Alsthom (Areva), Jyoti, ABB, BHEL, L&T, Schneider or Similar.
3	ACB (11kV)	<i>IS: 13118/1991</i>	Siemens, L&T, Crompton Greave, Schneider, Jyoti, GEC, ABB, Legrand or Similar.
4	PSS/CSS with HT/LT switch gear, transformer and connected accessories	<i>IS:11171/1985 for dry type Power transformer</i>	ABB, Siemens, L&T, Crompton Greave, BHEL, GEC, Kirloskar, Alsthom (Areva), Schneider or Similar.
5	MCCBs, MCBs, ELCBS/ RCCBs, RCBO, DB, ICTPN, TP, HRC fuse, Changing over switch, Fuse Unit	<i>IS: 8828/1996 for MCB IS: 13947(Part-1)/1993 & part 5/Sec1)/2004 for MCCB IS: 12640/2008(Part-1) for RCCB & (Part-2) for RCBO. IS: 13703/1993 for LV HRC fuse IS: 13947(Part-3)/1993 for SFU</i>	L&T, Crompton Greave, Siemens, Legrand, Jyoti, GEC, BCH, Schneider, ABB or Similar.
6	XLPE Cable 11/33kV grade	<i>IS:7098(Part-2)/2011</i>	Asian, NICCO, Universal, RPG, CCI, Fort Gloster, INCAB or Similar.
7	PVC/XLPE Power Cables up to 1.1kV grade	<i>IS: 694/2010 for PVC cable, IS: 1554(Part-1&2)/1988 for heavy duty PVC cable, IS:7098(Part-1)/1988 for XLPE cable</i>	CCI, Universal Cable, RPG, NICCO, Asian, Fort Gloster, Finolex, INCAB or Similar.
8	Instrument Voltmeter, Ammeter, PF meter	<i>IS:1248/2003 for Analog, IS:13875/2008 for digital</i>	Automatic Electric, Meco, Industrial Meter, Motwani, Toshniwal, L&T, Siemens or Similar.
9	11kV Cable End Termination & Jointing kits	<i>IS: 13573/1992 Part-1,2&3/2011</i>	Raychem, M-Seal, Xicon brand of CCI, 3M, Densons (Yamuna) or Similar.

10	Relays	<i>IS: 3231(Part-0&1)/1986 (Part-2&3)/1987</i>	Siemens, L&T, Alsthom, ABB, BHEL, Jyoti, GE or Similar.
11	LED Luminaries, MH, HPSV, T-5 fittings, CFL, & related accessories	<i>IS: 9974(Part-1)/1981 for HPSV IS:15111/2002 for CFL</i>	Phillips, Crompton, Bajaj, GE, or Similar.
12	PVC insulated Elect. Wires Sheathed/unsheathed, PVC flexible LT cable, multicore, single core, Flat cable for submersible pumps	<i>IS: 694/2010 for PVC cable</i>	Finolex, Havells, Fort Gloster, CCI, NICCO, Universal, RPG, INCAB or Similar.
13	Current Transformer	<i>IS: 2705/1992</i>	Automatic Electric, CGL, MECO, Siemens, L&T, Schneider or Similar.
14	Online UPS, Servo Stabilizer, Inverter, CVT	<i>IS:13314/1992 for Inverter IS:11260/1985 for voltage Stabilizer</i>	AEI, BHEL, Hind Rectifier, L&T, NGEF, Siemens, Autometer, Pyramid, APC, Luminous, Microtech, TATA Libert or Similar.
15	Rotary Switches. Selector Switches	<i>Relevant IS</i>	Kaycee, L&T, GE, ABB, Siemens, or Similar.
16	Exhaust fan/Air Circulator/ Bracket & Pedestal fans/Ceiling fan	<i>IS: 374/1979 for ceiling fan IS: 2312/1967 for Exhaust fan</i>	Crompton, GEC, Usha, Philips, Bajaj, Polar, Orient or Similar.
17	Galvanized High Mast Tower / Tubular pole/ Octagonal pole for general purpose lighting	<i>IS:875(Part-3)/1987 for High mast Structure, BSTN-10025/1993 for High Mast Shaft, IS:2026 for other component IS: 2629/1985, BSEN ISO- 1461 for Galvanization</i>	Bajaj, Philips, GE, CGL or Similar.
18	Electronic Energy Meter	<i>IS:13779/1999 IEC:62053-21</i>	L&T, IMP, HPL, Secure, ABB, Enercon or Similar.

19	Central Air Conditioning Plants & Package type plant	<i>IS: 8148/2003 for package type.IS: 1391/1992 for Room Air Conditioners.</i>	Voltas, Blue Star, Carrier, Hitachi, O General, Mitsubishi or Similar.
20	Capacitors- PF correction for Electrical General Services	<i>IS:13340/1993 IS:13341/1992</i>	ABB, BHEL, Unistar, WS Insulators, L&T, Hind Rectifier, Voltas, Siemens, Schneider, or Similar.
21	DG Sets- Portable	<i>IS: 13364(Part-1)/1992 for Alternator IS:10001/1981 for Diesel Engine</i>	Birla Yamaha, CGL, Shriram Honda or Similar.
22	DG Engine	<i>IS:13364/1992 For Alternator</i>	Cummins, Kirloskar, Caterpillar, Ashok Leyland or Similar.
23	Alternator for DG set	<i>IS:4722/2001 IS:4728/1975</i>	KEC, CGL, Stamford, Kirloskar-Green or Similar.
24	Induction Motor	<i>IS:325/1996 IS:12615/2011</i>	Bharat Bijlee, BHEL, CGL, GE, Jyoti, Kirloskar, Siemens, ABB, ASHIKA, NGEF, Alsthom or Similar.
25	LT Switchgear & control gears- Contactors & motor starters, Energy Efficient Soft Starter panel/ Earthing Switch, Single phase preventer	<i>IS:13947(Part1)/1993 IS:13947(Part4)/1993 IS:13947 (Part-5)/2004</i>	ABB, CGL, Jyoti, L&T, NGEF, Siemens, Legrand, BCH, Standard, GEC, BHEL, Schneider or Similar.
26	Pumps- Submersible	<i>IS: 8034/2002 for submersible pump sets IS: 9283/1995 for motors of submersible pump sets IS: 14220/1994 for open well submersible pump sets</i>	Calama, CGL, Jyoti, Kirloskar, KSB or Similar.
27	Timers- electronic solid state	<i>IEC: 60947(2004)</i>	ABB, BHEL, GE, Jyoti, L&T, BCH, Siemens, Legrand or Similar.
28	Water Coolers	<i>IS: 1475 Part-1/2001 IS:1475/2005</i>	Blue Star, Kelvinator, Shriram, Voltas or Similar.

29	Electrical accessories (Piano switch, Plugs & sockets, ceiling rose, Angle holder, holders, Modular switch and socket)	<i>IS: 3854/1997 for switches IS: 1293/2005 for plugs & sockets IS: 371/1999 for ceiling rose IS: 1258/2005 for lamp holder Bakelite</i>	SSK (Top line), Anchor (Penta-ornet), Precision (Prime), CONA(Nice-Indian), Legrand, ABB or Similar.
30	Bell Buzzer	<i>IS:2268/1994 or latest</i>	CONA, MAX, Anchor, SSK or Similar.
31	Electronic fan regulator	<i>IS:11037/1984</i>	Anchor, Usha, ERIK, Leader or Similar.
32	Solar cell/Module system	<i>IS: 12834/1989 IEC 61215/2005 IEC 60904-2006</i>	TATA BP, BEL, BHEL, REIL, MOSER BEAR, CEL or Similar.
33	Solar Lighting system	<i>RDSO/PE/SPEC/PS/0093-2008, Rev. 'O' – Amendment 'I'</i>	-----
34	GI/MS Pipe	<i>IS: 1239(Part-1)/1990</i>	TATA, Jindal, Prakash, Surya or Similar.
35	Geysers	<i>IS:2082/1993</i>	Bajaj, Usha, Crompton, Recold, Venus or Similar.
36	Lifts & Escalators	<i>IS-14665/2000 for Lift RDSO/2013/EM/SPEC/001 6 Rev (0) for Lift (Elevator) RDSO/PE/SPEC/TL/0095-2008 Rev (0) for Escalator</i>	OTIS, , Shindler, KONE, Mitsubishi or Similar.
37	LEDs	<i>IS: 16101-2012, IS: 16102-2012 Part-1,2 IS: 16103-2012</i>	NICHIA, SEOUL SEMICONDUCTOR, PHILLIPS LUMILEDS, LEDNIUM or Similar.
38	Solar Water Heaters	<i>RDSO/PE/SPEC/PS/0094-2008 Rev '0'</i>	As per MNRE approved sources.
39	Solar Distilled Water Plants	<i>Relevant IS</i>	As per MNRE approved sources.
40	Energy savers used for lighting loads	<i>RDSO/PE/SPEC/PS/0083-2008 Rev. '0'</i>	As per MNRE approved sources.
41	Air Cooling Plants	<i>Relevant IS for its concern equipments</i>	Voltas, Blue Star, Carrier or Similar.

42	Battery Charger for other than battery room for Train Lighting	<i>IS:2026/2011-power transformer IS:3895/1966 IS:3136/1965 IS:4540/1968</i>	Hind Rectifier, Usha Rectifier, Suresh Electrical, Pyramid, Automatic Electric, Trinity Elect., Universal Ind. Products, Venus Engg., RS Power or Similar.
43	Battery Charger for battery room	<i>As per RDSO specification having re-generation facility</i>	Amar Raja, Exide, RS Power or Similar.
44	PVC Conduit pipe & Casing capping for electrical wiring	<i>IS:9537/2000</i>	Precision, A.K.G., Polycab, Finolex, Prestoplast or Similar.
45	Aluminium Ladders	<i>IS:4571/1977</i>	Sumer, Beatfire or Similar.
46	LT Panels	<i>IS: 2147-1952 IS:2675-1966</i>	
47	Air Curtain	<i>Relevant IS</i>	Aircon, ALMONARD, Technocrate, Thermadyne, Mitzwak or Similar.

PART-VI

MILESTONES AND TIME SCHEDULE

MILESTONES AND TIME SCHEDULE

4.1.1 Time Schedule:

4.1.1.1 Time of start and completion:

The time allowed for execution of the works is 15 months from the date of issue of letter of acceptance from DFCCIL.

The contractor shall be expected to mobilize to the site of works and commence execution of the works within 10 (days) from issue of Acceptance Letter by DFCCIL.

The contractor shall be expected to complete the whole work ordered on the contractor within 15 months from the date of issue of Acceptance Letter by DFCCIL.

If the contractor commits defaults in commencing execution of the works as afore stated, DFCCIL shall without prejudice to any other right to remedy, be at liberty to forfeit fully the Earnest Money Deposit and performance guarantee of the contractor.

4.1.1.2 Progress of works:

The contractor shall submit a programme of work in the form of a Bar Chart of all the activities in consistence with milestone target envisaged below. In case this bar chart requires to be modified, the Engineer and the contractor shall agree upon a time and progress chart. The chart shall be prepared in direct relation to the time stated as 15 months for the completion of the works as the milestone targets specified below of these special conditions. It shall indicate the forecast of the dates of commencement and completion of various activities of the work and may be amended as necessary by agreements between the Engineer and the contractor within the limitation of 15 months as overall completion period.

4.1.2 Achievement of milestone progress:

In order to ensure progress during the execution of the work the contractor will be expected to achieve the following milestone targets ahead of dates mentioned against each. Failure to achieve accomplished milestone targets within allocated timeframe, save for reason accepted as laid by the Engineer shall create and constitute the ground for failure on the part of contractor for maintaining progress of the work as per agreed programme.

Milestone Targets	Time allocated within which to achieve completion in total 03 (Three) month time
(a) Physical commencement of work	D + 10 days
(b) Mobilization of equipments	D + 15 days
(c) Full mobilization of plant , machinery, men and material	D + 20 days
(d) completion of work	D+20 to D+455 days

Note:“D” is the date of issue of Letter of Acceptance by DFCCIL to the contractor.

PART-VII

TENDER ANNEXURES & FORMS

Annexures /form no.	Subject
Annexure no I	Tender form
Annexure no II	Agreement for zone contract (Not Applicable for this Tender)
Annexure no III	Work order under zone contract (Not Applicable for this Tender)
Annexure no IV	Contract agreement of works
Annexure no V	Format for certificate to be submitted / uploaded by tenderer along with the tender documents
Annexure no V(A)	This certificate is to be given by attorney/authorized signatory/each member of Partnership firm/Joint Venture (JV) /Hindu Undivided Family (HUF) /Limited Liability Partnership (LLP) etc.
Annexure no VI	Tenderer's credentials (bid capacity) (Not Applicable for this Tender)
Annexure –VIA	(Bid security) bank guarantee bond from any scheduled commercial bank of India.
Annexure –VIB	Annual contractual turnover data for the previous 3/4 years
Annexure no VII	Proforma for time extension
ANNEXURE – VIIA	Proforma of 14 days' notice for offloading of part of contract
ANNEXURE – VIIB	Notice for part of contract work offloaded
Annexure no VIII	Certificate of fitness
Annexure no IX	Proforma of 7 days' notice for works as a whole/ in parts
Annexure no X	Proforma of 48 hrs. Notice for whole work
Annexure no XI	Proforma of termination notice
Annexure no XII	Proforma of 48 hrs. Notice
Annexure no XIII	Proforma of termination notice
Annexure no XIV	Final supplementary agreement
Annexure no XV	Agreement towards waiver under section 12(5) and section 31a (5) of arbitration and conciliation (amendment) act
Form no.1	Schedule of prices & total prices Tender schedule
Form no. 2	Tenderer's credentials
Form no 2A	Technical eligibility criteria details
Form No.2B	Statement of works in progress for bid capacity (Not Applicable for

	this Tender)
Form-2C	Applicant's party information form
Form no. 3	ECS/ NEFT / RTGS mandate form
Form no. 4	Sample standing indemnity bond for “on account” payments
Form no.5	Pre contract integrity pact
Form No. 6	Anti-profiteering declaration to whomsoever it may concern
Form no 7	Draft memorandum of understanding (MOU) for Joint venture participation. (Not Applicable for this Tender)
Form no. 8	Draft format of joint venture agreement (Not Applicable for this Tender) (Not Applicable for this Tender)
Form no 9	Pro-forma letter of participation from each partner of joint venture (jv) (Not Applicable for this Tender)
Form no 10	Format for power of attorney for authorised signatory of joint venture (jv) partners (Not Applicable for this Tender)
Form no 11	Format for power of attorney to lead partner of joint venture (jv) (Not Applicable for this Tender)

TENDER FORM

Tender No:- JP-EN-Quarter-2024-11

Name of Work: - Construction of Type-3 Staff Quarters at REJN, AELN, DBLN, BAGN, SMPN, PMPN & FLN and providing additional floor over existing service building at FLN DFCCIL station in the jurisdiction of CGM Jaipur.

To

The DFCCIL

Acting through the Chief General Manager/ DFCCIL/Jaipur

I/We _____ have read the various conditions to tender attached hereto and agree to abide by the said conditions. I/We also agree to keep this offer open for acceptance for a period of _____ days from the date fixed for closing of the tender and in default thereof, I/We will be liable for forfeiture of my/our "Bid Security". I/We offer to do the work for _____ DFCCIL, at the rates quoted in the attached bill(s) of quantities and hereby bind myself/ourselves to complete the work in all respects within _____ months from the date of issue of letter of acceptance of the tender.

- 2. I/We also hereby agree to abide by the Indian DFCCIL/Railways Standard General Conditions of Contract, with all correction slips up-to-date and to carry out the work according to the Special Conditions of Contract and Specifications of materials and works as laid down by DFCCIL in the annexed Special Conditions/Specifications, Standard Schedule of Rates (SSOR) with all correction slips up-to-date for the present contract.
- 3. A Bid Security of ₹ _____ has already been deposited online/ submitted as Bank Guarantee bond. Full value of the Bid Security shall stand forfeited without prejudice to any other right or remedies in case my/our Tender is accepted and if:
 - (a) I/We do not submit the Performance Guarantee within the time specified in the Tender document;
 - (b) I/We do not execute the contract documents within seven days after receipt of notice issued by the DFCCIL that such documents are ready; and
 - (c) I/We do not commence the work within fifteen days after receipt of orders to that effect.
- 4.(a) I/We am/are a Startup firm registered by Department of Industrial Policy and Promotion (DIPP) and my registration number is valid upto (Copy enclosed) and hence exempted from submission of Bid Security.
- 5. We are a Labour Cooperative Society and our Registration No. is withand hence required to deposit only 50% of Bid Security.
- 6. Until a formal agreement is prepared and executed, acceptance of this tender shall constitute a binding contract between us subject to modifications, as may be mutually agreed to between us and indicated in the letter of acceptance of my/our offer for this work.

Signature of Witnesses:

(1) _____

(2) _____

Signature of Tenderer(s)

Date _____

Address of the Tenderer(s)

_____ DFCCIL

CONTRACT AGREEMENT OF WORKS

CONTRACT AGREEMENT NO. _____ DATED _____

ARTICLES OF AGREEMENT made this _____ day of _____ 20____ between DFCCIL acting through the DFCCIL Administration hereafter called the "DFCCIL" of the one part and _____ herein after called the "Contractor" of other part.

WHEREAS the Contractor has agreed with the DFCCIL for performance of the works _____ set forth in the Bill(s) of Quantities hereto annexed upon the Standard General Conditions of Contract, updated with correction slips issued up to date of inviting tender or as otherwise specified in the tender documents and the Specifications of _____ updated with correction slips issued up to date of inviting tender or as otherwise specified in the tender documents and the applicable Standard Schedule of Rates (SSOR) of _____ updated with correction slips issued up to date of inviting tender or as otherwise specified in the tender documents and the Special Conditions and Special Specifications, if any and in conformity with the drawings here-into annexed AND WHEREAS the performance of the said works is an act in which the public are interested.

NOW THIS INDENTURE WITNESSETH that in consideration to the payments to be made by the Railways/DFCCIL, the Contractors will duly perform the said works in the said Bill(s) of Quantities set forth and shall execute the same with great promptness, care and accuracy in a workman like manner to the satisfaction of the DFCCIL and will complete the same in accordance with the said specifications and said drawings and said conditions of contract on or before the _____ day of _____ 20__ and will maintain the said works for a period of _____ Calendar months from the certified date of their completion and will observe, fulfill and keep all the conditions therein mentioned (which shall be deemed and taken to be part of this contract, as if the same have been fully set forth herein), AND the DFCCIL, both hereby agree that if the Contractor shall duly perform the said works in the manner aforesaid and observe and keep the said terms and conditions, the DFCCIL will pay or cause to be paid to the Contractor for the said works on the final completion thereof the amount due in respect thereof at the rates specified in the Bill(s) of Quantities hereto annexed.

Contractor _____ (Signature) DFCCIL: Designation _____

Address _____ (For DFCCIL)

Date _____ Date _____

Signature of **Witnesses** (to Signature of Contractor) with address:

Witnesses:

FORMAT FOR CERTIFICATE TO BE SUBMITTED / UPLOADED BY TENDERER ALONGWITH THE TENDER DOCUMENTS

I.....(Name and designation)**appointed as the attorney/authorized signatory of the tenderer,

M/s_____ (hereinafter called the tenderer) for the purpose of the Tender documents for the work of _____ as per the tender No. _____ of _____(DFCCIL)**, do hereby solemnly affirm and state on the behalf of the tenderer including its constituents as under:

2. I/we the tenderer (s) am/are signing this document after carefully reading the contents.
3. I/We the tenderer(s) also accept all the conditions of the tender and have signed all the pages in confirmation thereof.
4. I/we hereby declare that I/we have downloaded the tender documents from Indian DFCCIL website www.ireps.gov.in . I/we have verified the content of the document from the website and there is no addition, no deletion or no alteration to the content of the tender document. In case of any discrepancy noticed at any stage i.e. evaluation of tenders, execution of work or final payment of the contract, the master copy available with the DFCCIL Administration shall be final and binding upon me/us.
5. I/we declare and certify that I/we have not made any misleading or false representation in the forms, statements and attachments in proof of the qualification requirements.
6. **I/We also understand that my/our offer will be evaluated based on the documents/credentials submitted along with the offer and same shall be binding upon me/us.**
7. **I/We declare that the information and documents submitted along with the tender by me/us are correct and I/we are fully responsible for the correctness of the information and documents, submitted by us.**
8. I/we certify that I/we the tenderer(s) is/are not blacklisted or debarred by DFCCIL/Railways or any other Ministry / Department of Govt. of India from participation in tender on the date of submission of bids, either in individual capacity or as a HUF/ member of the partnership firm/LLP/JV/Society/Trust.
9. I/we understand that if the contents of the **certificate** submitted by us are found to be forged/false or incorrect at any time during process for evaluation of tenders, it shall lead to forfeiture of the Bid Security besides banning of business for a period of upto five year. Further, I/we (*insert name of the tenderer*) **_____ and all my/our constituents understand that my/our offer shall be summarily rejected.
10. I/we also understand that if the contents of the certificate submitted by us are found to be false/forged or incorrect at any time after the award of the contract, it will lead to termination of the contract, along with forfeiture of Bid Security/Security Deposit and Performance guarantee besides any other action provided in the contract including banning of business for a period of upto five year.

11. I/We have read the clause regarding restriction on procurement from a bidder of a country which shares a land border with India and certify that I am/We are not from such a country or, if from such a country, have been registered with the competent Authority. I/We hereby certify that I/we fulfil all the requirements in this regard and am/are eligible to be considered (evidence of valid registration by the competent authority is enclosed)

SEAL AND SIGNATURE
OF THE TENDERER

Place:

Dated:

***The contents in Italics are only for guidance purpose. Details as appropriate are to be filled in suitably by tenderer.*

(As per advance Correction Slip No. 2, Letter No. 2022/CE-I/CT/GCC-2022/Policy
Dated-13.12.2022)

(This certificate is to be given by attorney/authorized signatory/each member of Partnership firm/Joint Venture (JV) /Hindu Undivided Family (HUF) /Limited Liability Partnership (LLP) etc.)

I/We(Name), attorney/authorized signatory of the
.....(constituent firm/constituent partner) and member/partner of the
..... (Tendering firm) hereby solemnly affirm and state as under:

1. I/we certify that (constituent firm/constituent partner) is/are not blacklisted or debarred by Railways or any other Ministry / Department of Govt, of India from participation in tender on the date of submission of bids, either in individual capacity or as a HUF/ member of the partnership firm/LLP/JV/Society/Trust.
2. I/We have read the clause regarding restriction on procurement from a bidder of a country which shares a land border with India and certify that I am/We are not from such a country or, if from such a country, have been registered with the competent Authority. I/We hereby certify that I/we fulfil all the requirements in this regard and am/are eligible to be considered (evidence of valid registration by the competent authority is enclosed),

SEAL AND SIGNATURE
OF THE CONSTITUENT FIRM/CONSTITUENT PARTNER

Place:
Dated:

(As per advance Correction Slip No. 2, Letter No. 2022/CE-I/CT/GCC-2022/Policy
Dated-13.12.2022)

(Bid Security)

Bank Guarantee Bond from any scheduled commercial bank of India
(On non-judicial stamp paper, which should be in the name of the Executing Bank).

Name of the Bank: -----

DFCCIL,
Acting through,
Chief General Manager/DFCCIL/Jaipur,

Beneficiary: DFCCIL

Date:.....

Bank Guarantee Bond No.:

Date:-----

In consideration of the DFCCIL acting through---- (*Designation & address of Contract Signing Authority*), DFCCIL,, (hereinafter called “The DFCCIL”) having invited the bid for _____through Notice inviting tender (NIT)

No.._____, We have been informed that [*Insert name of the Bidder*]..... (hereinafter called "**the Bidder**") intends to submit its bid (hereinafter called "the Bid") .

WHEREAS, the Bidder is required to furnish Bid Security for the sum of [*Insert required Value of Bid Security*], in the form of Bank Guarantee, according to conditions of Bid.

AND

WHEREAS,[*Insert Name of the Bank*], with its Branch[*Insert Address*] having its Headquarters office at..... [*Insert Address*], hereinafter called the **Bank**, acting through[*Insert Name and Designation of the authorised persons of the Bank*], have, at the request of the Bidder, agreed to give guarantee for Bid Security as hereinafter contained, in favour of the DFCCIL:

1. KNOW ALL MEN that by these present that I/We the undersigned [*Insert name(s) of authorized representatives of the Bank*], being fully authorized to sign and incur obligations for and on behalf of the Bank, confirm that the Bank, hereby, unconditionally and irrevocably guarantee to pay to the DFCCIL full amount in the sum of [*Insert required Value of Bid Security*] as above stated.
2. The Bank undertakes to immediately pay on presentation of demand by the DFCCIL any amount up to and including aforementioned full amount without any demur, reservation or recourse. Any such demand made by the DFCCIL on the Bank shall be final, conclusive and binding, absolute and unequivocal on the Bank notwithstanding any disputes raised/ pending before any Court, Tribunal, Arbitration or any Authority or any threatened litigation by the Bidder or Bank.
3. The Bank shall pay the amount as demanded immediately on presentation of the demand by DFCCIL without any reference to the Bidder and without the DFCCIL being required to show grounds or give reasons for its demand of the amount so demanded.
4. The guarantee hereinbefore shall not be affected by any change in the constitution of the Bank or in the constitution of the Bidder.
5. The Bank agrees that no change, addition, modifications to the terms of the Bid document or to any documents, which have been or may be made between the DFCCIL and the Bidder, will

in any way absolve the Bank from the liability under this guarantee; and the Bank, hereby, waives any requirement for notice of any such change, addition or modification made by DFCCIL at any time.

6. This guarantee will remain valid and effective from.....*[insert date of issue]*till*[insert date, which should be minimum 90 days beyond the expiry of validity of Bid]*. Any demand in respect of this Guarantee should reach the Bank within the validity period of Bid Security.
7. The Bank Guarantee is unconditional and irrevocable.
8. The expressions Bank and DFCCIL herein before used shall include their respective successors and assigns.
9. The Bank hereby undertakes not to revoke the guarantee during its currency, except with the previous consent in writing of the DFCCIL. This guarantee is subject to the Uniform Rules for Demand Guarantees, ICC Publication No.758.
10. The Bank hereby confirms that it is on the SFMS (Structured Financial Messaging System) and shall invariably send the advice of this Bank Guarantee to the following bank details –

IFSC CODE	UBIN0536920
IFSC TYPE	BRANCH
BANK NAME	Union Bank of India
BRANCH NAME	Bapu Nagar, Jaipur (Rajasthan)
CITY NAME	Jaipur
ADDRESS	Bapu Nagar, Jaipur (Rajasthan)
DISTRICT	Jaipur
STATE	Rajasthan
BG ENABLED	YES

11. The Guarantee shall be valid in addition to and without prejudice to any other security Guarantee(s) of Bidder in favour of the DFCCIL. The Bank, under this Guarantee, shall be deemed as Principal Debtor of the DFCCIL.

Date

Place.....

Bank's Seal and authorized signature(s)
[Name in Block letters]
[Designation with Code No.].....
[P/Attorney] No.

Witness:

1 Signature, Name & Address & Seal

2 Signature, Name & address & Seal

Bank's Seal

Note: All italicized text is for guidance on how to prepare this bank guarantee and shall be deleted from the final document.

Each Bidder or each member of a JV must fill in this form separately:

NAME OF BIDDER/JV PARTNER:

Annual Contractual Turnover Data for the Previous 3/4 Years (Contractual Payment only)			
Year	Amount Currency	Exchange Rate	Indian National Rupees Equivalent
Average Annual Contractual Turnover for last 3 years			

1. The average annual contractual turnover shall be calculated as an average of “total contractual payments” in the previous three financial years. However, in case balance sheet of the previous year is yet to be prepared/ audited, the audited balance sheet of the fourth previous year shall be considered for calculating average annual contractual turnover.
2. The information supplied shall be substantiated by data in the audited balance sheets and profit and loss accounts for the relevant years in respect of the bidder or all members constituting the bidder.
3. Contents of this form should be certified by a Chartered Accountant duly supported by Audited Balance Sheet duly certified by the Chartered Accountant.

SEAL AND SIGNATURE OF THE BIDDER

Certified that all figures and facts submitted in this form have been furnished after full consideration of all observations/notes in Auditor’s reports. _____

(Signature of Chartered Accountant)

Name of CA: _____

Registration No: _____

(Seal)

PROFORMA FOR TIME EXTENSION

No. _____ Dated: _____

Sub: (i) _____ (name of work).

(ii) Acceptance letter no. _____

(iii) Understanding/Agreement no. _____

Ref: _____ (Quote specific application of
Contractor for extension to the date received)

Dear Sir,

1. The stipulated date for completion of the work mentioned above is _____. From the progress made so far and the present rate of progress, it is unlikely that the work will be completed by the above date (or 'However, the work was not completed on this date').
2. Expecting that you may be able to complete the work if some more time is given, the competent authority, although not bound to do so, hereby extends the time for completion from _____ to _____.
3. Please note that an amount equal to the liquidated damages for delay in the completion of the work after the expiry of _____ (give here the stipulated date for completion with/without any liquidated damage fixed earlier) will be recovered from you as mentioned in Clause 17B of the Standard General Conditions of Contract for the extended period, notwithstanding the grant of this extension. You may proceed with the work accordingly.
4. The above extension of the completion date will also be subject to the further condition that no increase in rates on any account will be payable to you.
5. Please intimate within a week of the receipt of this letter your acceptance of the extension of the conditions stated above.
6. Please note that in the event of your declining to accept the extension on the above said conditions or in the event of your failure after accepting or acting upto this extension to complete the work by _____ (here mention the extended date), further action will be taken in terms of Clause 62 of the Standard General Conditions of Contract.

Yours faithfully

For and on behalf of the DFCCIL

PROFORMA OF 14 DAYS NOTICE FOR OFFLOADING OF PART OF CONTRACT WORK

_____ **DFCCIL**

(Without Prejudice)

To

M/s _____

Dear Sir,

Contract Agreement No. _____

In connection with _____

In spite of repeated instructions to you by the subordinate offices as well as by this office through various letters of even no. _____, dated _____; you have failed to show adequate progress of work so as to complete the contract within the original / extended date of completion of contract and part(s) of contract work are yet to be started/ still lagging behind the agreed program of work, listed as under:

(Details of part(s) of work which is delayed and can be executed independently, to be mentioned).

2. Your attention is invited to this office/Chief Engineer's office letter no. _____, dated _____ in reference to your representation, dated _____.
3. As you have failed to abide by the instructions issued to commence the work /to show adequate progress of work, you are hereby given 14 days' notice in accordance with Clause 40A of the Standard General Conditions of Contract to deploy adequate resources i.e. *(the details of resource requirement, to be mentioned)* and commence / to make good the progress for part(s) of works detailed above, failing which action as provided in Clause 40A of the Standard General Conditions of Contract shall be commenced after expiry of 14 days' notice period viz. to offload few/ all part(s) of work mentioned above to any of the existing or new contractor without your participation and at your Risk & Cost, not exceeding the value of Performance Guarantee of this contract, which may please be noted.

Kindly acknowledge receipt.

Yours faithfully

For and on behalf of the DFCCIL

NOTICE FOR PART OF CONTRACT WORK OFFLOADED

_____ **DFCCIL**

(Without Prejudice)

To

M/s _____

Dear Sir,

Contract Agreement No. _____

In connection with _____

1. Fourteen days' notice under Clause 40A of the Standard General Conditions of Contract was given to you under this office letter of even no., dated _____; but you have taken no/inadequate action to deploy adequate resources to commence the part(s) of work/show adequate progress of the part(s) of work, mentioned therein.

As you have failed to abide by the instructions issued to commence the part(s) of work/show adequate progress of the part(s) of work even at the lapse of 14 days' notice period under Clause 40A of the Standard General Conditions of Contract, few part(s) of the work under the contract have been offloaded and being executed by other mode(s) at the cost detailed below:

Or,

1. Please refer your request letter no. dated, wherein it was requested under clause 40 A of the Standard General Conditions of Contract to offload part(s) of works at your risk & cost. The details of part(s) of the work under the contract which have been offloaded and being executed by other mode(s) at the cost detailed below:

(List of Part(s) of work offloaded, Details of mode of execution of such offloaded work alongwith approximate cost thereof to be mentioned)

2. The final measurement of work(s) already executed for above part(s) of work recorded as per clause 45 (A) or/and 45 (B) of the Standard General Conditions of Contract is enclosed herewith.

3. The Bill(s) of Quantities for Part(s) of work offloaded is enclosed herewith.

4. The additional cost in execution of offloaded work through mode(s) mentioned in para (1) above is determined as Rs. _____, over& above the cost of execution under this contract (including the PVC amount payable as per contract, as on the date of issue of this notice). This additional cost shall be recovered from your next on account bill(s) or any other dues payable to you under contract.
5. The Contract value gets reduced to Rs.....:
6. You are requested to continue with the balance work in the contract subsequent to offloading of above part(s) of work.

Kindly acknowledge receipt.

Yours faithfully
For and on behalf of the DFCCIL

CERTIFICATE OF FITNESS

1. (a) Serial Number _____
(b) Date _____
2. Name of person examined _____
3. Father's Name: son/daughter of _____
Residing at _____
4. Sex _____
5. Residence: _____

6. Physical fitness _____
7. Identification marks _____
8. Date of birth, if available, and/or certified age _____

I certify that I have personally examined (name) _____ who is desirous of being employed in a factory or on a work requiring manual labour and that his/her age as nearly as can be ascertained from my examination, is _____ years.

I certify that he/she is fit for employment in a factory or on a work requiring manual labour as an adult/child.

9. Reasons for :
 - (a) Refusal to grant certificate, or _____
 - (b) Revoking the certificate _____

Signature or left hand

Thumb impression of the person examined.

Signature of Certifying Surgeon

Note: In case of physical disability, the exact details and cause of the physical disability should be clearly stated.

**PROFORMA OF 7 DAYS NOTICE FOR WORKS AS A WHOLE/ IN PARTS
(DETAILS OF PART OF WORK TO BE MENTIONED)**

_____ DFCCIL

(Without Prejudice)

To

M/s _____

Dear Sir,

Contract Agreement No. _____

In connection with _____

1. In spite of repeated instructions to you by the subordinate offices as well as by this office through various letters of even no. _____, dated _____; you have failed to start work/show adequate progress and/or submit detailed programme for completing the work/ part of work (details of part of work to be mentioned).
2. Your attention is invited to this office/Chief Engineer's office letter no. _____, dated _____ in reference to your representation, dated _____.
3. As you have failed to abide by the instructions issued to commence the work /to show adequate progress of work you are hereby given 7 days' notice in accordance with Clause 62 of the Standard General Conditions of Contract to commence works / to make good the progress, failing which further action as provided in Clause 62 of the Standard General Conditions of Contract viz. to terminate your Contract and complete the balance work without your participation will be taken.

Kindly acknowledge receipt.

Yours faithfully

For and on behalf of the DFCCIL

ANNEXURE – X

Reference Para 62(1)

Registered Acknowledgement Due

PROFORMA OF 48 HRS. NOTICE FOR WHOLE WORK

_____ **DFCCIL**

(Without Prejudice)

To

M/s _____

Dear Sir,

Contract Agreement No. _____

In connection with _____

1. Seven days' notice under Clause 62 of the Standard General Conditions of Contract was given to you under this office letter of even no., dated _____; but you have taken no action to commence the work/show adequate progress of the work.
2. You are hereby given 48 hours' notice in terms of Clause 62 of the Standard General Conditions of Contract to commence works / to make good the progress of works, failing which and on expiry of this period your above contract will be rescinded and the work under this contract will be carried out independently without your participation and your Security Deposit shall be forfeited and Performance Guarantee shall also be encashed and any other consequences which may please be noted.

Kindly acknowledge receipt.

Yours faithfully

For and on behalf of the DFCCIL

ANNEXURE – XI

Reference Para 62.(1)

Registered Acknowledgement Due

PROFORMA OF TERMINATION NOTICE

_____ **DFCCIL**

(Without Prejudice)

No. _____

Dated _____

To

M/s _____

Dear Sir,

Contract Agreement No. _____

In connection with _____

Forty eight hours (48 hrs.) notice was given to you under this office letter of even no., dated _____; but you have taken no action to commence the work/show adequate progress of the work.

Since the period of 48 hours' notice has already expired, the above contract stands rescinded in terms of Clause 62 of the Standard General Conditions of Contract and the balance work under this contract will be carried out independently without your participation. Your participation as well as participation of every member/partner in any manner as an individual or a partnership firm/JV is hereby debarred from participation in the tender for executing the balance work and your Security Deposit shall be forfeited and Performance Guarantee shall also be encashed.

Kindly acknowledge receipt.

Yours faithfully

For and on behalf of the DFCCIL

ANNEXURE – XII

Reference Para 62.(1)

Registered Acknowledgement Due

PROFORMA OF 48 HRS. NOTICE FOR PART OF THE WORK.....

(DETAILS OF PART OF WORK TO BE MENTIONED)

_____ **DFCCIL**

(Without Prejudice)

To

M/s _____

Dear Sir,

Contract Agreement No. _____

In connection with _____

1. Seven days' notice under Clause 62 of the Standard General Conditions of Contract was given to you under this office letter of even no., dated _____; but you have taken no action to commence the work/show adequate progress of the part of work.....(details of part to be mentioned).
2. You are hereby given 48 hours' notice in terms of Clause 62 of the Standard General Conditions of Contract to commence works / to make good the progress of works, failing which and on expiry of this period your above part of work.....(Details of part to be mentioned) in contract will be rescinded and the work will be carried out independently without your participation.
3. Your full Performance Guarantee for the contract shall be forfeited and you shall not be issued any completion certificate for the contract. However, no additional Performance Guarantee shall be required for balance of work being executed through the part terminated contract.
4. The contract value of part terminated contract shall stands reduced to

Kindly acknowledge receipt.

Yours faithfully

For and on behalf of the DFCCIL

ANNEXURE – XIII

Reference Para 62.(1)

Registered Acknowledgement Due

**PROFORMA OF TERMINATION NOTICE FOR PART OF THE WORK.....
(DETAILS OF PART OF WORK TO BE MENTIONED)**

_____ **DFCCIL**

(Without Prejudice)

No. _____

Dated _____

To

M/s _____

Dear Sir,

Contract Agreement No. _____

In connection with _____

1. Forty eight hours (48 hrs.) notice was given to you under this office letter of even no., dated _____; but you have taken no action to commence the work/show adequate progress of the part of work.....(details of part to be mentioned).
2. Your above part of work in contract(details of part to be mentioned) stands rescinded in terms of Clause 62 of the Standard General Conditions of Contract and the same will be carried out independently without your participation. Your participation as well as participation of every member/partner in any manner as an individual or a partnership firm/JV is hereby debarred from participation in the tender for executing the balance work
3. Your full Performance Guarantee for the contract shall be forfeited and you shall not be issued any completion certificate for the contract. However, no additional Performance Guarantee shall be required for balance of work being executed through the part terminated contract.
4. The contract value of part terminated contract stands reduced to

Kindly acknowledge receipt.

Yours faithfully

For and on behalf of the DFCCIL

FINAL SUPPLEMENTARY AGREEMENT

1. Articles of agreement made this day _____ in the year _____ between the DFCCIL, acting through the _____ DFCCIL Administration having his office at _____ herein after called the DFCCIL of the one part and _____ of the second part.
2. Whereas the party hereto of the second part executed an agreement with the party hereto of the first part being agreement Number _____ dated ____ for the performance _____ herein after called the 'Principal Agreement'.
3. And whereas it was agreed by and between the parties hereto that the works would be completed by the party hereto of the second part on _____ date last extended and whereas the party hereto of the second part has executed the work to the entire satisfaction of the party hereto of the first part.
4. And whereas the party hereto of the first part already made payment to the party hereto of the second part diverse sums from time to time aggregating to ₹ _____ including the Final Bill bearing voucher No. _____ dated _____ of value _____ duly adjusted as per price variation clause, if applicable (the receipt of which is hereby acknowledged by the party hereto of the second part in full and final settlement of all his /its claims under the principal agreement.

And whereas the party hereto of the second part have received sum of ₹ _____ through the Final Bill bearing voucher No. _____ dated _____ duly adjusted as per price variation clause (PVC), if applicable (the receipt of which is hereby acknowledged by the party thereto of the second part) from the party hereto of the first part in full and final settlement of all his/its disputed claims under principal agreement.

Now, it is hereby agreed by and between the parties in the consideration of sums already paid by the party hereto of the first part to the party hereto of the second part against all outstanding dues and claims for all works done under the aforesaid principal agreement excluding the Security Deposit, the party hereto of the second part have no further dues of claims against the party hereto of the first part under the said Principal Agreement. It is further agreed by and between the parties that the party hereto of the second part has accepted the said sums mentioned above in full and final satisfaction of all its dues and claims under the said Principal Agreement.

(Applicable in case Final Supplementary Agreement is signed after release of Final Payment)

Or

And whereas the party hereto of the first part already made payment to the party hereto of the second part diverse sums from time to time aggregating to ₹ _____ through various On Account Bills (the receipt of which is hereby acknowledged by the party hereto of the second part).

And whereas the party hereto of the second part have received sum of ₹ _____ through

various On Account Bills (the receipt of which is hereby acknowledged by the party thereto of the second part) from the party hereto of the first part and party hereto of the second part have accepted final measurements recorded on Page No..... to Page No.... of Measurement Book No.....and corresponding Final Bill duly adjusted as per price variation clause (PVC), if applicable, for full and final settlement of all his/its disputed claims under principal agreement.

Now, it is hereby agreed by and between the parties in the consideration of sums already paid through various On Account Bills and sums to be paid through Final Bill duly adjusted as per price variation clause (PVC), if applicable, based on accepted final measurements including the Security Deposit by the party hereto of the first part to the party hereto of the second part against all outstanding dues and claims for all works done under the aforesaid principal agreement, the party hereto of the second part have no further dues of claims against the party hereto of the first part under the said Principal Agreement.

(Applicable in case Final Supplementary Agreement is signed before release of Final Payment)

5. It is further agreed and understood by and between the parties that the arbitration clause contained in the said principal agreement shall cease to have any effect and/or shall be deemed to be non-existent for all purposes.

Signature of the Contractor/s

for and on behalf of the DFCCIL

Witnesses_____

ADDRESS:_____

Agreement towards Waiver under Section 12(5) and Section 31A (5) of Arbitration and Conciliation (Amendment) Act

I/we..... (Name of agency/Contractor) with reference to agreement no..... raise disputes as to the construction and operation of this contract, or the respective rights and liabilities, withholding of certificate and demand arbitration in respect of following claims :

Brief of claim:

- (i) Claim 1- Detailed at Annexure-
- (ii) Claim 2 –
- (iii) Claim 3 –

I/we..... (post of Engineer) with reference to agreement no..... hereby raise disputes as to the construction and operation of this contract, or the respective rights and liabilities, withholding of certificate and demand arbitration in respect of following claims:

I/we.....do/do not agree to waive off applicability of section 12(5) of Arbitration and Conciliation (Amendment) Act.

Signature of Claimant_____ Signature of Respondent

Agreement under Section 31(5)

zzI/we..... (Name of claimant) with reference to agreement no..... hereby waive off the applicability of sub section 31-A (2) to 31-A (4) of the Arbitration and Conciliation (Amendment) Act. We further agree that the cost of arbitration will be shared by the parties as per Clause 64(6) of the Standard General Conditions of Contract.

Signature of Claimant_____ Signature of Respondent_____

*Strike out whichever not applicable.

ANNEXURE-XVI

**Certification by Arbitrators appointed under Clause 63 & 64 of Indian Railways
General Conditions of Contract**

1. Name:
2. Contact Details:
3. Prior experience (Including Experience with Arbitrations):
4. **I do not have more than ten on-going Arbitration cases with me.**
5. I hereby certify that I have retired from Railways w.e.f. _____ and empanelled as DFCCIL Arbitrator as per 'The Arbitration and Conciliation Act- 1996'.
6. I have no any past or present relationship in relation to the subject matter in dispute, whether financial, business, professional or other kind.
Or
I have past or present relationship in relation to the subject matter in dispute, whether financial, business, professional or other kind. The list of such interests is as under:
7. I have no any past or present relationship with or interest in any of the parties whether financial, business, professional or other kind, which is likely to give rise to justifiable doubts as to my independence or impartiality in terms of The Arbitration and Conciliation Act-1996.
Or
I have past or present relationship with or interest in any of the parties whether financial, business, professional or other kind, which is likely to give rise to justifiable doubts as to my independence or impartiality in terms of The Arbitration and Conciliation Act-1996. The details of such relationship or interests are as under:
8. There are no concurrent Circumstances which are likely to affect my ability to devote sufficient time to the arbitration and in particular to finish the entire arbitration within twelve months.
Or
There are Circumstances which are likely to affect my ability to devote sufficient time to the arbitration and in particular to finish the entire arbitration within twelve months. The list of such circumstances is as under:

SCHEDULE OF PRICES & TOTAL PRICES**Tender Schedule**

Name of work:- Construction of Type-3 Staff Quarters at REJN, AELN, DBLN, BAGN, SMPN, PMPN & FLN and providing additional floor over existing service building at FLN DFCCIL station in the jurisdiction of CGM Jaipur.

Schedule-A							
DSR Code	DESCRIPTION	QTY	UNIT	RATE incl GST as per DSR 2021	Rate incl. 18% GST (Multiflying factor 1.0633)	Rate applicable after Escalation (- 38%)	AMOUNT
2.8	Earth work in excavation by mechanical means (Hydraulic excavator) / manual means in foundation trenches or drains (not exceeding 1.5 m in width or 10 sqm on plan), including dressing of sides and ramming of bottoms, lift upto 1.5 m, including getting out the excavated soil and disposal of surplus excavated soil as directed, within a lead of 50 m.						
2.8.1	All kinds of soil	2592.00	Cum	286.85	305.01	189.10	4,90,147.20
2.25	Filling available excavated earth (excluding rock) in trenches, plinth, sides of foundations etc. in layers not exceeding 20cm in depth, consolidating each deposited layer by ramming and watering, lead up to 50 m and lift upto 1.5 m.	2112.00	Cum	253.95	270.03	167.42	3,53,591.04
2.27	Supplying and filling in plinth with sand under floors, including watering, ramming, consolidating and dressing complete.	960.00	Cum	2161.20	2298.00	1424.76	13,67,769.60
4.1	Providing and laying in position cement concrete of specified grade excluding the cost of centering and shuttering - All work up to plinth level :						
4.1.3	1:2:4 (1 cement : 2 coarse sand (zone-III) derived from natural sources : 4 graded stone aggregate 20 mm nominal size derived from natural sources)	112.00	Cum	7365.15	7831.36	4855.44	5,43,809.28
4.1.5	1:3:6 (1 Cement : 3 coarse sand (zone-III) derived from natural sources : 6 graded stone aggregate 20 mm nominal size derived from natural sources)	368.00	Cum	6833.40	7265.95	4504.89	16,57,799.52

5.2	Reinforced cement concrete work in walls (any thickness), including attached pilasters, buttresses, plinth and string courses, fillets, columns, pillars, piers, abutments, posts and struts etc. above plinth level up to floor five level, excluding cost of centering, shuttering, finishing and reinforcement :						
5.2.2	1:1.5:3 (1 cement : 1.5 coarse sand (zone-III) derived from natural sources : 3 graded stone aggregate 20 mm nominal size derived from natural sources)	120.00	Cum	10185.05	10829.76	6714.45	8,05,734.00
5.33	Providing and laying in position ready mixed or site batched design mix cement concrete for reinforced cement concrete work; using coarse aggregate and fine aggregate derived from natural sources, Portland Pozzolana / Ordinary Portland /Portland Slag cement, admixtures in recommended proportions as per IS: 9103 to accelerate / retard setting of concrete, to improve durability and workability without impairing strength; including pumping of concrete to site of laying, curing, carriage for all leads; but excluding the cost of centering, shuttering, finishing and reinforcement as per direction of the engineer-in-charge; for the following grades of concrete. Note: Extra cement up to 10% of the minimum specified cement content in design mix shall be payable separately. In case the cement content in design mix is more than 110% of the specified minimum cement content, the contractor shall have discretion to either re-design the mix or bear the cost of extra cement.						
5.33.1	All works upto plinth level						
5.33.1.1	Concrete of M25 grade with minimum cement content of 330 kg /cum	400.00	Cum	7997.30	8503.53	5272.19	21,08,876.00
5.33.2	All works above plinth level upto floor V level						
5.33.2.1	Concrete of M25 grade with minimum cement content of 330 kg /cum	1200.00	Cum	10080.15	10718.22	6645.30	79,74,360.00
5.9	Centering and shuttering including strutting, propping etc. and removal of form for						
5.9.1	Foundations, footings, bases of columns, etc. for mass concrete	592.00	Sqm	307.95	327.44	203.01	1,20,181.92
5.9.19	Weather shade, Chajjas, corbels etc., including edges	488.00	Sqm	814.95	866.54	537.25	2,62,178.00

5.9.3	Suspended floors, roofs, landings, balconies and access platform	4209.00	Sqm	766.55	815.07	505.35	21,27,018.15
5.9.5	Lintels, beams, plinth beams, girders, bressumers and cantilevers	5805.00	Sqm	608.35	646.86	401.05	23,28,095.25
5.9.6	Columns, Pillars, Piers, Abutments, Posts and Struts	4392.00	Sqm	804.25	855.16	530.20	23,28,638.40
	Columns						
5.9.7	Stairs, (excluding landings) except spiral-staircases	344.00	Sqm	657.75	699.39	433.62	1,49,165.28
5.22	Steel reinforcement for R.C.C. work including straightening, cutting, bending, placing in position and binding all complete upto plinth level.	-	-	-			
5.22.6	Thermo-Mechanically Treated bars of grade Fe-500D or more.	44148.05	Kg	89.65	95.32	59.10	26,09,149.76
5.22A	Steel reinforcement for R.C.C. work including straightening, cutting, bending, placing in position and binding all complete above plinth level.						
5.22A.6	Thermo-Mechanically Treated bars of grade Fe-500D or more.	102000.00	Kg	89.65	95.32	59.10	60,28,200.00
6.1	Brick work with common burnt clay F.P.S. (non modular) bricks of class designation 7.5 in foundation and plinth in:						
6.1.1	Cement mortar 1:4 (1 cement : 4 coarse sand)	235	Cum	6882	7317.63	4536.93	10,66,178.55
6.12	Half brick masonry with common burnt clay F.P.S. (non modular) bricks of class designation 7.5 in foundations and plinth in :						
6.12.2	Cement mortar 1:4 (1 cement : 4 coarse sand)	185	Sqm	1018.05	1082.49	671.15	1,24,162.75
7.1	Random rubble masonry with hard stone in foundation and plinth including levelling up with cement concrete 1:6:12 (1 cement : 6 coarse sand : 12 graded stone aggregate 20 mm nominal size) upto plinth level with :						
7.1.1	Cement mortar 1:6 (1 cement : 6 coarse sand)	624.00	Cum	6653.45	7074.61	4386.26	27,37,026.24
6.4	Brick work with common burnt clay F.P.S. (non modular) bricks of class designation 7.5 in superstructure above plinth level up to floor V level in all shapes and sizes in :	-	-	-			
6.4.1	Cement mortar 1:4 (1 cement : 4 coarse sand)	1560.00	Cum	8512.10	9050.92	5611.57	87,54,049.20
13.1	12 mm cement plaster of mix :						
13.1.2	1:6 (1 cement: 6 fine sand)	5615.00	Sqm	282.00	299.85	185.91	10,43,884.65
13.2	15 mm cement plaster on the rough side of single or half brick wall of mix :						

13.2.1	1:4 (1 cement: 4 fine sand)	11944.00	Sqm	339.70	361.20	223.95	26,74,858.80
13.2.2	1:6 (1 cement: 6 fine sand)	1010.00	Sqm	324.30	344.83	213.79	2,15,927.90
13.11	18 mm cement plaster in two coats under layer 12 mm thick cement plaster 1:5 (1 cement : 5 coarse sand) finished with a top layer 6 mm thick cement plaster 1:6 (1 cement : 6 fine sand).	4752.00	Sqm	442.75	470.78	291.88	13,87,013.76
13.16	6 mm cement plaster of mix :						
13.16.1	1:3 (1 cement : 3 fine sand)	3382.00	Sqm	253.05	269.07	166.82	5,64,185.24
13.26	Providing and applying plaster of paris putty of 2 mm thickness over plastered surface to prepare the surface even and smooth complete.	7055.00	Sqm	214.30	227.87	141.28	9,96,730.40
13.80	Providing and applying white cement based putty of average thickness 1 mm, of approved brand and manufacturer, over the plastered wall surface to prepare the surface even and smooth complete.	18460.00	Sqm	123.85	131.69	81.65	15,07,259.00
13.41	Distempering with oil bound washable distemper of approved brand and manufacture to give an even shade :						
13.41.1	New work (two or more coats) over and including water thinnable priming coat with cement primer	20941.00	Sqm	162.55	172.84	107.16	22,44,037.56
13.46	Finishing walls with Acrylic Smooth exterior paint of required shade :						
13.46.1	New work (Two or more coat applied @ 1.67 ltr/10 sqm over and including priming coat of exterior primer applied @ 2.20 kg/10 sqm)	3564.00	Sqm	166.85	177.41	110.00	3,92,040.00
13.47	Finishing walls with Premium Acrylic Smooth exterior paint with Silicone additives of required shade:						
13.47.1	New work (Two or more coats applied @ 1.43 ltr/10 sqm over and including priming coat of exterior primer applied @ 2.20 kg/10 sqm)	1010.00	Sqm	162.35	172.63	107.03	1,08,100.30
11.16	Precast terrazo tiles 22 mm thick with graded marble chips of size upto 12 mm, laid in floors, and landings, jointed with neat cement slurry mixed with pigment to match the shade of the tiles, including rubbing and polishing complete, on 20 mm thick bed of cement mortar 1:4 (1 cement:4 coarse sand) :						
11.16.1	Light shade pigment using white cement	3302.00	Sqm	1309.90	1392.82	863.55	28,51,442.10

11.18	Precast terrazo tiles 22 mm thick with graded marble chips of sizes upto 12 mm, in skirting and risers of steps not exceeding 30 cm in height, on 12 mm thick cement plaster 1:3 (1 cement : 3 coarse sand), jointed with neat cement slurry mixed with pigment to match the shade of the tiles, including rubbing and polishing complete with tiles of :						
11.18.1	Light shade pigment using white cement	56.00	Sqm	2027.75	2156.11	1336.79	74,860.24
11.26	Kota stone slab flooring over 20 mm (average) thick base laid over and jointed with grey cement slurry mixed with pigment to match the shade of the slab, including rubbing and polishing complete with base of cement mortar 1 : 4 (1 cement : 4 coarse sand) :						
11.26.1	25mm thick	314.00	Sqm	1706.60	1814.63	1125.07	3,53,271.98
11.27	Kota stone slabs 20 mm thick in risers of steps, skirting, dado and pillars laid on 12 mm (average) thick cement mortar 1:3 (1 cement: 3 coarse sand) and jointed with grey cement slurry mixed with pigment to match the shade of the slabs, including rubbing and polishing complete.	63.00	Sqm	2038.55	2167.59	1343.91	84,666.33
11.37	Providing and laying Ceramic glazed floor tiles of size 300x300 mm (thickness to be specified by the manufacturer) of 1st quality conforming to IS : 15622 of approved make in colours such as White, Ivory, Grey, Fume Red Brown, laid on 20 mm thick cement mortar 1:4 (1 Cement : 4 Coarse sand), Jointing with grey cement slurry @ 3.3 kg/sqm including pointing the joints with white cement and matching pigment etc., complete.	22.00	Sqm	935.60	994.82	616.79	13,569.38
11.38	Providing and laying Ceramic glazed floor tiles of size 300x300 mm (thickness to be specified by the manufacturer), of 1st quality conforming to IS : 15622, of approved make, in all colours, shades, except White, Ivory, Grey, Fume Red Brown, laid on 20 mm thick bed of cement mortar 1:4 (1 Cement : 4 Coarse sand), jointing with grey cement slurry @ 3.3 kg/sq.m including pointing the joints with white cement and matching pigments etc., complete.	256.00	Sqm	1107.05	1177.13	729.82	1,86,833.92

11.41	Providing and laying vitrified floor tiles in different sizes (thickness to be specified by the manufacturer) with water absorption less than 0.08% and conforming to IS: 15622, of approved make, in all colours and shades, laid on 20mm thick cement mortar 1:4 (1 cement : 4 coarse sand), jointing with grey cement slurry @ 3.3 kg/sqm including grouting the joints with white cement and matching pigments etc., complete.						
11.41.2	Size of Tile 600x600 mm	3082.00	Sqm	1416.65	1506.32	933.92	28,78,341.44
8.31	Providing and fixing Ist quality ceramic glazed wall tiles conforming to IS: 15622 (thickness to be specified by the manufacturer), of approved make, in all colours, shades except burgundy, bottle green, black of any size as approved by Engineer-in-Charge, in skirting, risers of steps and dados, over 12 mm thick bed of cement mortar 1:3 (1 cement : 3 coarse sand) and jointing with grey cement slurry @ 3.3kg per sqm, including pointing in white cement mixed with pigment of matching shade complete.	734.00	Sqm	1063.45	1130.77	701.08	5,14,592.72
8.2	Providing and fixing 18 mm thick gang saw cut, mirror polished, pre moulded and prepolished, machine cut for kitchen platforms, vanity counters, window sills, facias and similar locations of required size, approved shade, colour and texture laid over 20 mm thick base cement mortar 1:4 (1 cement : 4 coarse sand), joints treated with white cement, mixed with matching pigment, epoxy touch ups, including rubbing, curing, moulding and polishing to edges to give high gloss finish etc. complete at all levels.						
8.2.2	Granite stone slab colour black, Cherry/Ruby red						
8.2.2.2	Area of slab over 0.50 sqm	128.00	Sqm	4425.35	4705.47	2917.39	3,73,425.92
8.3	Providing edge moulding to 18 mm thick marble stone counters, Vanities etc., including machine polishing to edge to give high gloss finish etc. complete as per design approved by Engineer-in-Charge.						
8.3.2	Granite work	480.00	metre	418.85	445.36	276.13	1,32,542.40

9.147D	<p>Providing and fixing factory made uPVC white colour sliding glazed window upto 1.50 m in height dimension comprising of uPVC multi-chambered frame with in-built roller track and sash extruded profiles duly reinforced with 1.60 ± 0.2 mm thick galvanized mild steel section made from roll forming process of required length (shape & size according to uPVC profile), appropriate dimension of uPVC extruded glazing beads and uPVC extruded interlocks, EPDM gasket, wool pile, zinc alloy (white powder coated) touch locks with hook, zinc alloy body with single nylon rollers (weight bearing capacity to be 40 kg), G.I fasteners 100 x 8 mm size for fixing frame to finished wall and necessary stainless steel screws etc. Profile of frame & sash shall be mitred cut and fusion welded at all corners, including drilling of holes for fixing hardware's and drainage of water etc. After fixing frame the gap between frame and adjacent finished wall shall be filled with weather proof silicon sealant over backer rod of required size and of approved quality, all complete as per approved drawing & direction of Engineer-in-Charge. (Single / double glass panes, wire mesh and silicon sealant shall be paid separately). Variation in profile dimension in higher side shall be accepted but no extra payment on this account shall be made. Note: For uPVC frame and sash extruded profiles minus 5% tolerance in dimension i.e. in depth & width of profile shall be acceptable.</p>						
9.147D .3	<p>Two track two panels sliding window made of (big series) frame 67 x 50 mm & sash 46 x 62 mm both having wall thickness of 2.3 ± 0.2 mm and single glazing bead / double glazing bead of appropriate dimension . (Area of window above 1.75 sqm upto 2.50 sqm).</p>	25.00	Sqm	7821.15	8316.23	5156.06	1,28,901.50
9.147D .4	<p>Three track three panels sliding window with fly proof S.S wire mesh (Two nos. glazed & one no. wire mesh panels) made of (big series) frame 116 x 45 mm & sash 46 x 62 mm both having wall thickness of 2.3 ± 0.2 mm and single glazing bead / double glazing bead of appropriate dimension. (Area of window above 1.75 sqm).</p>	584.00	Sqm	9642.60	10252.98	6356.85	37,12,400.40

9.147B	<p>Providing and fixing factory made uPVC white colour fixed glazed windows/ ventilators comprising of uPVC multi-chambered frame and mullion (where ever required) extruded profiles duly reinforced with 1.60 ± 0.2 mm thick galvanized mild steel section made from roll forming process of required length (shape & size according to uPVC profile), uPVC extruded glazing beads of appropriate dimension, EPDM gasket, G.I fasteners 100 x 8 mm size for fixing frame to finished wall, plastic packers, plastic caps and necessary stainless steel screws etc. Profile of frame shall be mitred cut and fusion welded at all corners, mullion (if required) shall be also fusion welded including drilling of holes for fixing hardware's and drainage of water etc. After fixing frame the gap between frame and adjacent finished wall shall be filled with weather proof silicon sealant over backer rod of required size and of approved quality, all complete as per approved drawing & direction of Engineer-in-Charge. (Single / double glass panes and silicon sealant shall be paid separately). Variation in profile dimension in higher side shall be accepted but no extra payment on this account shall be made. Note: For uPVC frame, sash and mullion extruded profiles minus 5% tolerance in dimension i.e. in depth & width of profile shall be acceptable.</p>						
9.147B.1	<p>Fixed window / ventilator made of (small series) frame 47 x 50 mm & mullion 47 x 68 mm both having wall thickness of 1.9 ± 0.2 mm and single glazing bead of appropriate dimension. (Area upto 0.75 sqm.)</p>	40.00	Sqm	7249.90	7708.82	4779.47	1,91,178.80
9.7	<p>Providing and fixing panelling or panelling and glazing in panelled or panelled and glazed shutters for doors, windows and clerestory windows (Area of opening for panel inserts excluding portion inside grooves or rebates to be measured). Panelling for panelled or panelled and glazed shutters 25 mm to 40 mm thick :</p>						
9.7.7	<p>Float glass panes</p>						
9.7.7.1	<p>4 mm thick glass pane (weight not less than 10kg/sqm).</p>	25.00	Sqm	1897.10	2017.19	1250.66	31,266.50

9.21	Providing and fixing ISI marked flush door shutters conforming to IS : 2202 (Part I) non-decorative type, core of block board construction with frame of 1st class hard wood and well matched commercial 3 ply veneering with vertical grains or cross bands and face veneers on both faces of shutters:	-	-	-			
9.21.1	35 mm thick including ISI marked Stainless Steel butt hinges with necessary screws	588.00	Sqm	2015.75	2143.35	1328.88	7,81,381.44
9.23	Extra for providing lipping with 2nd class teak wood battens 25 mm minimum depth on all edges of flush door shutters (over all area of door shutter to be measured).	560.00	Sqm	401.40	426.81	264.62	1,48,187.20
9.134	Providing and fixing wire gauge shutters using stainless steel grade 304 wire gauge with wire of dia 0.5 mm and average width of aperture 1.4 mm in both directions for doors, windows and clerestory windows with necessary screws :						
9.134.2	30 mm thick shutters						
9.134.2.2	With ISI marked stainless steel butt hinges of required size						
9.134.2.2.1	Second class teak wood	236.00	Sqm	4153.20	4416.10	2737.98	6,46,163.28
9.48	Providing and fixing M.S. grills of required pattern in frames of windows etc. with M.S. flats, square or round bars etc. including priming coat with approved steel primer all complete.						
9.48.2	Fixed to openings /wooden frames with rawl plugs screws etc.	1450.00	Kg	197.70	210.21	130.33	1,88,978.50
10.14	Providing and fixing pressed steel door frames conforming to IS: 4351, manufactured from commercial mild steel sheet of 1.60 mm thickness, including hinges, jamb, lock jamb, bead and if required angle threshold of mild steel angle of section 50x25 mm, or base ties of 1.60 mm, pressed mild steel welded or rigidly fixed together by mechanical means, including M.S. pressed butt hinges 2.5 mm thick with mortar guards, lock strike-plate and shock absorbers as specified and applying a coat of approved steel primer after pre-treatment of the surface as directed by Engineer-in-charge:	-	-	-			
10.14.1	Profile B						
10.14.1.1	Fixing with adjustable lugs with split end tail to each jamb	976.00	Rmt	444.50	472.64	293.03	2,85,997.28
10.14.2	Profile-C						

10.14.2.1	Fixing with adjustable lugs with split end tail to each jamb	572.00	Rmt	471.25	501.08	310.67	1,77,703.24
9.83	Providing and fixing aluminium die cast body tubular type universal hydraulic door closer (having brand logo with ISI, IS : 3564, embossed on the body, door weight upto 35 kg and door width upto 700 mm), with necessary accessories and screws etc. complete.	96.00	Each	1025.65	1090.57	676.16	64,911.36
9.101	Providing and fixing aluminium hanging floor door stopper, ISI marked, anodised (anodic coating not less than grade AC 10 as per IS : 1868) transparent or dyed to required colour and shade, with necessary screws etc. complete.						
9.101.2	Twin rubber stopper	192.00	Each	62.25	66.19	41.04	7,879.68
9.62	Providing and fixing ISI marked oxidised M.S. sliding door bolts with nuts and screws etc. complete :						
9.62.1	300x16mm	616.00	Each	180.55	191.98	119.03	73,322.48
9.65	Providing and fixing ISI marked oxidised M.S. door latches conforming to IS:5930 with screws etc. complete :						
9.65.1	300x20x6 mm	596.00	Each	82.40	87.62	54.32	32,374.72
9.66	Providing and fixing ISI marked oxidised M.S. handles conforming to IS:4992 with necessary screws etc. complete :						
9.66.1	125 mm	616.00	Each	35.20	37.43	23.21	14,297.36
10.16	Steel work in built up tubular (round, square or rectangular hollow tubes etc.) trusses etc., including cutting, hoisting, fixing in position and applying a priming coat of approved steel primer, including welding and bolted with special shaped washers etc. complete.						
10.16.1	Hot finished welded type tubes	4848.00	Kg	154.90	164.71	102.12	4,95,077.76
13.61	Painting with synthetic enamel paint of approved brand and manufacture to give an even shade :						
13.61.1	Two or more coats on new work	1008.00	Sqm	131.45	139.77	86.66	87,353.28
14.28	Providing and fixing brass curtain rods of wall thickness 1.25 mm with two brass brackets fixed with brass screws and wooden plugs etc. wherever necessary complete.						
14.28.2	25 mm diameter.	520.00	Rmt	362.10	385.02	238.71	1,24,129.20

18.8	Providing and fixing Chlorinated Polyvinyl Chloride (CPVC) pipes, having thermal stability for hot & cold water supply, including all CPVC plain & brass threaded fittings, i/c fixing the pipe with clamps at 1.00 m spacing. This includes jointing of pipes & fittings with one step CPVC solvent cement and the cost of cutting chases and making good the same including testing of joints complete as per direction of Engineer in Charge. Concealed work, including cutting chases and making good the walls etc.						
18.8.1	15mm nominal outer dia. Pipes	1440.00	metre	441.15	469.07	290.83	4,18,795.20
18.8.2	20 mm nominal dia Pipes	838.00	metre	513.75	546.27	338.69	2,83,822.22
18.9	Providing and fixing Chlorinated Polyvinyl Chloride (CPVC) pipes, having thermal stability for hot & cold water supply including all CPVC plain & brass threaded fittings This includes jointing of pipes & fittings with one step CPVC solvent cement, trenching, refilling & testing of joints complete as per direction of Engineer in Charge.						
18.9.2	20 mm nominal dia Pipes	320.00	metre	275.25	292.67	181.46	58,067.20
18.9.3	25 mm nominal dia Pipes	1280.00	metre	370.65	394.11	244.35	3,12,768.00
18.9.4	32 mm nominal dia Pipes	10.00	metre	435.05	462.59	286.80	2,868.00
18.15	Providing and fixing brass bib cock of approved quality :						
18.15.1	15 mm nominal bore	6.00	Each	303.85	323.08	200.31	1,201.86
18.18	Providing and fixing ball valve (brass) of approved quality, High or low pressure, with plastic floats complete :						
18.18.2	20 mm nominal bore	2.00	Each	397.45	422.61	262.02	524.04
18.17	Providing and fixing gun metal gate valve with C.I. wheel of approved quality (screwed end) :						
18.17.1	25 mm nominal bore	48.00	Each	532.35	566.05	350.95	16,845.60
18.48	Providing and placing on terrace (at all floor levels) polyethylene water storage tank, IS : 12701 marked, with cover and suitable locking arrangement and making necessary holes for inlet, outlet and overflow pipes but without fittings and the base support for tank.	52000.00	litre	9.70	10.31	6.39	3,32,280.00
18.18	Providing and fixing ball valve (brass) of approved quality, High or low pressure, with plastic floats complete :						
18.18.3	25 mm nominal bore	48.00	Each	399.15	424.42	263.14	12,630.72

19.32	Making soak pit 2.5 m diameter 3.0 metre deep with 45 x 45 cm dry brick honey comb shaft with bricks and S.W. drain pipe 100 mm diameter, 1.8 m long complete as per standard design.						
19.32.1	With common burnt clay F.P.S. (non modular) bricks of class designation 7.5	8.00	Each	28029.15	29803.40	18478.11	1,47,824.88
19.30	Constructing brick masonry chamber for underground C.I. inspection chamber and bends with bricks in cement mortar 1:4 (1 cement : 4 coarse sand) C.I. cover with frame (light duty) 455x610 mm internal dimensions, total weight of cover with frame to be not less than 38 kg (weight of cover 23 kg and weight of frame 15 kg), R.C.C. top slab with 1:1.5:3 mix (1 cement : 1.5 fine sand : 3 graded stone aggregate 20 mm nominal size), foundation concrete 1:5:10 (1 cement : 5 fine sand : 10 graded stone aggregate 40 mm nominal size), inside plastering 12 mm thick with cement mortar 1:3 (1 cement : 3 coarse sand), finished smooth with a floating coat of neat cement on walls and bed concrete etc. complete as per standard design:						
19.30.1	Inside dimensions 455x610 mm and 45 cm deep for single pipe line :						
19.30.1.1	With common burnt clay F.P.S. (non modular) bricks of class designation 7.5	8.00	Each	6431.30	6838.40	4239.81	33,918.48
19.31	Extra for depth beyond 45 cm of brick masonry chamber :						
19.31.1	For 455x610 mm size						
19.31.1.1	With common burnt clay F.P.S. (non modular) bricks of class designation 7.5	8.00	metre	5640.75	5997.81	3718.64	29,749.12
19.7	Constructing brick masonry manhole in cement mortar 1:4 (1 cement : 4 coarse sand) with R.C.C. top slab with 1:1.5:3 mix (1 cement : 1.5 coarse sand (zone-III) : 3 graded stone aggregate 20 mm nominal size), foundation concrete 1:4:8 mix (1 cement : 4 coarse sand (zone-III) : 8 graded stone aggregate 40 mm nominal size), inside plastering 12 mm thick with cement mortar 1:3 (1 cement : 3 coarse sand) finished with floating coat of neat cement and making channels in cement concrete 1:2:4 (1 cement : 2 coarse sand : 4 graded stone aggregate 20 mm nominal size) finished with a floating coat of neat cement complete as per standard design :						

19.7.1	Inside size 90x80 cm and 45 cm deep including C.I. cover with frame (light duty) 455x610 mm internal dimensions, total weight of cover and frame to be not less than 38 kg (weight of cover 23 kg and weight of frame 15 kg) :						
19.7.1.1	With common burnt clay F.P.S. (non modular) bricks of class designation 7.5	16.00	Each	11687.10	12426.89	7704.67	1,23,274.72
19.4	Providing and fixing square-mouth S.W. gully trap class SP-1 complete with C.I. grating brick masonry chamber with water tight C.I. cover with frame of 300 x300 mm size (inside) the weight of cover to be not less than 4.50 kg and frame to be not less than 2.70 kg as per standard design:						
19.4.1	100x100 mm size P type						
19.4.1.1	With common burnt clay F.P.S. (non modular) bricks of class designation 7.5	32.00	Each	2453.55	2608.86	1617.49	51,759.68
12.41	Providing and fixing on wall face unplasticised Rigid PVC rain water pipes conforming to IS : 13592 Type A, including jointing with seal ring conforming to IS : 5382, leaving 10 mm gap for thermal expansion, (i) Single socketed pipes.						
12.41.2	110 mm diameter	1824.00	Mtr.	319.75	339.99	210.79	3,84,480.96
12.42	Providing and fixing on wall face unplasticised - PVC moulded fittings/ accessories for unplasticised Rigid PVC rain water pipes conforming to IS : 13592 Type A, including jointing with seal ring conforming to IS : 5382, leaving 10 mm gap for thermal expansion.						
12.42.1	Coupler						
12.42.1.2	110 mm	200.00	Each	119.95	127.54	79.08	15,816.00
12.42.5	Bend 87.5°						
12.42.5.2	110 mm bend	80.00	Each	132.00	140.36	87.02	6,961.60
12.42.3	Single tee with door						
12.42.3.2	110x110x110 mm	96.00	Each	205.45	218.45	135.44	13,002.24
12.43	Providing and fixing unplasticised -PVC pipe clips of approved design to unplasticised - PVC rain water pipes by means of 50x50x50 mm hard wood plugs, screwed with M.S. screws of required length, including cutting brick work and fixing in cement mortar 1:4 (1 cement : 4 coarse sand) and making good the wall etc. complete.						

12.43.2	110 mm dia	200.00	Each	309.50	329.09	204.04	40,808.00
19.2	Providing and laying cement concrete 1:5:10 (1 cement : 5 coarse sand : 10 graded stone aggregate 40 mm nominal size) all-round S.W. pipes including bed concrete as per standard design :						
19.2.3	200 mm diameter S.W. pipe	800.00	Rmt	1276.70	1357.52	841.66	6,73,328.00
17.2	Providing and fixing white vitreous china pedestal type water closet (European type W.C. pan) with seat and lid, 10 litre low level white P.V.C. flushing cistern, including flush pipe, with manually controlled device (handle lever), conforming to IS : 7231, with all fittings and fixtures complete, including cutting and making good the walls and floors wherever required :						
17.2.1	W.C. pan with ISI marked white solid plastic seat and lid	50.00	Each	5540.55	5891.27	3652.59	1,82,629.50
17.1	Providing and fixing water closet squatting pan (Indian type W.C. pan) with 100 mm sand cast Iron P or S trap, 10 litre low level white P.V.C. flushing cistern, including flush pipe, with manually controlled device (handle lever) conforming to IS : 7231, with all fittings and fixtures complete, including cutting and making good the walls and floors wherever required:						
17.1.1	White Vitreous china Orissa pattern W.C. pan of size 580x440 mm with integral type foot rests	48.00	Each	5781.35	6147.31	3811.33	1,82,943.84
17.4	Providing and fixing white vitreous china flat back or wall corner type lipped front urinal basin of 430x260x350 mm and 340x410x265 mm sizes respectively with automatic flushing cistern with standard flush pipe and C.P. brass spreaders with brass unions and G.I clamps complete, including painting of fittings and brackets, cutting and making good the walls and floors wherever required :						
17.4.1	One urinal basin with 5 litre white P.V.C. automatic flushing cistern	4.00	Each	5268.85	5602.37	3473.47	13,893.88
17.7	Providing and fixing wash basin with C.I. brackets, 15 mm C.P. brass pillar taps, 32 mm C.P. brass waste of standard pattern, including painting of fittings and brackets, cutting and making good the walls wherever require:						
17.7.4	White Vitreous China Flat back wash basin size 550x 400 mm with single 15 mm C.P. brass pillar tap	2.00	Each	1679.60	1785.92	1107.27	2,214.54

17.7.7	White Vitreous China Flat back wash basin size 450x 300 mm with single 15mm C.P. brass pillar tap	96.00	Each	1318.35	1401.80	869.12	83,435.52
17.28	Providing and fixing P.V.C. waste pipe for sink or wash basin including P.V.C. waste fittings complete.						
17.28.1	Semi rigid pipe						
17.28.1.1	32 mm dia	146.00	Each	90.95	96.71	59.96	8,754.16
17.31	Providing and fixing 600x450 mm beveled edge mirror of superior glass (of approved quality) complete with 6 mm thick hard board ground fixed to wooden cleats with C.P. brass screws and washers complete.	96.00	Each	1411.15	1500.48	930.29	89,307.84
17.16A	Providing and fixing 8 mm dia C.P. / S.S. Jet with flexible tube upto 1 metre long with S.S. triangular plate to European type W.C. of quality and make as approved by Engineer - in - charge	96.00	Each	299.35	318.30	197.35	18,945.60
17.73	Providing and fixing PTMT towel rail complete with brackets fixed to wooden cleats with CP brass screws with concealed fittings arrangement of approved quality and colour						
17.73.1	450 mm long towel rail with total length of 495 mm, 78 mm wide and effective height of 88 mm, weighing not less than 170 gms	96.00	Each	573.60	609.91	378.14	36,301.44
17.74	Providing and fixing PTMT shelf 440 mm long, 124 mm width and 36 mm height of approved quality and colour, weighing not less than 300 gms.	96.00	Each	607.05	645.48	400.20	38,419.20
18.53	Providing and fixing C.P. brass angle valve for basin mixer and geyser points of approved quality conforming to IS:8931						
18.53.1	15mm nominal bore	304.00	Each	500.35	532.02	329.85	1,00,274.40
17.69	Providing and fixing PTMT Waste Coupling for wash basin and sink, of approved quality and colour.						
17.69.1	Waste coupling 31 mm dia of 79 mm length and 62mm breadth weighing not less than 45 gms	192.00	Each	103.00	109.52	67.90	13,036.80
17.9	Providing and fixing kitchen sink with C.I. brackets, C.P. brass chain with rubber plug, 40 mm C.P. brass waste complete, including painting the fittings and brackets, cutting and making good the walls wherever required:						
17.9.1	White glazed fire clay kitchen sink of size 600x450x 250 mm	48.00	Each	3302.95	3512.03	2177.46	1,04,518.08

18.49	Providing and fixing C.P. brass bib cock of approved quality conforming to IS:8931 :						
18.49.1	15 mm nominal bore	192.00	Each	434.20	461.68	286.24	54,958.08
19.1	Providing, laying and jointing glazed stoneware pipes class SP-1 with stiff mixture of cement mortar in the proportion of 1:1 (1 cement : 1 fine sand) including testing of joints etc. complete :						
19.1.2	150 mm diameter	240.00	Metre	591.40	628.84	389.88	93,571.20
15.3	Demolishing R.C.C. work manually/ by mechanical means including stacking of steel bars and disposal of unserviceable material within 50 metres lead as per direction of Engineer - in- charge.	30.00	Cum	2928.10	3113.45	1930.34	57,910.20
15.7	Demolishing brick work manually/ by mechanical means including stacking of serviceable material and disposal of unserviceable material within 50 metres lead as per direction of Engineer-in-charge.						
15.7.4	In cement mortar	32.00	Cum	1698.45	1805.96	1119.70	35,830.40
15.13	Taking out doors, windows and clerestory window shutters (steel or wood) including stacking within 50 metres lead :						
15.13.1	Of area 3 sq. metres and below	2.00	Each	118.3	125.79	77.99	155.98
	Grand Total of Schedule A						7,38,03,045.34
Schedule B							
1/NS	Providing and laying Cement Concrete Solid Block Masonry in foundation and superstructure above plinth level upto floor two level in Cement mortar 1:4 (1cement: 4fine sand) including cement :(factory made blocks)	240.00	Cum	7472.00	7872.29	7872.29	18,89,349.60
	Grand Total of Schedule B						18,89,350
Schedule C							
1/NS	PROVIDING AND APPLYING 1MM THICK 'TERRE PALETTE' TERRE PERLINA PLASTER MADE OF COPOLYMER BINDERS AND FINE NATURAL MARBLE POWDERS OF (EARTHEN , CORAL , SPECTRUM) AS PER THE REQUIRED DESIGN AND PATTERN (APPROVED BY THE ARCHITECT/ENGINEER IN CHARGE) ON 1 COAT OF BASE PRIMER OF (EARTHEN , CORAL , SPECTRUM). ABOVE APPLICATION TO BE CARRIED OUT ON THE BASE OF SINGLE COAT / DOUBLE COAT SMOOTH MALA PLASTER	12782.88	SQFT	35.00		35.00	4,47,400.80

Grand Total of Schedule C							4,47,401
Schedule D							
1/NS	Supply and fixing of wardrobe almirah shutter and frame made with 20 gauge CR sheet with Godreg make handle and lock and including 16 mm fasteners etc. complete	2016	SQFT	620	731.6	731.6	14,74,905.60
Grand Total of Schedule D							14,74,906

Item No.	Description	Unit	Quantity	Rate (Exc.Gst)	Rate incl GST	Amount (Incl. Gst)
Schedule E						
1	Wiring for light point/ fan point/ exhaust fan point/ call bell point with 1.5 sq.mm FRLS PVC insulated copper conductor single core cable in surface / recessed medium class PVC conduit, with modular switch, modular plate, suitable GI box and earthing the point with 1.5 sq.mm FRLS PVC insulated copper conductor single core cable etc. as required.					
1.1	Group A	point	840	906.25	1069.38	8,98,279.20
1.2	Group B	point	42	1055.36	1245.32	52,303.44
1.3	Group C	point	95	1309.82	1545.59	1,46,831.05
2	Wiring for circuit/ submain wiring alongwith earth wire with the following sizes of FRLS PVC insulated copper conductor, single core cable in surface/ recessed medium class PVC conduit as required.					
2.1	2 X 2.5 sq. mm + 1 X 2.5 sq. mm earth wire	Metre	2180	245.54	289.74	6,31,633.20
2.2	2 X 4 sq. mm + 1 X 4 sq. mm earth wire	Metre	2180	298.21	351.89	7,67,120.20
2.3	2 X 6 sq. mm + 1 X 6 sq. mm earth wire	Metre	560	391.96	462.51	2,59,005.60
2.4	4 X 6 sq. mm + 2 X 6 sq. mm earth wire	Metre	200	673.21	794.39	1,58,878.00
2.5	4 X 10 sq. mm + 2 X 6 sq. mm earth wire	Metre	300	897.32	1058.84	3,17,652.00
3	Wiring for group controlled (looped) light point/fan point/exhaust fan point/ call bell point (without independentswitch etc.) with 1.5 sq. mm FRLS PVC insulated copper conductor single core cable in surface/ recessed PVC conduit, and earthing the point with 1.5 sq. mm FRLS PVC insulated copper conductor single core cable etc. as required.					
3.1	Group A	Metre	84	693.75	818.63	68,764.92
3.2	Group B	Metre	42	838.39	989.30	41,550.60
3.3	Group C	Metre	20	976.79	1152.61	23,052.20

4	Wiring for twin control light point with 1.5 sq.mm FRLS PVC insulated copper conductor single core cable in surface / recessed medium class PVC conduit, 2 way modular switch, modular plate, suitable GI box and earthing the point with 1.5 sq.mm FRLS PVC insulated copper conductor single core cable etc. as required.	Metre	42	1394.64	1645.68	69,118.56
5	Supplying and fixing following size/ modules, GI box alongwith modular base & cover plate for modular switches in recess etc. as required.					
5.1	3 Module (100mmX75mm)	Each	564	291.96	344.51	1,94,303.64
5.2	8 Module (125mmX125mm)	Each	62	405.36	478.32	29,655.84
6	Supplying and fixing following modular switch/ socket on the existing modular plate & switch box including connections but excluding modular plate etc. as required.					
6.1	5/6 A switch	Each	282	91.96	108.51	30,599.82
6.2	15/16 A switch	Each	260	139.29	164.36	42,733.60
6.3	3 pin 5/6 A socket outlet	Each	186	108.93	128.54	23,908.44
6.4	6 pin 15/16 A socket outlet	Each	198	175.89	207.55	41,094.90
6.5	Telephone socket outlet	Each	55	132.14	155.93	8,576.15
6.6	TV antenna socket outlet	Each	42	132.14	155.93	6,549.06
7	Supplying and fixing modular blanking plate on the existing modular plate & switch box excluding modular plate asrequired.	Each	104	35.71	42.14	4,382.56
8	Supplying and fixing 3 pin, 5 A ceiling rose on the existing junction box/ wooden block including connections etc. as required.	Each	228	77.68	91.66	20,898.48
9	Supplying and fixing brass batten/ angle holder including connection etc. as required.	Each	228	116.96	138.01	31,466.28
10	Supplying and fixing metal box of following sizes (nominal size) on surface or in recess with suitable size of phenolic laminated sheet cover in front including painting etc. as required.	Each				
10.1	150 mm X 150 mm X 60 mm deep		99	277.68	327.66	32,438.34
10.2	250 mm X 300 mm X 60 mm deep	Each	15	541.96	639.51	9,592.65
11	Supplying & fixing suitable size GI box wih modular plate and cover in front on surface or in recess including providing and fixing 25 A modular socket outlet and 25 A modular SP MCB, "C" curve including connections, painting etc. as required.	Each	57	649.11	765.95	43,659.15
12	Supplying and fixing following way, single pole and neutral, sheet steel, MCB distribution board, 240 V, on surface/ recess, complete with tinned copper bus bar, neutral bus bar, earth bar, din bar, interconnections, powder painted including earthing etc. as required. (But without MCB/RCCB/Isolator) - 8 way , Double door	Each	42	2297.32	2710.84	1,13,855.28

13	Supplying and fixing following way, horizontal type three pole and neutral, sheet steel, MCB distribution board, 415 V, on surface/ recess, complete with tinned copper bus bar, neutral bus bar, earth bar, din bar, interconnections, powder painted including earthing etc. as required. (But without MCB/RCCB/Isolator) 4 way (4 + 12), Double door	Each	4	3652.68	4310.16	17,240.64
14	Supplying and fixing 5 A to 32 A rating, 240/415 V, 10 kA, "C" curve, miniature circuit breaker suitable for inductive load of following poles in the existing MCB DB complete with connections, testing and commissioning etc. as required.					
14.1	Single pole	Each	438	228.57	269.71	1,18,132.98
14.2	Double pole	Each	55	585.71	691.14	38,012.70
14.3	Triple pole and neutral	Each	4	1096.43	1293.79	5,175.16
15	Supplying and fixing single pole blanking plate in the existing MCB DB complete etc. as required.	Each	62	11.61	13.70	849.40
16	Supplying and fixing following rating, double pole, (single phase and neutral), 240 V, residual current circuit breaker (RCCB), having a sensitivity current 30 mA in the existing MCB DB complete with connections, testing and commissioning etc. as required. 40 A	Each	42	2358.93	2783.54	1,16,908.68
17	Supplying and fixing following rating, four pole, (three phase and neutral), 415 volts, residual current circuit breaker (RCCB), having a sensitivity current 30 mA in the existing MCB DB complete with connections, testing and commissioning etc. as required. 63 A	Each	50	2564.29	3025.86	1,51,293.00
18	Supplying and fixing of following sizes of medium class PVC conduit along with accessories in surface/recess including cutting the wall and making good the same in case of recessed conduit as required.					
18.1	20 mm	Metre	904	114.29	134.86	1,21,913.44
18.2	25 mm	Metre	904	129.46	152.76	1,38,095.04
18.3	32 mm	Metre	100	164.29	193.86	19,386.00
19	Supplying and drawing following pair 0.5 mm dia FRLS PVC insulated annealed copper conductor, unarmored telephone cable in the existing surface/ recessed steel/ PVC conduit as required. 4 Pair	Metre	400	48.21	56.89	22,756.00
20	Supplying and drawing co-axial TV cable RG-6 grade, 0.7 mm solid copper conductor PE insulated, shielded with fine tinned copper braid and protected with PVC sheath in the existing surface/ recessed steel/ PVC conduit as required.	Metre	300	41.96	49.51	14,853.00
21	Supplying and drawing of UTP 4 pair CAT 6 LAN Cable in the existing surface/ recessed Steel/ PVC conduit as required.					

21.1	1 run of cable	Metre	200	50.89	60.05	12,010.00
21.2	3 run of cable	Metre	200	119.64	141.18	28,236.00
22	Providing of PVC/XLPE armoured cable with aluminium conductor 650/1100 V. Grade in required size of 4Core X 16 sqmm	Metre	1400	183.95	217.06	3,03,884.00
23	Providing of PVC/XLPE armoured cable with aluminium conductor 650/1100 V. Grade in required size of 4 Core X 50 sqmm	Metre	1400	420.02	495.62	6,93,868.00
24	Providing of PVC/XLPE armoured cable with aluminium conductor 650/1100 V. Grade in required size of 4 Core X 70 sqmm	Metre	500	564.11	665.65	3,32,825.00
25	Laying of one number PVC insulated and PVC sheathed / XLPE power cable of 1.1 KV grade of following size direct in ground including excavation and refilling the trench etc as required, but excluding sand cushioning and protective covering.					
25.1	Upto 35 sq. mm	Metre	2800	178.57	210.71	5,89,988.00
25.2	Above 35 sq. mm and upto 95 sq. mm	Metre	500	193.75	228.63	1,14,315.00
26	Supply & laying of following size HDPE pipe PE-80, PN-4 ISI Marked along with all accessories like socket, bend, coupler etc conforming to is 4984 complete with fitting and cutting jointing etc.in the existing trench complete as required. (50 mm OD)	Metre	3300	137.46	162.20	5,35,260.00
27	Supply, Installation, Testing and Commissioning of LED batten fitting 1200 mm long (Nominal size) having lumens output not less than 2000 lumen efficacy ≥ 100 lumens / watt and not higher than 20 Watt, THD should be less than 20%, luminaire power factor should not be less than 0.90 with minimum 25000 burning hours, CRI >80 and CCT-4000-5700 K(as reqd.), with inbuilt electronic driver with efficiency should not be less than 85% with surge protection 2.0 KV, IP-20 rated made out of Extruded aluminium housing high quality polycarbonate diffuser and making connection with 1.5 sqmm. FRLS Copper conductor single core cable i/c earthing and dismantling etc. as required.	Metre	277	841.54	993.02	2,75,066.54
28	Providing of energy efficient LED Street Light 35/36 watt as per specification.	Nos	35	2530.84	2986.39	1,04,523.65
29	Providing of energy efficient LED Street Light 60 watt as per specification.	Nos	14	4669.44	5509.94	77,139.16
30	Installation, testing and commissioning of pre-wired, fluorescent fitting / compact fluorescent fitting of all types, complete with all accessories and tube/lamp etc. directly on ceiling/ wall, including connections with 1.5 sq. mm FRLS PVC insulated, copper conductor, single core cable and earthing etc. as required. (Street Light etc.)	Metre	49	150.00	177.00	8,673.00

31	Supply and erection of Hot Dip Galvanized octagonal pole of 3 mm thickness with base plate including cost of nut and bolts ,earthing studs, Integral Cable termination arrangement 5mm thick Bakelite baseplate on suitable welded MS/GI bracket 32 A four way connector 2 no10 A SP MCB, end cover and all accessories as supplied by the manufacture including Providing MS foundation having thick sheet 16mmfor 9 meter pole with all labour and material required up to the entire satisfaction of the Engineer-in-charge of work/ RCC foundation of M25 grade (1Cement: 1Stoneaggregate: 2Coarse sand)i/c excavation, steel reinforcement (Fe 500) @ 80kg/cum of concrete contents, concrete cover50mm, anchor bolts etc. over a bed of PCC 1:5:10 of required dimensions for octagonal poles of various heights as per following specifications complete in all respects and as per directions of Engineer-in-charge- 9 Meter Long pole with top Dia 100 mm and bottom200 mm with base plate of size 350 x 350x 20 mm.	Each	35	15452.24	18233.64	6,38,177.40
32	Supply Erection and fixing of hot dipped galvanized Overhang (60 x3.25 mm)with cap (250 x 137.9x4.05mm) over with existing poles - Single Arm Overhang	Each	49	1068.48	1260.81	61,779.69
33	Supply, Installation, Testing and Commissioning of 1200 mm sweep,BEE 5 star rated, ceiling fan with Brush Less Direct Current (BLDC)Motor, class of insulation: B, 3 nos. blades, 30 cm long down rod, 2nos. canopies, shackle kit, safety rope, copper winding, Power Factornot less than 0.9, Service Value (CM/M/W) minimum 6.00, Air deliveryminimum 210 Cum/Min , 350 RPM (tolerance as per IS : 374-2019),THD less than 10%, remote or electronic regulator unit for speedcontrol and all remaining accessories including safety pin, nut bolts,washers, temperature rise=75 degree C (max.), insulation resistancemore than 2 mega ohm, suitable for 230 V, 50 Hz, single phase ACSupply, earthing etc. complete as required	Each	146	2437.50	2876.25	4,19,932.50
34	PROVIDING AND FIXING CIRCULAR/ HEXAGONAL G.I. BOX FOR CEILING FAN CLAMP, OF INTERNAL DIA 140 MM, 73 MM HEIGHT, TOP LID OF 1.5 MM THICK G.I. SHEET WITH ITS TOP SURFACE HACKED FOR PROPER BONDING, TOP LID SHALL BE SCREWED INTO THE G.I. BOX BY MEANS OF 3.3 MM DIA ROUNDHEADED SCREWS, ONE LOCK AT THE CORNERS. CLAMP SHALL BE MADE OF 12 MM DIA M.S. BAR BENT TO SHAPE AS PER STANDARD DRAWING.	Each	183	127.63	150.60	27,559.80

35	Providing & Fixing of 450 mm Sweep Oscillating type Wall mounting / Pedestal type fans with Three speed, ON and OFF position, Sintered Iron bush oil impregnated, with metal front and back 120 or more ribs guard; Three no. Aluminium blades, minimum Air delivery 100 Cum. / Minute , Minimum Service Value 1.11 Cum./min/watt, noise level should be <= 75 dB, power consumption <= 120 watts, motor protection through thermal overload protection device, including fixing with anchor bolts, making connection testing etc. as required. All as per pre approved by Engineer in-charge. For additional technical parameters of products/ work , refer Annexure "A" attached with this BSR . Wall mounting type with Adjustable Vertical Angle	Each	15	4316.10	5093.00	76,395.00
36	Supplying and fixing two module stepped type electronic fan regulator on the existing modular plate switch box including connections but excluding modular plate etc. as required.	Each	183	329.46	388.76	71,143.08
37	Providing & Fixing of of BLDC Technology ventilating fans , single phase with PVC impeller, ABS body, Double Ball bearing, automatic back lower shutter including making connection, testing etc. as required. All as per pre approved by Engineer in-charge 150 mm sweep with Min. Air delivery 350 cmh, 2000 RPM	Each	92	2099.15	2477.00	2,27,884.00
38	Providing & Fixing of Heavy duty capacitor start, copper wound Double ball bearing 900/1400 RPM single phase Exhaust fan conforming to IS:2312 ISI marked in existing opening including making connections testing etc. as required. All as per pre approved by Engineer in-charge. 300 mm sweep(900/1400 RPM)	Each	44	2757.63	3254.00	1,43,176.00
39	Earthing with G.I. earth pipe 4.5 metre long, 40 mm dia including accessories, and providing masonry enclosure with cover plate having locking arrangement and watering pipe etc. with charcoal/ coke and salt as required.	Each	10	4792.86	5655.57	56,555.70
40	Providing and fixing 25 mm X 5 mm G.I. strip on surface or in recess for connections etc. as required.	Metre	70	217.86	257.07	17,994.90
41	Providing and fixing G.I. tape 20 mm X 3 mm thick on parapet or surface of wall for lightning conductor complete as required.(For horizontal run)	Metre	570	112.50	132.75	75,667.50
42	Providing and fixing G.I. tape 20 mm X 3 mm thick on parapet or surface of wall for lightning conductor complete as required.(For vertical run)	Metre	120	175.89	207.55	24,906.00

43	Supply installation testing commissioning of LT Distribution panel in size of 1000 mm x 1000 mm x30 mm, weatherproof ,1.6mm thick Sheet , powder coated having - 1 nos 100 Amp 4P MCCB WITH ROTERY HANDLE, , 8 NOS 32 AMP 4P MCB , 7 nos digital kwh meter , related Led phase indicators , 3 PHASE BUS BAR , Necessary terminal block etc. with suitable arrangement of fixing on wall/floor as required and glass panel in suitable size for kwh meter reading parameters .	Each	7	73000.00	86140.00	6,02,980.00
Grand Total of Schedule E						1,03,52,459.12
Total of Schedule A+B+C+D+E						8,79,67,160.46

Explanatory Notes for BOQ:

- (i) All CPWD DSR-2021/22 items contain item nos., if any discrepancy is found in nomenclature, rates, units etc. CPWD DSR-2021/22 will prevail.
- (ii) The rates shall also be inclusive of all taxes legally leviable and/or any other taxes license fee and loyalty charges etc. including GST.
- (iii) Tenderer should bear the fact in mind while quoting the rates that GST will be paid by Contractor as per prevailing rate as applicable.
- (iv) The above quantity is approximate: -The DFCCIL reserves the right to increase / decrease the same.
- (v) The contractor should adhere to **Anti Profiteering Provisions** as per section 171 of the CGST Act. Where due to change in the rates of GST / Change in law, the contractor gets any credits / benefits, the same shall be passed on to DFCCIL by way of reduction in prices.

TENDERER'S CREDENTIALS

S. No	Description
1.	For technical experience/competence, give details of similar completed works during the last Seven financial years in the Performa given in Form-2A
2.	Bid Capacity- Details Of Existing Commitment And Balance Work Form-2B
3.	Give constitution of your firm. Attach certified copies of legal documents in support thereof. Form-2C

FORM No. 2A**TECHNICAL ELIGIBILITY CRITERIA DETAILS**

Details of the similar works completed (as per Para 10 of Preamble and General Instruction to Tenders)

Similar Contract No.		
Contract Identification		
Award date		
Completion date		
Role in Contract	Prime Contractor	Member in JV
Total Contract Amount (Rs.)		
If member in a JV, Specify participation in total contract amount	[insert a percentage amount]	Total contract amount in Rs.
Total work done (Final Bill/Last Bill paid in case final bill under preparation)		
Amount of work executed having similar nature of work i.e “Construction of building on framed RCC structure of minimum G+2 storey”		
Employer’s Name: Address: Telephone/Fax number E-Mail:		
Description of the similarity in accordance with Criteria as per Para 10 of Preamble and General Instruction to Tenders		

Note:-The Bidder shall attach certified work completions certificates / certified copy of final bill/last bill paid issued by clients for Construction of building on framed RCC structure of minimum G+2 storey. In case main contract is not exclusively for Construction of building on framed RCC structure of minimum G+2 storey, the client’s certificate indicating the amount of executed work for Construction of building on framed RCC structure of minimum G+2 storey shall be attached by the bidder.

In case above documents clearly showing the amount of work done for similar nature of work i.e. “Construction of building on framed RCC structure of minimum G+2 storey” are not submitted by the bidder at the time of submission of his bid, his bid will be treated as invalid and shall not be considered for evaluation.

Signature of the
Tenderer with Seal

Statement of Works in Progress for Bid Capacity

BID CAPACITY- DETAILS OF EXISTING COMMITMENT AND BALANCE WORK

Each Bidder or each member of JV must fill in this form separately.

Name of Tenderer/JV partner:

S. N	Name and place of work	Organization for whom work is being carried out	Date of award of contract. Contract Agreement No. & Date	Original Cost of Work/Revised Cost (Up to latest corrigendum)	Date of Completion (Original/Extended)	Payment Received till date of opening of present tender	Balance amount of the work to be executed	B' value of work to be done in 'N' years

Note:-

Where

A= (Maximum value of construction works executed and payment received in any one of the previous three financial years or the current financial year (up to date of inviting tender), taking into account the completed as well as works in progress)=Rs.....

N = (Number of years prescribed for completion of work for which bids has been invited).
.....Years

B = (Existing commitments and balance amount of ongoing works with the tenderer as per the above format for statement of all works in progress and also the works which are awarded to tenderer but yet not started up to the date of inviting of tender)=Rs.....

Calculated Bid Capacity of the Tenderer / JV Partner $[AxNx2 - 0.33xNxNxB]$ =Rs.....

2. This statement should be submitted duly verified by Chartered Accountants.

APPLICANT'S PARTY INFORMATION FORM

<p>Applicant name: <i>[insert full name]</i></p>
<p>Applicant's Party name: <i>[insert full name of Applicant's Party]</i></p>
<p>Applicant's Party country of registration: <i>[indicate country of registration]</i></p>
<p>Applicant Party's year of constitution: <i>[indicate year of constitution]</i></p>
<p>Applicant Party's legal address in country of constitution: <i>[insert street/ number/ town or city/ country]</i></p>
<p>Applicant Party's authorized representative information</p> <p>Name: <i>[insert full name]</i></p> <p>Address: <i>[insert street/ number/ town or city/ country]</i></p> <p>Telephone/Fax numbers: <i>[insert telephone/fax numbers, including country and city codes]</i></p> <p>E-mail address: <i>[indicate e-mail address]</i></p>
<p>1. Attached are copies of original documents of</p> <p><input type="checkbox"/> Articles of Incorporation (or equivalent documents of constitution or association), and/or registration documents of the legal entity named above.</p> <p><input type="checkbox"/> In case of a Government-owned enterprise or institution, documents establishing legal and financial autonomy, operation in accordance with commercial law, and absence of dependent status.</p> <p>2. Included are the organizational chart, a list of Board of Directors, and the beneficial ownership.</p>

Signature of the
Tenderer with Seal

**ECS / NEFT / RTGS
MANDATE FORM**

Date:-
To,
Dy.CPM/Finance
DFCCIL/Jaipur
Sub: ECS / NEFT / RTGS payments

We refer to the ECS / NEFT / RTGS set up by DFCCIL for remittance of our payments using RBI's NEFT / RTGS scheme, our payments may be made through the above scheme to our under noted account.

Name of Bank	
Name of City	
Bank Code No	
Name of Bank Branch	
Branch Code No	
Address of Bank Branch	
Telephone Number of Bank Branch	
Fax No of Bank Branch	
Name of customer / Tenderer as per account	
Account Number of Tenderer appearing on cheque book	
Type of Account (S. B. / Current / Cash credit)	
IFSC code for NEFT	
IFSC code for RTGS	
9-Digit-code number of the bank and branch appearing on the MICR cheque issued by the bank.	
Details of Cancelled Cheque leaf	
Telephone no of tenderer	
Cell Phone Number of the tenderer to whom details with regard to the status of bill submitted to Accounts Office i.e. Co6 & Co7 & Cheque Purchase Orders particulars can be intimated through SMS	
Tenderer's E - mail ID	

Confirmed by Bank signature of tenderer with stamp and address
Enclose a copy of crossed cheque

SAMPLE
STANDING INDEMNITY BOND FOR “ON ACCOUNT” PAYMENTS

(On paper of requisite stamp value)

We, M/s _____ hereby undertake that we hold at our stores Depot/s at _____ for and on behalf of the Managing Director/ DFCCIL acting in the premises through _____ the Chief General Manager/Co / DFCCIL/ Jaipur or his successor (hereinafter referred to as “The Employer”) all materials for which “On Account” payments have been made to us against the Contract for (_____) on the section _____ DFCCIL also referred to as Group/s _____ vide letter of Acceptance of Tender _____ dated _____ and material handed over to us by the employer for the purpose of execution of the said contract, until such time the materials are duly erected or otherwise handed over to him.

We shall be entirely responsible for the safe custody and protection of the said materials against all risk till they are duly delivered as erected equipment to the employer or as he may direct otherwise and shall indemnify the employer against any loss /damage or deterioration whatsoever in respect of the said material while in our possession and against disposal of surplus materials. The said materials shall at all times be open to inspection by any officer authorized by the CGM, DFCCIL/ Jaipur in charge of Dedicated Freight Corridor Corporation of India Limited (Whose address will be intimated in due course).

Should any loss, damage or deterioration of materials occur or surplus material disposed off and refund becomes due, the Employer shall be entitled to recover from us the 85% of supply portion of the Contract (as applicable) and also compensation for such loss or damage if any long with the amount to be refunded without prejudice to any other remedies available to him by deduction from any sum due or any sum which at any time hereafter becomes due to us under the said or any other Contract.

Dated this day _____ day of _____ 200 For and on behalf of
M/s _____ (Contractor) Signature of witness
Name of witness in Block letter. Address.

PRE CONTRACT INTEGRITY PACT**General**

This pre-bid pre-contract Agreement (herein after called the Integrity Pact) is made on-----day of the month of-----, between, on one hand, the DFCCIL acting through Shri ----- Designation of the officer, (hereinafter called the CLIENT, which expression shall mean and include, unless the context otherwise requires, his successors in office and assigns) of the First Part and M/s-----represented by Shri----- Chief Executive Officer (hereinafter called the "BIDDER/SELLER" which expression shall mean and include, unless the context otherwise requires, his successors and permitted assigns) of the Second part.

WHEREAS the CLIENT proposes to procure (Name of the Stores/Equipment/Item, Name of the Consultancy Service, Name of Works Contract, Name of Services) and the BIDDER is willing to Offer/has offered for stores or works.

WHEREAS the BIDDER is a private company/ public company/ Government undertaking/ partnership/ registered export agency, constituted in accordance with the relevant law in the matter and the CLIENT is a PSU performing its functions or behalf of the DFCCIL.

NOW, THEREFOR,

To avoid all forms of corruption by following a system that is fair, transparent and free from any influence/prejudiced dealings prior to, during and subsequent to the currency of the contract to be entered into with a view to:-

Enabling the CLIENT to obtain the desired said (Name of the Stores/Equipment/Item, Name of the Consultancy Service, Name of Works Contract, Name of Services) at a competitive price in conformity with the defined specifications by avoiding the high cost and the distortionary impact of corruption on public procurement, and

Enabling BIDDERS to abstain from bribing or indulging in any corrupt practice in order to secure Contract by providing assurance to them that their competitors will also abstain from bribing and other corrupt practices and the CLIENT will commit to prevent corruption, in any form, by its Officials by following transparent procedures.

The parties hereto hereby agree to enter into this Integrity Pact and agree as follows: **Commitments**

of the CLIENT

- 1.0 The CLIENT undertakes that no official of the CLIENT, connected directly or indirectly with the Contract, will demand, take a promise for or accept, directly or through intermediaries, any bribe, consideration, gift, reward, favour or any material or immaterial benefit or any other advantage from the BIDDER either for themselves or for any person, organization or third party related to the Contract, in exchange for an advantage in the bidding process, bid evaluation, contracting or implementation process related to the Contract.
- 1.1 The CLIENT will, during the pre-contract stage, treat all BIDDERS alike, and will provide to all BIDDERS the same information and will not provide any such information to any particular BIDDER which could afford an advantage to that particular BIDDER in comparison to other BIDDERS.

- 1.2 All the officials of the CLIENT will report to the appropriate Government office any attempted or completed breaches of the above commitments as well as any substantial suspicion of such breach.
2. In case any such preceding misconduct on the part of such official(s) is reported by the BIDDER to the CLIENT with full, and verifiable facts and the same is prima facie found to be correct by the CLIENT, necessary disciplinary proceedings, or any other action as deemed fit, including criminal proceedings may be initiated by the CLIENT and such a person shall be debarred from further dealings related to the Contract process. In such a case while an enquiry is being conducted by the CLIENT the proceedings under the Contract would not be stalled.

Commitments of BIDDERS

3. The BIDDER commits itself to take all measures necessary to prevent corrupt practices, unfair means and illegal activities during any stage of its bid or during any pre-contract or post-contract stage) in order to secure the Contract or in furtherance to secure it and in particular committee itself to the following:-
 - 3.1 The BIDDER will not offer, directly or through intermediaries, any bribe, gift, consideration, reward, favour, any material or immaterial benefit or other advantage, commission fees, brokerage or inducement to any official of the CLIENT, connected directly or indirectly with the bidding process, or to any person, organization or third party related to the (B] in exchange for any advantage in the bidding, evaluation, contracting and implementation of the Contract.
 - 3.2 The BIDDER further undertakes that it has not given, offered or promised to give, directly or indirectly any bribe, gift, consideration, reward, favour, any Material or immaterial benefit or other advantage, commission, fees, brokerage or inducement to any official of the CLIENT or otherwise in procuring the Contract or forbearing to do or having done any act in relation to the obtaining or execution of the Contract or any other Contract with the Government for showing or forbearing to show favour or disfavour to any person in relation to the Contract or any other Contract with the Government.
 - 3.3 *BIDDER shall disclose the name and address of agents and representatives and Indian BIDDER shall disclose their foreign principals or associates.
 - 3.4 * BIDDER shall disclose the payments to be made by them to agents/brokers or any other intermediary, in connection with this bid/contract.
 - 3.5 The BIDDER further confirms and declares to the CLIENT that the BIDDER is the original manufacturer/ integrator/ authorized government sponsored export entity of the defense stores and has not engaged any individual or firm or company whether Indian or foreign to intercede, facilitate or in any way to recommend to the CLIENT or any of its functionaries, whether officially or unofficially to the award of the Contract to the BIDDER nor has any amount been paid, promised or intended to be paid to any such individual, firm or company in respect of any such intercession, facilitation or recommendation.
 - 3.6 The BIDDER either while presenting the bid or during pre-contract negotiations or before signing the Contract shall disclose any payments he has made, is committed to or intends to make to officials of the CLIENT or their family members, agents, brokers or any other intermediaries in connection with the Contract and the details of services agreed upon for such

payments.

- 3.7 The BIDDER will not collude with other parties interested in the Contract to impair the transparency, fairness and progress of the bidding process, bid evaluation, contracting and implementation of the Contract.
- 3.8 The BIDDER will not accept any advantage in exchange for any corrupt practice, unfair means and illegal activities.
- 3.9 The BIDDER shall not use improperly, for purposes of competition or personal gain, or pass on to others, any information provided by the CLIENT as part of the business relationship, regarding plans, technical proposals and business details, including information contained in any electronic data carrier. The BIDDER also undertakes to exercise due and adequate care lest any such information is divulged.
- 3.10 The BIDDER commits to refrain from giving any complaint directly or through any other manner without supporting it with full and verifiable facts.
- 3.11 The BIDDER shall not instigate or cause to instigate any third person to commit any of the actions mentioned above.
- 3.12 If the, BIDDER or any employee of the BIDDER or any person acting on behalf of the BIDDER, either directly or indirectly, is a relative of any of the officers of the CLIENT, or alternatively, if any relative of an officer of the CLIENT has financial. Interest/stake in the Bidder's firm, the same shall be disclosed by the BIDDER at the time of filling of tender.
The term 'relative' for this purpose would be as defined in section 6 of the companies' act 1956.
- 3.13 The BIDDER shall not lend to or borrow any money from or enter into any monetary dealing so transactions, directly or indirectly, with any employee of the CLIENT.

4. Previous Transaction

- 4.1 The BIDDER declares that no previous transgression occurred in the last three years immediately before signing of this integrity Pact, with any other company in any country in respect of any corrupt practices envisaged hereunder or with any public sector enterprise in India or any Government department in India that could justify BIDDER's from the tender process.
- 4.2 The BIDDER agrees that if it makes incorrect statement on this subject, BIDDER can be disqualified from the tender process or the contract, if already awarded, can be terminated for such reason.

5. Earnest Money (Security Deposit)

- 5.1 While submitting commercial bid, the BIDDER shall deposit an amount _____ (to be specified in RFP) as Earnest Money/Security Deposit, with the CLIENT through any of the following instruments:-
 - i. Bank draft or a pay order in favour of _____.
 - ii. A confirmed guarantee by an Indian nationalized bank, promising payment of the guaranteed sum to the CLIENT on demand within three working days without any demur whatsoever and without seeking any reasons whatsoever. The demand for payment by the CLIENT shall be treated as conclusive proof or payment.
 - iii. Any other mode or through any other instrument (to be specified in the RFP).
- 5.2 The earnest money/Security deposit shall be valid up to a period of five years or the contractual obligations to the complete satisfaction of both the BIDDER and the CLIENT, including warranty period, whichever is later.

5.3 In case of the successful BIDDER a clause would also be incorporated in the article pertaining to performance Guarantee in the Contract that the provisions of sanctions for violation shall be applicable for forfeiture of performance bond in case of a decision by client to forfeit the same without assigning any reason for imposing sanction for violation of this pact.

5.4 No interest shall be payable by CLIENT to the BIDDER on earnest Money/Security Deposit for the period of its currency.

6. Sanctions for Violations

6.1 Any breach of the aforesaid provisions by the BIDDER or any one employed by it or acting on its behalf (whether with or without the knowledge of the BIDDER shall entitle the CLIENT to take all or any one of the following actions, wherever required:-

(i) To immediately call off the pre-contract negotiations without assigning any reason or giving any compensation to the [A]. However, the proceedings with the other BIDDER(s) would continue.

(ii) The earnest money deposit (in pre-contract stage) and/or security Deposit/performance Bond (after the Contract is signed) shall stand forfeited fully and the CLIENT shall not be required to assign any reason therefore.

(iii) To immediately cancel the Contract, if already signed, without giving any compensation to the [A].

(iv) To recover all sums already paid by the CLIENT, and in case of an Indian [A] with interest thereon at 2% higher than the prevailing prime lending rate of state bank of India, while in case of a BIDDER from the country other than India with interest thereon at 2% higher than the LIBOR. If any outstanding payment is due to BIDDER from the CLIENT in connection with any other Contract, such outstanding payment could also be utilized to recover the aforesaid sum and interest.

(v) To encash the advance bank guarantee and performance bond, if furnished by the [A], in order to recover the payments, already made by CLIENT, along with interest.

(vi) To cancel all or any other contracts with the BIDDER. The BIDDER shall be liable to pay compensation for any loss or damage to the Client resulting from such cancellation/rescission and the client shall be entitled to deduct the amount so payable from the money(s) due to the BIDDER.

(vii) To debar the BIDDER from participating in future bidding processes of the Government of India for a minimum period of five years, which may be further extended at the discretion of the CLIENT.

(viii) To recover all sums paid in violation of this pact by BIDDER to any middleman or agent or broker with a view a view to securing Contract the contract.

(ix) In cases where irrevocable letters of credit have been received in respect of any Contract signed by the client with the BIDDER, The shall not be opened.

(x) Forfeiture of Performance Bond in case of a decision by the client to forfeit the same without assigning any reason for imposing sanction for violation of this pact.

6.2 The client will entitled totakealloranyoftheactionsmentionedatpara6.1(i)to

(x) of this pact also on the commission by the BIDDER or any one employed by it or acting on its

behalf (whether with or without the knowledge of the [A], of an offence as defined in chapter IX of the Indian penal code, 1860 or prevention of Corruption Act, 1988 or any other statute enacted for prevention of corruption.

- 6.3 The decision of the CLIENT to the effect that a breach of the provisions of this pact has been committed by the BIDDER shall be final and conclusive on the [A]. However, the BIDDER can approach the Independent Monitor(s) appointed for the purposes of this Pact.
7. Fall Clause
 - 7.1 The BIDDER undertakes that it has not supplied/is not supplying similar product/systems or subsystems at a price lower than that offered in the present bid in respect of any other Ministry/Department of the Government of India or PSU and if it is found at any stage that similar product/system or subsystems were supplied by BIDDER to any other Ministry/Department of the Government of India or a PSU at a lower price, then that very price, with due allowance for elapsed time, will be applicable to the present case and the difference in the cost would be refunded by the BIDDER to the CLIENT, if the Contract has already been concluded.
8. Independent Monitors
 - 8.1 The CLIENT has appointed Independent Monitors (hereinafter referred to as Monitors) for this pact in consultant with the central vigilance commission (Names and addresses of the Monitors to be given)
 - 8.2 The task of the Monitors shall be to review independently and objectively, whether and to what extent the parties comply with the obligations under this pact.
 - 8.3 The monitors shall not be subject to instructions by the representatives of the parties and perform their functions neutrally and independently.
 - 8.4 Both the parties accept that the Monitors have the right to access all the documents relating to the project/procurement, including minutes of meetings.
 - 8.5 As soon as the Monitor notices, or has reason to believe, a violation of this Pact, he will so inform the Authority designated by the CLIENT
 - 8.6 The BIDDER(s) accepts that the Monitor has the right to access without restriction to all Project documentation of the CLIENT including that provided by the BIDOER. The BIDDER will also grant the Monitor, upon his request and demonstration of a valid Interest, unrestricted and unconditional access to his project documentation. The same is applicable to Subcontractors. The Monitor shall be under contractual obligation to treat the information and documents of the [A] With confidentiality.
 - 8.7 The client will provide to the Monitor sufficient information about all meetings among the parties related to the Project provided such meetings could have an impact on the contractual relations between the parties. The parties will offer to the Monitor the option to participate in such meetings.
 - 8.8 The monitor will submit a written report to the MD/DFCCIL within 8 to 10 weeks from the date of reference or intimation to him by the CLIENT/BIDDER and, should the occasion arise, submit proposal for correcting problematic situations.
9. Facilitation of Investigation

In case of any allegation of violation of any provisions of this Pact or payment of commission, the CLIENT or its agencies shall be entitled to examine all the documents including the Books of Accounts of the BIDDER and the BIDDER shall provide necessary information and documents in English and shall extend all possible help for the purpose of such examination.
10. Law and Place of Jurisdiction

This pact is subject to Indian law. The place of performance and jurisdiction is the seat of the

CLIENT.

11. Other Legal Actions

The actions stipulated in this integrity pact are without prejudice to any other legal action that may follow in accordance with the provisions of the extant law in force relating to any civil or criminal proceedings.

12. Validity

12.1 The validity of this integrity pact shall be from date of its signing and extend up to 5 years or the complete execution of the Contract to the satisfaction of both the CLIENT and the BIDDER including warranty period, whichever is later. In case BIDDER is unsuccessful, this integrity pact shall expire after six months from the date of the signing of the Contract.

12.2 Should one or several provisions of this pact turn out to be invalid; the remainder of this pact shall remain valid. In this case, the parties will strive to come to an agreement to their original intentions.

13. The parties here by sign this integrity pact at.....On.....

CLIENT

BIDDER

Name of the Officer
Designation
Deptt./Ministry/PSU

Witness

Witness

1. _____

1.-----

2. _____ 2. _____

Form No. 6

**ANTI-PROFITEERING DECLARATION TO WHOMSOEVER IT MAY
CONCERN**

I....., age.....,years, Son/Daughter of.....,
resident of

..... Do solemnly affirm and state as under:

- 1) That I am the _____ <Designation of the authorized signatory> of
.....And I am duly authorized to furnish this undertaking/declaration on behalf of
..... (Name of the company).
- 2) That (Name of the company) has been awarded
the work (Name of Work) vide Letter of Award number
..... Dated by M/s Dedicated Freight Corridor Corporation of India
Limited.
- 3) That the Company is fully aware of the anti-profiteering provision under the Goods &
Services Tax ("GST")Law(s),
- 4) That the Company Has passed the benefit of input tax credit
available on the.....(good/services) having HSN.....supplied
to M/s Dedicated Freight Corridor Corporation of India Limited which it is getting on
account of reduced tax liability and input tax credit because of enactment of GST Laws after
introduction of Goods and Service Tax w.e.f. 1st July, 2017. The details and amounts being
passed on to DFCCIL are provided in Annexure Of this document and are as per
applicable GST Laws. These are true and correct to the best of my knowledge, information
and belief.
- 5) Further, it is to confirm also that in case (name of the organization) will receive
any further benefit in future after 1st July, 2017 by way of availment of input tax credits
which were not allowed to be availed before 1st July, 2017 or reduction in tax rates or in any
other manner which results in reduction of cost of the goods/services supplied to M/s
Dedicated Freight Corridor Corporation of India Limited, then Company will pass that
benefit to M/s Dedicated Freight Corridor Corporation of India Limited also.
- 6) That I declare that the foregoing is true and correct and the same is a legal obligation and
failure to fulfil it could result in penalties under the law.
- 7) I confirm that I am aware of the implication of the above undertaking and our liability on
account of incorrect/misleading declaration under the GST Laws.

Signature of the Authorized signatory/ person

Name and Designation of the Auth. Sign/person of the person

Name of the Organization and Seal

All expenses in drawing up the agreement and the cost of stamp duty if any shall be borne by the
contractor.


PART-VIII

DRAWINGS

DRAWINGS

The indicative Architectural drawings of Type-3 quarters and extension of FLN service building are attached. These drawings are indicative only and are not to be used for execution purpose.

The successful bidder to whom the work is awarded shall do the Geotechnical investigation at every building location and get the Architectural & structural designs prepared from reputed consultant and get the structural design proof checked from IIT/NIT at his own cost. Cost of all Architectural and structural drawings, design and proof checking is deemed to be included in the quoted rates and nothing extra shall be paid for this item.

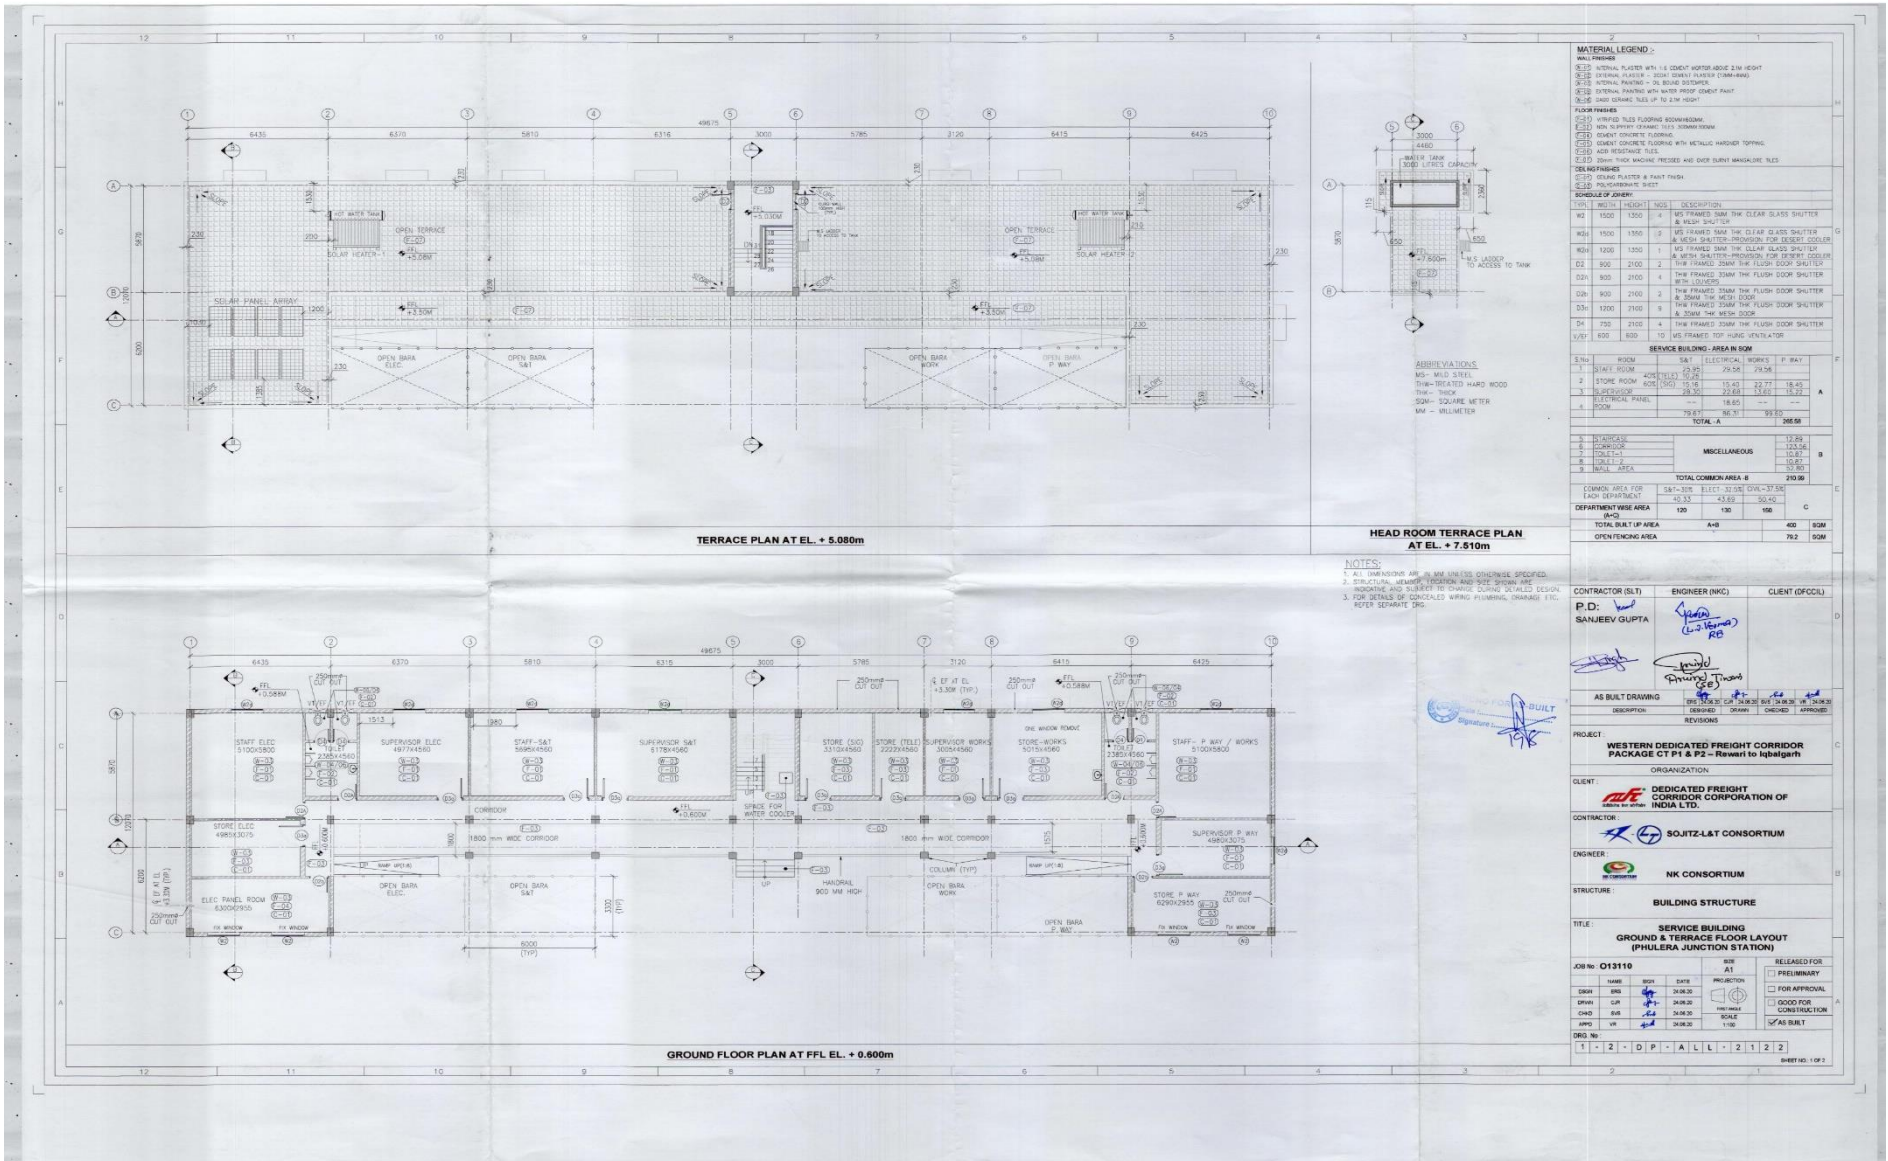

MATERIAL LEGEND :

WALL FINISHES

- W-1 INTERNAL PLASTER WITH 1.6 COEFFICIENT OF ABSORPTION 200 HEIGHT
- W-2 EXTERNAL PLASTER WITH 1.6 COEFFICIENT OF ABSORPTION 200 HEIGHT
- W-3 INTERNAL PAINTING - OL BRUSH OUTDOORS
- W-4 EXTERNAL PAINTING WITH WATER PROOF COATING PAINT
- W-5 SHED ROOFING SLAG UP TO 200 HEIGHT

FLOOR FINISHES

- F-1 UNPAVED TILES FLOORING ROOFING ROOM
- F-2 NON-SLIPPLY GRANITE TILES 300MM SQUARE
- F-3 POLISHED CONCRETE FLOORING
- F-4 POLISHED CONCRETE FLOORING WITH METALLIC HARDWAX TOPPING
- F-5 POLISHED CONCRETE FLOORING
- F-6 POLISHED CONCRETE FLOORING WITH METALLIC HARDWAX TOPPING
- F-7 POLISHED CONCRETE FLOORING WITH METALLIC HARDWAX TOPPING
- F-8 POLISHED CONCRETE FLOORING WITH METALLIC HARDWAX TOPPING
- F-9 POLISHED CONCRETE FLOORING WITH METALLIC HARDWAX TOPPING
- F-10 POLISHED CONCRETE FLOORING WITH METALLIC HARDWAX TOPPING

DOOR FINISHES

- D-1 POLISHED PLASTER & PAINT FINISH
- D-2 POLISHED PLASTER & PAINT FINISH

SCHEDULE OF JOINTS

TYPE	WIDTH	HEIGHT	NO. OF JOINTS	DESCRIPTION
WJ	1500	1500	4	MS FRAMED SHAM THIN CLEAR GLASS SHUTTER & WELD SHUTTER
WJ	1500	1500	8	MS FRAMED SHAM THIN CLEAR GLASS SHUTTER & WELD SHUTTER-PROVISION FOR RESET COOLER
WJ	1200	1200	1	MS FRAMED SHAM THIN CLEAR GLASS SHUTTER & SHAM THIN WELD SHUTTER
DJ	750	2100	2	MS FRAMED SHAM THIN FLUSH DOOR SHUTTER
DJ	800	2100	4	MS FRAMED SHAM THIN FLUSH DOOR SHUTTER WITH LOCK
DJ	900	2100	2	MS FRAMED SHAM THIN FLUSH DOOR SHUTTER & SHAM THIN WELD SHUTTER
DJ	1200	2100	8	MS FRAMED SHAM THIN FLUSH DOOR SHUTTER & SHAM THIN WELD SHUTTER
DJ	750	2100	4	MS FRAMED SHAM THIN FLUSH DOOR SHUTTER
VJ	800	800	10	MS FRAMED TOP HUNG VENTILATOR

ABBREVIATIONS

- MS - MILD STEEL
- TR - TREATED HARD WOOD
- TRK - TRUCK
- SQ - SQUARE METER
- MM - MILLIMETER

SERVICE BUILDING - AREA IN SQM

ITEM	ROOM	SQ. M	ELECTRICAL WORKS	P. WAY
1	STAFF ROOM	42.00	29.54	29.54
2	STORE ROOM	605.00	15.43	22.77
3	STORE ROOM	605.00	22.88	15.77
4	ELECTRICAL PANEL ROOM	18.65	---	---
	TOTAL	1231.65	68.35	68.35

DEPARTMENTWISE AREA

DEPARTMENT	AREA	NO.	100	150	200
TOTAL BUILT UP AREA	A+B		400	50M	
OPEN FENCING AREA			762	50M	

NOTES:

- ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED.
- CONSTRUCTION METHODS, MATERIALS AND SPECIFICATIONS ARE INDICATIVE AND SUBJECT TO CHANGE DURING DETAILED DESIGN.
- FOR DETAILS OF CONTRACTED WORK INCLUDING CHARGES ETC. REFER SEPARATE DRS.

CONTRACTOR (SIT) ENGINEER (NKC) CLIENT (OFCCL)

P.D.: SANJEEV GUPTA

AS BUILT DRAWING

PROJECT: WESTERN DEDICATED FREIGHT CORRIDOR PACKAGE CT P1 & P2 - Rewari to Jajigarh

CLIENT: DEDICATED FREIGHT CORRIDOR CORPORATION OF INDIA LTD.

CONTRACTOR: SOJITZ & L CONSORTIUM

ENGINEER: NK CONSORTIUM

STRUCTURE: BUILDING STRUCTURE

TITLE: SERVICE BUILDING GROUND & TERRACE FLOOR LAYOUT (PHULERA JUNCTION STATION)


JOB No: O13110

DATE: 11/06/2024

SCALE: 1:100

DRG No: 1 - 2 - 0 - P - A - L - L - 2 - 1 - 2 - 2

Signature of tenderer (s) with seal

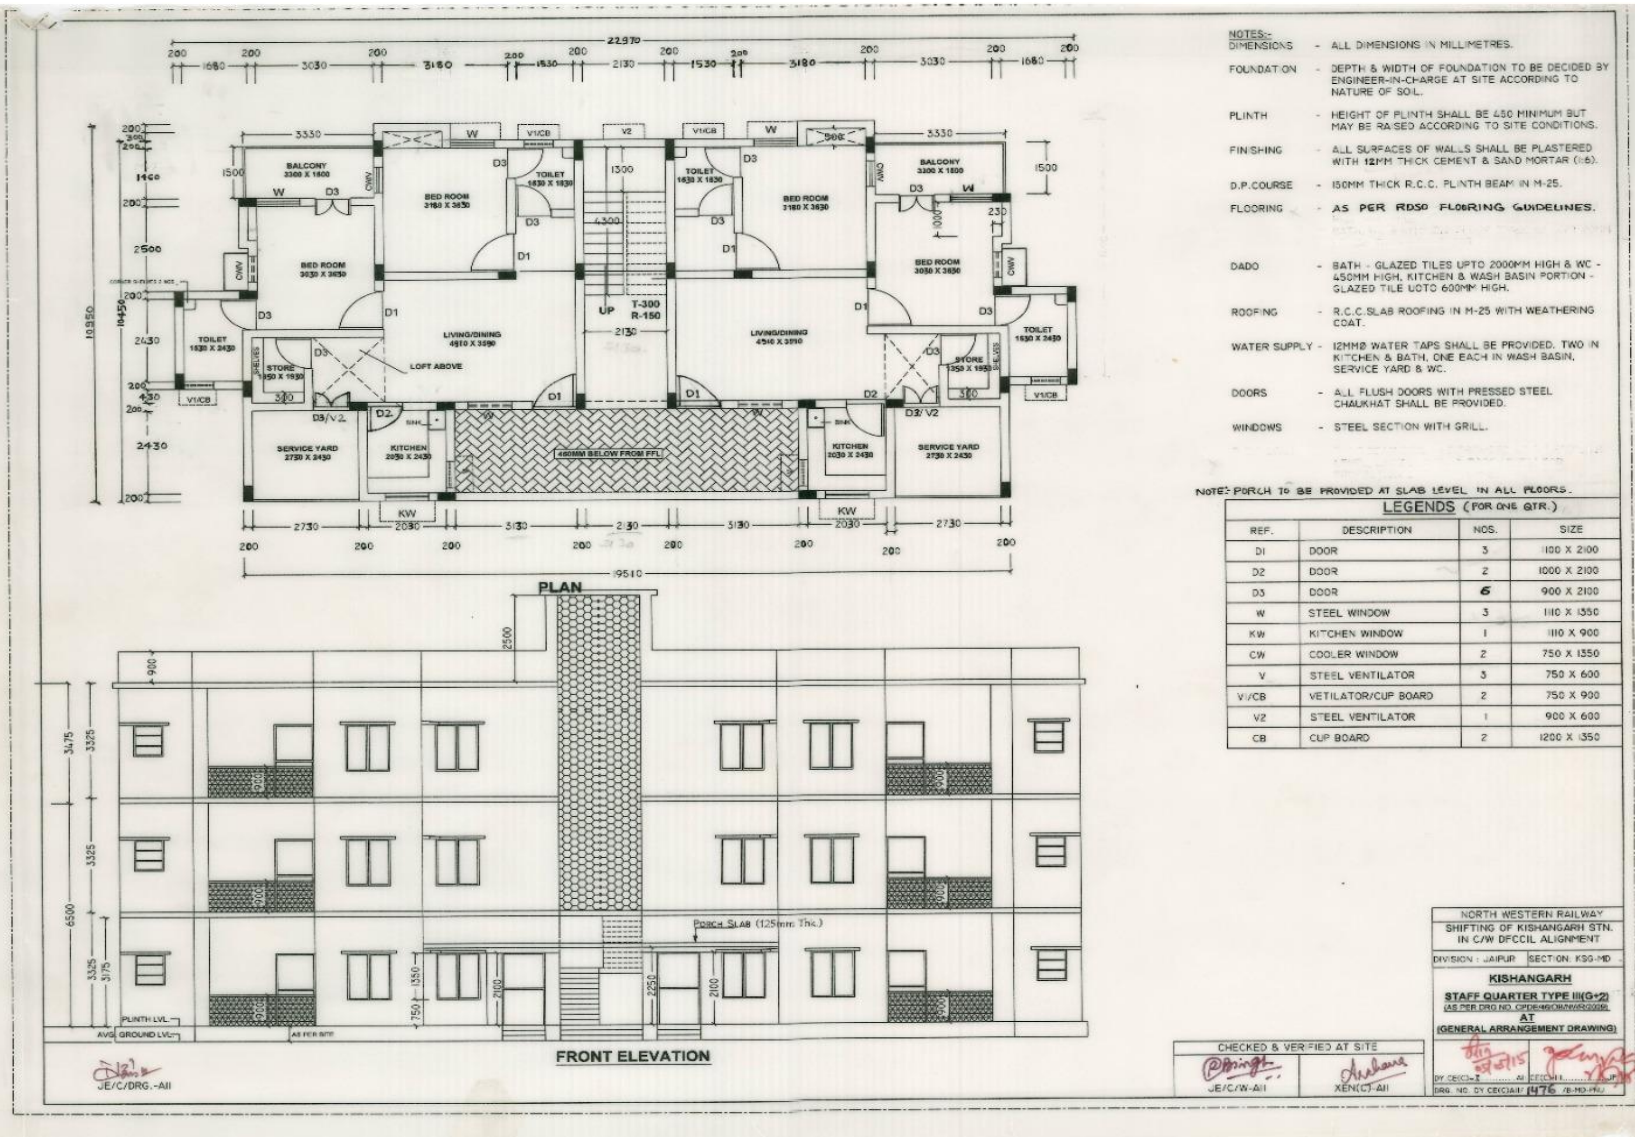

END OF DOCUMENT